

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P921627

Luminaire Tested: DFN2DIP-HX3F0-030D060US940-FLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P921627
REPORT IS A COMBINATION OF REPORTS P900763 AND P897645
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX3F0-030D060US940-FLLONL
Description: 3 foot, Hexagon Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 7945.1 lumens
Efficiency: N/A
Efficacy: 115.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 2.84' x L: 3.28' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 69
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.983
Total Harmonic Distortion (THDi): 0.073
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P921627

CATALOG NUMBER: DFN2DIP-HX3F0-030D060US940-FLLONL

Luminous Intensity Polar Plot

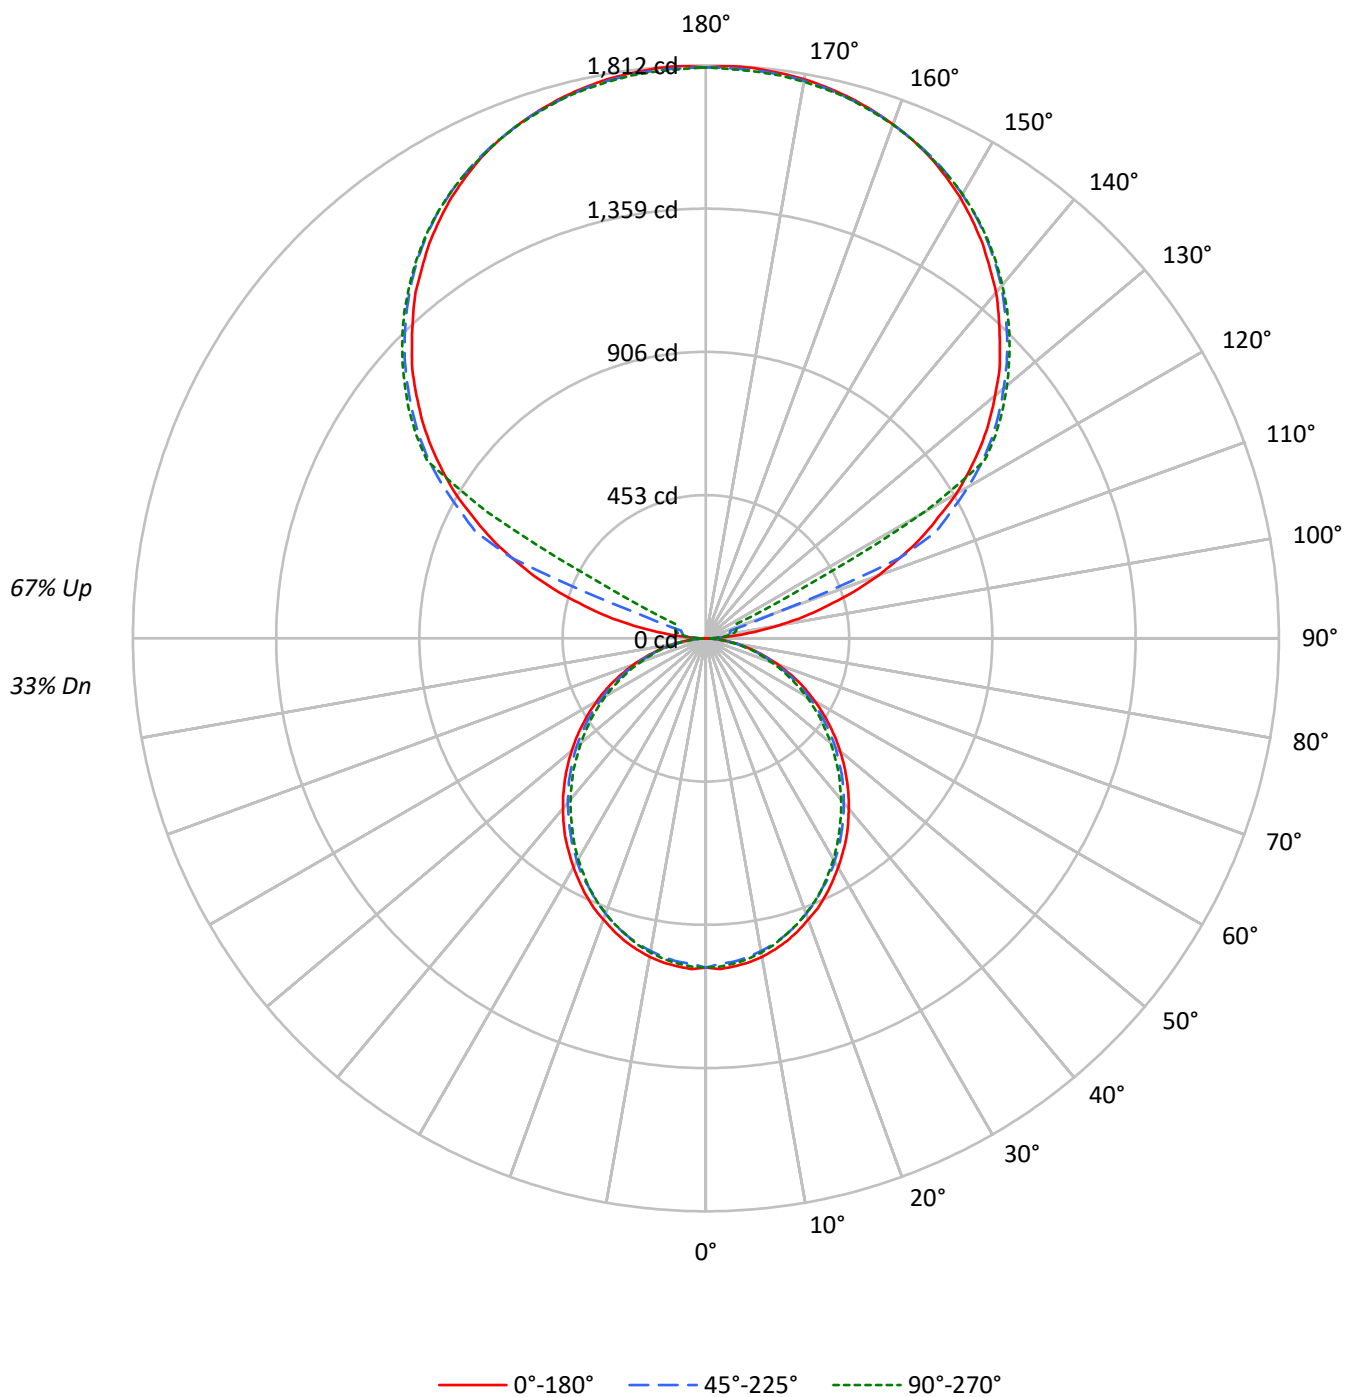

TEST NUMBER: P921627

CATALOG NUMBER: DFN2DIP-HX3F0-030D060US940-FLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	103	103	103	103	93	93	93	93	74	74	74	57	57	57	41	41	41
1	94	90	86	83	85	81	78	75	65	63	61	50	48	47	36	35	34
2	86	78	72	67	77	71	66	62	57	53	50	44	41	39	32	30	29
3	78	69	62	56	70	62	56	51	50	46	42	39	36	33	28	26	25
4	71	61	53	47	64	55	49	43	44	40	36	34	31	28	25	23	21
5	65	54	46	40	59	49	42	37	40	35	31	31	27	25	23	20	18
6	60	48	41	35	54	44	37	32	36	31	27	28	24	21	20	18	16
7	56	44	36	30	50	40	33	28	32	27	23	25	22	19	19	16	14
8	51	39	32	27	46	36	29	25	29	24	21	23	19	17	17	15	13
9	48	36	29	24	43	33	26	22	27	22	19	21	18	15	16	13	12
10	45	33	26	21	40	30	24	20	25	20	17	19	16	14	15	12	11

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1206	1206	1206
5°	1207	1188	1196
10°	1197	1171	1179
15°	1179	1151	1153
20°	1154	1123	1127
25°	1130	1091	1096
30°	1100	1060	1057
35°	1071	1024	1017
40°	1036	988	978
45°	1001	951	938
50°	962	913	892
55°	922	868	849
60°	876	816	800
65°	827	761	742
70°	763	694	680
75°	675	614	622
80°	569	512	512
85°	404	339	332

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 1157 cd/sqm

TEST NUMBER: P921627

CATALOG NUMBER: DFN2DIP-HX3F0-030D060US940-FLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	98.0	1.2
10°-20°	275.6	3.5
20°-30°	405.1	5.1
30°-40°	470.5	5.9
40°-50°	469.9	5.9
50°-60°	409.8	5.2
60°-70°	302.9	3.8
70°-80°	171.4	2.2
80°-90°	48.4	0.6
90°-100°	59.5	0.7
100°-110°	222.0	2.8
110°-120°	588.7	7.4
120°-130°	976.3	12.3
130°-140°	1037.1	13.1
140°-150°	963.9	12.1
150°-160°	774.9	9.8
160°-170°	499.3	6.3
170°-180°	171.9	2.2
0°-30°	778.7	9.8
0°-40°	1249.2	15.7
0°-60°	2128.9	26.8
0°-90°	2651.6	33.4
90°-120°	870.2	11.0
90°-150°	3847.4	48.4
90°-180°	5294.0	66.6
0°-180°	7945.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1041	1041	1041	1041	1041	
5°	1041	1037	1026	1034	1032	99
15°	991	985	972	976	971	279
25°	897	889	872	874	872	413
35°	774	764	748	742	737	483
45°	630	623	608	597	592	486
55°	476	470	458	446	442	426
65°	321	315	305	296	291	318
75°	168	166	161	155	157	179
85°	41	40	39	36	35	46
90°	1	16	26	33	35	7
95°	85	42	51	58	56	101
105°	397	436	80	94	99	424
115°	751	774	806	201	107	740
125°	1062	1079	1104	1113	1117	947
135°	1314	1335	1347	1360	1358	1015
145°	1525	1523	1546	1555	1548	954
155°	1679	1667	1683	1691	1680	774
165°	1769	1761	1765	1774	1765	500
175°	1810	1800	1803	1812	1799	172
180°	1806	1806	1806	1806	1806	

TEST NUMBER: P921627

CATALOG NUMBER: DFN2DIP-HX3F0-030D060US940-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1040.9	1040.9	1040.9	1040.9	1040.9
2.5°	1047.0	1042.0	1030.9	1040.9	1039.0
5°	1040.9	1037.0	1025.9	1033.9	1032.0
7.5°	1033.9	1028.0	1016.9	1025.0	1023.0
10°	1023.0	1015.9	1004.0	1011.9	1009.0
12.5°	1007.9	1001.9	990.0	994.9	992.9
15°	990.9	985.0	971.9	975.9	970.9
17.5°	969.8	963.9	950.8	955.8	950.8
20°	946.8	940.8	926.8	929.8	925.9
22.5°	923.9	914.9	901.8	901.8	899.7
25°	896.8	888.9	871.8	873.8	871.8
27.5°	866.7	859.7	846.8	843.8	838.8
30°	836.8	828.8	813.8	810.7	806.7
32.5°	804.8	798.8	782.7	776.7	772.7
35°	773.7	763.7	747.7	741.6	736.6
37.5°	738.7	729.7	713.6	706.6	701.6
40°	702.7	694.6	678.6	669.7	665.7
42.5°	667.6	659.6	643.6	633.6	627.6
45°	629.6	622.6	607.5	596.6	592.5
47.5°	592.5	585.6	569.5	558.5	552.5
50°	553.5	548.5	534.5	520.5	515.5
52.5°	515.5	508.5	495.5	484.5	477.4
55°	476.5	470.5	458.4	446.5	441.5
57.5°	437.4	432.4	419.4	407.3	403.3
60°	398.3	394.4	380.4	369.3	366.4
62.5°	360.3	353.3	343.3	333.3	329.3
65°	321.4	315.3	305.3	296.3	291.3
67.5°	281.3	276.3	267.2	260.3	256.3
70°	244.2	240.2	231.2	224.2	220.3
72.5°	206.3	202.2	197.2	190.2	187.3
75°	168.1	166.2	161.1	155.2	157.2
77.5°	134.1	130.1	128.0	125.1	122.2
80°	100.1	99.1	97.0	94.1	92.1
82.5°	68.0	68.0	67.1	63.0	63.0
85°	41.0	40.0	39.1	36.0	35.0
87.5°	18.0	16.1	14.0	11.1	10.0
90°	1.2	15.7	26.0	32.7	35.2
92.5°	32.7	27.5	31.3	34.0	35.2
95°	84.9	41.7	50.9	57.6	56.2
97.5°	152.8	45.7	66.5	70.6	71.9
100°	231.3	52.3	74.5	84.9	87.5
102.5°	317.4	315.0	77.1	91.4	95.4
105°	397.2	436.4	79.7	94.0	99.3
107.5°	490.0	522.5	82.4	96.7	101.9
110°	578.9	606.2	228.7	98.1	103.2

TEST NUMBER: P921627

CATALOG NUMBER: DFN2DIP-HX3F0-030D060US940-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	662.5	685.9	663.7	100.5	104.6
115°	751.3	773.5	806.2	201.3	107.2
117.5°	828.3	854.4	876.7	689.8	347.5
120°	914.6	934.2	957.8	973.4	797.0
122.5°	987.7	1008.6	1034.8	1042.6	1044.0
125°	1062.2	1079.2	1104.0	1113.2	1117.0
127.5°	1130.2	1148.4	1168.1	1181.2	1182.4
130°	1194.2	1215.1	1229.4	1243.8	1242.6
132.5°	1259.5	1276.6	1290.8	1302.6	1301.4
135°	1314.5	1335.4	1347.0	1360.2	1357.5
137.5°	1371.8	1387.5	1400.7	1413.7	1409.9
140°	1428.0	1438.6	1452.9	1464.6	1458.1
142.5°	1475.2	1484.3	1501.3	1511.6	1505.1
145°	1524.8	1523.4	1545.6	1554.8	1548.3
147.5°	1567.8	1563.9	1586.1	1592.6	1587.5
150°	1609.7	1600.5	1621.5	1629.2	1622.7
152.5°	1644.9	1634.5	1654.0	1662.0	1652.8
155°	1678.9	1667.2	1682.9	1690.7	1680.2
157.5°	1706.4	1695.9	1707.7	1716.9	1706.4
160°	1729.9	1722.0	1729.9	1737.7	1728.6
162.5°	1750.7	1742.9	1749.4	1758.6	1746.9
165°	1769.1	1761.3	1765.1	1774.3	1765.1
167.5°	1783.4	1775.6	1779.6	1788.8	1776.9
170°	1795.3	1787.3	1790.0	1799.1	1787.3
172.5°	1803.0	1795.3	1797.9	1807.1	1795.3
175°	1809.5	1800.4	1803.0	1812.1	1799.1
177.5°	1812.1	1803.0	1804.4	1813.6	1801.8
180°	1805.6	1805.6	1805.6	1805.6	1805.6



TEST NUMBER: P921627

CATALOG NUMBER: DFN2DIP-HX3F0-030D060US940-FLLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	6.11	6.83	7.19	7.92	9.41	5.68	6.41	6.76	7.49	8.98
	3H	7.75	8.40	8.84	9.50	11.00	7.28	7.93	8.38	9.03	10.54
	4H	8.32	8.94	9.43	10.04	11.55	7.86	8.48	8.96	9.57	11.09
	6H	8.71	9.28	9.83	10.38	11.91	8.24	8.81	9.36	9.91	11.44
	8H	8.81	9.35	9.93	10.47	11.99	8.34	8.88	9.46	10.00	11.52
	12H	8.85	9.37	9.97	10.47	12.02	8.38	8.89	9.50	10.00	11.54
4H	2H	6.55	7.17	7.66	8.26	9.78	6.20	6.82	7.32	7.92	9.43
	3H	8.39	8.91	9.51	10.03	11.56	8.00	8.52	9.12	9.64	11.17
	4H	9.10	9.57	10.22	10.68	12.23	8.69	9.17	9.82	10.28	11.83
	6H	9.60	10.00	10.73	11.14	12.68	9.19	9.60	10.32	10.74	12.27
	8H	9.74	10.12	10.87	11.25	12.80	9.33	9.71	10.46	10.84	12.39
	12H	9.80	10.15	10.95	11.29	12.85	9.39	9.73	10.53	10.87	12.43
8H	4H	9.28	9.66	10.41	10.79	12.34	8.92	9.30	10.05	10.43	11.98
	6H	9.89	10.21	11.05	11.38	12.93	9.54	9.85	10.69	11.02	12.57
	8H	10.11	10.38	11.27	11.53	13.10	9.74	10.02	10.90	11.17	12.74
	12H	10.23	10.47	11.39	11.62	13.22	9.85	10.09	11.01	11.24	12.84
12H	4H	9.26	9.60	10.41	10.74	12.30	8.91	9.25	10.06	10.39	11.95
	6H	9.92	10.20	11.08	11.35	12.92	9.57	9.85	10.73	11.00	12.57
	8H	10.15	10.39	11.31	11.54	13.15	9.80	10.04	10.96	11.19	12.79