

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P927978

Luminaire Tested: DFN2DIP-HX4F0-070D100US850-RLLONL

Issue Date: 12/12/2024

Test Information

Test Method: LM-79-2019
Report Number: P927978
REPORT IS A COMBINATION OF REPORTS P900934 AND P896187
Test Lab: INNOVATION CENTER
Issue Date: 12/12/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX4F0-070D100US850-RLLONL
Description: 4 foot, Hexagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 17577.6 lumens
Efficiency: N/A
Efficacy: 123.4 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.54' x L: 4.09' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 142.4
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9972
Total Harmonic Distortion (THDi): 0.128
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P927978

CATALOG NUMBER: DFN2DIP-HX4F0-070D100US850-RLLONL

Luminous Intensity Polar Plot

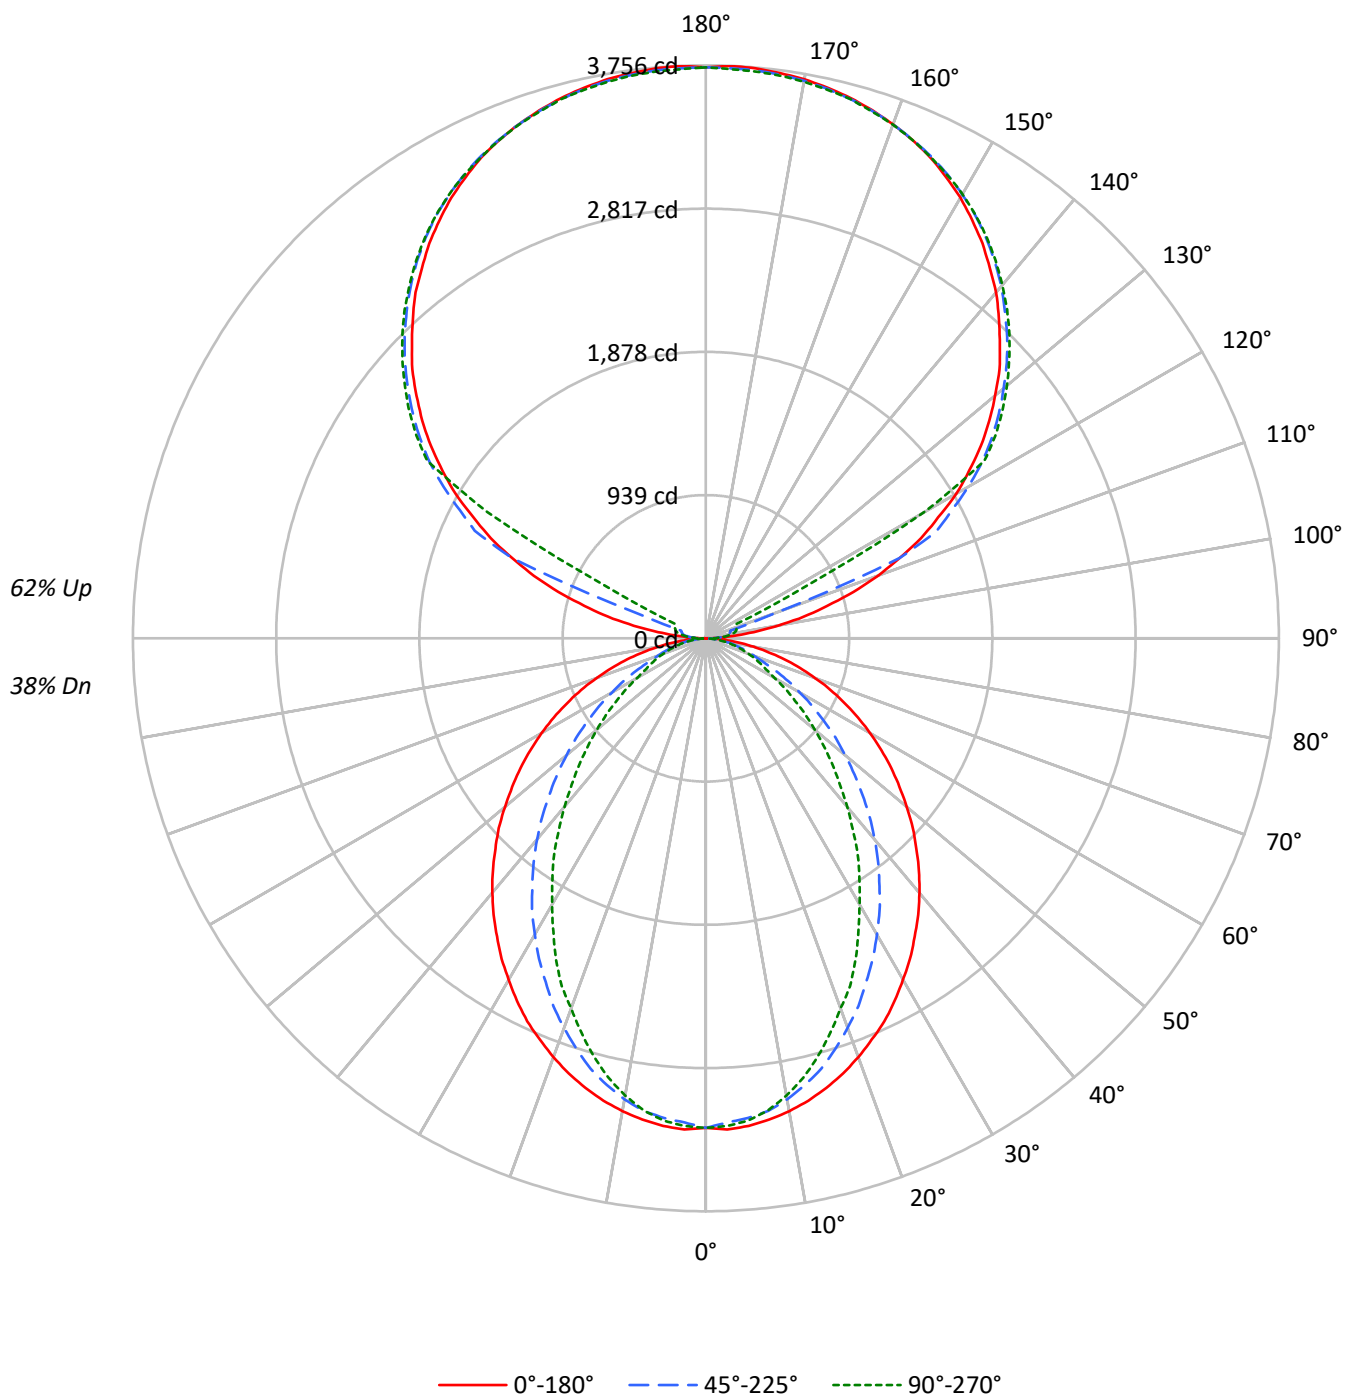

TEST NUMBER: P927978

CATALOG NUMBER: DFN2DIP-HX4F0-070D100US850-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	104	104	104	104	95	95	95	95	76	76	76	60	60	60	45	45	45
1	95	91	88	84	86	83	80	77	67	65	63	53	52	51	40	39	38
2	87	80	74	69	79	73	68	64	60	56	53	47	45	43	36	34	33
3	80	71	64	58	72	64	58	54	53	48	45	42	39	37	32	30	28
4	73	63	55	49	66	57	51	46	47	42	39	38	34	32	29	27	25
5	67	56	48	42	61	51	44	39	42	37	33	34	30	28	26	24	22
6	62	50	43	37	56	46	39	34	38	33	29	31	27	24	24	21	19
7	57	45	38	32	52	42	35	30	35	30	26	28	24	22	22	19	17
8	53	41	34	29	48	38	31	27	32	27	23	26	22	19	20	18	16
9	49	38	30	26	45	35	28	24	29	24	21	24	20	17	19	16	14
10	46	35	28	23	42	32	26	21	27	22	19	22	18	16	17	15	13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2386	2386	2386
5°	2390	2348	2363
10°	2366	2302	2286
15°	2334	2226	2167
20°	2291	2122	2022
25°	2247	2004	1881
30°	2188	1884	1702
35°	2130	1755	1546
40°	2071	1621	1365
45°	2003	1472	1203
50°	1932	1322	1043
55°	1858	1161	890
60°	1773	994	733
65°	1675	823	660
70°	1556	664	597
75°	1406	586	544
80°	1190	492	472
85°	832	330	355

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2003 cd/sqm

TEST NUMBER: P927978

CATALOG NUMBER: DFN2DIP-HX4F0-070D100US850-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	300.7	1.7
10°-20°	825.5	4.7
20°-30°	1158.9	6.6
30°-40°	1263.3	7.2
40°-50°	1161.1	6.6
50°-60°	911.9	5.2
60°-70°	593.5	3.4
70°-80°	305.5	1.7
80°-90°	84.6	0.5
90°-100°	123.4	0.7
100°-110°	460.1	2.6
110°-120°	1220.2	6.9
120°-130°	2023.8	11.5
130°-140°	2149.7	12.2
140°-150°	1997.9	11.4
150°-160°	1606.3	9.1
160°-170°	1035.0	5.9
170°-180°	356.2	2.0
0°-30°	2285.1	13.0
0°-40°	3548.4	20.2
0°-60°	5621.4	32.0
0°-90°	6605.1	37.6
90°-120°	1803.7	10.3
90°-150°	7975.0	45.4
90°-180°	10973.0	62.4
0°-180°	17577.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	3208	3208	3208	3208	3208	
5°	3208	3194	3156	3182	3174	304
15°	3052	3020	2921	2866	2837	860
25°	2770	2677	2485	2366	2323	1274
35°	2387	2239	1983	1800	1736	1494
45°	1951	1756	1452	1246	1176	1507
55°	1484	1257	944	770	714	1326
65°	1002	766	505	407	398	993
75°	534	331	232	212	209	565
85°	125	64	55	55	55	143
90°	3	32	54	68	73	16
95°	176	86	106	119	116	208
105°	823	905	165	195	206	880
115°	1557	1603	1671	417	222	1533
125°	2202	2237	2288	2308	2316	1964
135°	2725	2768	2792	2819	2814	2105
145°	3161	3158	3204	3223	3209	1977
155°	3480	3456	3488	3504	3483	1604
165°	3667	3651	3659	3678	3659	1036
175°	3751	3732	3737	3756	3729	357
180°	3743	3743	3743	3743	3743	

TEST NUMBER: P927978

CATALOG NUMBER: DFN2DIP-HX4F0-070D100US850-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	3208.4	3208.4	3208.4	3208.4	3208.4
2.5°	3222.9	3208.4	3176.4	3205.7	3199.8
5°	3208.4	3193.9	3156.1	3182.3	3173.6
7.5°	3182.3	3165.0	3124.4	3135.7	3121.3
10°	3147.5	3127.2	3069.2	3060.3	3043.0
12.5°	3104.0	3077.8	2999.3	2982.0	2949.9
15°	3051.6	3019.6	2921.0	2865.9	2836.9
17.5°	2990.6	2944.2	2822.2	2758.3	2711.8
20°	2921.0	2862.8	2717.7	2645.3	2581.2
22.5°	2845.6	2778.7	2610.1	2511.6	2468.2
25°	2770.1	2677.0	2485.4	2366.5	2322.8
27.5°	2680.1	2581.2	2369.3	2232.9	2166.0
30°	2584.3	2473.7	2241.4	2093.6	2015.1
32.5°	2491.3	2357.6	2119.7	1945.4	1872.7
35°	2386.8	2238.6	1983.3	1800.4	1736.3
37.5°	2285.2	2125.3	1855.5	1654.8	1582.5
40°	2177.6	2003.6	1721.7	1515.7	1440.1
42.5°	2067.4	1881.6	1588.3	1373.3	1301.0
45°	1951.3	1756.5	1451.9	1245.5	1175.9
47.5°	1840.9	1634.9	1321.3	1114.9	1051.1
50°	1719.0	1512.9	1193.4	992.9	932.2
52.5°	1599.7	1381.9	1071.4	879.8	824.7
55°	1483.6	1257.2	943.5	769.5	714.4
57.5°	1364.7	1132.4	830.5	667.8	621.4
60°	1242.7	1010.4	711.3	563.5	516.9
62.5°	1123.7	891.5	609.6	470.4	447.3
65°	1001.8	766.4	505.3	406.7	397.7
67.5°	885.6	650.3	406.7	357.0	348.4
70°	763.7	537.2	336.7	307.7	296.0
72.5°	647.5	432.5	281.6	258.5	252.6
75°	534.2	330.8	232.2	211.9	209.2
77.5°	421.1	235.0	183.0	171.2	165.5
80°	316.4	168.5	139.3	127.9	127.9
82.5°	220.6	113.3	95.8	89.9	89.9
85°	124.8	63.8	55.1	55.1	55.1
87.5°	46.5	23.1	23.1	20.3	20.3
90°	2.6	32.5	54.0	67.9	73.0
92.5°	67.9	56.9	65.0	70.4	73.0
95°	175.9	86.5	105.5	119.3	116.4
97.5°	316.7	94.8	138.0	146.3	148.9
100°	479.5	108.3	154.4	175.9	181.4
102.5°	658.0	652.9	159.8	189.4	197.7
105°	823.3	904.6	165.4	194.9	205.8
107.5°	1015.6	1083.2	170.8	200.4	211.3
110°	1199.8	1256.5	474.0	203.3	213.8

TEST NUMBER: P927978

CATALOG NUMBER: DFN2DIP-HX4F0-070D100US850-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1373.2	1421.7	1375.8	208.4	216.8
115°	1557.1	1603.2	1671.0	417.1	222.2
117.5°	1717.0	1771.1	1817.3	1429.8	720.4
120°	1895.8	1936.3	1985.2	2017.7	1652.1
122.5°	2047.3	2090.7	2145.0	2161.1	2164.0
125°	2201.7	2237.1	2288.5	2307.5	2315.5
127.5°	2342.5	2380.5	2421.3	2448.3	2450.9
130°	2475.3	2518.8	2548.4	2578.2	2575.7
132.5°	2610.7	2646.1	2675.7	2700.1	2697.5
135°	2724.6	2768.0	2792.1	2819.4	2814.0
137.5°	2843.6	2876.1	2903.4	2930.4	2922.3
140°	2959.9	2981.9	3011.4	3035.9	3022.4
142.5°	3057.7	3076.7	3111.7	3133.3	3119.8
145°	3160.6	3157.8	3203.8	3222.8	3209.2
147.5°	3249.7	3241.7	3287.6	3301.2	3290.6
150°	3336.5	3317.6	3361.0	3377.1	3363.6
152.5°	3409.5	3388.0	3428.6	3444.9	3425.9
155°	3480.0	3455.9	3488.4	3504.4	3482.9
157.5°	3536.9	3515.4	3539.8	3558.8	3536.9
160°	3585.8	3569.4	3585.8	3601.9	3583.0
162.5°	3628.9	3612.8	3626.3	3645.3	3620.9
165°	3666.8	3650.7	3658.8	3677.8	3658.8
167.5°	3696.7	3680.3	3688.8	3707.7	3683.2
170°	3721.1	3704.8	3710.3	3729.2	3704.8
172.5°	3737.2	3721.1	3726.7	3745.6	3721.1
175°	3750.7	3731.8	3737.2	3756.3	3729.2
177.5°	3756.3	3737.2	3740.2	3759.2	3734.7
180°	3742.8	3742.8	3742.8	3742.8	3742.8

TEST NUMBER: P927978

CATALOG NUMBER: DFN2DIP-HX4F0-070D100US850-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.89	9.62	9.95	10.69	12.13	4.86	5.60	5.92	6.66	8.10
	3H	10.56	11.22	11.63	12.29	13.75	6.04	6.70	7.11	7.77	9.23
	4H	11.16	11.79	12.25	12.86	14.33	6.49	7.11	7.57	8.19	9.65
	6H	11.58	12.15	12.67	13.23	14.71	6.81	7.38	7.90	8.46	9.94
	8H	11.70	12.25	12.80	13.34	14.81	6.90	7.44	7.99	8.53	10.01
	12H	11.76	12.28	12.86	13.37	14.86	6.94	7.46	8.04	8.54	10.04
4H	2H	8.89	9.52	9.98	10.59	12.06	5.44	6.07	6.53	7.14	8.61
	3H	10.72	11.24	11.81	12.33	13.81	6.79	7.31	7.88	8.41	9.88
	4H	11.40	11.88	12.51	12.97	14.47	7.33	7.81	8.43	8.90	10.40
	6H	11.92	12.32	13.02	13.44	14.93	7.75	8.16	8.86	9.27	10.76
	8H	12.09	12.47	13.20	13.58	15.08	7.88	8.26	8.99	9.36	10.87
	12H	12.18	12.53	13.31	13.64	15.16	7.94	8.28	9.07	9.40	10.91
8H	4H	11.37	11.75	12.47	12.85	14.36	7.61	7.99	8.72	9.09	10.60
	6H	11.93	12.24	13.06	13.39	14.90	8.12	8.44	9.25	9.59	11.09
	8H	12.15	12.42	13.28	13.55	15.07	8.32	8.59	9.45	9.72	11.24
	12H	12.28	12.52	13.42	13.65	15.21	8.43	8.67	9.57	9.80	11.36
12H	4H	11.31	11.66	12.44	12.78	14.29	7.61	7.95	8.73	9.07	10.58
	6H	11.90	12.18	13.04	13.31	14.83	8.17	8.45	9.31	9.58	11.10
	8H	12.12	12.36	13.26	13.49	15.05	8.38	8.62	9.52	9.75	11.31

END OF REPORT