

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P911625

Luminaire Tested: DFN2DIP-PN4F0-120D060US850-FLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P911625
REPORT IS A COMBINATION OF REPORTS P901181 AND P898053
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN4F0-120D060US850-FLLONL
Description: 4 foot, Pentagon Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 19762.3 lumens
Efficiency: N/A
Efficacy: 115.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.74' x L: 3.94' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 171.4
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9781
Total Harmonic Distortion (THDi): 0.075
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P911625

CATALOG NUMBER: DFN2DIP-PN4F0-120D060US850-FLLONL

Luminous Intensity Polar Plot

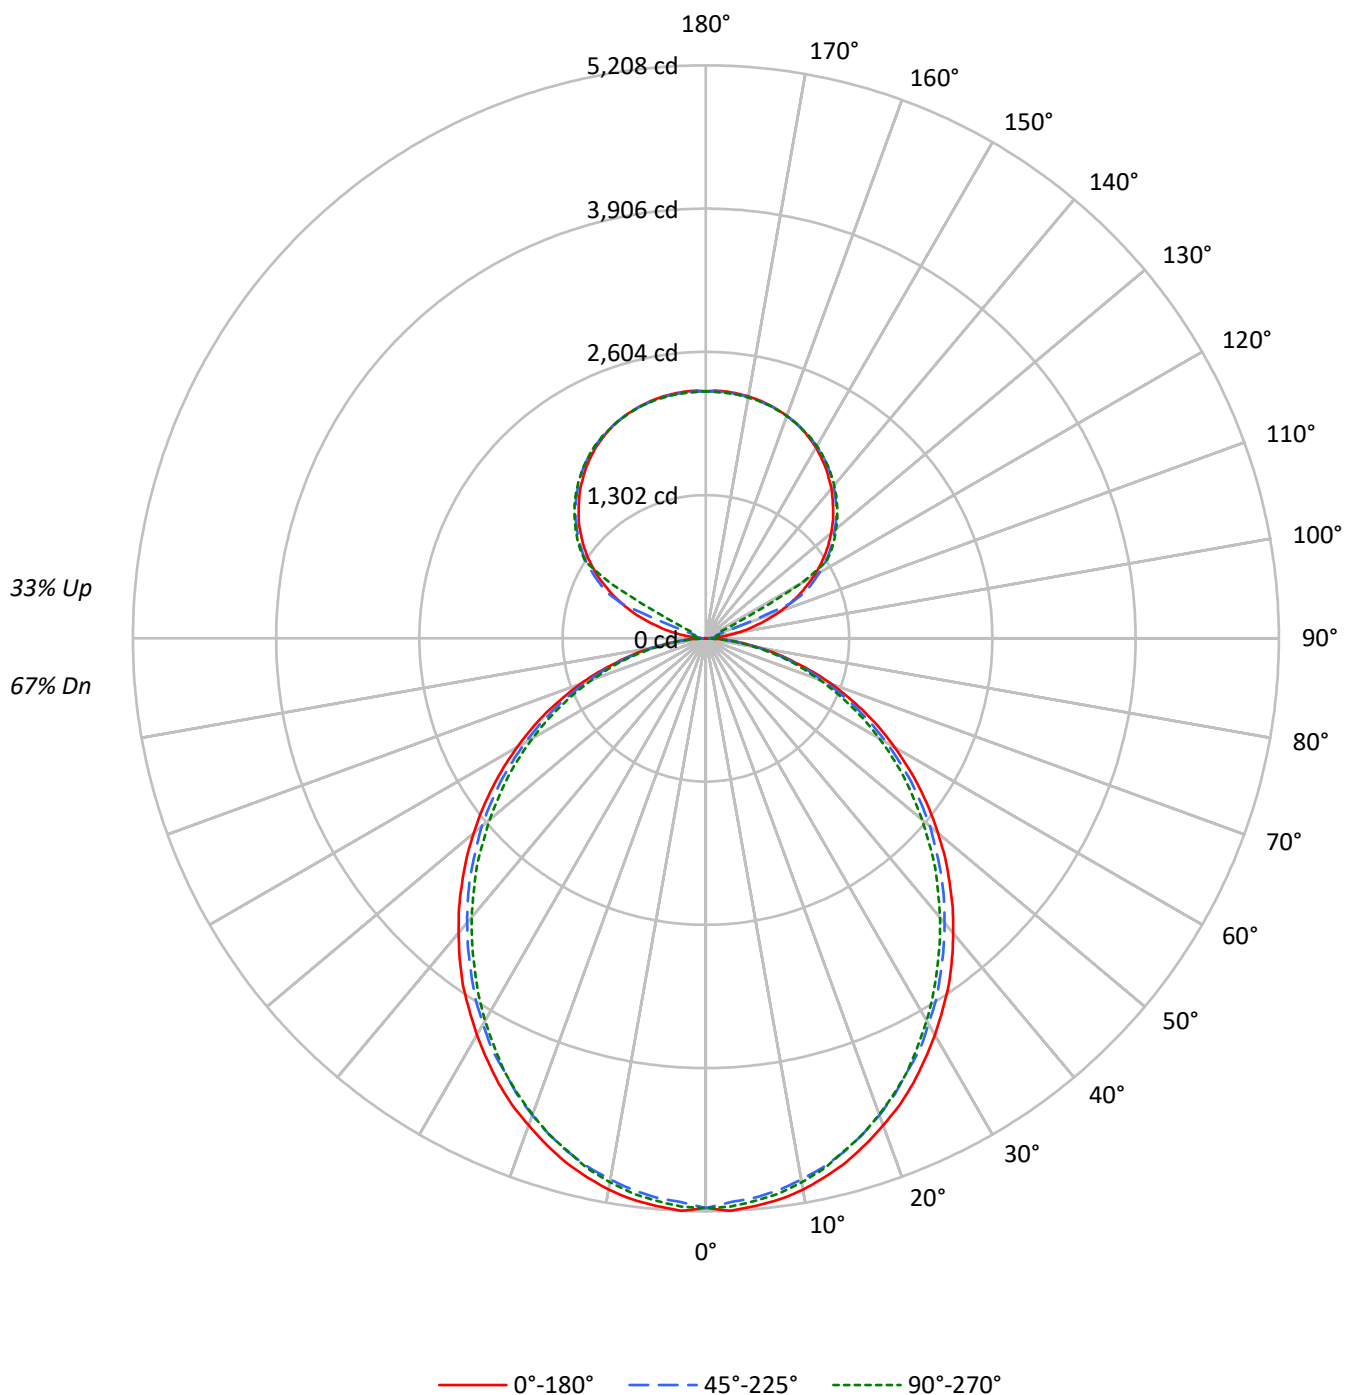

TEST NUMBER: P911625

CATALOG NUMBER: DFN2DIP-PN4F0-120D060US850-FLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	111	111	111	111	105	105	105	105	93	93	93	82	82	82	71	71	71
1	102	97	93	90	95	92	88	85	81	79	76	72	70	68	63	62	60
2	92	85	79	73	87	80	75	70	71	67	63	63	60	57	56	53	51
3	84	75	67	61	79	71	64	58	63	58	53	56	52	48	49	46	43
4	77	66	58	52	72	63	55	50	56	50	45	50	45	41	44	40	37
5	71	59	51	44	67	56	48	43	50	44	39	45	40	36	40	36	33
6	66	53	45	39	62	50	43	37	45	39	34	41	35	32	36	32	29
7	61	48	40	34	57	46	38	33	41	35	30	37	32	28	33	29	26
8	56	44	36	30	53	42	34	29	38	31	27	34	29	25	30	26	23
9	53	40	32	27	50	38	31	26	35	29	24	31	26	23	28	24	21
10	49	37	29	24	46	35	28	24	32	26	22	29	24	20	26	22	19

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3780	3780	3780
5°	3786	3728	3753
10°	3755	3678	3703
15°	3700	3618	3624
20°	3625	3534	3544
25°	3551	3434	3450
30°	3458	3341	3331
35°	3370	3231	3206
40°	3262	3120	3086
45°	3153	3009	2964
50°	3035	2892	2822
55°	2911	2757	2692
60°	2771	2597	2543
65°	2619	2431	2367
70°	2424	2229	2179
75°	2154	1987	2005
80°	1831	1679	1672
85°	1324	1146	1118

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 3153 cd/sqm

TEST NUMBER: P911625

CATALOG NUMBER: DFN2DIP-PN4F0-120D060US850-FLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	487.4	2.5
10°-20°	1371.3	6.9
20°-30°	2015.2	10.2
30°-40°	2340.6	11.8
40°-50°	2337.7	11.8
50°-60°	2038.4	10.3
60°-70°	1506.8	7.6
70°-80°	852.5	4.3
80°-90°	229.0	1.2
90°-100°	74.1	0.4
100°-110°	276.0	1.4
110°-120°	732.1	3.7
120°-130°	1214.2	6.1
130°-140°	1289.8	6.5
140°-150°	1198.7	6.1
150°-160°	963.8	4.9
160°-170°	621.0	3.1
170°-180°	213.7	1.1
0°-30°	3873.9	19.6
0°-40°	6214.5	31.4
0°-60°	10590.5	53.6
0°-90°	13178.9	66.7
90°-120°	1082.2	5.5
90°-150°	4785.0	24.2
90°-180°	6583.0	33.3
0°-180°	19762.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	5178	5178	5178	5178	5178	
5°	5178	5159	5104	5143	5134	492
15°	4929	4900	4835	4855	4830	1388
25°	4461	4422	4337	4347	4337	2053
35°	3849	3799	3720	3690	3665	2404
45°	3132	3097	3022	2968	2948	2417
55°	2370	2340	2280	2221	2196	2119
65°	1599	1568	1519	1474	1449	1581
75°	836	827	801	772	782	893
85°	204	199	194	179	174	227
90°	2	20	32	41	44	18
95°	106	52	63	72	70	125
105°	494	543	99	117	124	528
115°	934	962	1003	250	133	920
125°	1321	1342	1373	1384	1389	1178
135°	1635	1661	1675	1692	1688	1263
145°	1896	1895	1922	1934	1926	1186
155°	2088	2074	2093	2103	2090	962
165°	2200	2190	2195	2207	2195	622
175°	2250	2239	2242	2254	2238	214
180°	2246	2246	2246	2246	2246	

TEST NUMBER: P911625

CATALOG NUMBER: DFN2DIP-PN4F0-120D060US850-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	5178.3	5178.3	5178.3	5178.3	5178.3
2.5°	5208.3	5183.5	5128.6	5178.3	5168.7
5°	5178.3	5158.6	5103.7	5143.3	5133.8
7.5°	5143.3	5113.7	5058.8	5099.0	5089.0
10°	5089.0	5054.0	4994.4	5034.0	5019.2
12.5°	5013.9	4984.3	4924.6	4949.5	4939.4
15°	4929.4	4899.8	4834.8	4854.9	4830.0
17.5°	4824.8	4795.2	4730.2	4755.1	4730.2
20°	4710.1	4680.5	4610.9	4625.6	4606.1
22.5°	4596.0	4551.1	4486.1	4486.1	4476.1
25°	4461.3	4421.7	4337.2	4346.7	4337.2
27.5°	4311.8	4277.0	4212.5	4197.7	4172.9
30°	4162.9	4122.7	4048.2	4033.4	4013.4
32.5°	4003.3	3973.8	3893.9	3863.9	3843.8
35°	3849.0	3799.4	3719.6	3689.5	3664.7
37.5°	3674.7	3629.9	3550.0	3515.2	3490.4
40°	3495.7	3455.5	3375.7	3331.3	3311.3
42.5°	3321.3	3281.2	3201.9	3151.8	3122.2
45°	3132.1	3097.3	3022.2	2967.9	2947.8
47.5°	2947.8	2912.9	2833.2	2778.3	2748.7
50°	2753.4	2728.6	2658.8	2589.1	2564.2
52.5°	2564.2	2529.4	2465.0	2410.0	2375.1
55°	2370.4	2340.3	2280.5	2220.9	2196.0
57.5°	2176.0	2151.1	2086.1	2026.5	2006.4
60°	1981.6	1962.0	1892.3	1837.4	1822.5
62.5°	1792.5	1757.5	1708.0	1658.3	1638.2
65°	1598.6	1568.5	1518.8	1473.9	1449.1
67.5°	1399.4	1374.1	1329.7	1294.9	1274.8
70°	1215.0	1194.9	1150.0	1115.2	1095.7
72.5°	1025.9	1005.9	981.0	946.2	931.3
75°	836.3	826.8	801.4	771.9	781.8
77.5°	667.2	647.1	637.1	622.3	607.5
80°	498.2	492.8	482.9	468.1	458.0
82.5°	338.6	338.6	333.9	313.8	313.8
85°	203.9	199.2	194.4	179.1	174.3
87.5°	89.8	79.7	69.8	54.9	49.7
90°	1.6	19.5	32.4	40.7	43.8
92.5°	40.7	34.2	38.9	42.3	43.8
95°	105.6	51.9	63.3	71.6	69.9
97.5°	190.1	56.9	82.7	87.8	89.4
100°	287.7	65.0	92.6	105.6	108.8
102.5°	394.8	391.7	95.9	113.7	118.7
105°	493.9	542.7	99.1	116.9	123.5
107.5°	609.4	649.9	102.5	120.2	126.8
110°	720.0	753.9	284.5	122.0	128.3

TEST NUMBER: P911625

CATALOG NUMBER: DFN2DIP-PN4F0-120D060US850-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	823.9	853.0	825.4	125.0	130.1
115°	934.3	961.9	1002.6	250.3	133.3
117.5°	1030.2	1062.6	1090.4	857.9	432.2
120°	1137.5	1161.8	1191.2	1210.6	991.2
122.5°	1228.3	1254.4	1287.0	1296.6	1298.4
125°	1321.0	1342.2	1373.1	1384.5	1389.2
127.5°	1405.5	1428.3	1452.8	1469.0	1470.5
130°	1485.2	1511.2	1529.0	1546.9	1545.4
132.5°	1566.5	1587.6	1605.4	1620.0	1618.5
135°	1634.8	1660.8	1675.3	1691.7	1688.3
137.5°	1706.1	1725.6	1742.0	1758.2	1753.4
140°	1776.0	1789.1	1806.9	1821.5	1813.4
142.5°	1834.6	1846.0	1867.1	1880.0	1871.9
145°	1896.4	1894.6	1922.2	1933.7	1925.6
147.5°	1949.8	1945.0	1972.6	1980.7	1974.4
150°	2002.0	1990.5	2016.6	2026.3	2018.2
152.5°	2045.8	2032.8	2057.1	2067.0	2055.5
155°	2088.0	2073.5	2093.0	2102.7	2089.7
157.5°	2122.2	2109.2	2123.8	2135.3	2122.2
160°	2151.5	2141.6	2151.5	2161.1	2149.8
162.5°	2177.3	2167.7	2175.7	2187.2	2172.5
165°	2200.1	2190.5	2195.3	2206.7	2195.3
167.5°	2218.0	2208.2	2213.2	2224.7	2209.9
170°	2232.7	2222.9	2226.2	2237.5	2222.9
172.5°	2242.4	2232.7	2236.0	2247.4	2232.7
175°	2250.5	2239.1	2242.4	2253.7	2237.5
177.5°	2253.7	2242.4	2244.1	2255.5	2240.8
180°	2245.6	2245.6	2245.6	2245.6	2245.6

TEST NUMBER: P911625

CATALOG NUMBER: DFN2DIP-PN4F0-120D060US850-FLLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	13.31	14.35	14.11	15.17	16.18	12.87	13.91	13.67	14.73	15.74
	3H	14.99	15.92	15.80	16.75	17.79	14.50	15.43	15.32	16.26	17.30
	4H	15.58	16.46	16.41	17.30	18.35	15.10	15.98	15.93	16.81	17.87
	6H	16.00	16.81	16.84	17.65	18.72	15.50	16.31	16.35	17.16	18.23
	8H	16.11	16.88	16.96	17.74	18.81	15.61	16.39	16.46	17.25	18.32
	12H	16.16	16.90	17.02	17.76	18.85	15.66	16.40	16.52	17.26	18.35
4H	2H	13.79	14.67	14.63	15.51	16.56	13.44	14.32	14.28	15.16	16.21
	3H	15.68	16.41	16.52	17.28	18.35	15.28	16.01	16.12	16.88	17.95
	4H	16.40	17.07	17.26	17.94	19.03	15.98	16.65	16.84	17.52	18.62
	6H	16.93	17.51	17.80	18.40	19.50	16.51	17.08	17.38	17.98	19.07
	8H	17.08	17.62	17.96	18.51	19.62	16.66	17.20	17.53	18.08	19.19
	12H	17.17	17.65	18.07	18.56	19.68	16.73	17.21	17.63	18.12	19.24
8H	4H	16.61	17.15	17.49	18.04	19.15	16.24	16.78	17.12	17.67	18.78
	6H	17.25	17.70	18.16	18.63	19.74	16.88	17.33	17.78	18.26	19.37
	8H	17.48	17.88	18.39	18.80	19.93	17.09	17.49	18.01	18.41	19.54
	12H	17.62	17.97	18.54	18.89	20.06	17.22	17.57	18.14	18.48	19.66
12H	4H	16.61	17.09	17.50	18.00	19.12	16.24	16.73	17.14	17.64	18.75
	6H	17.29	17.68	18.20	18.61	19.73	16.92	17.32	17.84	18.24	19.37
	8H	17.54	17.89	18.46	18.80	19.98	17.17	17.52	18.08	18.43	19.61