

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P922341

Luminaire Tested: DFN2DIP-PN4F0-060D110US940-FLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P922341
REPORT IS A COMBINATION OF REPORTS P901259 AND P898053
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN4F0-060D110US940-FLLONL
Description: 4 foot, Pentagon Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 15007.5 lumens
Efficiency: N/A
Efficacy: 102.7 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.74' x L: 3.94' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 146.2
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9933
Total Harmonic Distortion (THDi): 0.066
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P922341

CATALOG NUMBER: DFN2DIP-PN4F0-060D110US940-FLLONL

Luminous Intensity Polar Plot

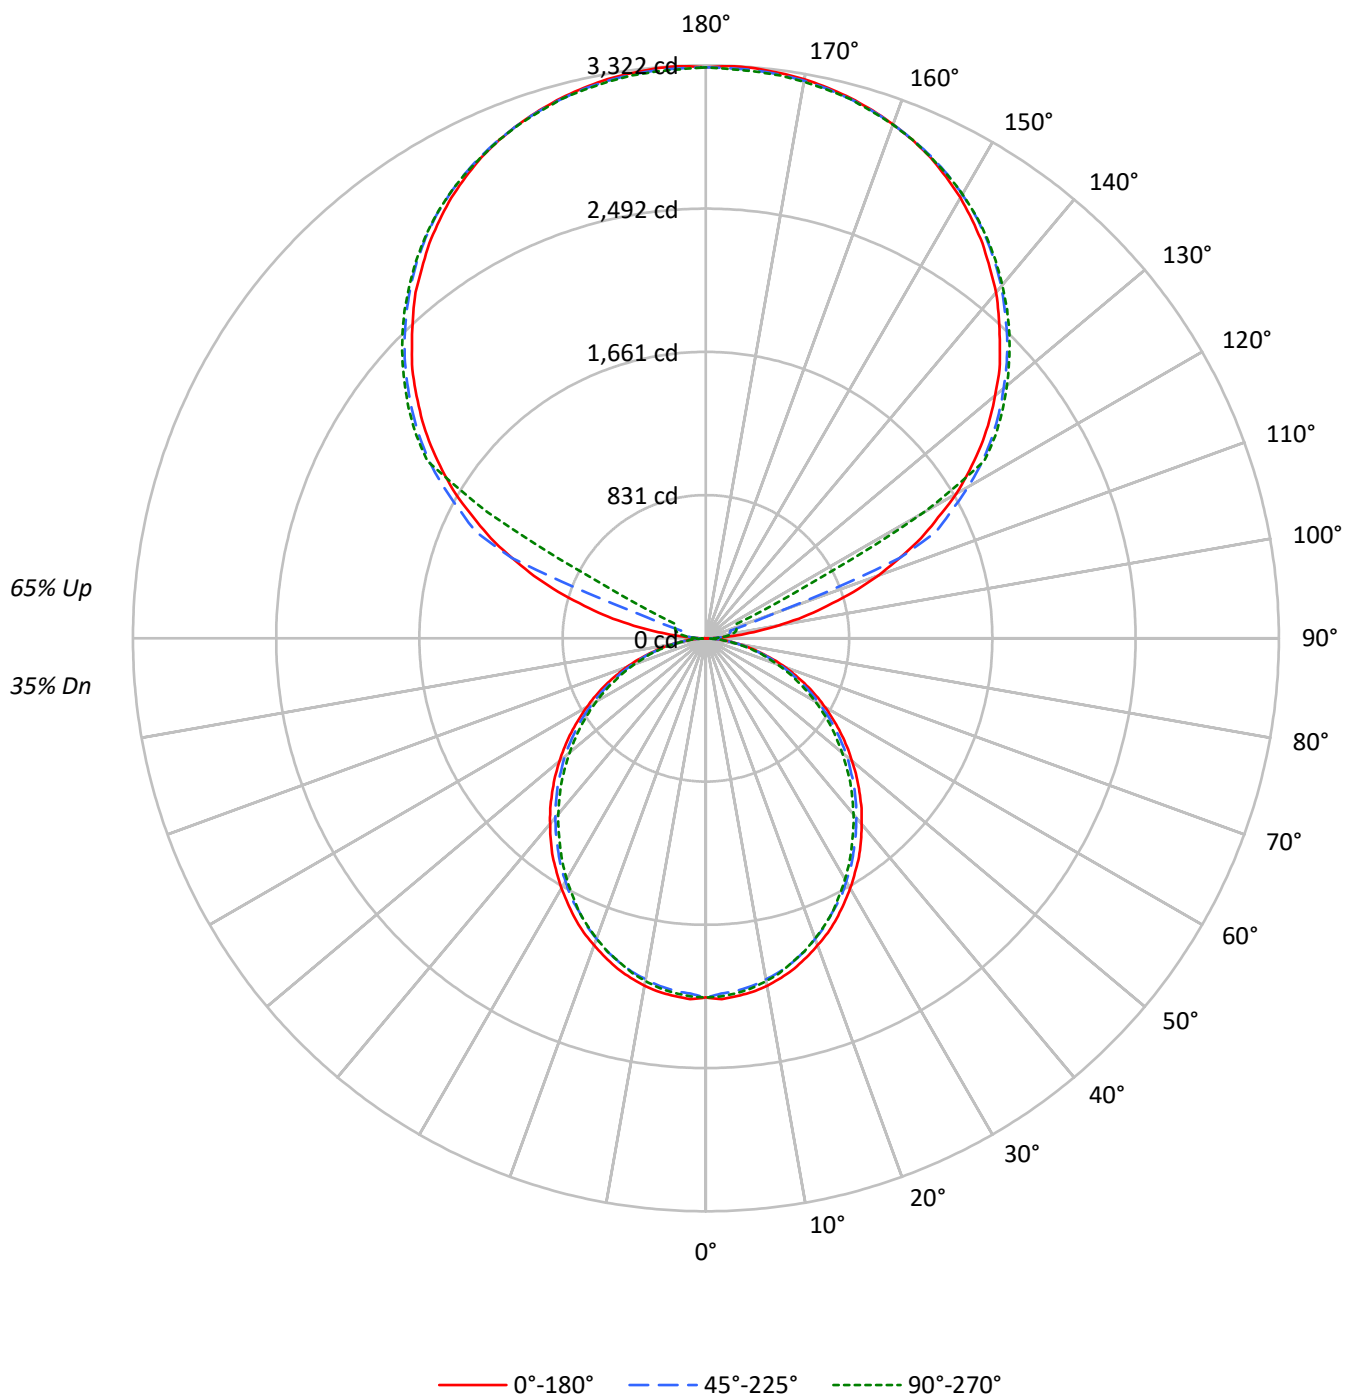

TEST NUMBER: P922341

CATALOG NUMBER: DFN2DIP-PN4F0-060D110US940-FLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	104	104	104	104	94	94	94	94	75	75	75	58	58	58	43	43	43
1	95	90	86	83	85	82	79	76	66	64	62	51	50	48	38	37	36
2	86	79	73	68	78	71	66	62	58	54	51	45	43	40	33	32	30
3	78	69	62	56	71	63	57	52	51	46	43	40	37	34	29	27	26
4	72	61	53	48	65	56	49	44	45	40	36	35	32	29	26	24	22
5	66	54	46	41	59	50	43	38	40	35	31	32	28	25	24	21	19
6	60	49	41	35	54	44	37	32	36	31	27	29	25	22	21	19	17
7	56	44	36	31	50	40	33	28	33	28	24	26	22	19	20	17	15
8	52	40	32	27	47	36	30	25	30	25	21	24	20	17	18	15	13
9	48	36	29	24	43	33	27	22	27	22	19	22	18	15	17	14	12
10	45	33	26	21	41	30	24	20	25	20	17	20	16	14	15	13	11

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1520	1520	1520
5°	1522	1499	1509
10°	1510	1479	1489
15°	1487	1455	1457
20°	1457	1421	1425
25°	1428	1381	1387
30°	1390	1343	1339
35°	1355	1299	1289
40°	1311	1254	1241
45°	1268	1210	1192
50°	1220	1163	1135
55°	1170	1109	1082
60°	1114	1044	1022
65°	1053	977	952
70°	975	896	876
75°	866	799	806
80°	736	675	672
85°	532	460	450

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 1766 cd/sqm

TEST NUMBER: P922341

CATALOG NUMBER: DFN2DIP-PN4F0-060D110US940-FLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	195.9	1.3
10°-20°	551.3	3.7
20°-30°	810.2	5.4
30°-40°	941.0	6.3
40°-50°	939.8	6.3
50°-60°	819.5	5.5
60°-70°	605.8	4.0
70°-80°	342.7	2.3
80°-90°	96.3	0.6
90°-100°	109.2	0.7
100°-110°	406.9	2.7
110°-120°	1079.2	7.2
120°-130°	1789.9	11.9
130°-140°	1901.3	12.7
140°-150°	1767.1	11.8
150°-160°	1420.7	9.5
160°-170°	915.4	6.1
170°-180°	315.1	2.1
0°-30°	1557.4	10.4
0°-40°	2498.4	16.6
0°-60°	4257.8	28.4
0°-90°	5302.6	35.3
90°-120°	1595.3	10.6
90°-150°	7053.7	47.0
90°-180°	9705.0	64.7
0°-180°	15007.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2082	2082	2082	2082	2082	
5°	2082	2074	2052	2068	2064	198
15°	1982	1970	1944	1952	1942	558
25°	1794	1778	1744	1748	1744	825
35°	1548	1528	1495	1483	1473	966
45°	1259	1245	1215	1193	1185	972
55°	953	941	917	893	883	852
65°	643	631	611	592	583	635
75°	336	332	322	310	314	359
85°	82	80	78	72	70	91
90°	2	29	48	60	65	14
95°	156	76	93	106	103	184
105°	728	800	146	172	182	778
115°	1377	1418	1478	369	196	1356
125°	1947	1979	2024	2041	2048	1737
135°	2410	2448	2470	2494	2489	1862
145°	2796	2793	2834	2850	2838	1748
155°	3078	3057	3085	3100	3080	1418
165°	3243	3229	3236	3253	3236	916
175°	3317	3301	3306	3322	3298	316
180°	3310	3310	3310	3310	3310	

TEST NUMBER: P922341

CATALOG NUMBER: DFN2DIP-PN4F0-060D110US940-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2081.8	2081.8	2081.8	2081.8	2081.8
2.5°	2093.9	2083.9	2061.8	2081.8	2078.0
5°	2081.8	2073.9	2051.8	2067.8	2064.0
7.5°	2067.8	2055.9	2033.8	2050.0	2045.9
10°	2045.9	2031.9	2007.9	2023.8	2017.9
12.5°	2015.8	2003.9	1979.9	1989.9	1985.8
15°	1981.7	1969.9	1943.8	1951.9	1941.9
17.5°	1939.7	1927.9	1901.8	1911.6	1901.8
20°	1893.6	1881.8	1853.7	1859.7	1851.8
22.5°	1847.8	1829.7	1803.6	1803.6	1799.6
25°	1793.6	1777.7	1743.7	1747.5	1743.7
27.5°	1733.5	1719.5	1693.5	1687.7	1677.7
30°	1673.7	1657.4	1627.5	1621.6	1613.5
32.5°	1609.4	1597.6	1565.5	1553.4	1545.3
35°	1547.5	1527.5	1495.4	1483.3	1473.3
37.5°	1477.4	1459.3	1427.3	1413.2	1403.2
40°	1405.3	1389.2	1357.2	1339.3	1331.2
42.5°	1335.2	1319.1	1287.3	1267.1	1255.2
45°	1259.3	1245.2	1215.0	1193.2	1185.1
47.5°	1185.1	1171.1	1139.1	1117.0	1105.0
50°	1107.0	1097.0	1069.0	1040.9	1030.9
52.5°	1030.9	1016.9	991.0	968.9	954.9
55°	953.0	940.8	916.9	892.9	882.9
57.5°	874.9	864.9	838.7	814.8	806.6
60°	796.7	788.8	760.8	738.7	732.7
62.5°	720.6	706.6	686.6	666.6	658.6
65°	642.7	630.6	610.6	592.5	582.6
67.5°	562.6	552.4	534.6	520.6	512.5
70°	488.5	480.5	462.4	448.4	440.5
72.5°	412.4	404.4	394.4	380.4	374.4
75°	336.2	332.4	322.2	310.3	314.3
77.5°	268.2	260.2	256.1	250.2	244.2
80°	200.3	198.1	194.1	188.2	184.1
82.5°	136.2	136.2	134.2	126.2	126.2
85°	81.9	80.1	78.1	72.0	70.1
87.5°	36.1	32.1	28.0	22.1	20.0
90°	2.3	28.7	47.8	60.0	64.6
92.5°	60.0	50.4	57.4	62.3	64.6
95°	155.6	76.5	93.3	105.5	103.0
97.5°	280.2	83.9	122.0	129.4	131.7
100°	424.1	95.9	136.5	155.6	160.4
102.5°	581.9	577.4	141.3	167.6	175.0
105°	728.2	800.1	146.2	172.4	182.1
107.5°	898.3	958.0	151.1	177.2	186.9
110°	1061.2	1111.3	419.3	179.8	189.1

TEST NUMBER: P922341

CATALOG NUMBER: DFN2DIP-PN4F0-060D110US940-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1214.6	1257.5	1216.8	184.3	191.7
115°	1377.2	1417.9	1478.0	368.9	196.5
117.5°	1518.7	1566.5	1607.4	1264.6	637.1
120°	1676.8	1712.6	1755.9	1784.6	1461.2
122.5°	1810.8	1849.1	1897.2	1911.5	1914.1
125°	1947.3	1978.6	2024.1	2040.9	2048.0
127.5°	2071.9	2105.4	2141.5	2165.4	2167.7
130°	2189.3	2227.8	2253.9	2280.4	2278.1
132.5°	2309.1	2340.4	2366.6	2388.2	2385.9
135°	2409.8	2448.2	2469.5	2493.8	2488.9
137.5°	2515.1	2543.8	2567.9	2591.8	2584.7
140°	2618.1	2637.3	2663.5	2685.1	2673.2
142.5°	2704.5	2721.2	2752.3	2771.3	2759.4
145°	2795.5	2792.9	2833.6	2850.4	2838.5
147.5°	2874.3	2867.2	2907.9	2919.8	2910.5
150°	2951.1	2934.4	2972.7	2987.0	2975.0
152.5°	3015.7	2996.6	3032.4	3047.0	3030.2
155°	3078.0	3056.6	3085.3	3099.6	3080.5
157.5°	3128.3	3109.2	3130.9	3147.6	3128.3
160°	3171.5	3157.0	3171.5	3185.7	3169.0
162.5°	3209.6	3195.4	3207.4	3224.2	3202.6
165°	3243.2	3229.0	3236.1	3252.9	3236.1
167.5°	3269.6	3255.2	3262.6	3279.4	3257.8
170°	3291.3	3276.8	3281.6	3298.4	3276.8
172.5°	3305.5	3291.3	3296.1	3312.9	3291.3
175°	3317.4	3300.7	3305.5	3322.3	3298.4
177.5°	3322.3	3305.5	3308.1	3324.8	3303.3
180°	3310.4	3310.4	3310.4	3310.4	3310.4

TEST NUMBER: P922341

CATALOG NUMBER: DFN2DIP-PN4F0-060D110US940-FLLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	7.20	7.94	8.27	9.02	10.48	6.76	7.50	7.83	8.58	10.04
	3H	8.85	9.52	9.94	10.60	12.09	8.37	9.04	9.45	10.12	11.60
	4H	9.44	10.07	10.53	11.15	12.65	8.95	9.58	10.04	10.67	12.16
	6H	9.83	10.42	10.94	11.50	13.01	9.34	9.92	10.44	11.01	12.51
	8H	9.94	10.49	11.04	11.59	13.09	9.44	10.00	10.55	11.10	12.60
	12H	9.98	10.51	11.09	11.61	13.13	9.48	10.01	10.59	11.11	12.63
4H	2H	7.65	8.28	8.75	9.36	10.85	7.30	7.93	8.40	9.01	10.50
	3H	9.51	10.03	10.61	11.14	12.65	9.10	9.63	10.21	10.74	12.24
	4H	10.22	10.70	11.33	11.80	13.33	9.80	10.28	10.91	11.38	12.91
	6H	10.73	11.14	11.85	12.27	13.78	10.30	10.72	11.42	11.84	13.36
	8H	10.88	11.26	12.00	12.38	13.91	10.45	10.84	11.57	11.95	13.48
	12H	10.95	11.30	12.08	12.43	13.96	10.51	10.86	11.64	11.99	13.52
8H	4H	10.40	10.79	11.52	11.91	13.44	10.03	10.42	11.15	11.54	13.07
	6H	11.03	11.35	12.17	12.51	14.04	10.66	10.98	11.80	12.14	13.67
	8H	11.26	11.54	12.40	12.67	14.22	10.87	11.15	12.02	12.29	13.84
	12H	11.38	11.63	12.53	12.77	14.35	10.98	11.23	12.13	12.36	13.95
12H	4H	10.38	10.74	11.52	11.86	13.40	10.02	10.37	11.16	11.50	13.04
	6H	11.06	11.34	12.21	12.48	14.03	10.70	10.98	11.84	12.12	13.67
	8H	11.30	11.55	12.45	12.68	14.27	10.93	11.18	12.08	12.31	13.90