

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P925309

Luminaire Tested: DFN2DIP-SQ2F0-030D070US950-FLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P925309
REPORT IS A COMBINATION OF REPORTS P901339 AND P898215
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ2F0-030D070US950-FLLONL
Description: 2 foot, Square Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 9444.6 lumens
Efficiency: N/A
Efficacy: 121.9 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 2.21' x L: 2.21' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 77.5
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9963
Total Harmonic Distortion (THDi): 0.065
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P925309

CATALOG NUMBER: DFN2DIP-SQ2F0-030D070US950-FLLONL

Luminous Intensity Polar Plot

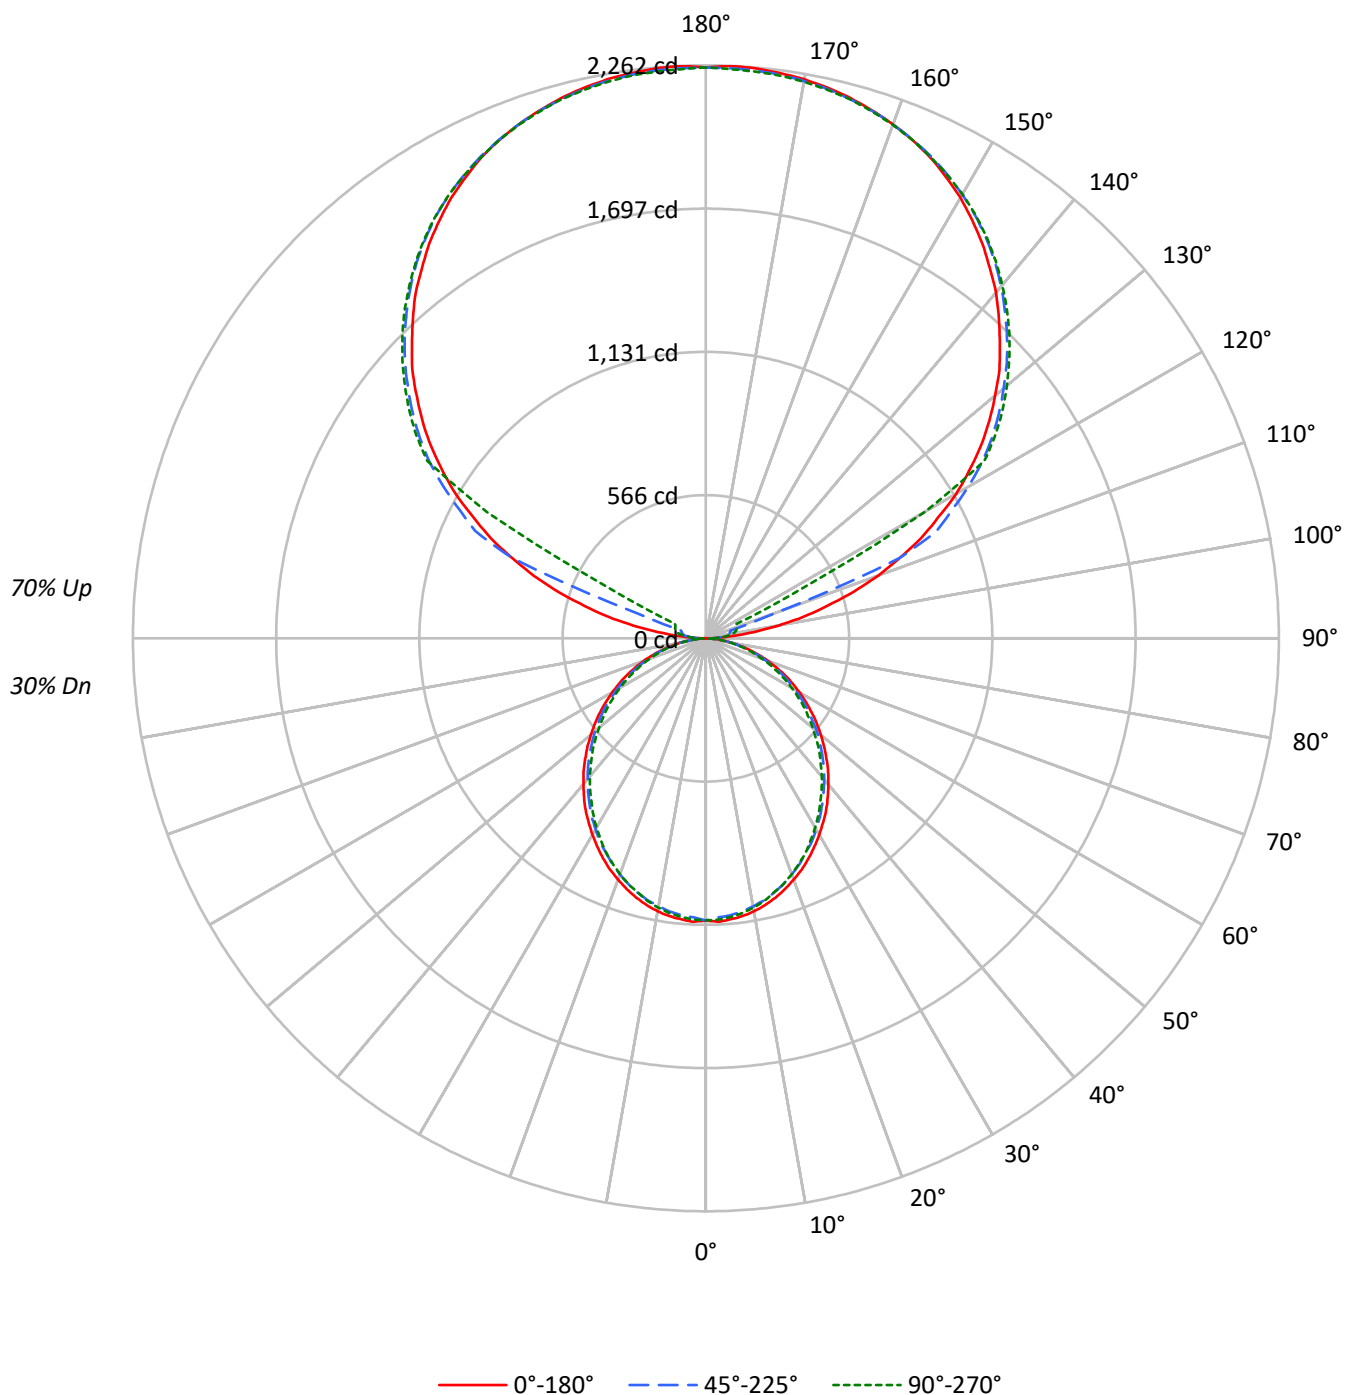

TEST NUMBER: P925309

CATALOG NUMBER: DFN2DIP-SQ2F0-030D070US950-FLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	102	102	102	102	92	92	92	92	72	72	72	54	54	54	38	38	38
1	93	89	85	82	84	80	77	74	63	61	59	48	46	45	33	33	32
2	85	78	72	67	76	70	65	61	55	52	49	42	40	38	29	28	27
3	77	68	61	56	69	62	56	51	49	45	41	37	34	32	26	24	23
4	71	60	53	47	63	54	48	43	43	39	35	33	30	27	23	21	20
5	65	54	46	40	58	48	42	37	39	34	30	29	26	23	21	19	17
6	60	48	40	35	53	43	37	32	35	30	26	27	23	20	19	17	15
7	55	43	35	30	49	39	32	28	31	26	23	24	21	18	17	15	13
8	51	39	32	26	46	35	29	24	28	24	20	22	19	16	16	14	12
9	47	36	28	23	42	32	26	22	26	21	18	20	17	14	15	12	11
10	44	32	26	21	40	30	23	19	24	19	16	19	15	13	14	11	10

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2449	2449	2449
5°	2448	2409	2427
10°	2424	2372	2391
15°	2384	2327	2336
20°	2332	2268	2280
25°	2280	2197	2216
30°	2215	2132	2136
35°	2154	2055	2051
40°	2079	1978	1970
45°	2004	1900	1886
50°	1922	1818	1790
55°	1836	1723	1701
60°	1738	1611	1599
65°	1631	1494	1478
70°	1494	1353	1347
75°	1307	1183	1223
80°	1079	965	993
85°	730	609	624

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 2141 cd/sqm

TEST NUMBER: P925309

CATALOG NUMBER: DFN2DIP-SQ2F0-030D070US950-FLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	104.8	1.1
10°-20°	294.9	3.1
20°-30°	433.4	4.6
30°-40°	503.4	5.3
40°-50°	502.7	5.3
50°-60°	438.4	4.6
60°-70°	324.1	3.4
70°-80°	183.3	1.9
80°-90°	52.3	0.6
90°-100°	74.3	0.8
100°-110°	277.0	2.9
110°-120°	734.8	7.8
120°-130°	1218.6	12.9
130°-140°	1294.5	13.7
140°-150°	1203.1	12.7
150°-160°	967.2	10.2
160°-170°	623.3	6.6
170°-180°	214.5	2.3
0°-30°	833.1	8.8
0°-40°	1336.5	14.2
0°-60°	2277.6	24.1
0°-90°	2837.3	30.0
90°-120°	1086.1	11.5
90°-150°	4802.2	50.8
90°-180°	6607.0	70.0
0°-180°	9444.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1114	1114	1114	1114	1114	
5°	1114	1109	1098	1106	1104	106
15°	1060	1054	1040	1044	1039	299
25°	959	951	933	935	933	441
35°	828	817	800	793	788	517
45°	674	666	650	638	634	520
55°	510	503	490	478	472	456
65°	344	337	327	317	312	340
75°	180	178	172	166	168	192
85°	44	43	42	38	38	49
90°	2	20	32	41	44	9
95°	106	52	64	72	70	125
105°	496	545	100	117	124	530
115°	938	965	1006	251	134	923
125°	1326	1347	1378	1390	1394	1182
135°	1641	1667	1681	1698	1694	1267
145°	1903	1902	1929	1941	1932	1190
155°	2096	2081	2100	2110	2097	966
165°	2208	2198	2203	2215	2203	624
175°	2259	2247	2250	2262	2246	215
180°	2254	2254	2254	2254	2254	

TEST NUMBER: P925309

CATALOG NUMBER: DFN2DIP-SQ2F0-030D070US950-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1113.6	1113.6	1113.6	1113.6	1113.6
2.5°	1120.1	1114.7	1102.9	1113.6	1111.6
5°	1113.6	1109.4	1097.6	1106.2	1104.1
7.5°	1106.2	1099.8	1087.9	1096.6	1094.4
10°	1094.4	1086.9	1074.1	1082.6	1079.5
12.5°	1078.3	1071.9	1059.1	1064.4	1062.3
15°	1060.1	1053.8	1039.8	1044.1	1038.7
17.5°	1037.6	1031.3	1017.3	1022.6	1017.3
20°	1013.0	1006.6	991.6	994.7	990.5
22.5°	988.4	978.8	964.8	964.8	962.6
25°	959.4	950.9	932.7	934.8	932.7
27.5°	927.3	919.8	905.9	902.8	897.4
30°	895.2	886.6	870.6	867.4	863.1
32.5°	861.0	854.6	837.4	830.9	826.6
35°	827.8	817.1	799.9	793.4	788.1
37.5°	790.3	780.7	763.5	755.9	750.6
40°	751.8	743.2	726.0	716.5	712.2
42.5°	714.3	705.7	688.6	677.8	671.4
45°	673.6	666.1	650.0	638.2	633.9
47.5°	633.9	626.5	609.3	597.5	591.1
50°	592.1	586.8	571.8	556.8	551.5
52.5°	551.5	544.0	530.1	518.3	510.8
55°	509.8	503.3	490.5	477.7	472.3
57.5°	467.9	462.6	448.7	435.8	431.5
60°	426.2	422.0	407.0	395.1	392.0
62.5°	385.5	378.0	367.3	356.6	352.3
65°	343.8	337.3	326.6	317.0	311.7
67.5°	301.0	295.5	285.9	278.5	274.2
70°	261.3	257.0	247.4	239.8	235.6
72.5°	220.7	216.3	210.9	203.5	200.3
75°	179.8	177.8	172.4	166.0	168.2
77.5°	143.5	139.2	137.0	133.8	130.7
80°	107.1	106.0	103.8	100.6	98.5
82.5°	72.8	72.8	71.8	67.4	67.4
85°	43.9	42.8	41.8	38.5	37.5
87.5°	19.3	17.2	15.0	11.8	10.7
90°	1.5	19.6	32.5	40.8	44.0
92.5°	40.8	34.2	39.1	42.5	44.0
95°	105.9	52.1	63.5	71.8	70.1
97.5°	190.7	57.1	83.1	88.1	89.7
100°	288.8	65.3	92.9	105.9	109.2
102.5°	396.2	393.1	96.3	114.1	119.1
105°	495.8	544.7	99.5	117.3	123.9
107.5°	611.5	652.2	102.8	120.7	127.3
110°	722.6	756.6	285.4	122.4	128.8

TEST NUMBER: P925309

CATALOG NUMBER: DFN2DIP-SQ2F0-030D070US950-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	826.9	856.1	828.5	125.5	130.5
115°	937.7	965.4	1006.2	251.2	133.8
117.5°	1033.9	1066.5	1094.3	861.0	433.8
120°	1141.6	1166.0	1195.5	1215.0	994.8
122.5°	1232.8	1258.9	1291.7	1301.4	1303.1
125°	1325.8	1347.0	1378.1	1389.5	1394.3
127.5°	1410.6	1433.4	1458.0	1474.3	1475.8
130°	1490.5	1516.7	1534.5	1552.5	1551.0
132.5°	1572.1	1593.4	1611.2	1625.9	1624.4
135°	1640.6	1666.7	1681.3	1697.7	1694.5
137.5°	1712.2	1731.9	1748.3	1764.6	1759.7
140°	1782.4	1795.5	1813.4	1828.1	1819.9
142.5°	1841.2	1852.7	1873.8	1886.7	1878.6
145°	1903.2	1901.5	1929.2	1940.6	1932.5
147.5°	1956.8	1952.1	1979.7	1987.8	1981.5
150°	2009.1	1997.8	2023.9	2033.5	2025.4
152.5°	2053.1	2040.1	2064.6	2074.4	2063.0
155°	2095.6	2081.0	2100.5	2110.2	2097.3
157.5°	2129.8	2116.8	2131.5	2143.0	2129.8
160°	2159.3	2149.4	2159.3	2168.9	2157.5
162.5°	2185.2	2175.5	2183.6	2195.1	2180.4
165°	2208.0	2198.4	2203.2	2214.6	2203.2
167.5°	2226.1	2216.1	2221.2	2232.6	2218.0
170°	2240.8	2230.9	2234.2	2245.6	2230.9
172.5°	2250.5	2240.8	2244.1	2255.4	2240.8
175°	2258.6	2247.1	2250.5	2261.8	2245.6
177.5°	2261.8	2250.5	2252.2	2263.7	2248.9
180°	2253.7	2253.7	2253.7	2253.7	2253.7

TEST NUMBER: P925309

CATALOG NUMBER: DFN2DIP-SQ2F0-030D070US950-FLLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.06	8.77	9.17	9.87	11.40	7.62	8.32	8.73	9.43	10.96
	3H	9.69	10.32	10.81	11.44	12.98	9.20	9.83	10.32	10.95	12.49
	4H	10.26	10.86	11.39	11.97	13.53	9.76	10.36	10.89	11.48	13.03
	6H	10.63	11.19	11.77	12.31	13.87	10.13	10.69	11.27	11.81	13.37
	8H	10.73	11.25	11.87	12.39	13.94	10.23	10.75	11.37	11.89	13.44
	12H	10.76	11.26	11.91	12.39	13.97	10.25	10.75	11.40	11.88	13.46
4H	2H	8.49	9.09	9.63	10.21	11.76	8.14	8.74	9.27	9.85	11.40
	3H	10.32	10.82	11.46	11.96	13.53	9.91	10.41	11.06	11.56	13.12
	4H	11.01	11.47	12.16	12.60	14.19	10.59	11.05	11.73	12.18	13.76
	6H	11.50	11.90	12.65	13.05	14.62	11.07	11.46	12.22	12.62	14.19
	8H	11.64	12.01	12.79	13.15	14.74	11.20	11.57	12.35	12.71	14.31
	12H	11.69	12.03	12.86	13.18	14.78	11.24	11.58	12.41	12.74	14.33
8H	4H	11.19	11.55	12.34	12.70	14.29	10.81	11.18	11.96	12.32	13.91
	6H	11.79	12.09	12.96	13.28	14.87	11.40	11.71	12.57	12.89	14.48
	8H	11.99	12.26	13.17	13.42	15.03	11.60	11.86	12.78	13.03	14.64
	12H	12.10	12.34	13.28	13.50	15.14	11.69	11.93	12.87	13.09	14.73
12H	4H	11.16	11.49	12.33	12.65	14.25	10.79	11.13	11.96	12.28	13.88
	6H	11.81	12.08	12.99	13.24	14.85	11.44	11.70	12.61	12.87	14.48
	8H	12.03	12.26	13.21	13.43	15.07	11.65	11.88	12.83	13.04	14.69