

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P912076

Luminaire Tested: DFN2DIP-SQ3F0-110D110US850-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P912076
REPORT IS A COMBINATION OF REPORTS P900001 AND P896733
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ3F0-110D110US850-FLLFLL
Description: 3 foot, Square Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 22873.1 lumens
Efficiency: N/A
Efficacy: 115.6 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.06' x L: 3.06' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 197.8
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9977
Total Harmonic Distortion (THDi): 0.049
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P912076

CATALOG NUMBER: DFN2DIP-SQ3F0-110D110US850-FLLFLL

Luminous Intensity Polar Plot

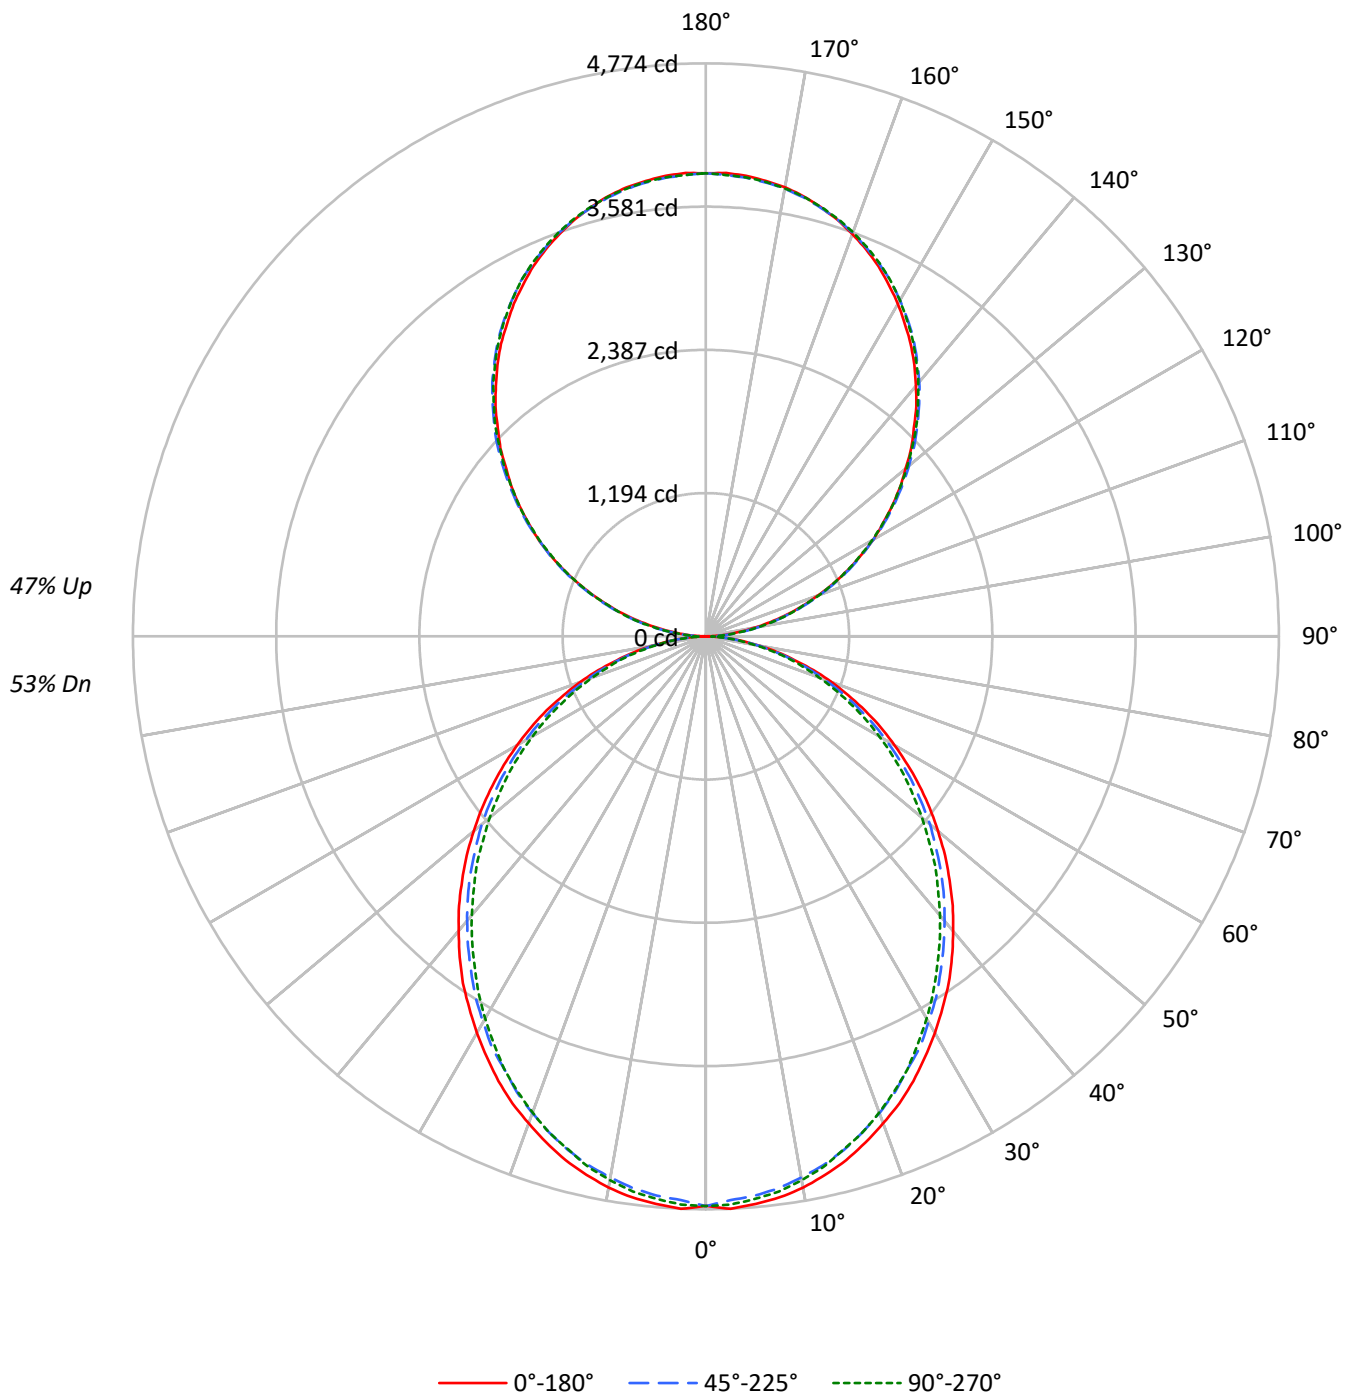

TEST NUMBER: P912076

CATALOG NUMBER: DFN2DIP-SQ3F0-110D110US850-FLLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	108	108	108	108	100	100	100	100	85	85	85	71	71	71	59	59	59
1	98	94	90	87	91	87	84	81	74	72	70	63	61	59	52	51	50
2	90	82	76	71	83	76	71	66	65	61	58	55	52	50	46	44	42
3	82	72	65	59	75	67	61	55	58	53	49	49	45	42	41	38	36
4	75	64	56	50	69	60	52	47	51	46	41	43	39	36	36	33	31
5	69	57	49	43	63	53	46	40	46	40	36	39	35	31	33	29	27
6	63	51	43	37	58	48	40	35	41	36	31	35	31	27	30	26	24
7	59	46	38	33	54	43	36	31	37	32	28	32	28	24	27	24	21
8	54	42	34	29	50	39	32	27	34	29	24	29	25	22	25	21	19
9	51	38	31	26	47	36	29	24	31	26	22	27	23	19	23	20	17
10	47	35	28	23	44	33	26	22	29	23	20	25	21	18	21	18	15

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	5439	5439	5439
5°	5444	5359	5397
10°	5396	5284	5322
15°	5314	5193	5207
20°	5203	5069	5088
25°	5093	4921	4951
30°	4955	4782	4777
35°	4825	4620	4594
40°	4665	4456	4419
45°	4506	4291	4240
50°	4331	4118	4033
55°	4147	3918	3842
60°	3940	3681	3624
65°	3713	3435	3366
70°	3424	3134	3088
75°	3025	2774	2828
80°	2543	2315	2338
85°	1791	1534	1530

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 4506 cd/sqm

TEST NUMBER: P912076

CATALOG NUMBER: DFN2DIP-SQ3F0-110D110US850-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	446.8	2.0
10°-20°	1257.0	5.5
20°-30°	1847.3	8.1
30°-40°	2145.5	9.4
40°-50°	2142.9	9.4
50°-60°	1868.5	8.2
60°-70°	1381.3	6.0
70°-80°	781.5	3.4
80°-90°	217.2	0.9
90°-100°	238.7	1.0
100°-110°	758.6	3.3
110°-120°	1298.1	5.7
120°-130°	1707.2	7.5
130°-140°	1916.3	8.4
140°-150°	1879.1	8.2
150°-160°	1576.3	6.9
160°-170°	1045.4	4.6
170°-180°	365.4	1.6
0°-30°	3551.1	15.5
0°-40°	5696.6	24.9
0°-60°	9708.0	42.4
0°-90°	12088.0	52.8
90°-120°	2295.4	10.0
90°-150°	7798.0	34.1
90°-180°	10785.0	47.2
0°-180°	22873.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	4747	4747	4747	4747	4747	
5°	4747	4729	4678	4715	4706	451
15°	4519	4491	4432	4450	4428	1273
25°	4090	4053	3976	3984	3976	1882
35°	3528	3483	3410	3382	3359	2203
45°	2871	2839	2770	2721	2702	2216
55°	2173	2145	2091	2036	2013	1943
65°	1465	1438	1392	1351	1328	1449
75°	766	758	735	708	717	818
85°	187	182	178	164	160	209
90°	3	42	114	107	110	22
95°	170	202	208	208	202	189
105°	700	710	716	722	722	739
115°	1303	1321	1316	1312	1303	1288
125°	1895	1924	1914	1904	1900	1693
135°	2451	2487	2494	2490	2481	1894
145°	2975	2998	3017	3021	3008	1859
155°	3402	3411	3422	3438	3428	1566
165°	3701	3698	3698	3721	3704	1044
175°	3851	3842	3835	3858	3838	366
180°	3858	3858	3858	3858	3858	

TEST NUMBER: P912076

CATALOG NUMBER: DFN2DIP-SQ3F0-110D110US850-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	4746.7	4746.7	4746.7	4746.7	4746.7
2.5°	4774.2	4751.5	4701.2	4746.7	4738.0
5°	4746.7	4728.8	4678.4	4714.7	4706.0
7.5°	4714.7	4687.6	4637.3	4674.1	4664.9
10°	4664.9	4632.8	4578.2	4614.4	4600.9
12.5°	4596.1	4569.0	4514.3	4537.0	4527.8
15°	4518.6	4491.4	4431.9	4450.3	4427.6
17.5°	4422.7	4395.6	4336.1	4358.8	4336.1
20°	4317.7	4290.5	4226.6	4240.2	4222.3
22.5°	4213.1	4171.8	4112.3	4112.3	4103.1
25°	4089.5	4053.3	3975.8	3984.5	3975.8
27.5°	3952.5	3920.5	3861.4	3847.9	3825.2
30°	3816.0	3779.1	3710.8	3697.3	3678.9
32.5°	3669.7	3642.6	3569.4	3541.8	3523.4
35°	3528.3	3482.8	3409.6	3382.0	3359.3
37.5°	3368.5	3327.3	3254.2	3222.2	3199.5
40°	3204.3	3167.5	3094.4	3053.7	3035.3
42.5°	3044.5	3007.7	2935.1	2889.1	2862.0
45°	2871.2	2839.2	2770.4	2720.6	2702.2
47.5°	2702.2	2670.3	2597.1	2546.7	2519.5
50°	2524.0	2501.2	2437.2	2373.4	2350.6
52.5°	2350.6	2318.6	2259.6	2209.1	2177.2
55°	2172.9	2145.2	2090.6	2035.8	2013.1
57.5°	1994.6	1971.9	1912.4	1857.6	1839.2
60°	1816.4	1798.6	1734.6	1684.2	1670.7
62.5°	1643.1	1611.2	1565.6	1520.1	1501.7
65°	1465.3	1437.7	1392.2	1351.1	1328.4
67.5°	1282.8	1259.6	1218.9	1187.0	1168.6
70°	1113.8	1095.4	1054.2	1022.3	1004.3
72.5°	940.4	922.0	899.3	867.3	853.7
75°	766.5	757.9	734.6	707.5	716.7
77.5°	611.6	593.2	584.0	570.5	556.9
80°	456.7	451.8	442.6	429.1	419.9
82.5°	310.4	310.4	306.1	287.7	287.7
85°	187.0	182.5	178.2	164.1	159.8
87.5°	82.3	73.1	63.9	50.3	45.5
90°	3.4	41.9	114.0	107.0	110.5
92.5°	72.1	97.7	101.1	104.7	104.7
95°	169.8	202.4	208.2	208.2	202.4
97.5°	282.7	312.8	325.7	325.7	325.7
100°	412.9	439.6	448.9	448.9	445.5
102.5°	550.2	569.9	582.8	586.2	582.8
105°	700.2	709.5	716.5	722.3	722.3
107.5°	849.1	863.0	863.0	865.4	849.1
110°	993.3	1012.0	1012.0	1012.0	1002.6

TEST NUMBER: P912076

CATALOG NUMBER: DFN2DIP-SQ3F0-110D110US850-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1149.1	1168.9	1165.4	1156.1	1149.1
115°	1302.7	1321.3	1315.5	1312.1	1302.7
117.5°	1455.1	1480.6	1464.3	1455.1	1445.8
120°	1608.6	1634.2	1608.6	1608.6	1598.2
122.5°	1748.2	1780.7	1764.4	1755.1	1748.2
125°	1894.7	1923.8	1914.5	1904.0	1900.5
127.5°	2037.8	2073.8	2061.1	2047.1	2037.8
130°	2171.5	2213.5	2207.6	2200.6	2187.8
132.5°	2321.6	2354.2	2356.5	2340.2	2330.9
135°	2450.7	2486.7	2493.7	2490.3	2480.9
137.5°	2594.9	2624.0	2629.8	2627.4	2613.6
140°	2721.7	2750.8	2767.1	2767.1	2754.3
142.5°	2852.0	2881.1	2890.4	2893.8	2881.1
145°	2975.2	2998.5	3017.1	3020.6	3007.8
147.5°	3085.8	3114.8	3128.8	3134.6	3121.8
150°	3199.8	3219.5	3232.3	3242.8	3232.3
152.5°	3300.9	3320.7	3337.0	3349.8	3337.0
155°	3402.2	3411.4	3421.9	3438.2	3427.7
157.5°	3489.4	3496.3	3502.1	3525.4	3509.1
160°	3567.3	3574.3	3577.7	3597.6	3583.6
162.5°	3639.4	3639.4	3643.0	3665.0	3648.7
165°	3701.1	3697.5	3697.5	3720.8	3704.5
167.5°	3756.8	3746.4	3746.4	3769.7	3753.4
170°	3798.8	3789.5	3786.0	3809.2	3789.5
172.5°	3827.8	3818.5	3815.1	3838.4	3818.5
175°	3851.1	3841.8	3834.8	3858.1	3838.4
177.5°	3863.9	3854.6	3847.6	3867.4	3847.6
180°	3858.1	3858.1	3858.1	3858.1	3858.1

TEST NUMBER: P912076

CATALOG NUMBER: DFN2DIP-SQ3F0-110D110US850-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	13.38	14.27	14.31	15.22	16.45	12.94	13.82	13.87	14.77	16.00
	3H	15.04	15.83	15.98	16.79	18.05	14.55	15.34	15.49	16.30	17.56
	4H	15.62	16.38	16.58	17.34	18.60	15.13	15.88	16.09	16.85	18.11
	6H	16.02	16.72	16.99	17.68	18.96	15.52	16.22	16.49	17.18	18.46
	8H	16.13	16.79	17.10	17.77	19.04	15.62	16.28	16.60	17.27	18.54
	12H	16.17	16.80	17.15	17.78	19.08	15.66	16.29	16.64	17.27	18.57
4H	2H	13.84	14.59	14.80	15.56	16.82	13.49	14.24	14.45	15.20	16.46
	3H	15.70	16.33	16.68	17.33	18.60	15.30	15.92	16.27	16.92	18.19
	4H	16.41	16.99	17.40	17.98	19.28	15.99	16.57	16.97	17.55	18.85
	6H	16.93	17.42	17.92	18.43	19.73	16.49	16.99	17.49	18.00	19.30
	8H	17.08	17.54	18.07	18.54	19.85	16.64	17.10	17.63	18.10	19.42
	12H	17.15	17.57	18.16	18.58	19.90	16.70	17.12	17.71	18.14	19.45
8H	4H	16.61	17.07	17.61	18.08	19.39	16.23	16.70	17.23	17.70	19.01
	6H	17.24	17.62	18.26	18.66	19.97	16.85	17.23	17.87	18.28	19.59
	8H	17.45	17.79	18.48	18.82	20.15	17.06	17.40	18.09	18.43	19.76
	12H	17.58	17.88	18.62	18.91	20.28	17.17	17.47	18.21	18.50	19.87
12H	4H	16.60	17.01	17.61	18.03	19.35	16.23	16.64	17.24	17.66	18.98
	6H	17.26	17.60	18.29	18.63	19.96	16.89	17.23	17.92	18.26	19.59
	8H	17.50	17.80	18.54	18.83	20.20	17.12	17.42	18.16	18.45	19.82