

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P912600

Luminaire Tested: DFN2DIP-TR3F0-050D040US850-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P912600
REPORT IS A COMBINATION OF REPORTS P900289 AND P897195
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR3F0-050D040US850-FLLFLL
Description: 3 foot, Triangle Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 9415.4 lumens
Efficiency: N/A
Efficacy: 125.7 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 2.74' x L: 3.16' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 74.9
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9933
Total Harmonic Distortion (THDi): 0.066
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P912600

CATALOG NUMBER: DFN2DIP-TR3F0-050D040US850-FLLFLL

Luminous Intensity Polar Plot

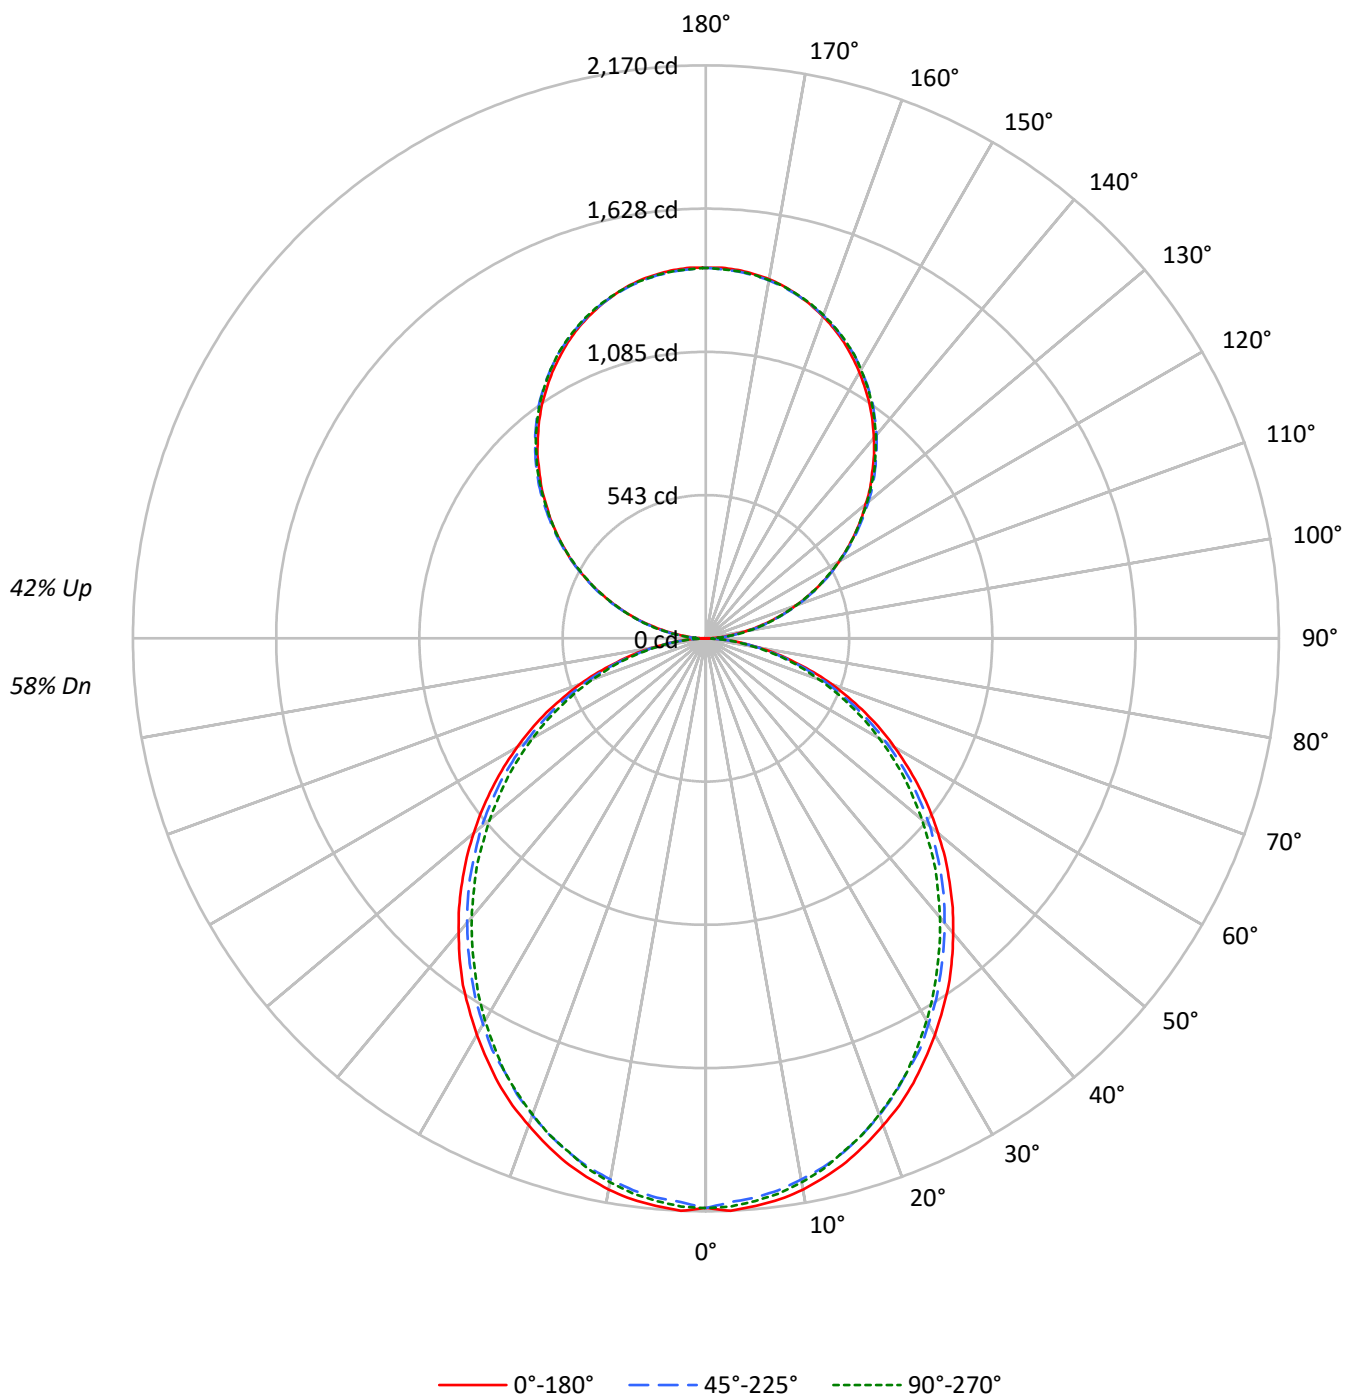

TEST NUMBER: P912600

CATALOG NUMBER: DFN2DIP-TR3F0-050D040US850-FLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	109	109	109	109	102	102	102	102	88	88	88	75	75	75	64	64	64
1	100	95	91	88	93	89	86	82	77	75	72	66	65	63	56	55	54
2	91	83	77	72	84	78	72	68	68	64	60	58	55	52	50	47	45
3	83	73	66	60	77	69	62	57	60	55	50	52	48	44	44	41	39
4	76	65	57	51	70	61	54	48	53	47	43	46	42	38	39	36	33
5	70	58	50	43	65	54	47	41	48	42	37	41	37	33	35	32	29
6	64	52	44	38	60	49	41	36	43	37	32	37	33	29	32	29	26
7	59	47	39	33	55	44	37	32	39	33	29	34	29	26	29	26	23
8	55	43	35	29	51	40	33	28	36	30	26	31	26	23	27	23	20
9	51	39	31	26	48	37	30	25	33	27	23	29	24	21	25	21	18
10	48	36	28	24	45	34	27	23	30	25	21	27	22	19	23	19	17

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2689	2689	2689
5°	2691	2649	2667
10°	2668	2611	2629
15°	2627	2566	2571
20°	2573	2504	2512
25°	2519	2430	2443
30°	2451	2361	2356
35°	2387	2281	2265
40°	2308	2199	2178
45°	2229	2117	2088
50°	2143	2031	1985
55°	2053	1931	1889
60°	1951	1814	1780
65°	1839	1691	1651
70°	1697	1542	1512
75°	1500	1362	1380
80°	1263	1134	1135
85°	891	746	732

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2229 cd/sqm

TEST NUMBER: P912600

CATALOG NUMBER: DFN2DIP-TR3F0-050D040US850-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	203.1	2.2
10°-20°	571.4	6.1
20°-30°	839.7	8.9
30°-40°	975.2	10.4
40°-50°	974.0	10.3
50°-60°	849.3	9.0
60°-70°	627.9	6.7
70°-80°	355.2	3.8
80°-90°	97.7	1.0
90°-100°	86.8	0.9
100°-110°	275.8	2.9
110°-120°	472.0	5.0
120°-130°	620.8	6.6
130°-140°	696.8	7.4
140°-150°	683.3	7.3
150°-160°	573.2	6.1
160°-170°	380.1	4.0
170°-180°	132.9	1.4
0°-30°	1614.1	17.1
0°-40°	2589.4	27.5
0°-60°	4412.7	46.9
0°-90°	5493.5	58.3
90°-120°	834.7	8.9
90°-150°	2835.6	30.1
90°-180°	3922.0	41.7
0°-180°	9415.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2158	2158	2158	2158	2158	
5°	2158	2150	2126	2143	2139	205
15°	2054	2042	2014	2023	2012	578
25°	1859	1842	1807	1811	1807	855
35°	1604	1583	1550	1537	1527	1001
45°	1305	1290	1259	1237	1228	1007
55°	988	975	950	925	915	883
65°	666	654	633	614	604	659
75°	348	344	334	322	326	372
85°	85	83	81	75	73	95
90°	1	15	42	39	40	9
95°	62	74	76	76	74	69
105°	255	258	260	263	263	269
115°	474	480	478	477	474	469
125°	689	700	696	692	691	616
135°	891	904	907	906	902	689
145°	1082	1090	1097	1098	1094	676
155°	1237	1240	1244	1250	1246	569
165°	1346	1345	1345	1353	1347	380
175°	1400	1397	1394	1403	1396	133
180°	1403	1403	1403	1403	1403	

TEST NUMBER: P912600

CATALOG NUMBER: DFN2DIP-TR3F0-050D040US850-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2157.6	2157.6	2157.6	2157.6	2157.6
2.5°	2170.1	2159.8	2136.9	2157.6	2153.7
5°	2157.6	2149.5	2126.5	2143.0	2139.2
7.5°	2143.0	2130.7	2107.9	2124.6	2120.4
10°	2120.4	2105.9	2081.0	2097.5	2091.4
12.5°	2089.1	2076.8	2052.0	2062.3	2058.1
15°	2053.9	2041.6	2014.5	2022.9	2012.5
17.5°	2010.3	1998.0	1970.9	1981.2	1970.9
20°	1962.6	1950.3	1921.2	1927.3	1919.2
22.5°	1915.0	1896.3	1869.2	1869.2	1865.0
25°	1858.9	1842.4	1807.1	1811.1	1807.1
27.5°	1796.6	1782.1	1755.2	1749.0	1738.7
30°	1734.5	1717.8	1686.8	1680.6	1672.3
32.5°	1668.0	1655.7	1622.5	1609.9	1601.6
35°	1603.7	1583.1	1549.8	1537.3	1527.0
37.5°	1531.1	1512.5	1479.2	1464.7	1454.3
40°	1456.6	1439.8	1406.5	1388.0	1379.7
42.5°	1383.9	1367.2	1334.1	1313.2	1300.9
45°	1305.1	1290.5	1259.3	1236.6	1228.2
47.5°	1228.2	1213.7	1180.5	1157.6	1145.3
50°	1147.3	1136.9	1107.9	1078.8	1068.4
52.5°	1068.4	1053.9	1027.0	1004.2	989.7
55°	987.7	975.1	950.2	925.3	915.0
57.5°	906.6	896.3	869.2	844.4	836.0
60°	825.7	817.6	788.5	765.5	759.4
62.5°	746.9	732.4	711.6	690.9	682.6
65°	666.1	653.5	632.8	614.2	603.7
67.5°	583.1	572.6	554.1	539.5	531.1
70°	506.3	497.9	479.2	464.7	456.6
72.5°	427.5	419.1	408.8	394.2	388.0
75°	348.4	344.5	333.9	321.6	325.8
77.5°	278.0	269.6	265.5	259.3	253.2
80°	207.6	205.4	201.2	195.1	190.9
82.5°	141.1	141.1	139.1	130.8	130.8
85°	84.9	83.0	81.0	74.6	72.6
87.5°	37.4	33.3	29.1	22.8	20.7
90°	1.2	15.2	41.5	38.9	40.1
92.5°	26.2	35.5	36.8	38.0	38.0
95°	61.8	73.6	75.7	75.7	73.6
97.5°	102.8	113.8	118.4	118.4	118.4
100°	150.2	159.9	163.2	163.2	162.0
102.5°	200.1	207.3	211.9	213.1	211.9
105°	254.6	258.0	260.5	262.6	262.6
107.5°	308.7	313.8	313.8	314.6	308.7
110°	361.2	368.0	368.0	368.0	364.6

TEST NUMBER: P912600

CATALOG NUMBER: DFN2DIP-TR3F0-050D040US850-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	417.9	425.1	423.7	420.4	417.9
115°	473.7	480.5	478.3	477.1	473.7
117.5°	529.1	538.4	532.5	529.1	525.8
120°	585.0	594.2	585.0	585.0	581.1
122.5°	635.7	647.5	641.7	638.2	635.7
125°	689.0	699.6	696.2	692.3	691.1
127.5°	741.0	754.1	749.5	744.4	741.0
130°	789.6	804.9	802.8	800.3	795.6
132.5°	844.2	856.0	856.9	850.9	847.6
135°	891.2	904.3	906.8	905.5	902.2
137.5°	943.6	954.2	956.3	955.4	950.4
140°	989.7	1000.3	1006.2	1006.2	1001.5
142.5°	1037.1	1047.7	1051.0	1052.3	1047.7
145°	1081.9	1090.4	1097.1	1098.5	1093.8
147.5°	1122.1	1132.6	1137.7	1139.8	1135.2
150°	1163.6	1170.8	1175.4	1179.2	1175.4
152.5°	1200.4	1207.5	1213.5	1218.1	1213.5
155°	1237.1	1240.5	1244.3	1250.3	1246.4
157.5°	1268.9	1271.4	1273.5	1282.0	1276.0
160°	1297.2	1299.7	1301.0	1308.2	1303.1
162.5°	1323.4	1323.4	1324.7	1332.7	1326.8
165°	1345.9	1344.6	1344.6	1353.0	1347.1
167.5°	1366.2	1362.3	1362.3	1370.8	1364.8
170°	1381.4	1377.9	1376.7	1385.1	1377.9
172.5°	1391.9	1388.6	1387.2	1395.8	1388.6
175°	1400.4	1397.0	1394.5	1402.9	1395.8
177.5°	1405.1	1401.7	1399.1	1406.3	1399.1
180°	1402.9	1402.9	1402.9	1402.9	1402.9

TEST NUMBER: P912600

CATALOG NUMBER: DFN2DIP-TR3F0-050D040US850-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.39	12.33	12.27	13.24	14.38	10.96	11.91	11.85	12.81	13.95
	3H	13.05	13.89	13.94	14.81	15.98	12.58	13.43	13.47	14.34	15.51
	4H	13.63	14.43	14.54	15.35	16.53	13.17	13.97	14.08	14.88	16.06
	6H	14.03	14.77	14.95	15.69	16.89	13.56	14.30	14.48	15.22	16.42
	8H	14.13	14.84	15.06	15.78	16.97	13.67	14.37	14.59	15.31	16.50
	12H	14.18	14.85	15.12	15.79	17.00	13.71	14.38	14.64	15.31	16.53
4H	2H	11.86	12.66	12.77	13.58	14.76	11.52	12.32	12.43	13.23	14.42
	3H	13.72	14.39	14.65	15.34	16.53	13.33	14.00	14.26	14.95	16.15
	4H	14.43	15.04	15.37	15.99	17.21	14.03	14.64	14.97	15.58	16.81
	6H	14.94	15.47	15.89	16.44	17.66	14.54	15.07	15.49	16.03	17.25
	8H	15.09	15.58	16.04	16.54	17.78	14.68	15.18	15.64	16.14	17.37
	12H	15.16	15.61	16.13	16.58	17.83	14.75	15.19	15.72	16.17	17.41
8H	4H	14.63	15.12	15.58	16.08	17.32	14.27	14.77	15.23	15.73	16.96
	6H	15.26	15.66	16.23	16.66	17.90	14.90	15.30	15.87	16.31	17.54
	8H	15.47	15.83	16.46	16.82	18.07	15.11	15.47	16.09	16.46	17.71
	12H	15.60	15.92	16.59	16.90	18.20	15.22	15.54	16.21	16.52	17.82
12H	4H	14.62	15.06	15.59	16.04	17.28	14.27	14.71	15.24	15.69	16.93
	6H	15.28	15.64	16.27	16.64	17.89	14.94	15.30	15.92	16.29	17.54
	8H	15.52	15.84	16.51	16.82	18.12	15.17	15.49	16.16	16.47	17.77