

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P923693

Luminaire Tested: DFN2DIP-TR4F0-050D080US940-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P923693
REPORT IS A COMBINATION OF REPORTS P901964 AND P898849
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-TR4F0-050D080US940-RLLONL
Description: 4 foot, Triangle Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 10852.1 lumens
Efficiency: N/A
Efficacy: 107.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.43' x L: 3.96' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 101.1
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.996
Total Harmonic Distortion (THDi): 0.064
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P923693

CATALOG NUMBER: DFN2DIP-TR4F0-050D080US940-RLLONL

Luminous Intensity Polar Plot

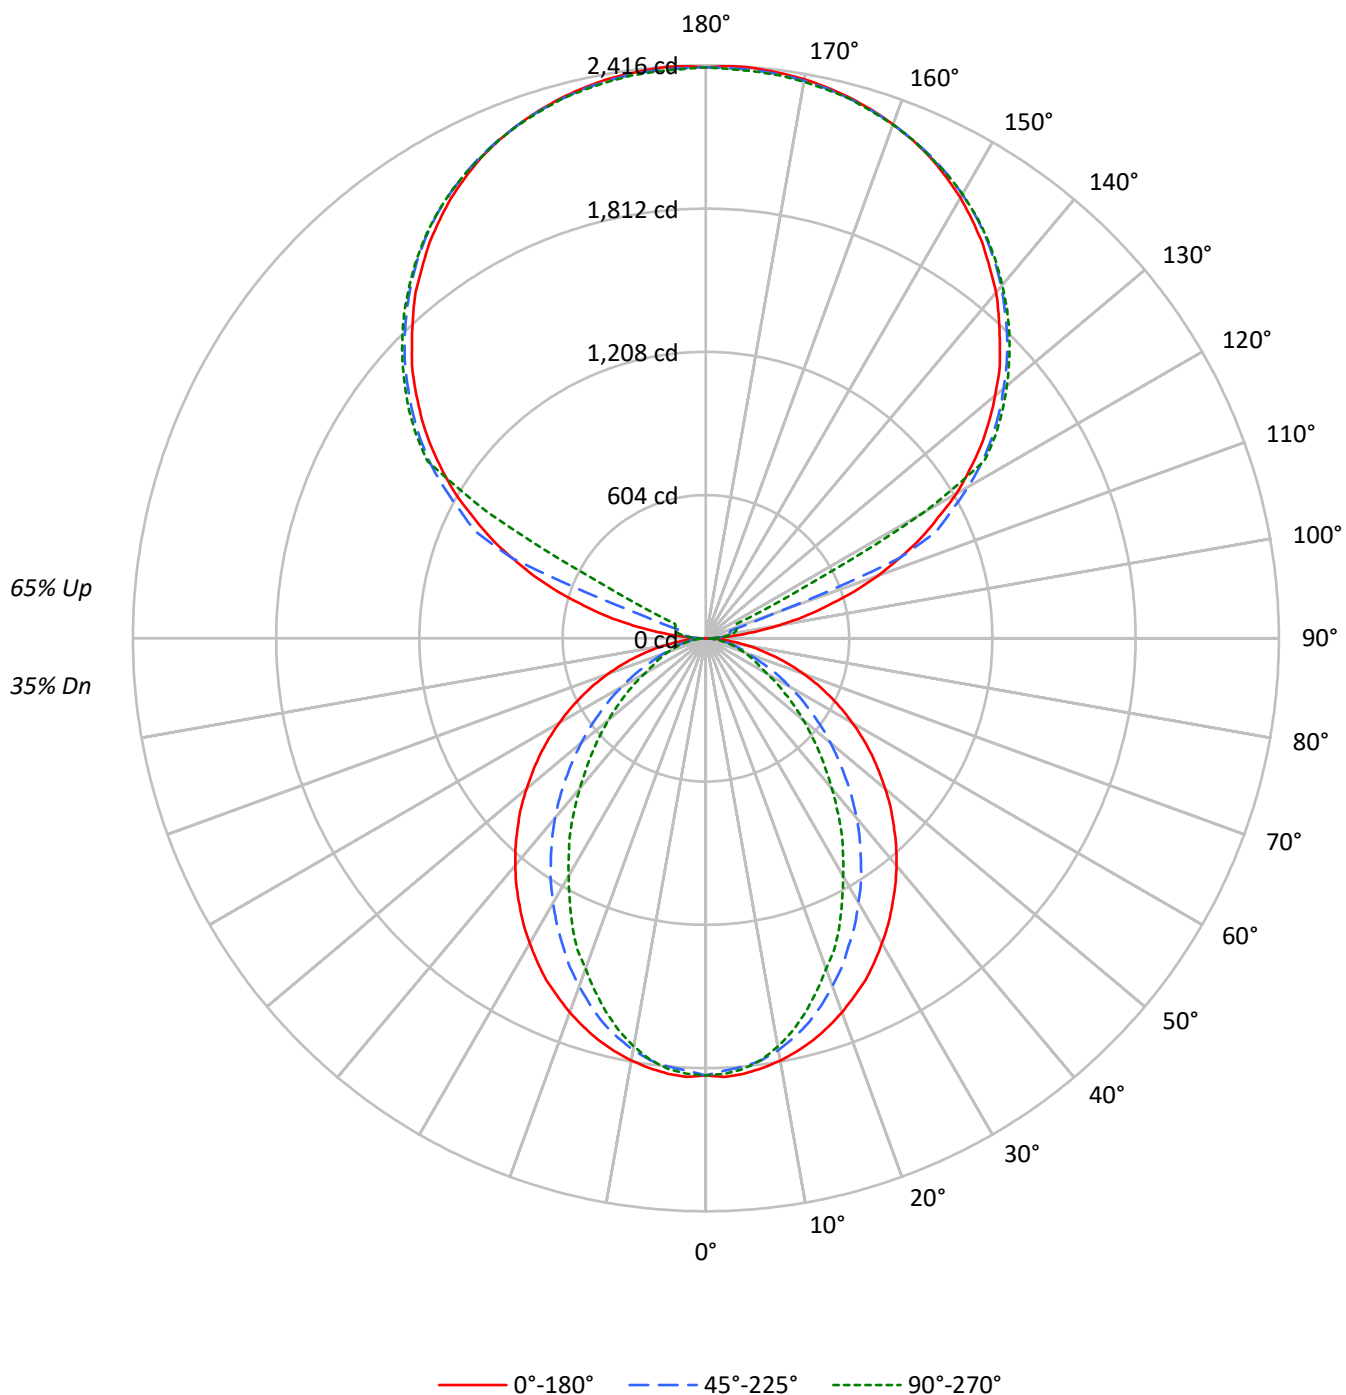

TEST NUMBER: P923693

CATALOG NUMBER: DFN2DIP-TR4F0-050D080US940-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	104	104	104	104	94	94	94	94	75	75	75	58	58	58	42	42	42
1	95	91	87	84	86	82	79	76	66	64	62	51	50	49	38	37	36
2	87	80	74	69	78	72	67	63	58	55	52	46	43	41	34	32	31
3	79	70	63	58	71	64	58	53	52	47	44	41	38	35	30	28	27
4	72	62	55	49	65	57	50	45	46	41	38	36	33	30	27	25	23
5	67	56	48	42	60	51	44	39	41	36	33	33	29	27	25	22	21
6	61	50	42	37	55	45	39	34	37	32	29	30	26	23	22	20	18
7	57	45	37	32	51	41	34	30	34	29	25	27	23	21	21	18	16
8	53	41	33	28	48	37	31	26	31	26	22	25	21	19	19	17	15
9	49	37	30	25	44	34	28	23	28	23	20	23	19	17	18	15	13
10	46	34	27	23	41	31	25	21	26	21	18	21	18	15	16	14	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1464	1464	1464
5°	1466	1441	1450
10°	1452	1412	1403
15°	1432	1366	1330
20°	1405	1301	1240
25°	1378	1229	1154
30°	1342	1155	1044
35°	1306	1076	948
40°	1270	993	837
45°	1228	902	737
50°	1185	810	639
55°	1139	711	546
60°	1086	608	449
65°	1026	504	404
70°	953	406	366
75°	861	358	332
80°	727	300	288
85°	507	201	217

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 1279 cd/sqm

TEST NUMBER: P923693

CATALOG NUMBER: DFN2DIP-TR4F0-050D080US940-RLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	172.7	1.6
10°-20°	474.1	4.4
20°-30°	665.6	6.1
30°-40°	725.6	6.7
40°-50°	666.9	6.1
50°-60°	523.7	4.8
60°-70°	340.9	3.1
70°-80°	175.5	1.6
80°-90°	49.0	0.5
90°-100°	79.4	0.7
100°-110°	295.9	2.7
110°-120°	784.9	7.2
120°-130°	1301.8	12.0
130°-140°	1382.8	12.7
140°-150°	1285.1	11.8
150°-160°	1033.2	9.5
160°-170°	665.8	6.1
170°-180°	229.2	2.1
0°-30°	1312.4	12.1
0°-40°	2038.0	18.8
0°-60°	3228.6	29.8
0°-90°	3794.0	35.0
90°-120°	1160.2	10.7
90°-150°	5129.9	47.3
90°-180°	7058.0	65.0
0°-180°	10852.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1843	1843	1843	1843	1843	
5°	1843	1834	1813	1828	1823	175
15°	1753	1734	1678	1646	1629	494
25°	1591	1538	1427	1359	1334	732
35°	1371	1286	1139	1034	997	858
45°	1121	1009	834	715	675	865
55°	852	722	542	442	410	761
65°	575	440	290	234	228	570
75°	307	190	133	122	120	324
85°	72	37	32	32	32	82
90°	2	21	35	44	47	10
95°	113	56	68	77	75	134
105°	530	582	106	125	132	566
115°	1002	1031	1075	268	143	986
125°	1416	1439	1472	1484	1489	1263
135°	1753	1780	1796	1814	1810	1354
145°	2033	2031	2061	2073	2064	1272
155°	2238	2223	2244	2254	2240	1032
165°	2359	2348	2354	2366	2354	666
175°	2413	2400	2404	2416	2399	230
180°	2408	2408	2408	2408	2408	

TEST NUMBER: P923693

CATALOG NUMBER: DFN2DIP-TR4F0-050D080US940-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1842.7	1842.7	1842.7	1842.7	1842.7
2.5°	1851.0	1842.7	1824.4	1841.1	1837.7
5°	1842.7	1834.4	1812.7	1827.6	1822.7
7.5°	1827.6	1817.8	1794.4	1801.0	1792.6
10°	1807.7	1796.0	1762.7	1757.7	1747.7
12.5°	1782.7	1767.7	1722.6	1712.7	1694.2
15°	1752.7	1734.3	1677.7	1646.0	1629.3
17.5°	1717.6	1691.0	1620.9	1584.2	1557.5
20°	1677.7	1644.2	1560.8	1519.3	1482.5
22.5°	1634.3	1595.9	1499.1	1442.5	1417.6
25°	1590.9	1537.5	1427.4	1359.1	1334.0
27.5°	1539.3	1482.5	1360.8	1282.4	1244.0
30°	1484.3	1420.8	1287.4	1202.4	1157.3
32.5°	1430.8	1354.1	1217.5	1117.3	1075.6
35°	1370.8	1285.8	1139.1	1033.9	997.2
37.5°	1312.4	1220.7	1065.7	950.5	908.9
40°	1250.7	1150.8	988.8	870.5	827.2
42.5°	1187.4	1080.7	912.2	788.7	747.2
45°	1120.7	1008.9	833.8	715.3	675.3
47.5°	1057.3	939.0	758.8	640.3	603.7
50°	987.3	868.9	685.5	570.2	535.4
52.5°	918.8	793.7	615.4	505.3	473.7
55°	852.1	722.0	541.9	441.9	410.3
57.5°	783.8	650.4	477.0	383.6	356.9
60°	713.7	580.3	408.5	323.6	296.9
62.5°	645.4	512.0	350.2	270.2	256.9
65°	575.3	440.2	290.2	233.5	228.5
67.5°	508.6	373.5	233.5	205.1	200.1
70°	438.6	308.5	193.4	176.7	170.0
72.5°	371.9	248.4	161.8	148.5	145.1
75°	306.8	190.0	133.4	121.7	120.1
77.5°	241.8	135.0	105.1	98.4	95.0
80°	181.7	96.8	80.0	73.4	73.4
82.5°	126.7	65.1	55.0	51.6	51.6
85°	71.7	36.6	31.7	31.7	31.7
87.5°	26.8	13.3	13.3	11.7	11.7
90°	1.7	20.9	34.8	43.6	47.0
92.5°	43.6	36.6	41.8	45.3	47.0
95°	113.2	55.6	67.9	76.8	74.9
97.5°	203.8	61.0	88.7	94.2	95.8
100°	308.4	69.7	99.3	113.2	116.6
102.5°	423.3	419.9	102.8	121.8	127.2
105°	529.6	581.9	106.3	125.4	132.4
107.5°	653.3	696.7	109.9	128.9	135.9
110°	771.9	808.2	305.0	130.7	137.6

TEST NUMBER: P923693

CATALOG NUMBER: DFN2DIP-TR4F0-050D080US940-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	883.3	914.5	885.0	134.0	139.5
115°	1001.7	1031.3	1074.9	268.3	142.9
117.5°	1104.5	1139.2	1169.0	919.7	463.4
120°	1219.5	1245.5	1277.0	1297.9	1062.7
122.5°	1316.9	1344.9	1379.8	1390.2	1392.0
125°	1416.2	1439.0	1472.0	1484.3	1489.4
127.5°	1506.8	1531.2	1557.6	1574.8	1576.5
130°	1592.2	1620.1	1639.2	1658.5	1656.8
132.5°	1679.4	1702.1	1721.2	1736.9	1735.2
135°	1752.6	1780.5	1796.0	1813.6	1810.1
137.5°	1829.2	1850.0	1867.6	1885.0	1879.8
140°	1904.0	1918.1	1937.2	1952.8	1944.1
142.5°	1966.9	1979.1	2001.6	2015.5	2006.8
145°	2033.1	2031.2	2060.8	2073.0	2064.3
147.5°	2090.4	2085.3	2114.8	2123.5	2116.7
150°	2146.3	2134.0	2162.0	2172.3	2163.6
152.5°	2193.3	2179.3	2205.4	2216.0	2203.8
155°	2238.5	2223.0	2243.9	2254.2	2240.4
157.5°	2275.1	2261.3	2277.0	2289.2	2275.1
160°	2306.6	2296.1	2306.6	2316.9	2304.7
162.5°	2334.3	2324.0	2332.6	2344.8	2329.1
165°	2358.8	2348.4	2353.6	2365.7	2353.6
167.5°	2377.9	2367.4	2372.8	2385.0	2369.3
170°	2393.7	2383.1	2386.7	2398.9	2383.1
172.5°	2404.1	2393.7	2397.2	2409.4	2393.7
175°	2412.7	2400.5	2404.1	2416.2	2398.9
177.5°	2416.2	2404.1	2405.8	2418.1	2402.4
180°	2407.5	2407.5	2407.5	2407.5	2407.5

TEST NUMBER: P923693

CATALOG NUMBER: DFN2DIP-TR4F0-050D080US940-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	6.87	7.60	7.96	8.67	10.15	2.85	3.57	3.93	4.65	6.12
	3H	8.54	9.19	9.63	10.27	11.76	4.03	4.67	5.12	5.76	7.25
	4H	9.15	9.76	10.25	10.85	12.34	4.47	5.09	5.58	6.17	7.67
	6H	9.56	10.12	10.67	11.21	12.72	4.79	5.35	5.90	6.44	7.95
	8H	9.69	10.22	10.80	11.33	12.83	4.88	5.41	5.99	6.52	8.02
	12H	9.74	10.25	10.86	11.35	12.88	4.92	5.43	6.04	6.53	8.05
4H	2H	6.88	7.49	7.99	8.58	10.08	3.43	4.04	4.54	5.13	6.63
	3H	8.70	9.21	9.81	10.32	11.83	4.77	5.28	5.89	6.39	7.90
	4H	9.39	9.85	10.50	10.96	12.49	5.31	5.78	6.43	6.89	8.42
	6H	9.89	10.29	11.02	11.42	12.94	5.73	6.13	6.86	7.26	8.78
	8H	10.07	10.44	11.19	11.56	13.10	5.86	6.23	6.98	7.35	8.89
	12H	10.16	10.49	11.30	11.63	13.17	5.92	6.25	7.06	7.39	8.93
8H	4H	9.35	9.72	10.47	10.84	12.38	5.59	5.96	6.71	7.08	8.62
	6H	9.91	10.21	11.05	11.38	12.91	6.10	6.41	7.25	7.57	9.11
	8H	10.12	10.39	11.28	11.53	13.09	6.29	6.56	7.45	7.70	9.26
	12H	10.26	10.49	11.41	11.63	13.22	6.41	6.64	7.56	7.78	9.37
12H	4H	9.29	9.63	10.43	10.76	12.30	5.59	5.92	6.73	7.06	8.60
	6H	9.88	10.15	11.03	11.29	12.85	6.15	6.42	7.30	7.56	9.12
	8H	10.10	10.33	11.25	11.47	13.06	6.36	6.59	7.51	7.73	9.32