

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P982701

Luminaire Tested: S122IW-B1440UB30-4F0-XX-W2A

Issue Date: 5/2/2025

**Test Information**

Test Method: LM-79-2019  
Report Number: P982701  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2)  
Test Lab: INNOVATION CENTER  
Issue Date: 5/2/2025  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: S122IW-B1440UB30-4F0-XX-W2A  
Description: Define 2 Indirect Wall Mount with 3000K BioUP LEDs {m-DER=0.589} {m-EER=0.647}  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 5850.0 lumens  
Efficiency: N/A  
Efficacy: 112.1 lumens/watt  
Spacing Criteria (0/90/45): - / - / -  
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')  
CIE Type: Indirect

Input Watts (W): 52.2  
Input Voltage (V):  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P982701

CATALOG NUMBER: S122IW-B1440UB30-4F0-XX-W2A

### Luminous Intensity Polar Plot

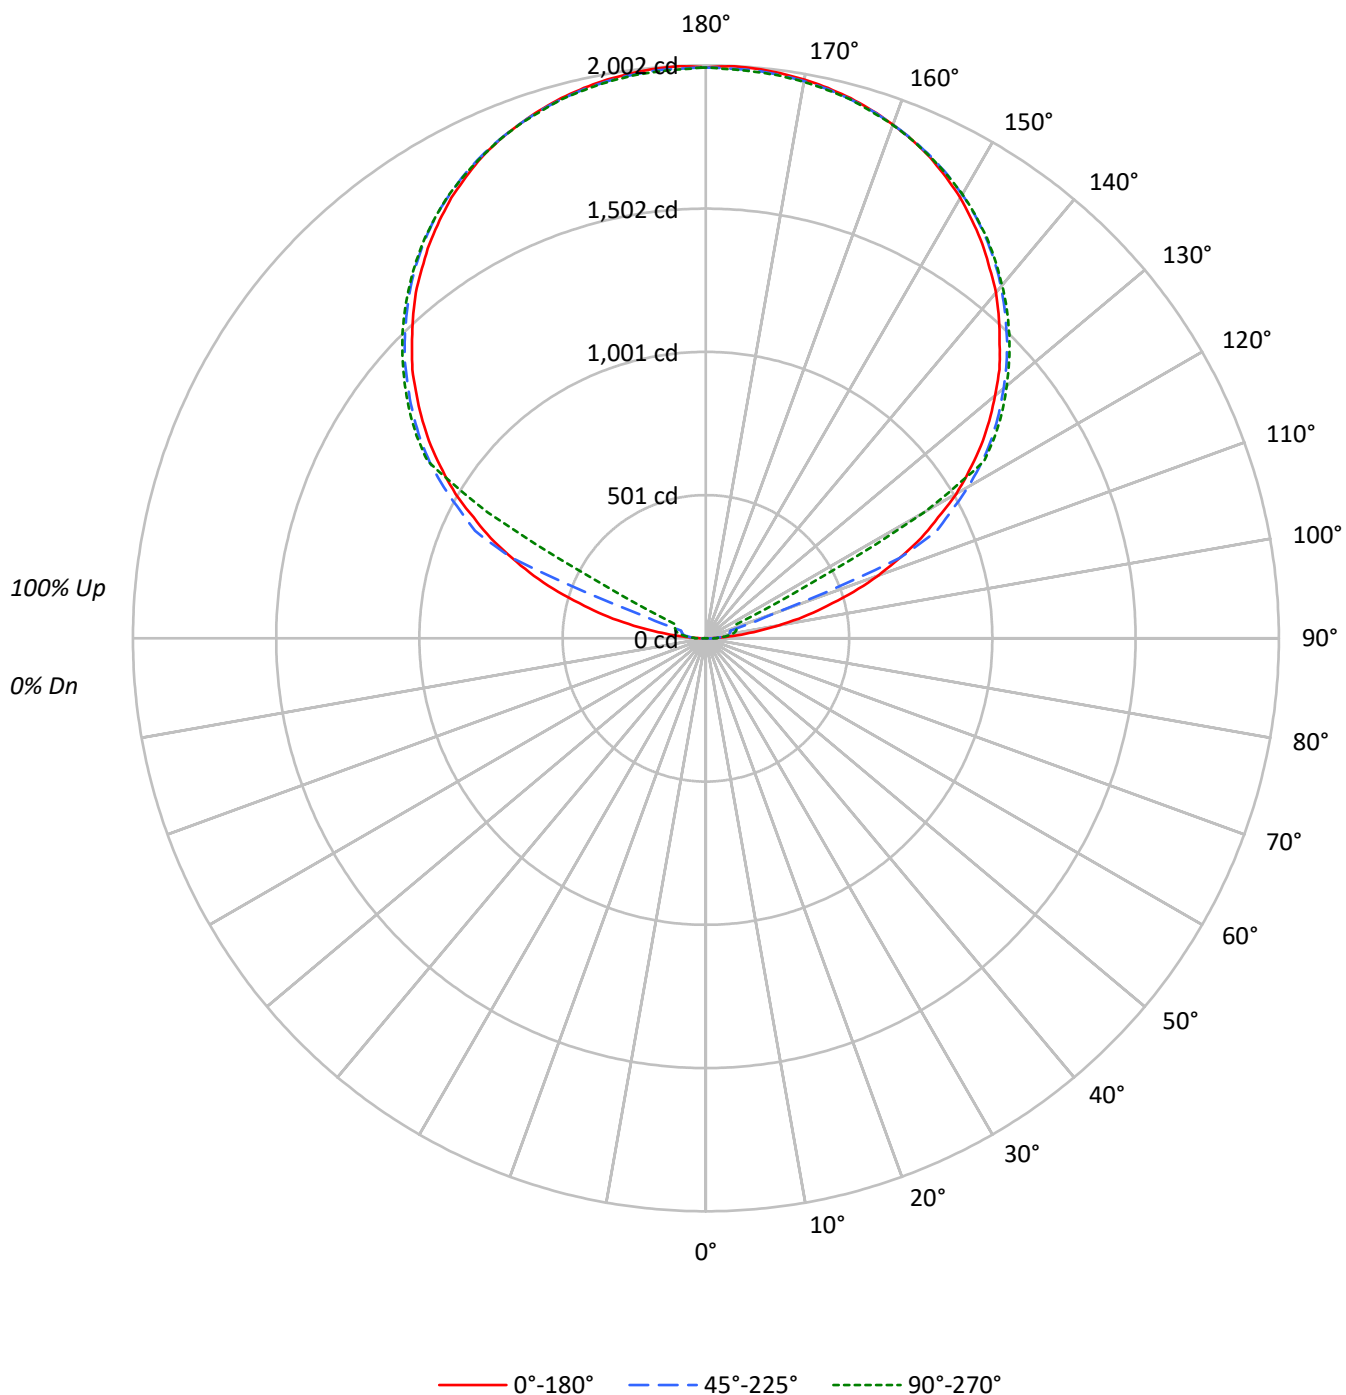

TEST NUMBER: P982701

CATALOG NUMBER: S122IW-B1440UB30-4F0-XX-W2A

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| RF  | 20 |    |    |    | 20 |    |    |    | 20 |    |    |    | 20 |    |    |    | 20 |
| RC  | 80 |    |    |    | 70 |    |    |    | 50 |    |    |    | 30 |    |    |    | 10 |
| RW  | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 |
| RCR |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| 0   | 95 | 95 | 95 | 95 | 81 | 81 | 81 | 81 | 56 | 56 | 56 | 32 | 32 | 32 | 10 | 10 | 10 |
| 1   | 87 | 83 | 79 | 76 | 74 | 71 | 68 | 65 | 48 | 47 | 45 | 28 | 27 | 26 | 9  | 9  | 8  |
| 2   | 79 | 72 | 66 | 62 | 67 | 62 | 57 | 53 | 42 | 40 | 37 | 24 | 23 | 22 | 8  | 7  | 7  |
| 3   | 72 | 63 | 56 | 51 | 61 | 54 | 49 | 44 | 37 | 34 | 31 | 21 | 20 | 18 | 7  | 6  | 6  |
| 4   | 65 | 56 | 48 | 43 | 56 | 48 | 42 | 37 | 33 | 29 | 26 | 19 | 17 | 16 | 6  | 6  | 5  |
| 5   | 60 | 49 | 42 | 36 | 51 | 42 | 36 | 32 | 29 | 25 | 22 | 17 | 15 | 13 | 5  | 5  | 4  |
| 6   | 55 | 44 | 36 | 31 | 47 | 38 | 32 | 27 | 26 | 22 | 19 | 15 | 13 | 11 | 5  | 4  | 4  |
| 7   | 50 | 39 | 32 | 27 | 43 | 34 | 28 | 23 | 23 | 19 | 17 | 14 | 11 | 10 | 4  | 4  | 3  |
| 8   | 47 | 35 | 28 | 23 | 40 | 30 | 24 | 20 | 21 | 17 | 14 | 12 | 10 | 9  | 4  | 3  | 3  |
| 9   | 43 | 32 | 25 | 20 | 37 | 27 | 22 | 18 | 19 | 15 | 13 | 11 | 9  | 8  | 4  | 3  | 3  |
| 10  | 40 | 29 | 22 | 18 | 34 | 25 | 19 | 16 | 17 | 14 | 11 | 10 | 8  | 7  | 3  | 3  | 2  |

**AVERAGE LUMINANCE (cd/sqm):**

|     | 0° | 45° | 90° |
|-----|----|-----|-----|
| 0°  | 0  | 0   | 0   |
| 5°  | 0  | 0   | 0   |
| 10° | 0  | 0   | 0   |
| 15° | 0  | 0   | 0   |
| 20° | 0  | 0   | 0   |
| 25° | 0  | 0   | 0   |
| 30° | 0  | 0   | 0   |
| 35° | 0  | 0   | 0   |
| 40° | 0  | 0   | 0   |
| 45° | 0  | 0   | 0   |
| 50° | 0  | 0   | 0   |
| 55° | 0  | 0   | 0   |
| 60° | 0  | 0   | 0   |
| 65° | 0  | 0   | 0   |
| 70° | 0  | 0   | 0   |
| 75° | 0  | 0   | 0   |
| 80° | 0  | 0   | 0   |
| 85° | 0  | 0   | 0   |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
Vertical Angle: 0°  
Luminance: 0 cd/sqm

TEST NUMBER: P982701

CATALOG NUMBER: S122IW-B1440UB30-4F0-XX-W2A

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 0.0    | 0.0       |
| 10°-20°   | 0.0    | 0.0       |
| 20°-30°   | 0.0    | 0.0       |
| 30°-40°   | 0.0    | 0.0       |
| 40°-50°   | 0.0    | 0.0       |
| 50°-60°   | 0.0    | 0.0       |
| 60°-70°   | 0.0    | 0.0       |
| 70°-80°   | 0.0    | 0.0       |
| 80°-90°   | 3.5    | 0.1       |
| 90°-100°  | 65.8   | 1.1       |
| 100°-110° | 245.1  | 4.2       |
| 110°-120° | 650.1  | 11.1      |
| 120°-130° | 1078.3 | 18.4      |
| 130°-140° | 1145.4 | 19.6      |
| 140°-150° | 1064.6 | 18.2      |
| 150°-160° | 855.9  | 14.6      |
| 160°-170° | 551.5  | 9.4       |
| 170°-180° | 189.8  | 3.2       |
| 0°-30°    | 0.0    | 0.0       |
| 0°-40°    | 0.0    | 0.0       |
| 0°-60°    | 0.0    | 0.0       |
| 0°-90°    | 3.5    | 0.1       |
| 90°-120°  | 961.1  | 16.4      |
| 90°-150°  | 4249.3 | 72.6      |
| 90°-180°  | 5846.0 | 99.9      |
| 0°-180°   | 5850.0 | 100.0     |

**CANDELA DISTRIBUTION:**

|      | 0°   | 22.5° | 45°  | 67.5° | 90°  | Flux |
|------|------|-------|------|-------|------|------|
| 0°   | 0    | 0     | 0    | 0     | 0    |      |
| 5°   | 0    | 0     | 0    | 0     | 0    | 0    |
| 15°  | 0    | 0     | 0    | 0     | 0    | 0    |
| 25°  | 0    | 0     | 0    | 0     | 0    | 0    |
| 35°  | 0    | 0     | 0    | 0     | 0    | 0    |
| 45°  | 0    | 0     | 0    | 0     | 0    | 0    |
| 55°  | 0    | 0     | 0    | 0     | 0    | 0    |
| 65°  | 0    | 0     | 0    | 0     | 0    | 0    |
| 75°  | 0    | 0     | 0    | 0     | 0    | 0    |
| 85°  | 0    | 0     | 0    | 0     | 0    | 0    |
| 90°  | 1    | 17    | 29   | 36    | 39   | 5    |
| 95°  | 94   | 46    | 56   | 64    | 62   | 111  |
| 105° | 439  | 482   | 88   | 104   | 110  | 469  |
| 115° | 830  | 854   | 890  | 222   | 118  | 817  |
| 125° | 1173 | 1192  | 1219 | 1230  | 1234 | 1046 |
| 135° | 1452 | 1475  | 1488 | 1502  | 1499 | 1121 |
| 145° | 1684 | 1683  | 1707 | 1717  | 1710 | 1053 |
| 155° | 1854 | 1841  | 1859 | 1867  | 1856 | 854  |
| 165° | 1954 | 1945  | 1950 | 1960  | 1950 | 552  |
| 175° | 1999 | 1988  | 1991 | 2002  | 1987 | 190  |
| 180° | 1994 | 1994  | 1994 | 1994  | 1994 |      |

TEST NUMBER: P982701

CATALOG NUMBER: S122IW-B1440UB30-4F0-XX-W2A

**CANDELA DISTRIBUTION (FULL):**

|        | 0°    | 22.5° | 45°   | 67.5° | 90°   |
|--------|-------|-------|-------|-------|-------|
| 0°     | 0.0   | 0.0   | 0.0   | 0.0   | 0.0   |
| 2.5°   | 0.0   | 0.0   | 0.0   | 0.0   | 0.0   |
| 5°     | 0.0   | 0.0   | 0.0   | 0.0   | 0.0   |
| 7.5°   | 0.0   | 0.0   | 0.0   | 0.0   | 0.0   |
| 10°    | 0.0   | 0.0   | 0.0   | 0.0   | 0.0   |
| 12.5°  | 0.0   | 0.0   | 0.0   | 0.0   | 0.0   |
| 15°    | 0.0   | 0.0   | 0.0   | 0.0   | 0.0   |
| 17.5°  | 0.0   | 0.0   | 0.0   | 0.0   | 0.0   |
| 20°    | 0.0   | 0.0   | 0.0   | 0.0   | 0.0   |
| 22.5°  | 0.0   | 0.0   | 0.0   | 0.0   | 0.0   |
| 25°    | 0.0   | 0.0   | 0.0   | 0.0   | 0.0   |
| 27.5°  | 0.0   | 0.0   | 0.0   | 0.0   | 0.0   |
| 30°    | 0.0   | 0.0   | 0.0   | 0.0   | 0.0   |
| 32.5°  | 0.0   | 0.0   | 0.0   | 0.0   | 0.0   |
| 35°    | 0.0   | 0.0   | 0.0   | 0.0   | 0.0   |
| 37.5°  | 0.0   | 0.0   | 0.0   | 0.0   | 0.0   |
| 40°    | 0.0   | 0.0   | 0.0   | 0.0   | 0.0   |
| 42.5°  | 0.0   | 0.0   | 0.0   | 0.0   | 0.0   |
| 45°    | 0.0   | 0.0   | 0.0   | 0.0   | 0.0   |
| 47.5°  | 0.0   | 0.0   | 0.0   | 0.0   | 0.0   |
| 50°    | 0.0   | 0.0   | 0.0   | 0.0   | 0.0   |
| 52.5°  | 0.0   | 0.0   | 0.0   | 0.0   | 0.0   |
| 55°    | 0.0   | 0.0   | 0.0   | 0.0   | 0.0   |
| 57.5°  | 0.0   | 0.0   | 0.0   | 0.0   | 0.0   |
| 60°    | 0.0   | 0.0   | 0.0   | 0.0   | 0.0   |
| 62.5°  | 0.0   | 0.0   | 0.0   | 0.0   | 0.0   |
| 65°    | 0.0   | 0.0   | 0.0   | 0.0   | 0.0   |
| 67.5°  | 0.0   | 0.0   | 0.0   | 0.0   | 0.0   |
| 70°    | 0.0   | 0.0   | 0.0   | 0.0   | 0.0   |
| 72.5°  | 0.0   | 0.0   | 0.0   | 0.0   | 0.0   |
| 75°    | 0.0   | 0.0   | 0.0   | 0.0   | 0.0   |
| 77.5°  | 0.0   | 0.0   | 0.0   | 0.0   | 0.0   |
| 80°    | 0.0   | 0.0   | 0.0   | 0.0   | 0.0   |
| 82.5°  | 0.0   | 0.0   | 0.0   | 0.0   | 0.0   |
| 85°    | 0.0   | 0.0   | 0.0   | 0.0   | 0.0   |
| 87.5°  | 0.0   | 0.0   | 0.0   | 0.0   | 0.0   |
| 90°    | 1.4   | 17.3  | 28.9  | 36.1  | 39.0  |
| 92.5°  | 36.1  | 30.3  | 34.6  | 37.5  | 39.0  |
| 95°    | 93.8  | 46.2  | 56.3  | 63.5  | 62.1  |
| 97.5°  | 168.8 | 50.5  | 73.6  | 77.9  | 79.4  |
| 100°   | 255.4 | 57.7  | 82.3  | 93.8  | 96.7  |
| 102.5° | 350.7 | 347.8 | 85.1  | 101.0 | 105.3 |
| 105°   | 438.7 | 482.0 | 88.0  | 103.9 | 109.7 |
| 107.5° | 541.1 | 577.2 | 90.9  | 106.8 | 112.6 |
| 110°   | 639.3 | 669.6 | 252.5 | 108.2 | 114.0 |

TEST NUMBER: P982701

CATALOG NUMBER: S122IW-B1440UB30-4F0-XX-W2A

**CANDELA DISTRIBUTION (continued):**

|        | 0°     | 22.5°  | 45°    | 67.5°  | 90°    |
|--------|--------|--------|--------|--------|--------|
| 112.5° | 731.6  | 757.6  | 733.1  | 111.1  | 115.4  |
| 115°   | 829.7  | 854.3  | 890.3  | 222.2  | 118.3  |
| 117.5° | 914.9  | 943.7  | 968.3  | 761.9  | 383.8  |
| 120°   | 1010.1 | 1031.8 | 1057.7 | 1075.1 | 880.2  |
| 122.5° | 1090.9 | 1114.0 | 1142.9 | 1151.5 | 1153.0 |
| 125°   | 1173.2 | 1191.9 | 1219.4 | 1229.5 | 1233.8 |
| 127.5° | 1248.2 | 1268.4 | 1290.1 | 1304.5 | 1305.9 |
| 130°   | 1318.9 | 1342.0 | 1357.9 | 1373.8 | 1372.3 |
| 132.5° | 1391.1 | 1409.8 | 1425.7 | 1438.7 | 1437.3 |
| 135°   | 1451.7 | 1474.8 | 1487.8 | 1502.2 | 1499.3 |
| 137.5° | 1515.2 | 1532.5 | 1546.9 | 1561.4 | 1557.0 |
| 140°   | 1577.2 | 1588.8 | 1604.6 | 1617.6 | 1610.4 |
| 142.5° | 1629.2 | 1639.3 | 1658.0 | 1669.6 | 1662.4 |
| 145°   | 1684.0 | 1682.6 | 1707.1 | 1717.2 | 1710.0 |
| 147.5° | 1731.6 | 1727.3 | 1751.8 | 1759.1 | 1753.3 |
| 150°   | 1777.8 | 1767.7 | 1790.8 | 1799.5 | 1792.2 |
| 152.5° | 1816.8 | 1805.2 | 1826.9 | 1835.5 | 1825.4 |
| 155°   | 1854.3 | 1841.3 | 1858.6 | 1867.3 | 1855.7 |
| 157.5° | 1884.6 | 1873.1 | 1886.0 | 1896.1 | 1884.6 |
| 160°   | 1910.6 | 1901.9 | 1910.6 | 1919.2 | 1909.1 |
| 162.5° | 1933.7 | 1925.0 | 1932.2 | 1942.3 | 1929.3 |
| 165°   | 1953.9 | 1945.2 | 1949.5 | 1959.6 | 1949.5 |
| 167.5° | 1969.7 | 1961.1 | 1965.4 | 1975.5 | 1962.5 |
| 170°   | 1982.7 | 1974.1 | 1977.0 | 1987.1 | 1974.1 |
| 172.5° | 1991.4 | 1982.7 | 1985.6 | 1995.7 | 1982.7 |
| 175°   | 1998.6 | 1988.5 | 1991.4 | 2001.5 | 1987.1 |
| 177.5° | 2001.5 | 1991.4 | 1992.8 | 2002.9 | 1989.9 |
| 180°   | 1994.3 | 1994.3 | 1994.3 | 1994.3 | 1994.3 |



TEST NUMBER: P982701

CATALOG NUMBER: S122IW-B1440UB30-4F0-XX-W2A

**CIE UGR TABLE:**

| Reflectances:   |      |                  |      |      |      |      |                |      |      |      |      |
|-----------------|------|------------------|------|------|------|------|----------------|------|------|------|------|
| Ceiling         |      | 0.7              | 0.7  | 0.5  | 0.5  | 0.3  | 0.7            | 0.7  | 0.5  | 0.5  | 0.3  |
| Wall            |      | 0.5              | 0.3  | 0.5  | 0.3  | 0.3  | 0.5            | 0.3  | 0.5  | 0.3  | 0.3  |
| Reference plane |      | 0.2              | 0.2  | 0.2  | 0.2  | 0.2  | 0.2            | 0.2  | 0.2  | 0.2  | 0.2  |
| Room dimensions |      | Viewed crosswise |      |      |      |      | Viewed endwise |      |      |      |      |
| X=2H            | Y=2H | 0.00             | 0.00 | 0.00 | 0.00 | 0.00 | 0.00           | 0.00 | 0.00 | 0.00 | 0.00 |
|                 | 3H   | 0.00             | 0.00 | 0.00 | 0.00 | 0.00 | 0.00           | 0.00 | 0.00 | 0.00 | 0.00 |
|                 | 4H   | 0.00             | 0.00 | 0.00 | 0.00 | 0.00 | 0.00           | 0.00 | 0.00 | 0.00 | 0.00 |
|                 | 6H   | 0.00             | 0.00 | 0.00 | 0.00 | 0.00 | 0.00           | 0.00 | 0.00 | 0.00 | 0.00 |
|                 | 8H   | 0.00             | 0.00 | 0.00 | 0.00 | 0.00 | 0.00           | 0.00 | 0.00 | 0.00 | 0.00 |
|                 | 12H  | 0.00             | 0.00 | 0.00 | 0.00 | 0.00 | 0.00           | 0.00 | 0.00 | 0.00 | 0.00 |
| 4H              | 2H   | 0.00             | 0.00 | 0.00 | 0.00 | 0.00 | 0.00           | 0.00 | 0.00 | 0.00 | 0.00 |
|                 | 3H   | 0.00             | 0.00 | 0.00 | 0.00 | 0.00 | 0.00           | 0.00 | 0.00 | 0.00 | 0.00 |
|                 | 4H   | 0.00             | 0.00 | 0.00 | 0.00 | 0.00 | 0.00           | 0.00 | 0.00 | 0.00 | 0.00 |
|                 | 6H   | 0.00             | 0.00 | 0.00 | 0.00 | 0.00 | 0.00           | 0.00 | 0.00 | 0.00 | 0.00 |
|                 | 8H   | 0.00             | 0.00 | 0.00 | 0.00 | 0.00 | 0.00           | 0.00 | 0.00 | 0.00 | 0.00 |
|                 | 12H  | 0.00             | 0.00 | 0.00 | 0.00 | 0.00 | 0.00           | 0.00 | 0.00 | 0.00 | 0.00 |
| 8H              | 4H   | 0.00             | 0.00 | 0.00 | 0.00 | 0.00 | 0.00           | 0.00 | 0.00 | 0.00 | 0.00 |
|                 | 6H   | 0.00             | 0.00 | 0.00 | 0.00 | 0.00 | 0.00           | 0.00 | 0.00 | 0.00 | 0.00 |
|                 | 8H   | 0.00             | 0.00 | 0.00 | 0.00 | 0.00 | 0.00           | 0.00 | 0.00 | 0.00 | 0.00 |
|                 | 12H  | 0.00             | 0.00 | 0.00 | 0.00 | 0.00 | 0.00           | 0.00 | 0.00 | 0.00 | 0.00 |
| 12H             | 4H   | 0.00             | 0.00 | 0.00 | 0.00 | 0.00 | 0.00           | 0.00 | 0.00 | 0.00 | 0.00 |
|                 | 6H   | 0.00             | 0.00 | 0.00 | 0.00 | 0.00 | 0.00           | 0.00 | 0.00 | 0.00 | 0.00 |
|                 | 8H   | 0.00             | 0.00 | 0.00 | 0.00 | 0.00 | 0.00           | 0.00 | 0.00 | 0.00 | 0.00 |

END OF REPORT