

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1031067

Luminaire Tested: S123RDIW-B1165D1030UB2750-4F0-XX-W2A-A_3500K

Issue Date: 5/7/2025

Test Information

Test Method: LM-79-2019
Report Number: P1031067
REPORT IS A COMBINATION OF REPORTS P993949 AND P1007351
Test Lab: INNOVATION CENTER
Issue Date: 5/7/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S123RDIW-B1165D1030UB2750-4F0-XX-W2A-A_3500K
Description: Define 3 Regressed Direct/Indirect Wall Mount with 3500K BioUP LEDs {m-DER=0.721}
{m-EER=0.792}
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 8803.0 lumens
Efficiency: N/A
Efficacy: 94.9 lumens/watt
Spacing Criteria (0/90/45): 1.22 / 1.2 / 1.34
Luminous Opening: Rectangular w/ Sides (W: 0.25' x L: 4' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 92.8
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1031067

CATALOG NUMBER: S123RDIW-B1165D1030UB2750-4F0-XX-W2A-A_3500K

Luminous Intensity Polar Plot

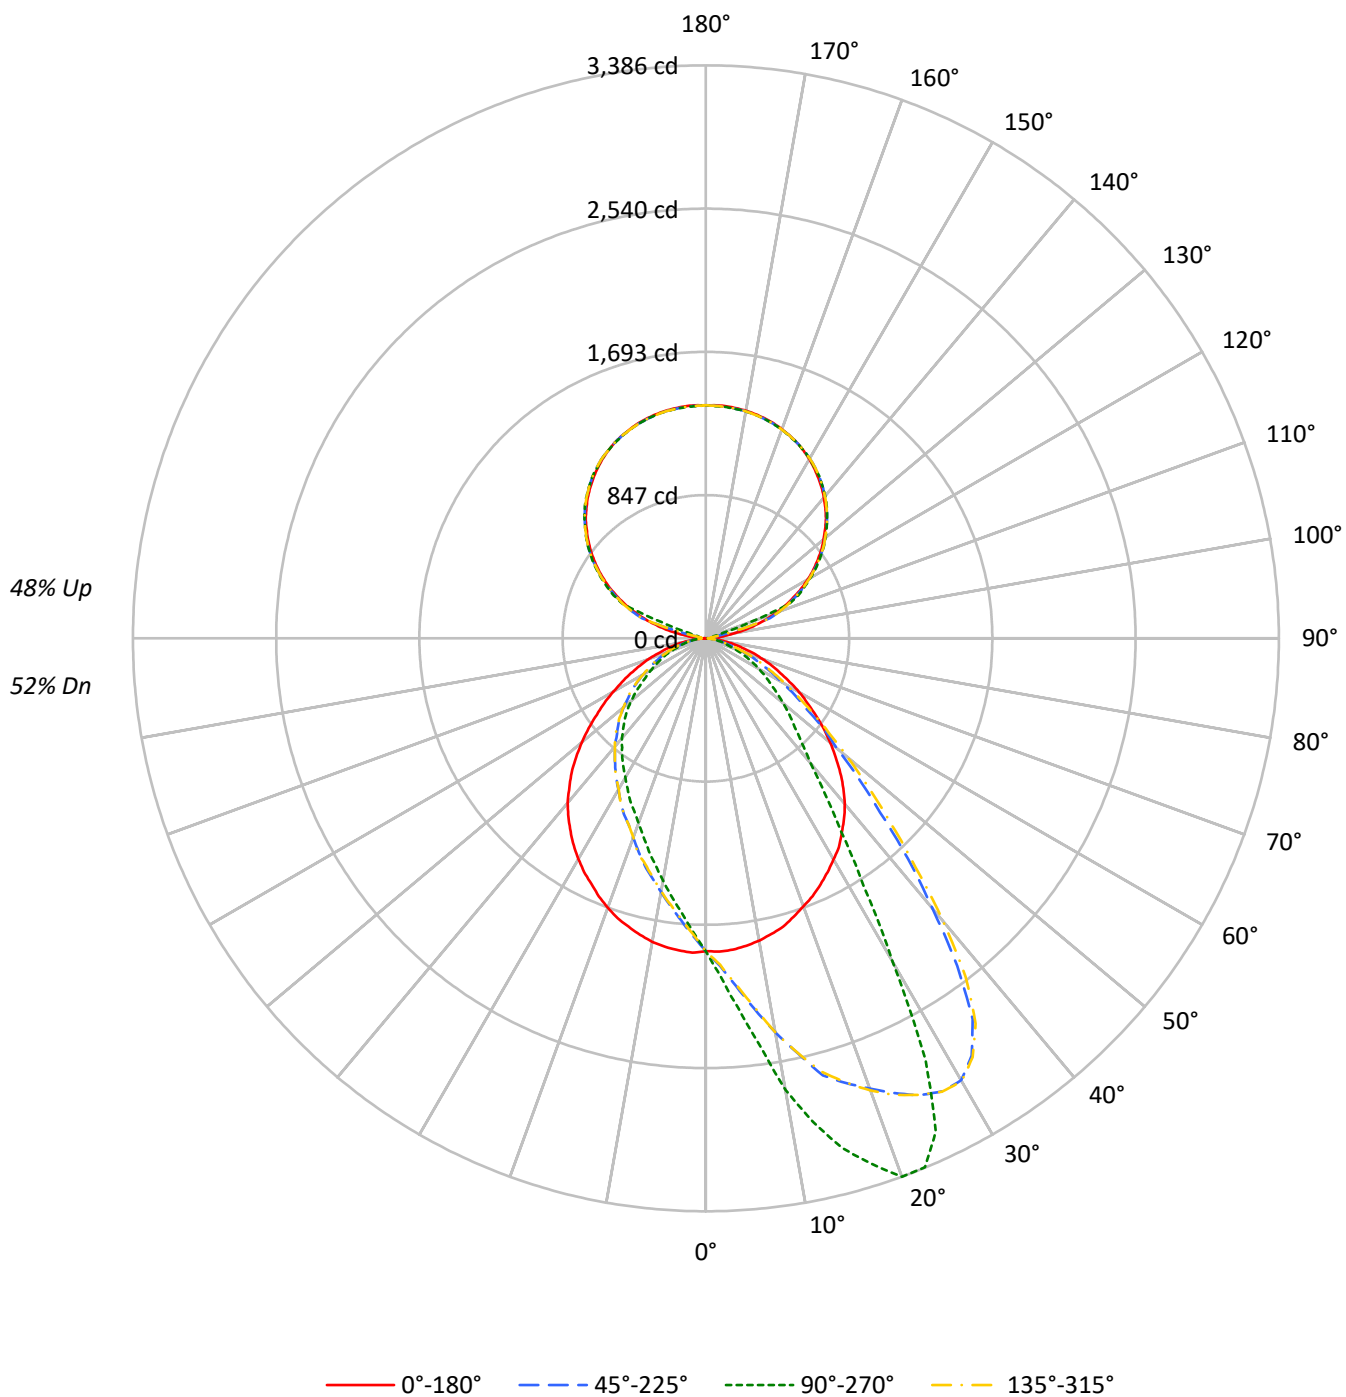

TEST NUMBER: P1031067

CATALOG NUMBER: S123RDIW-B1165D1030UB2750-4F0-XX-W2A-A_3500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	108	108	108	108	100	100	100	100	85	85	85	71	71	71	58	58	58
1	99	95	91	88	91	88	85	82	75	73	71	63	62	60	52	51	50
2	91	84	78	73	84	78	73	68	67	63	60	56	54	51	47	45	43
3	83	74	67	61	77	69	63	58	59	55	51	50	47	44	42	40	38
4	76	66	58	52	70	61	55	50	53	48	44	45	41	38	38	35	33
5	70	59	51	45	65	55	48	43	48	42	38	41	37	34	35	31	29
6	65	53	45	40	60	50	43	38	43	38	34	37	33	30	32	28	26
7	60	48	40	35	56	45	38	33	39	34	30	34	30	26	29	26	23
8	56	44	36	31	52	41	34	30	36	31	27	31	27	24	27	23	21
9	52	40	33	28	48	38	31	27	33	28	24	29	25	21	25	21	19
10	49	37	30	25	45	35	28	24	31	25	22	27	22	20	23	20	17

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	19894	19894	19894	19894
5°	19909	22912	19960	16998
10°	19732	27657	19819	14847
15°	19530	31390	19530	13091
20°	19129	33859	19237	11613
25°	18837	32168	18799	10596
30°	18495	22288	18457	9602
35°	18085	14310	18002	8853
40°	17573	10105	17487	8107
45°	16684	8086	16662	7381
50°	15593	6764	15541	6532
55°	14363	5575	14249	5537
60°	13159	4609	13026	4709
65°	11744	3688	11818	3991
70°	10437	2562	10716	3227
75°	8848	1900	9209	2481
80°	7047	1261	7644	1860
85°	5014	596	5475	1157

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 30°

Vertical Angle: 45°

Luminance: 26558 cd/sqm

TEST NUMBER: P1031067

CATALOG NUMBER: S123RDIW-B1165D1030UB2750-4F0-XX-W2A-A_3500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	181.5	2.1
10°-20°	568.1	6.5
20°-30°	894.8	10.2
30°-40°	930.5	10.6
40°-50°	796.0	9.0
50°-60°	606.9	6.9
60°-70°	388.8	4.4
70°-80°	186.3	2.1
80°-90°	51.8	0.6
90°-100°	48.6	0.6
100°-110°	234.8	2.7
110°-120°	575.4	6.5
120°-130°	730.4	8.3
130°-140°	780.3	8.9
140°-150°	729.6	8.3
150°-160°	588.5	6.7
160°-170°	379.8	4.3
170°-180°	130.9	1.5
0°-30°	1644.5	18.7
0°-40°	2574.9	29.3
0°-60°	3977.9	45.2
0°-90°	4604.8	52.3
90°-120°	858.7	9.8
90°-150°	3099.0	35.2
90°-180°	4198.0	47.7
0°-180°	8803.0	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1848	1848	1848	1848	1848	
5°	1847	2195	1851	1628	1847	175
15°	1764	3119	1764	1301	1764	496
25°	1604	3214	1601	1059	1604	739
35°	1400	1394	1394	862	1400	876
45°	1123	744	1122	679	1123	865
55°	793	467	786	464	793	710
65°	486	269	489	291	486	485
75°	233	114	242	149	233	251
85°	52	27	57	52	52	58
90°	1	31	1	31	1	6
95°	62	39	62	39	62	75
105°	305	45	305	45	305	323
115°	572	602	572	602	572	565
125°	806	823	806	823	806	720
135°	1004	1014	1004	1014	1004	773
145°	1158	1169	1158	1169	1158	725
155°	1276	1274	1276	1274	1276	588
165°	1345	1342	1345	1342	1345	380
175°	1377	1372	1377	1372	1377	131
180°	1377	1377	1377	1377	1377	

TEST NUMBER: P1031067

CATALOG NUMBER: S123RDIW-B1165D1030UB2750-4F0-XX-W2A-A_3500K

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
0°	1848.2	1848.2	1848.2	1848.2	1848.2	1848.2	1848.2	1848.2	1848.2	1848.2	1848.2
2.5°	1852.9	1865.6	1875.1	1881.4	1897.2	1906.7	1914.6	1928.9	1928.9	1932.0	1938.3
5°	1846.6	1873.5	1892.5	1917.8	1951.0	1966.8	1989.0	2008.0	2034.9	2049.1	2063.3
7.5°	1832.3	1870.3	1909.9	1947.8	1996.9	2028.5	2050.7	2099.7	2134.6	2177.3	2210.5
10°	1813.3	1865.6	1916.2	1974.7	2041.2	2088.7	2121.9	2186.8	2253.2	2313.4	2364.0
12.5°	1789.6	1852.9	1925.7	1996.9	2090.2	2137.7	2191.5	2272.2	2367.2	2443.1	2511.1
15°	1764.3	1837.1	1919.4	2006.4	2123.5	2189.9	2267.5	2365.6	2471.6	2580.8	2674.1
17.5°	1724.7	1816.5	1908.3	2034.9	2172.5	2212.1	2278.5	2413.0	2544.4	2642.5	2756.4
20°	1685.2	1788.0	1903.5	2017.5	2166.2	2258.0	2319.7	2462.1	2602.9	2721.6	2830.8
22.5°	1648.8	1756.4	1876.6	2020.6	2159.9	2251.6	2329.2	2477.9	2640.9	2773.8	2908.3
25°	1604.5	1721.6	1854.5	1990.6	2159.9	2229.5	2314.9	2487.4	2659.9	2813.4	2979.5
27.5°	1557.0	1675.7	1807.0	1946.3	2101.3	2204.2	2288.0	2473.2	2683.6	2848.2	3019.1
30°	1509.5	1631.4	1758.0	1883.0	2057.0	2155.1	2251.6	2455.8	2696.3	2884.6	3015.9
32.5°	1463.6	1566.5	1691.5	1813.3	1985.8	2093.4	2202.6	2438.4	2701.0	2859.3	2922.5
35°	1400.4	1508.0	1609.2	1739.0	1913.0	2019.0	2147.2	2436.8	2680.5	2778.6	2746.9
37.5°	1341.8	1432.0	1528.5	1644.0	1822.8	1960.5	2093.4	2395.6	2612.4	2618.7	2439.9
40°	1276.9	1351.3	1432.0	1553.8	1746.9	1883.0	2027.0	2332.3	2489.0	2395.6	2080.8
42.5°	1202.6	1269.0	1332.3	1451.0	1661.4	1813.3	1968.4	2253.2	2310.2	2095.0	1767.5
45°	1123.4	1177.2	1235.8	1360.8	1571.2	1721.6	1876.6	2131.4	2072.8	1769.0	1457.3
47.5°	1041.2	1087.1	1144.0	1257.9	1474.7	1628.2	1775.4	1957.3	1808.6	1482.6	1221.6
50°	958.9	995.3	1050.7	1167.8	1376.6	1515.9	1651.9	1770.6	1561.8	1272.2	1009.5
52.5°	878.2	906.7	963.6	1063.3	1265.9	1398.8	1496.9	1542.8	1330.7	1050.7	876.6
55°	792.7	824.4	862.4	963.6	1164.6	1262.7	1327.6	1326.0	1107.6	890.8	724.7
57.5°	710.5	738.9	772.2	873.4	1036.4	1102.9	1158.3	1131.4	924.1	729.5	621.9
60°	637.7	653.5	689.9	775.3	898.8	955.7	987.4	941.5	754.8	615.5	514.3
62.5°	558.6	574.4	604.4	685.1	761.1	791.2	818.1	759.5	623.4	501.6	439.9
65°	485.8	506.3	525.3	590.2	631.3	667.7	664.6	615.5	487.4	408.2	357.6
67.5°	422.5	430.4	446.2	485.8	504.8	531.7	533.2	477.9	392.4	332.3	302.2
70°	354.4	362.4	373.4	392.4	405.1	411.4	408.2	359.2	295.9	259.5	232.6
72.5°	295.9	294.3	302.2	302.2	314.9	313.3	303.8	265.8	224.7	194.6	178.8
75°	232.6	234.2	235.8	232.6	227.9	221.5	213.6	185.1	158.2	144.0	129.8
77.5°	182.0	178.8	180.4	169.3	163.0	156.6	145.6	131.3	109.2	106.0	99.7
80°	129.8	128.2	126.6	121.8	107.6	101.3	93.4	85.4	80.7	77.5	76.0
82.5°	87.0	87.0	83.9	74.4	66.5	61.7	60.1	57.0	52.2	52.2	50.6
85°	52.2	50.6	47.5	38.0	33.2	33.2	33.2	33.2	30.1	30.1	28.5
87.5°	20.6	19.0	14.2	14.2	12.7	12.7	12.7	11.1	11.1	9.5	9.5
90°	1.0	3.3	5.6	7.9	10.2	11.3	12.8	15.7	18.7	21.6	24.6
92.5°	23.5	22.1	20.8	19.4	18.1	17.4	18.4	20.5	22.5	24.6	26.6
95°	62.4	53.1	43.8	34.5	25.2	20.5	21.7	24.2	26.7	29.2	31.7
97.5°	113.6	107.2	100.8	94.5	88.1	84.9	79.1	67.5	55.9	44.3	32.7
100°	172.9	177.5	182.0	186.6	191.1	193.4	175.7	140.2	104.7	69.3	33.8
102.5°	240.4	243.4	246.3	249.3	252.2	253.7	233.9	194.4	154.8	115.3	75.7
105°	304.9	307.4	309.9	312.4	314.9	316.1	305.9	285.4	265.0	244.5	224.1
107.5°	373.4	375.4	377.5	379.5	381.6	382.6	384.3	387.7	391.2	394.6	398.0
110°	442.0	443.8	445.6	447.5	449.3	450.2	451.4	453.9	456.4	458.9	461.4



TEST NUMBER: P1031067

CATALOG NUMBER: S123RDIW-B1165D1030UB2750-4F0-XX-W2A-A_3500K

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
112.5°	507.5	509.1	510.7	512.2	513.8	514.6	515.9	518.4	520.9	523.4	525.9
115°	571.9	573.3	574.7	576.0	577.4	578.1	579.1	581.2	583.2	585.3	587.3
117.5°	635.4	637.0	638.6	640.1	641.7	642.5	643.1	644.2	645.3	646.5	647.6
120°	693.7	695.7	697.8	699.8	701.9	702.9	703.2	703.9	704.6	705.3	706.0
122.5°	753.0	754.6	756.2	757.8	759.4	760.2	760.7	761.6	762.5	763.4	764.3
125°	806.2	808.0	809.8	811.7	813.5	814.4	814.9	815.8	816.7	817.6	818.5
127.5°	859.4	861.2	863.0	864.9	866.7	867.6	868.2	869.3	870.4	871.6	872.7
130°	908.5	910.3	912.1	914.0	915.8	916.7	917.2	918.1	919.0	919.9	920.8
132.5°	955.6	957.4	959.2	961.1	962.9	963.8	964.1	964.8	965.5	966.1	966.8
135°	1003.7	1005.1	1006.4	1007.8	1009.1	1009.8	1010.3	1011.2	1012.1	1013.0	1013.9
137.5°	1044.6	1046.4	1048.2	1050.1	1051.9	1052.8	1053.0	1053.5	1053.9	1054.4	1054.8
140°	1085.5	1086.9	1088.3	1089.6	1091.0	1091.7	1092.0	1092.7	1093.4	1094.0	1094.7
142.5°	1123.4	1124.8	1126.1	1127.5	1128.8	1129.5	1129.8	1130.5	1131.2	1131.9	1132.6
145°	1158.2	1159.8	1161.4	1162.9	1164.5	1165.3	1165.5	1166.0	1166.5	1166.9	1167.4
147.5°	1191.9	1193.0	1194.2	1195.3	1196.4	1197.0	1197.2	1197.7	1198.2	1198.6	1199.1
150°	1222.6	1223.3	1224.0	1224.7	1225.4	1225.7	1225.9	1226.4	1226.8	1227.3	1227.7
152.5°	1250.2	1250.4	1250.7	1250.9	1251.2	1251.3	1251.4	1251.6	1251.9	1252.1	1252.3
155°	1275.8	1275.4	1274.9	1274.5	1274.0	1273.8	1273.9	1274.1	1274.4	1274.6	1274.8
157.5°	1296.3	1296.3	1296.3	1296.3	1296.3	1296.3	1296.2	1296.0	1295.7	1295.5	1295.3
160°	1314.7	1314.5	1314.3	1314.0	1313.8	1313.7	1313.6	1313.4	1313.1	1312.9	1312.7
162.5°	1332.1	1331.4	1330.7	1330.0	1329.3	1329.0	1328.9	1328.7	1328.4	1328.2	1328.0
165°	1345.4	1344.7	1344.0	1343.3	1342.6	1342.3	1342.2	1342.0	1341.7	1341.5	1341.3
167.5°	1356.7	1355.8	1354.9	1354.0	1353.1	1352.6	1352.6	1352.6	1352.6	1352.6	1352.6
170°	1365.9	1365.0	1364.1	1363.2	1362.3	1361.8	1361.8	1361.8	1361.8	1361.8	1361.8
172.5°	1372.0	1370.9	1369.7	1368.6	1367.5	1366.9	1367.0	1367.2	1367.5	1367.7	1367.9
175°	1377.1	1376.0	1374.8	1373.7	1372.6	1372.0	1372.1	1372.3	1372.6	1372.8	1373.0
177.5°	1379.2	1378.0	1376.9	1375.7	1374.6	1374.0	1374.1	1374.4	1374.6	1374.9	1375.1
180°	1377.1	1377.1	1377.1	1377.1	1377.1	1377.1	1377.1	1377.1	1377.1	1377.1	1377.1

TEST NUMBER: P1031067

CATALOG NUMBER: S123RDIW-B1165D1030UB2750-4F0-XX-W2A-A_3500K

CANDELA DISTRIBUTION (continued):

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°	95°
0°	1848.2	1848.2	1848.2	1848.2	1848.2	1848.2	1848.2	1848.2	1848.2	1848.2	1848.2
2.5°	1951.0	1951.0	1965.2	1979.5	1971.6	1976.3	1993.7	1987.4	2000.1	1998.5	2003.2
5°	2098.2	2115.6	2129.8	2159.9	2164.6	2159.9	2189.9	2197.8	2212.1	2194.7	2202.6
7.5°	2264.3	2300.7	2335.5	2379.8	2394.1	2397.2	2413.0	2435.2	2454.2	2419.4	2436.8
10°	2425.7	2481.1	2552.3	2591.8	2626.7	2639.3	2652.0	2666.2	2688.4	2708.9	2693.1
12.5°	2599.8	2680.5	2748.5	2819.7	2862.4	2857.7	2894.1	2903.6	2921.0	2925.7	2932.0
15°	2742.2	2856.1	2898.8	3004.8	3014.3	3046.0	3087.1	3123.5	3128.3	3118.8	3118.8
17.5°	2878.2	2976.3	3052.3	3137.7	3155.1	3182.0	3234.3	3251.7	3258.0	3256.4	3256.4
20°	2989.0	3053.9	3182.0	3253.3	3281.7	3316.5	3352.9	3375.1	3379.8	3386.2	3376.7
22.5°	3061.8	3159.9	3264.3	3322.9	3346.6	3359.3	3383.0	3389.3	3381.4	3383.0	3384.6
25°	3118.8	3215.3	3278.6	3294.4	3292.8	3277.0	3259.6	3229.5	3226.4	3213.7	3188.4
27.5°	3134.6	3171.0	3163.1	3098.2	3033.3	3027.0	2922.5	2865.6	2800.7	2810.2	2773.8
30°	3049.1	3001.7	2889.3	2724.8	2656.7	2546.0	2428.9	2307.0	2259.6	2207.3	2303.9
32.5°	2840.3	2671.0	2471.6	2258.0	2144.0	2045.9	1920.9	1832.3	1781.7	1739.0	1821.3
35°	2525.4	2261.1	1996.9	1794.4	1701.0	1612.4	1495.3	1451.0	1387.7	1394.0	1401.9
37.5°	2120.3	1829.2	1629.8	1430.4	1368.7	1332.3	1246.9	1178.8	1156.7	1150.3	1150.3
40°	1740.6	1501.6	1324.4	1167.8	1120.3	1090.2	1022.2	990.5	966.8	960.5	968.4
42.5°	1439.9	1235.8	1098.1	993.7	960.5	922.5	894.0	854.5	849.7	838.6	852.9
45°	1208.9	1031.7	928.8	852.9	824.4	810.1	778.5	754.8	745.3	743.7	754.8
47.5°	1025.3	887.7	797.5	750.0	727.9	713.6	686.7	677.2	667.7	670.9	666.2
50°	860.8	757.9	699.4	656.7	642.4	628.2	610.8	601.3	596.5	596.5	595.0
52.5°	738.9	653.5	615.5	576.0	569.6	561.7	542.7	536.4	528.5	526.9	533.2
55°	632.9	574.4	536.4	512.7	506.3	490.5	482.6	474.7	469.9	466.8	468.4
57.5°	541.2	496.8	471.5	451.0	439.9	433.6	419.3	417.7	414.6	414.6	413.0
60°	465.2	433.6	403.5	390.8	382.9	375.0	373.4	363.9	359.2	362.4	360.8
62.5°	394.0	368.7	351.3	337.0	332.3	326.0	321.2	318.0	313.3	314.9	314.9
65°	329.1	308.6	295.9	283.2	281.7	275.3	273.7	270.6	270.6	269.0	272.2
67.5°	270.6	256.3	245.3	237.3	232.6	234.2	227.9	223.1	223.1	221.5	226.3
70°	215.2	207.3	196.2	186.7	180.4	180.4	172.5	170.9	170.9	170.9	169.3
72.5°	166.1	151.9	147.2	144.0	144.0	144.0	140.8	140.8	139.2	140.8	139.2
75°	123.4	121.8	118.7	117.1	117.1	115.5	113.9	113.9	113.9	113.9	113.9
77.5°	96.5	96.5	93.4	91.8	91.8	91.8	90.2	90.2	88.6	88.6	88.6
80°	71.2	71.2	68.0	68.0	68.0	66.5	66.5	66.5	68.0	66.5	66.5
82.5°	49.1	49.1	47.5	49.1	47.5	45.9	45.9	45.9	44.3	45.9	45.9
85°	28.5	28.5	26.9	25.3	26.9	26.9	25.3	26.9	25.3	26.9	25.3
87.5°	11.1	9.5	9.5	9.5	7.9	9.5	7.9	7.9	9.5	7.9	9.5
90°	25.5	26.4	27.3	28.2	28.6	28.8	29.3	29.8	30.2	30.7	30.2
92.5°	28.2	29.8	31.4	33.0	33.8	33.9	34.1	34.4	34.6	34.8	34.6
95°	33.3	34.9	36.5	38.1	38.9	38.9	38.9	38.9	38.9	38.9	38.9
97.5°	34.5	36.3	38.2	40.0	40.9	41.0	41.2	41.5	41.7	41.9	41.7
100°	35.6	37.4	39.2	41.0	41.9	42.0	42.3	42.5	42.8	43.0	42.8
102.5°	68.2	60.7	53.2	45.7	41.9	42.1	42.6	43.1	43.5	44.0	43.5
105°	183.9	143.6	103.4	63.1	43.0	43.2	43.7	44.1	44.6	45.0	44.6
107.5°	363.0	328.0	292.9	257.9	240.4	225.5	195.7	166.0	136.2	106.4	136.2
110°	453.9	446.4	438.9	431.4	427.7	411.4	378.9	346.4	313.9	281.4	313.9

TEST NUMBER: P1031067

CATALOG NUMBER: S123RDIW-B1165D1030UB2750-4F0-XX-W2A-A_3500K

CANDELA DISTRIBUTION (continued):

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°	95°
112.5°	527.9	530.0	532.0	534.1	535.1	534.9	534.4	533.9	533.5	533.0	533.5
115°	589.6	591.8	594.1	596.4	597.5	598.0	598.9	599.8	600.7	601.6	600.7
117.5°	649.4	651.2	653.1	654.9	655.8	655.9	656.1	656.4	656.6	656.8	656.6
120°	707.8	709.6	711.4	713.2	714.1	714.1	714.1	714.1	714.1	714.1	714.1
122.5°	765.4	766.6	767.7	768.8	769.4	769.5	769.7	770.0	770.2	770.4	770.2
125°	818.9	819.4	819.8	820.3	820.5	820.7	821.2	821.7	822.1	822.6	822.1
127.5°	873.4	874.1	874.8	875.5	875.8	875.6	875.1	874.6	874.2	873.7	874.2
130°	921.7	922.6	923.5	924.4	924.9	924.7	924.2	923.8	923.3	922.9	923.3
132.5°	967.7	968.6	969.5	970.4	970.9	970.6	969.9	969.2	968.6	967.9	968.6
135°	1014.6	1015.3	1016.0	1016.7	1017.0	1016.7	1016.0	1015.3	1014.6	1013.9	1014.6
137.5°	1055.9	1057.1	1058.2	1059.3	1059.9	1059.7	1059.2	1058.8	1058.3	1057.9	1058.3
140°	1095.6	1096.5	1097.4	1098.3	1098.8	1098.6	1098.1	1097.7	1097.2	1096.8	1097.2
142.5°	1133.3	1134.0	1134.7	1135.4	1135.7	1135.4	1134.7	1134.0	1133.3	1132.6	1133.3
145°	1167.8	1168.3	1168.7	1169.2	1169.4	1169.4	1169.4	1169.4	1169.4	1169.4	1169.4
147.5°	1199.5	1200.0	1200.4	1200.9	1201.1	1200.5	1199.4	1198.3	1197.1	1196.0	1197.1
150°	1228.2	1228.6	1229.1	1229.6	1229.8	1229.5	1228.8	1228.1	1227.4	1226.7	1227.4
152.5°	1253.2	1254.1	1255.0	1255.9	1256.4	1255.8	1254.7	1253.6	1252.4	1251.3	1252.4
155°	1275.9	1277.1	1278.2	1279.3	1279.9	1279.2	1277.9	1276.5	1275.2	1273.8	1275.2
157.5°	1296.7	1298.0	1299.4	1300.7	1301.4	1300.5	1298.7	1296.8	1295.0	1293.2	1295.0
160°	1314.1	1315.4	1316.8	1318.1	1318.8	1318.0	1316.4	1314.8	1313.2	1311.6	1313.2
162.5°	1329.6	1331.2	1332.8	1334.4	1335.2	1334.5	1333.1	1331.8	1330.4	1329.0	1330.4
165°	1343.1	1344.9	1346.8	1348.6	1349.5	1348.7	1347.1	1345.5	1343.9	1342.3	1343.9
167.5°	1354.4	1356.2	1358.0	1359.8	1360.7	1359.8	1358.0	1356.2	1354.4	1352.6	1354.4
170°	1363.6	1365.4	1367.3	1369.1	1370.0	1369.1	1367.3	1365.4	1363.6	1361.8	1363.6
172.5°	1369.7	1371.5	1373.4	1375.2	1376.1	1375.1	1373.0	1371.0	1368.9	1366.9	1368.9
175°	1374.6	1376.2	1377.8	1379.4	1380.2	1379.3	1377.5	1375.6	1373.8	1372.0	1373.8
177.5°	1376.9	1378.7	1380.6	1382.4	1383.3	1382.2	1379.9	1377.6	1375.3	1373.0	1375.3
180°	1377.1	1377.1	1377.1	1377.1	1377.1	1377.1	1377.1	1377.1	1377.1	1377.1	1377.1

TEST NUMBER: P1031067

CATALOG NUMBER: S123RDIW-B1165D1030UB2750-4F0-XX-W2A-A_3500K

CANDELA DISTRIBUTION (continued):

	100°	105°	110°	112.5°	115°	120°	125°	130°	135°	140°	145°
0°	1848.2	1848.2	1848.2	1848.2	1848.2	1848.2	1848.2	1848.2	1848.2	1848.2	1848.2
2.5°	1995.3	1985.8	1979.5	1974.7	1970.0	1984.2	1965.2	1944.7	1930.4	1920.9	1917.8
5°	2204.2	2183.6	2166.2	2152.0	2155.1	2155.1	2121.9	2085.5	2053.9	2036.4	2017.5
7.5°	2446.3	2424.1	2389.3	2381.4	2375.1	2335.5	2302.3	2235.8	2196.3	2156.7	2121.9
10°	2686.8	2658.3	2625.1	2614.0	2598.2	2549.1	2498.5	2413.0	2364.0	2291.2	2245.3
12.5°	2911.5	2876.7	2843.4	2835.5	2811.8	2769.1	2682.0	2593.4	2509.6	2432.0	2351.3
15°	3099.8	3090.3	3039.6	3008.0	2955.8	2897.2	2878.2	2758.0	2652.0	2571.3	2425.7
17.5°	3258.0	3213.7	3166.2	3145.7	3125.1	3057.0	2989.0	2865.6	2751.7	2633.0	2539.6
20°	3384.6	3335.5	3302.3	3272.2	3262.7	3185.2	3077.6	2968.4	2843.4	2710.5	2588.7
22.5°	3390.9	3384.6	3362.4	3345.0	3326.0	3275.4	3190.0	3053.9	2921.0	2775.4	2615.6
25°	3259.6	3250.1	3313.4	3297.6	3310.2	3291.2	3245.3	3131.4	2976.3	2805.5	2644.1
27.5°	2864.0	2960.5	3060.2	3095.0	3118.8	3186.8	3208.9	3145.7	3020.7	2838.7	2658.3
30°	2326.0	2454.2	2615.6	2702.6	2769.1	2895.6	3060.2	3080.8	3022.2	2876.7	2655.1
32.5°	1826.0	1943.1	2072.8	2175.7	2264.3	2523.8	2745.3	2905.1	2933.6	2857.7	2663.0
35°	1471.6	1522.2	1645.6	1743.7	1864.0	2085.5	2346.6	2604.5	2778.6	2788.1	2639.3
37.5°	1213.6	1240.5	1348.1	1403.5	1474.7	1669.3	1913.0	2250.1	2520.6	2648.8	2572.9
40°	1004.8	1066.5	1128.2	1159.8	1210.5	1345.0	1579.2	1843.4	2178.9	2416.2	2470.0
42.5°	871.9	898.8	938.3	982.6	1014.3	1131.4	1288.0	1530.1	1832.3	2163.0	2311.8
45°	769.0	778.5	819.6	848.1	881.4	963.6	1074.4	1276.9	1542.8	1868.7	2121.9
47.5°	683.6	702.6	724.7	742.1	764.3	827.6	922.5	1069.6	1303.8	1595.0	1867.1
50°	607.6	618.7	647.2	655.1	670.9	715.2	788.0	900.3	1093.4	1326.0	1607.6
52.5°	536.4	557.0	568.1	579.1	593.4	629.8	677.2	769.0	914.6	1132.9	1371.9
55°	481.0	487.4	503.2	512.7	523.7	549.1	590.2	658.2	772.2	946.2	1172.5
57.5°	427.2	427.2	443.1	451.0	462.0	481.0	517.4	569.6	651.9	781.7	989.0
60°	370.3	371.8	384.5	394.0	397.2	416.2	446.2	487.4	550.6	645.6	814.9
62.5°	319.6	327.5	333.9	337.0	348.1	359.2	384.5	413.0	457.3	541.2	661.4
65°	276.9	278.5	283.2	286.4	291.1	303.8	322.8	341.8	379.8	441.5	539.6
67.5°	227.9	234.2	240.5	240.5	245.3	251.6	270.6	286.4	314.9	351.3	417.7
70°	170.9	174.1	183.5	188.3	194.6	205.7	215.2	224.7	246.8	273.7	324.4
72.5°	142.4	142.4	145.6	147.2	147.2	155.1	169.3	178.8	189.9	208.9	243.7
75°	113.9	113.9	118.7	117.1	120.3	123.4	125.0	131.3	137.7	151.9	172.5
77.5°	90.2	91.8	91.8	93.4	93.4	94.9	96.5	99.7	102.9	110.8	120.3
80°	66.5	68.0	68.0	69.6	69.6	71.2	72.8	74.4	77.5	80.7	85.4
82.5°	45.9	47.5	47.5	49.1	47.5	49.1	50.6	50.6	52.2	55.4	57.0
85°	26.9	26.9	28.5	26.9	26.9	26.9	28.5	28.5	30.1	34.8	34.8
87.5°	7.9	9.5	7.9	9.5	9.5	9.5	9.5	11.1	11.1	12.7	14.2
90°	29.8	29.3	28.8	28.6	28.2	27.3	26.4	25.5	24.6	21.6	18.7
92.5°	34.4	34.1	33.9	33.8	33.0	31.4	29.8	28.2	26.6	24.6	22.5
95°	38.9	38.9	38.9	38.9	38.1	36.5	34.9	33.3	31.7	29.2	26.7
97.5°	41.5	41.2	41.0	40.9	40.0	38.2	36.3	34.5	32.7	44.3	55.9
100°	42.5	42.3	42.0	41.9	41.0	39.2	37.4	35.6	33.8	69.3	104.7
102.5°	43.1	42.6	42.1	41.9	45.7	53.2	60.7	68.2	75.7	115.3	154.8
105°	44.1	43.7	43.2	43.0	63.1	103.4	143.6	183.9	224.1	244.5	265.0
107.5°	166.0	195.7	225.5	240.4	257.9	292.9	328.0	363.0	398.0	394.6	391.2
110°	346.4	378.9	411.4	427.7	431.4	438.9	446.4	453.9	461.4	458.9	456.4

TEST NUMBER: P1031067

CATALOG NUMBER: S123RDIW-B1165D1030UB2750-4F0-XX-W2A-A_3500K

CANDELA DISTRIBUTION (continued):

	100°	105°	110°	112.5°	115°	120°	125°	130°	135°	140°	145°
112.5°	533.9	534.4	534.9	535.1	534.1	532.0	530.0	527.9	525.9	523.4	520.9
115°	599.8	598.9	598.0	597.5	596.4	594.1	591.8	589.6	587.3	585.3	583.2
117.5°	656.4	656.1	655.9	655.8	654.9	653.1	651.2	649.4	647.6	646.5	645.3
120°	714.1	714.1	714.1	714.1	713.2	711.4	709.6	707.8	706.0	705.3	704.6
122.5°	770.0	769.7	769.5	769.4	768.8	767.7	766.6	765.4	764.3	763.4	762.5
125°	821.7	821.2	820.7	820.5	820.3	819.8	819.4	818.9	818.5	817.6	816.7
127.5°	874.6	875.1	875.6	875.8	875.5	874.8	874.1	873.4	872.7	871.6	870.4
130°	923.8	924.2	924.7	924.9	924.4	923.5	922.6	921.7	920.8	919.9	919.0
132.5°	969.2	969.9	970.6	970.9	970.4	969.5	968.6	967.7	966.8	966.1	965.5
135°	1015.3	1016.0	1016.7	1017.0	1016.7	1016.0	1015.3	1014.6	1013.9	1013.0	1012.1
137.5°	1058.8	1059.2	1059.7	1059.9	1059.3	1058.2	1057.1	1055.9	1054.8	1054.4	1053.9
140°	1097.7	1098.1	1098.6	1098.8	1098.3	1097.4	1096.5	1095.6	1094.7	1094.0	1093.4
142.5°	1134.0	1134.7	1135.4	1135.7	1135.4	1134.7	1134.0	1133.3	1132.6	1131.9	1131.2
145°	1169.4	1169.4	1169.4	1169.4	1169.2	1168.7	1168.3	1167.8	1167.4	1166.9	1166.5
147.5°	1198.3	1199.4	1200.5	1201.1	1200.9	1200.4	1200.0	1199.5	1199.1	1198.6	1198.2
150°	1228.1	1228.8	1229.5	1229.8	1229.6	1229.1	1228.6	1228.2	1227.7	1227.3	1226.8
152.5°	1253.6	1254.7	1255.8	1256.4	1255.9	1255.0	1254.1	1253.2	1252.3	1252.1	1251.9
155°	1276.5	1277.9	1279.2	1279.9	1279.3	1278.2	1277.1	1275.9	1274.8	1274.6	1274.4
157.5°	1296.8	1298.7	1300.5	1301.4	1300.7	1299.4	1298.0	1296.7	1295.3	1295.5	1295.7
160°	1314.8	1316.4	1318.0	1318.8	1318.1	1316.8	1315.4	1314.1	1312.7	1312.9	1313.1
162.5°	1331.8	1333.1	1334.5	1335.2	1334.4	1332.8	1331.2	1329.6	1328.0	1328.2	1328.4
165°	1345.5	1347.1	1348.7	1349.5	1348.6	1346.8	1344.9	1343.1	1341.3	1341.5	1341.7
167.5°	1356.2	1358.0	1359.8	1360.7	1359.8	1358.0	1356.2	1354.4	1352.6	1352.6	1352.6
170°	1365.4	1367.3	1369.1	1370.0	1369.1	1367.3	1365.4	1363.6	1361.8	1361.8	1361.8
172.5°	1371.0	1373.0	1375.1	1376.1	1375.2	1373.4	1371.5	1369.7	1367.9	1367.7	1367.5
175°	1375.6	1377.5	1379.3	1380.2	1379.4	1377.8	1376.2	1374.6	1373.0	1372.8	1372.6
177.5°	1377.6	1379.9	1382.2	1383.3	1382.4	1380.6	1378.7	1376.9	1375.1	1374.9	1374.6
180°	1377.1	1377.1	1377.1	1377.1	1377.1	1377.1	1377.1	1377.1	1377.1	1377.1	1377.1

TEST NUMBER: P1031067

CATALOG NUMBER: S123RDIW-B1165D1030UB2750-4F0-XX-W2A-A_3500K

CANDELA DISTRIBUTION (continued):

	150°	155°	157.5°	160°	165°	170°	175°	180°	185°	190°	195°
0°	1848.2	1848.2	1848.2	1848.2	1848.2	1848.2	1848.2	1848.2	1848.2	1848.2	1848.2
2.5°	1913.0	1905.1	1897.2	1897.2	1879.8	1864.0	1856.1	1859.2	1849.7	1837.1	1824.4
5°	1996.9	1965.2	1958.9	1941.5	1917.8	1884.5	1867.1	1851.3	1832.3	1807.0	1783.3
7.5°	2074.4	2033.3	2011.1	1993.7	1947.8	1902.0	1864.0	1838.7	1805.4	1767.5	1739.0
10°	2175.7	2099.7	2076.0	2036.4	1971.6	1906.7	1862.4	1821.3	1775.4	1731.1	1693.1
12.5°	2256.4	2169.4	2125.1	2085.5	2001.6	1919.4	1845.0	1794.4	1739.0	1689.9	1640.9
15°	2348.2	2250.1	2172.5	2125.1	2019.0	1919.4	1835.5	1764.3	1702.6	1642.4	1599.7
17.5°	2392.5	2269.0	2234.2	2166.2	2012.7	1913.0	1810.2	1734.2	1659.9	1590.2	1539.6
20°	2462.1	2318.1	2231.1	2185.2	2049.1	1902.0	1781.7	1694.7	1617.1	1542.8	1489.0
22.5°	2466.8	2310.2	2253.2	2166.2	1998.5	1868.7	1756.4	1650.4	1560.2	1490.5	1435.2
25°	2455.8	2295.9	2216.8	2147.2	2008.0	1849.7	1705.7	1601.3	1512.7	1432.0	1367.1
27.5°	2451.0	2254.8	2180.4	2110.8	1954.2	1794.4	1675.7	1557.0	1455.7	1384.5	1318.1
30°	2444.7	2210.5	2120.3	2039.6	1895.6	1751.6	1609.2	1506.4	1409.8	1319.7	1253.2
32.5°	2403.5	2150.4	2058.6	1973.2	1818.1	1674.1	1561.8	1452.6	1348.1	1264.3	1204.1
35°	2390.9	2095.0	1974.7	1883.0	1731.1	1602.9	1484.2	1394.0	1295.9	1212.1	1140.9
37.5°	2354.5	2038.0	1908.3	1791.2	1633.0	1511.1	1424.1	1333.9	1239.0	1148.8	1091.8
40°	2291.2	1971.6	1824.4	1704.2	1541.2	1417.8	1337.1	1270.6	1177.2	1096.5	1026.9
42.5°	2197.8	1903.5	1745.3	1618.7	1438.3	1322.8	1256.4	1193.1	1114.0	1030.1	973.1
45°	2090.2	1813.3	1666.2	1525.4	1341.8	1229.5	1159.8	1121.9	1049.1	977.9	911.4
47.5°	1943.1	1720.0	1574.4	1428.8	1242.1	1132.9	1077.6	1039.6	989.0	911.4	857.6
50°	1758.0	1599.7	1462.1	1332.3	1144.0	1039.6	984.2	955.7	913.0	857.6	805.4
52.5°	1552.3	1460.5	1346.6	1226.3	1044.3	946.2	895.6	873.4	841.8	789.6	745.3
55°	1345.0	1305.4	1227.9	1109.2	939.9	859.2	814.9	786.4	762.7	724.7	686.7
57.5°	1159.8	1140.9	1087.1	995.3	852.9	769.0	731.0	712.0	693.1	664.6	626.6
60°	968.4	989.0	933.6	887.7	757.9	685.1	651.9	631.3	621.9	596.5	572.8
62.5°	802.2	821.2	789.6	754.8	663.0	598.1	577.5	558.6	552.2	530.1	506.3
65°	651.9	675.7	651.9	632.9	577.5	523.7	498.4	488.9	482.6	468.4	449.4
67.5°	519.0	542.7	531.7	507.9	490.5	446.2	432.0	422.5	419.3	408.2	392.4
70°	390.8	424.1	427.2	413.0	397.2	376.6	367.1	363.9	356.0	346.5	337.0
72.5°	281.7	319.6	321.2	321.2	311.7	311.7	302.2	297.5	297.5	288.0	276.9
75°	207.3	232.6	235.8	238.9	243.7	248.4	242.1	242.1	240.5	231.0	226.3
77.5°	137.7	159.8	167.7	178.8	185.1	185.1	188.3	191.5	188.3	183.5	180.4
80°	88.6	104.4	113.9	120.3	129.8	134.5	139.2	140.8	137.7	136.1	131.3
82.5°	58.5	63.3	68.0	76.0	87.0	94.9	94.9	93.4	96.5	94.9	93.4
85°	33.2	36.4	38.0	39.6	45.9	53.8	55.4	57.0	60.1	57.0	53.8
87.5°	12.7	14.2	14.2	14.2	17.4	19.0	23.7	30.1	28.5	25.3	25.3
90°	15.7	12.8	11.3	10.2	7.9	5.6	3.3	1.0	3.3	5.6	7.9
92.5°	20.5	18.4	17.4	18.1	19.4	20.8	22.1	23.5	22.1	20.8	19.4
95°	24.2	21.7	20.5	25.2	34.5	43.8	53.1	62.4	53.1	43.8	34.5
97.5°	67.5	79.1	84.9	88.1	94.5	100.8	107.2	113.6	107.2	100.8	94.5
100°	140.2	175.7	193.4	191.1	186.6	182.0	177.5	172.9	177.5	182.0	186.6
102.5°	194.4	233.9	253.7	252.2	249.3	246.3	243.4	240.4	243.4	246.3	249.3
105°	285.4	305.9	316.1	314.9	312.4	309.9	307.4	304.9	307.4	309.9	312.4
107.5°	387.7	384.3	382.6	381.6	379.5	377.5	375.4	373.4	375.4	377.5	379.5
110°	453.9	451.4	450.2	449.3	447.5	445.6	443.8	442.0	443.8	445.6	447.5

TEST NUMBER: P1031067

CATALOG NUMBER: S123RDIW-B1165D1030UB2750-4F0-XX-W2A-A_3500K

CANDELA DISTRIBUTION (continued):

	150°	155°	157.5°	160°	165°	170°	175°	180°	185°	190°	195°
112.5°	518.4	515.9	514.6	513.8	512.2	510.7	509.1	507.5	509.1	510.7	512.2
115°	581.2	579.1	578.1	577.4	576.0	574.7	573.3	571.9	573.3	574.7	576.0
117.5°	644.2	643.1	642.5	641.7	640.1	638.6	637.0	635.4	637.0	638.6	640.1
120°	703.9	703.2	702.9	701.9	699.8	697.8	695.7	693.7	695.7	697.8	699.8
122.5°	761.6	760.7	760.2	759.4	757.8	756.2	754.6	753.0	754.6	756.2	757.8
125°	815.8	814.9	814.4	813.5	811.7	809.8	808.0	806.2	808.0	809.8	811.7
127.5°	869.3	868.2	867.6	866.7	864.9	863.0	861.2	859.4	861.2	863.0	864.9
130°	918.1	917.2	916.7	915.8	914.0	912.1	910.3	908.5	910.3	912.1	914.0
132.5°	964.8	964.1	963.8	962.9	961.1	959.2	957.4	955.6	957.4	959.2	961.1
135°	1011.2	1010.3	1009.8	1009.1	1007.8	1006.4	1005.1	1003.7	1005.1	1006.4	1007.8
137.5°	1053.5	1053.0	1052.8	1051.9	1050.1	1048.2	1046.4	1044.6	1046.4	1048.2	1050.1
140°	1092.7	1092.0	1091.7	1091.0	1089.6	1088.3	1086.9	1085.5	1086.9	1088.3	1089.6
142.5°	1130.5	1129.8	1129.5	1128.8	1127.5	1126.1	1124.8	1123.4	1124.8	1126.1	1127.5
145°	1166.0	1165.5	1165.3	1164.5	1162.9	1161.4	1159.8	1158.2	1159.8	1161.4	1162.9
147.5°	1197.7	1197.2	1197.0	1196.4	1195.3	1194.2	1193.0	1191.9	1193.0	1194.2	1195.3
150°	1226.4	1225.9	1225.7	1225.4	1224.7	1224.0	1223.3	1222.6	1223.3	1224.0	1224.7
152.5°	1251.6	1251.4	1251.3	1251.2	1250.9	1250.7	1250.4	1250.2	1250.4	1250.7	1250.9
155°	1274.1	1273.9	1273.8	1274.0	1274.5	1274.9	1275.4	1275.8	1275.4	1274.9	1274.5
157.5°	1296.0	1296.2	1296.3	1296.3	1296.3	1296.3	1296.3	1296.3	1296.3	1296.3	1296.3
160°	1313.4	1313.6	1313.7	1313.8	1314.0	1314.3	1314.5	1314.7	1314.5	1314.3	1314.0
162.5°	1328.7	1328.9	1329.0	1329.3	1330.0	1330.7	1331.4	1332.1	1331.4	1330.7	1330.0
165°	1342.0	1342.2	1342.3	1342.6	1343.3	1344.0	1344.7	1345.4	1344.7	1344.0	1343.3
167.5°	1352.6	1352.6	1352.6	1353.1	1354.0	1354.9	1355.8	1356.7	1355.8	1354.9	1354.0
170°	1361.8	1361.8	1361.8	1362.3	1363.2	1364.1	1365.0	1365.9	1365.0	1364.1	1363.2
172.5°	1367.2	1367.0	1366.9	1367.5	1368.6	1369.7	1370.9	1372.0	1370.9	1369.7	1368.6
175°	1372.3	1372.1	1372.0	1372.6	1373.7	1374.8	1376.0	1377.1	1376.0	1374.8	1373.7
177.5°	1374.4	1374.1	1374.0	1374.6	1375.7	1376.9	1378.0	1379.2	1378.0	1376.9	1375.7
180°	1377.1	1377.1	1377.1	1377.1	1377.1	1377.1	1377.1	1377.1	1377.1	1377.1	1377.1

TEST NUMBER: P1031067

CATALOG NUMBER: S123RDIW-B1165D1030UB2750-4F0-XX-W2A-A_3500K

CANDELA DISTRIBUTION (continued):

	200°	202.5°	205°	210°	215°	220°	225°	230°	235°	240°	245°
0°	1848.2	1848.2	1848.2	1848.2	1848.2	1848.2	1848.2	1848.2	1848.2	1848.2	1848.2
2.5°	1824.4	1816.5	1813.3	1805.4	1786.4	1773.8	1759.5	1750.0	1751.6	1743.7	1748.5
5°	1767.5	1765.9	1754.8	1739.0	1712.1	1697.8	1672.5	1659.9	1653.5	1655.1	1645.6
7.5°	1720.0	1705.7	1697.8	1672.5	1647.2	1617.1	1596.6	1585.5	1576.0	1566.5	1560.2
10°	1666.2	1653.5	1640.9	1614.0	1579.2	1550.7	1522.2	1511.1	1496.9	1490.5	1485.8
12.5°	1609.2	1601.3	1585.5	1553.8	1514.3	1487.4	1454.2	1447.8	1428.8	1416.2	1413.0
15°	1557.0	1552.3	1523.8	1487.4	1447.8	1420.9	1392.4	1373.5	1341.8	1348.1	1337.1
17.5°	1501.6	1481.1	1463.6	1414.6	1395.6	1354.5	1321.2	1311.7	1289.6	1275.4	1261.1
20°	1439.9	1427.3	1405.1	1373.5	1327.6	1280.1	1254.8	1239.0	1226.3	1204.1	1197.8
22.5°	1381.4	1365.5	1346.6	1305.4	1265.9	1226.3	1191.5	1177.2	1161.4	1145.6	1136.1
25°	1335.5	1311.7	1291.2	1240.5	1201.0	1167.8	1145.6	1121.9	1099.7	1090.2	1087.1
27.5°	1264.3	1250.0	1229.5	1182.0	1145.6	1109.2	1088.6	1072.8	1049.1	1038.0	1028.5
30°	1218.4	1189.9	1166.2	1128.2	1091.8	1052.2	1033.3	1014.3	1000.0	985.8	974.7
32.5°	1156.7	1134.5	1115.5	1077.6	1041.2	1004.8	984.2	955.7	947.8	936.7	924.1
35°	1096.5	1082.3	1061.7	1020.6	981.0	955.7	933.6	906.7	897.2	889.3	878.2
37.5°	1039.6	1019.0	1004.8	965.2	930.4	900.3	882.9	860.8	854.5	845.0	837.0
40°	990.5	970.0	955.7	916.2	879.8	848.1	837.0	814.9	805.4	794.3	789.6
42.5°	935.2	917.7	898.8	870.3	832.3	800.7	778.5	765.8	753.2	748.4	738.9
45°	876.6	860.8	846.5	814.9	775.3	753.2	734.2	716.8	707.3	699.4	693.1
47.5°	826.0	811.7	792.7	757.9	726.3	705.7	686.7	669.3	659.8	650.3	642.4
50°	767.4	759.5	738.9	705.7	675.7	651.9	634.5	618.7	612.4	601.3	588.6
52.5°	715.2	701.0	683.6	656.7	629.8	601.3	577.5	568.1	557.0	550.6	539.6
55°	653.5	644.0	625.0	601.3	572.8	549.1	531.7	519.0	504.8	498.4	484.2
57.5°	601.3	583.9	574.4	544.3	517.4	493.7	481.0	468.4	452.5	443.1	436.7
60°	544.3	528.5	514.3	488.9	469.9	444.6	425.6	414.6	403.5	390.8	384.5
62.5°	488.9	476.3	458.9	438.3	414.6	394.0	379.8	363.9	357.6	344.9	340.2
65°	428.8	419.3	405.1	381.3	362.4	344.9	330.7	318.0	311.7	307.0	303.8
67.5°	375.0	362.4	352.9	332.3	311.7	297.5	289.6	281.7	273.7	269.0	264.2
70°	319.6	310.1	300.6	281.7	267.4	254.8	248.4	242.1	237.3	232.6	227.9
72.5°	262.7	257.9	248.4	235.8	224.7	215.2	210.4	202.5	197.8	189.9	186.7
75°	216.8	208.9	204.1	193.0	183.5	175.6	169.3	159.8	153.5	150.3	148.7
77.5°	170.9	167.7	161.4	151.9	147.2	139.2	129.8	126.6	123.4	123.4	121.8
80°	128.2	123.4	118.7	110.8	106.0	99.7	99.7	99.7	98.1	99.7	98.1
82.5°	87.0	83.9	80.7	76.0	74.4	74.4	76.0	76.0	76.0	76.0	76.0
85°	50.6	50.6	50.6	52.2	50.6	50.6	52.2	53.8	52.2	52.2	50.6
87.5°	23.7	23.7	25.3	25.3	26.9	26.9	26.9	26.9	26.9	26.9	28.5
90°	10.2	11.3	12.8	15.7	18.7	21.6	24.6	25.5	26.4	27.3	28.2
92.5°	18.1	17.4	18.4	20.5	22.5	24.6	26.6	28.2	29.8	31.4	33.0
95°	25.2	20.5	21.7	24.2	26.7	29.2	31.7	33.3	34.9	36.5	38.1
97.5°	88.1	84.9	79.1	67.5	55.9	44.3	32.7	34.5	36.3	38.2	40.0
100°	191.1	193.4	175.7	140.2	104.7	69.3	33.8	35.6	37.4	39.2	41.0
102.5°	252.2	253.7	233.9	194.4	154.8	115.3	75.7	68.2	60.7	53.2	45.7
105°	314.9	316.1	305.9	285.4	265.0	244.5	224.1	183.9	143.6	103.4	63.1
107.5°	381.6	382.6	384.3	387.7	391.2	394.6	398.0	363.0	328.0	292.9	257.9
110°	449.3	450.2	451.4	453.9	456.4	458.9	461.4	453.9	446.4	438.9	431.4

TEST NUMBER: P1031067

CATALOG NUMBER: S123RDIW-B1165D1030UB2750-4F0-XX-W2A-A_3500K

CANDELA DISTRIBUTION (continued):

	200°	202.5°	205°	210°	215°	220°	225°	230°	235°	240°	245°
112.5°	513.8	514.6	515.9	518.4	520.9	523.4	525.9	527.9	530.0	532.0	534.1
115°	577.4	578.1	579.1	581.2	583.2	585.3	587.3	589.6	591.8	594.1	596.4
117.5°	641.7	642.5	643.1	644.2	645.3	646.5	647.6	649.4	651.2	653.1	654.9
120°	701.9	702.9	703.2	703.9	704.6	705.3	706.0	707.8	709.6	711.4	713.2
122.5°	759.4	760.2	760.7	761.6	762.5	763.4	764.3	765.4	766.6	767.7	768.8
125°	813.5	814.4	814.9	815.8	816.7	817.6	818.5	818.9	819.4	819.8	820.3
127.5°	866.7	867.6	868.2	869.3	870.4	871.6	872.7	873.4	874.1	874.8	875.5
130°	915.8	916.7	917.2	918.1	919.0	919.9	920.8	921.7	922.6	923.5	924.4
132.5°	962.9	963.8	964.1	964.8	965.5	966.1	966.8	967.7	968.6	969.5	970.4
135°	1009.1	1009.8	1010.3	1011.2	1012.1	1013.0	1013.9	1014.6	1015.3	1016.0	1016.7
137.5°	1051.9	1052.8	1053.0	1053.5	1053.9	1054.4	1054.8	1055.9	1057.1	1058.2	1059.3
140°	1091.0	1091.7	1092.0	1092.7	1093.4	1094.0	1094.7	1095.6	1096.5	1097.4	1098.3
142.5°	1128.8	1129.5	1129.8	1130.5	1131.2	1131.9	1132.6	1133.3	1134.0	1134.7	1135.4
145°	1164.5	1165.3	1165.5	1166.0	1166.5	1166.9	1167.4	1167.8	1168.3	1168.7	1169.2
147.5°	1196.4	1197.0	1197.2	1197.7	1198.2	1198.6	1199.1	1199.5	1200.0	1200.4	1200.9
150°	1225.4	1225.7	1225.9	1226.4	1226.8	1227.3	1227.7	1228.2	1228.6	1229.1	1229.6
152.5°	1251.2	1251.3	1251.4	1251.6	1251.9	1252.1	1252.3	1253.2	1254.1	1255.0	1255.9
155°	1274.0	1273.8	1273.9	1274.1	1274.4	1274.6	1274.8	1275.9	1277.1	1278.2	1279.3
157.5°	1296.3	1296.3	1296.2	1296.0	1295.7	1295.5	1295.3	1296.7	1298.0	1299.4	1300.7
160°	1313.8	1313.7	1313.6	1313.4	1313.1	1312.9	1312.7	1314.1	1315.4	1316.8	1318.1
162.5°	1329.3	1329.0	1328.9	1328.7	1328.4	1328.2	1328.0	1329.6	1331.2	1332.8	1334.4
165°	1342.6	1342.3	1342.2	1342.0	1341.7	1341.5	1341.3	1343.1	1344.9	1346.8	1348.6
167.5°	1353.1	1352.6	1352.6	1352.6	1352.6	1352.6	1352.6	1354.4	1356.2	1358.0	1359.8
170°	1362.3	1361.8	1361.8	1361.8	1361.8	1361.8	1361.8	1363.6	1365.4	1367.3	1369.1
172.5°	1367.5	1366.9	1367.0	1367.2	1367.5	1367.7	1367.9	1369.7	1371.5	1373.4	1375.2
175°	1372.6	1372.0	1372.1	1372.3	1372.6	1372.8	1373.0	1374.6	1376.2	1377.8	1379.4
177.5°	1374.6	1374.0	1374.1	1374.4	1374.6	1374.9	1375.1	1376.9	1378.7	1380.6	1382.4
180°	1377.1	1377.1	1377.1	1377.1	1377.1	1377.1	1377.1	1377.1	1377.1	1377.1	1377.1

TEST NUMBER: P1031067

CATALOG NUMBER: S123RDIW-B1165D1030UB2750-4F0-XX-W2A-A_3500K

CANDELA DISTRIBUTION (continued):

	247.5°	250°	255°	260°	265°	270°	275°	280°	285°	290°	292.5°
0°	1848.2	1848.2	1848.2	1848.2	1848.2	1848.2	1848.2	1848.2	1848.2	1848.2	1848.2
2.5°	1746.9	1748.5	1743.7	1734.2	1732.6	1735.8	1745.3	1742.1	1734.2	1748.5	1735.8
5°	1650.4	1642.4	1639.3	1642.4	1633.0	1628.2	1637.7	1633.0	1637.7	1639.3	1644.0
7.5°	1557.0	1558.6	1549.1	1550.7	1538.0	1541.2	1541.2	1541.2	1545.9	1549.1	1555.4
10°	1476.3	1479.5	1468.4	1470.0	1460.5	1454.2	1458.9	1468.4	1468.4	1468.4	1471.6
12.5°	1411.4	1397.2	1389.3	1387.7	1376.6	1373.5	1382.9	1386.1	1394.0	1394.0	1398.8
15°	1330.7	1327.6	1321.2	1321.2	1294.3	1300.7	1303.8	1314.9	1330.7	1318.1	1321.2
17.5°	1257.9	1250.0	1242.1	1239.0	1235.8	1226.3	1239.0	1237.4	1246.9	1248.5	1253.2
20°	1193.1	1186.7	1170.9	1172.5	1175.7	1161.4	1169.3	1169.3	1178.8	1188.3	1199.4
22.5°	1129.8	1123.4	1115.5	1118.7	1109.2	1106.0	1106.0	1114.0	1125.0	1132.9	1131.4
25°	1080.7	1069.6	1064.9	1060.2	1055.4	1058.6	1053.8	1061.7	1069.6	1074.4	1069.6
27.5°	1025.3	1020.6	1011.1	1006.4	998.4	1001.6	1004.8	1011.1	1015.9	1015.9	1020.6
30°	971.5	965.2	962.1	957.3	957.3	951.0	952.6	958.9	963.6	968.4	974.7
32.5°	919.3	914.6	909.8	909.8	906.7	905.1	903.5	913.0	913.0	922.5	922.5
35°	876.6	868.7	868.7	860.8	863.9	862.4	859.2	865.5	867.1	873.4	871.9
37.5°	829.1	829.1	826.0	818.1	811.7	813.3	821.2	821.2	826.0	824.4	829.1
40°	781.7	778.5	778.5	773.8	772.2	770.6	772.2	773.8	781.7	780.1	781.7
42.5°	734.2	735.8	727.9	727.9	727.9	723.1	724.7	726.3	729.5	732.6	737.4
45°	688.3	685.1	683.6	680.4	677.2	678.8	677.2	683.6	682.0	685.1	689.9
47.5°	639.3	634.5	632.9	626.6	626.6	629.8	628.2	632.9	634.5	639.3	636.1
50°	591.8	585.5	580.7	582.3	572.8	576.0	576.0	580.7	585.5	587.0	590.2
52.5°	536.4	534.8	533.2	525.3	523.7	522.2	523.7	525.3	531.7	536.4	538.0
55°	482.6	481.0	471.5	468.4	463.6	463.6	466.8	468.4	479.4	481.0	487.4
57.5°	433.6	428.8	417.7	416.2	416.2	416.2	411.4	417.7	420.9	428.8	428.8
60°	379.8	379.8	370.3	370.3	371.8	370.3	370.3	371.8	371.8	378.2	381.3
62.5°	337.0	335.5	335.5	332.3	330.7	332.3	330.7	330.7	332.3	337.0	341.8
65°	299.1	297.5	295.9	294.3	291.1	291.1	292.7	295.9	295.9	299.1	300.6
67.5°	262.7	262.7	259.5	259.5	257.9	256.3	257.9	256.3	262.7	262.7	264.2
70°	226.3	224.7	219.9	218.4	213.6	215.2	215.2	219.9	221.5	224.7	227.9
72.5°	182.0	182.0	178.8	175.6	177.2	174.1	174.1	175.6	175.6	180.4	182.0
75°	150.3	147.2	145.6	147.2	145.6	148.7	145.6	145.6	148.7	148.7	148.7
77.5°	123.4	123.4	121.8	121.8	123.4	121.8	123.4	123.4	123.4	121.8	123.4
80°	101.3	99.7	99.7	99.7	98.1	98.1	98.1	98.1	98.1	98.1	98.1
82.5°	76.0	76.0	74.4	76.0	76.0	74.4	76.0	74.4	74.4	76.0	76.0
85°	50.6	53.8	50.6	50.6	52.2	52.2	53.8	52.2	53.8	50.6	52.2
87.5°	26.9	28.5	28.5	26.9	26.9	28.5	28.5	28.5	30.1	26.9	28.5
90°	28.6	28.8	29.3	29.8	30.2	30.7	30.2	29.8	29.3	28.8	28.6
92.5°	33.8	33.9	34.1	34.4	34.6	34.8	34.6	34.4	34.1	33.9	33.8
95°	38.9	38.9	38.9	38.9	38.9	38.9	38.9	38.9	38.9	38.9	38.9
97.5°	40.9	41.0	41.2	41.5	41.7	41.9	41.7	41.5	41.2	41.0	40.9
100°	41.9	42.0	42.3	42.5	42.8	43.0	42.8	42.5	42.3	42.0	41.9
102.5°	41.9	42.1	42.6	43.1	43.5	44.0	43.5	43.1	42.6	42.1	41.9
105°	43.0	43.2	43.7	44.1	44.6	45.0	44.6	44.1	43.7	43.2	43.0
107.5°	240.4	225.5	195.7	166.0	136.2	106.4	136.2	166.0	195.7	225.5	240.4
110°	427.7	411.4	378.9	346.4	313.9	281.4	313.9	346.4	378.9	411.4	427.7

TEST NUMBER: P1031067

CATALOG NUMBER: S123RDIW-B1165D1030UB2750-4F0-XX-W2A-A_3500K

CANDELA DISTRIBUTION (continued):

	247.5°	250°	255°	260°	265°	270°	275°	280°	285°	290°	292.5°
112.5°	535.1	534.9	534.4	533.9	533.5	533.0	533.5	533.9	534.4	534.9	535.1
115°	597.5	598.0	598.9	599.8	600.7	601.6	600.7	599.8	598.9	598.0	597.5
117.5°	655.8	655.9	656.1	656.4	656.6	656.8	656.6	656.4	656.1	655.9	655.8
120°	714.1	714.1	714.1	714.1	714.1	714.1	714.1	714.1	714.1	714.1	714.1
122.5°	769.4	769.5	769.7	770.0	770.2	770.4	770.2	770.0	769.7	769.5	769.4
125°	820.5	820.7	821.2	821.7	822.1	822.6	822.1	821.7	821.2	820.7	820.5
127.5°	875.8	875.6	875.1	874.6	874.2	873.7	874.2	874.6	875.1	875.6	875.8
130°	924.9	924.7	924.2	923.8	923.3	922.9	923.3	923.8	924.2	924.7	924.9
132.5°	970.9	970.6	969.9	969.2	968.6	967.9	968.6	969.2	969.9	970.6	970.9
135°	1017.0	1016.7	1016.0	1015.3	1014.6	1013.9	1014.6	1015.3	1016.0	1016.7	1017.0
137.5°	1059.9	1059.7	1059.2	1058.8	1058.3	1057.9	1058.3	1058.8	1059.2	1059.7	1059.9
140°	1098.8	1098.6	1098.1	1097.7	1097.2	1096.8	1097.2	1097.7	1098.1	1098.6	1098.8
142.5°	1135.7	1135.4	1134.7	1134.0	1133.3	1132.6	1133.3	1134.0	1134.7	1135.4	1135.7
145°	1169.4	1169.4	1169.4	1169.4	1169.4	1169.4	1169.4	1169.4	1169.4	1169.4	1169.4
147.5°	1201.1	1200.5	1199.4	1198.3	1197.1	1196.0	1197.1	1198.3	1199.4	1200.5	1201.1
150°	1229.8	1229.5	1228.8	1228.1	1227.4	1226.7	1227.4	1228.1	1228.8	1229.5	1229.8
152.5°	1256.4	1255.8	1254.7	1253.6	1252.4	1251.3	1252.4	1253.6	1254.7	1255.8	1256.4
155°	1279.9	1279.2	1277.9	1276.5	1275.2	1273.8	1275.2	1276.5	1277.9	1279.2	1279.9
157.5°	1301.4	1300.5	1298.7	1296.8	1295.0	1293.2	1295.0	1296.8	1298.7	1300.5	1301.4
160°	1318.8	1318.0	1316.4	1314.8	1313.2	1311.6	1313.2	1314.8	1316.4	1318.0	1318.8
162.5°	1335.2	1334.5	1333.1	1331.8	1330.4	1329.0	1330.4	1331.8	1333.1	1334.5	1335.2
165°	1349.5	1348.7	1347.1	1345.5	1343.9	1342.3	1343.9	1345.5	1347.1	1348.7	1349.5
167.5°	1360.7	1359.8	1358.0	1356.2	1354.4	1352.6	1354.4	1356.2	1358.0	1359.8	1360.7
170°	1370.0	1369.1	1367.3	1365.4	1363.6	1361.8	1363.6	1365.4	1367.3	1369.1	1370.0
172.5°	1376.1	1375.1	1373.0	1371.0	1368.9	1366.9	1368.9	1371.0	1373.0	1375.1	1376.1
175°	1380.2	1379.3	1377.5	1375.6	1373.8	1372.0	1373.8	1375.6	1377.5	1379.3	1380.2
177.5°	1383.3	1382.2	1379.9	1377.6	1375.3	1373.0	1375.3	1377.6	1379.9	1382.2	1383.3
180°	1377.1	1377.1	1377.1	1377.1	1377.1	1377.1	1377.1	1377.1	1377.1	1377.1	1377.1

TEST NUMBER: P1031067

CATALOG NUMBER: S123RDIW-B1165D1030UB2750-4F0-XX-W2A-A_3500K

CANDELA DISTRIBUTION (continued):

	295°	300°	305°	310°	315°	320°	325°	330°	335°	337.5°	340°
0°	1848.2	1848.2	1848.2	1848.2	1848.2	1848.2	1848.2	1848.2	1848.2	1848.2	1848.2
2.5°	1748.5	1754.8	1748.5	1735.8	1748.5	1756.4	1764.3	1776.9	1783.3	1783.3	1792.8
5°	1648.8	1661.4	1656.7	1653.5	1666.2	1674.1	1686.8	1702.6	1720.0	1731.1	1743.7
7.5°	1560.2	1568.1	1576.0	1576.0	1588.7	1606.1	1625.0	1644.0	1666.2	1682.0	1691.5
10°	1482.6	1489.0	1493.7	1500.0	1519.0	1538.0	1563.3	1587.1	1606.1	1623.5	1639.3
12.5°	1408.3	1417.8	1428.8	1433.6	1447.8	1471.6	1495.3	1523.8	1553.8	1571.2	1587.1
15°	1337.1	1341.8	1354.5	1368.7	1381.4	1406.7	1436.7	1466.8	1492.1	1519.0	1533.3
17.5°	1264.3	1265.9	1299.1	1291.2	1332.3	1356.0	1371.9	1400.4	1441.5	1463.6	1485.8
20°	1193.1	1208.9	1223.1	1231.0	1253.2	1280.1	1326.0	1348.1	1381.4	1401.9	1420.9
22.5°	1137.7	1161.4	1161.4	1180.4	1191.5	1216.8	1250.0	1292.8	1329.2	1343.4	1370.3
25°	1088.6	1099.7	1118.7	1125.0	1145.6	1167.8	1189.9	1235.8	1275.4	1294.3	1313.3
27.5°	1025.3	1039.6	1064.9	1064.9	1091.8	1115.5	1142.4	1172.5	1212.1	1239.0	1259.5
30°	976.3	990.5	1001.6	1019.0	1030.1	1052.2	1099.7	1121.9	1156.7	1180.4	1205.7
32.5°	930.4	941.5	951.0	970.0	982.6	1007.9	1033.3	1072.8	1102.9	1125.0	1151.9
35°	879.8	890.8	903.5	917.7	936.7	960.5	984.2	1017.4	1047.5	1068.1	1090.2
37.5°	832.3	840.2	859.2	868.7	884.5	906.7	936.7	971.5	998.4	1014.3	1036.4
40°	786.4	792.7	807.0	824.4	835.5	852.9	884.5	914.6	947.8	966.8	984.2
42.5°	737.4	745.3	757.9	775.3	792.7	811.7	829.1	863.9	894.0	909.8	928.8
45°	694.6	699.4	708.9	726.3	743.7	757.9	784.8	816.5	845.0	857.6	878.2
47.5°	644.0	648.8	663.0	670.9	689.9	708.9	735.8	767.4	792.7	805.4	824.4
50°	591.8	596.5	606.0	623.4	636.1	656.7	680.4	707.3	738.9	756.3	767.4
52.5°	541.2	550.6	558.6	572.8	588.6	609.2	631.3	656.7	683.6	701.0	713.6
55°	490.5	498.4	507.9	515.8	534.8	553.8	579.1	602.9	626.6	642.4	656.7
57.5°	433.6	444.6	454.1	469.9	484.2	500.0	528.5	547.5	576.0	587.0	599.7
60°	384.5	395.6	403.5	416.2	428.8	449.4	468.4	492.1	515.8	530.1	545.9
62.5°	343.4	348.1	352.9	365.5	378.2	397.2	416.2	439.9	465.2	473.1	485.8
65°	302.2	307.0	314.9	326.0	335.5	346.5	367.1	386.1	409.8	422.5	427.2
67.5°	267.4	272.2	273.7	281.7	289.6	302.2	313.3	332.3	354.4	362.4	371.8
70°	227.9	235.8	237.3	243.7	246.8	254.8	267.4	281.7	299.1	313.3	321.2
72.5°	182.0	193.0	196.2	205.7	210.4	218.4	227.9	238.9	250.0	256.3	262.7
75°	148.7	151.9	153.5	161.4	169.3	180.4	185.1	191.5	201.0	208.9	215.2
77.5°	123.4	125.0	126.6	126.6	128.2	134.5	144.0	151.9	158.2	161.4	166.1
80°	99.7	98.1	98.1	99.7	99.7	99.7	102.9	113.9	117.1	125.0	123.4
82.5°	77.5	74.4	76.0	74.4	74.4	74.4	74.4	76.0	76.0	80.7	83.9
85°	50.6	52.2	50.6	50.6	49.1	50.6	49.1	49.1	47.5	47.5	45.9
87.5°	26.9	28.5	26.9	26.9	25.3	26.9	25.3	25.3	23.7	23.7	20.6
90°	28.2	27.3	26.4	25.5	24.6	21.6	18.7	15.7	12.8	11.3	10.2
92.5°	33.0	31.4	29.8	28.2	26.6	24.6	22.5	20.5	18.4	17.4	18.1
95°	38.1	36.5	34.9	33.3	31.7	29.2	26.7	24.2	21.7	20.5	25.2
97.5°	40.0	38.2	36.3	34.5	32.7	44.3	55.9	67.5	79.1	84.9	88.1
100°	41.0	39.2	37.4	35.6	33.8	69.3	104.7	140.2	175.7	193.4	191.1
102.5°	45.7	53.2	60.7	68.2	75.7	115.3	154.8	194.4	233.9	253.7	252.2
105°	63.1	103.4	143.6	183.9	224.1	244.5	265.0	285.4	305.9	316.1	314.9
107.5°	257.9	292.9	328.0	363.0	398.0	394.6	391.2	387.7	384.3	382.6	381.6
110°	431.4	438.9	446.4	453.9	461.4	458.9	456.4	453.9	451.4	450.2	449.3

TEST NUMBER: P1031067

CATALOG NUMBER: S123RDIW-B1165D1030UB2750-4F0-XX-W2A-A_3500K

CANDELA DISTRIBUTION (continued):

	295°	300°	305°	310°	315°	320°	325°	330°	335°	337.5°	340°
112.5°	534.1	532.0	530.0	527.9	525.9	523.4	520.9	518.4	515.9	514.6	513.8
115°	596.4	594.1	591.8	589.6	587.3	585.3	583.2	581.2	579.1	578.1	577.4
117.5°	654.9	653.1	651.2	649.4	647.6	646.5	645.3	644.2	643.1	642.5	641.7
120°	713.2	711.4	709.6	707.8	706.0	705.3	704.6	703.9	703.2	702.9	701.9
122.5°	768.8	767.7	766.6	765.4	764.3	763.4	762.5	761.6	760.7	760.2	759.4
125°	820.3	819.8	819.4	818.9	818.5	817.6	816.7	815.8	814.9	814.4	813.5
127.5°	875.5	874.8	874.1	873.4	872.7	871.6	870.4	869.3	868.2	867.6	866.7
130°	924.4	923.5	922.6	921.7	920.8	919.9	919.0	918.1	917.2	916.7	915.8
132.5°	970.4	969.5	968.6	967.7	966.8	966.1	965.5	964.8	964.1	963.8	962.9
135°	1016.7	1016.0	1015.3	1014.6	1013.9	1013.0	1012.1	1011.2	1010.3	1009.8	1009.1
137.5°	1059.3	1058.2	1057.1	1055.9	1054.8	1054.4	1053.9	1053.5	1053.0	1052.8	1051.9
140°	1098.3	1097.4	1096.5	1095.6	1094.7	1094.0	1093.4	1092.7	1092.0	1091.7	1091.0
142.5°	1135.4	1134.7	1134.0	1133.3	1132.6	1131.9	1131.2	1130.5	1129.8	1129.5	1128.8
145°	1169.2	1168.7	1168.3	1167.8	1167.4	1166.9	1166.5	1166.0	1165.5	1165.3	1164.5
147.5°	1200.9	1200.4	1200.0	1199.5	1199.1	1198.6	1198.2	1197.7	1197.2	1197.0	1196.4
150°	1229.6	1229.1	1228.6	1228.2	1227.7	1227.3	1226.8	1226.4	1225.9	1225.7	1225.4
152.5°	1255.9	1255.0	1254.1	1253.2	1252.3	1252.1	1251.9	1251.6	1251.4	1251.3	1251.2
155°	1279.3	1278.2	1277.1	1275.9	1274.8	1274.6	1274.4	1274.1	1273.9	1273.8	1274.0
157.5°	1300.7	1299.4	1298.0	1296.7	1295.3	1295.5	1295.7	1296.0	1296.2	1296.3	1296.3
160°	1318.1	1316.8	1315.4	1314.1	1312.7	1312.9	1313.1	1313.4	1313.6	1313.7	1313.8
162.5°	1334.4	1332.8	1331.2	1329.6	1328.0	1328.2	1328.4	1328.7	1328.9	1329.0	1329.3
165°	1348.6	1346.8	1344.9	1343.1	1341.3	1341.5	1341.7	1342.0	1342.2	1342.3	1342.6
167.5°	1359.8	1358.0	1356.2	1354.4	1352.6	1352.6	1352.6	1352.6	1352.6	1352.6	1353.1
170°	1369.1	1367.3	1365.4	1363.6	1361.8	1361.8	1361.8	1361.8	1361.8	1361.8	1362.3
172.5°	1375.2	1373.4	1371.5	1369.7	1367.9	1367.7	1367.5	1367.2	1367.0	1366.9	1367.5
175°	1379.4	1377.8	1376.2	1374.6	1373.0	1372.8	1372.6	1372.3	1372.1	1372.0	1372.6
177.5°	1382.4	1380.6	1378.7	1376.9	1375.1	1374.9	1374.6	1374.4	1374.1	1374.0	1374.6
180°	1377.1	1377.1	1377.1	1377.1	1377.1	1377.1	1377.1	1377.1	1377.1	1377.1	1377.1

TEST NUMBER: P1031067

CATALOG NUMBER: S123RDIW-B1165D1030UB2750-4F0-XX-W2A-A_3500K

CANDELA DISTRIBUTION (continued):

	345°	350°	355°	360°
0°	1848.2	1848.2	1848.2	1848.2
2.5°	1800.7	1811.8	1833.9	1852.9
5°	1762.7	1780.1	1813.3	1846.6
7.5°	1716.8	1743.7	1786.4	1832.3
10°	1672.5	1707.3	1759.5	1813.3
12.5°	1628.2	1664.6	1720.0	1789.6
15°	1576.0	1614.0	1680.4	1764.3
17.5°	1530.1	1580.7	1640.9	1724.7
20°	1481.1	1519.0	1596.6	1685.2
22.5°	1419.3	1482.6	1555.4	1648.8
25°	1370.3	1425.7	1498.5	1604.5
27.5°	1310.2	1375.0	1463.6	1557.0
30°	1261.1	1314.9	1397.2	1509.5
32.5°	1204.1	1267.4	1352.9	1463.6
35°	1153.5	1207.3	1288.0	1400.4
37.5°	1093.4	1151.9	1242.1	1341.8
40°	1041.2	1098.1	1183.6	1276.9
42.5°	977.9	1038.0	1123.4	1202.6
45°	927.2	982.6	1050.7	1123.4
47.5°	865.5	924.1	990.5	1041.2
50°	810.1	863.9	916.2	958.9
52.5°	750.0	799.1	846.5	878.2
55°	694.6	732.6	770.6	792.7
57.5°	629.8	666.2	697.8	710.5
60°	572.8	602.9	623.4	637.7
62.5°	512.7	534.8	550.6	558.6
65°	454.1	469.9	477.9	485.8
67.5°	394.0	408.2	413.0	422.5
70°	330.7	346.5	349.7	354.4
72.5°	283.2	283.2	289.6	295.9
75°	226.3	229.4	232.6	232.6
77.5°	177.2	177.2	180.4	182.0
80°	129.8	131.3	131.3	129.8
82.5°	88.6	91.8	88.6	87.0
85°	49.1	55.4	52.2	52.2
87.5°	20.6	20.6	23.7	20.6
90°	7.9	5.6	3.3	1.0
92.5°	19.4	20.8	22.1	23.5
95°	34.5	43.8	53.1	62.4
97.5°	94.5	100.8	107.2	113.6
100°	186.6	182.0	177.5	172.9
102.5°	249.3	246.3	243.4	240.4
105°	312.4	309.9	307.4	304.9
107.5°	379.5	377.5	375.4	373.4
110°	447.5	445.6	443.8	442.0

TEST NUMBER: P1031067

CATALOG NUMBER: S123RDIW-B1165D1030UB2750-4F0-XX-W2A-A_3500K

CANDELA DISTRIBUTION (continued):

	345°	350°	355°	360°
112.5°	512.2	510.7	509.1	507.5
115°	576.0	574.7	573.3	571.9
117.5°	640.1	638.6	637.0	635.4
120°	699.8	697.8	695.7	693.7
122.5°	757.8	756.2	754.6	753.0
125°	811.7	809.8	808.0	806.2
127.5°	864.9	863.0	861.2	859.4
130°	914.0	912.1	910.3	908.5
132.5°	961.1	959.2	957.4	955.6
135°	1007.8	1006.4	1005.1	1003.7
137.5°	1050.1	1048.2	1046.4	1044.6
140°	1089.6	1088.3	1086.9	1085.5
142.5°	1127.5	1126.1	1124.8	1123.4
145°	1162.9	1161.4	1159.8	1158.2
147.5°	1195.3	1194.2	1193.0	1191.9
150°	1224.7	1224.0	1223.3	1222.6
152.5°	1250.9	1250.7	1250.4	1250.2
155°	1274.5	1274.9	1275.4	1275.8
157.5°	1296.3	1296.3	1296.3	1296.3
160°	1314.0	1314.3	1314.5	1314.7
162.5°	1330.0	1330.7	1331.4	1332.1
165°	1343.3	1344.0	1344.7	1345.4
167.5°	1354.0	1354.9	1355.8	1356.7
170°	1363.2	1364.1	1365.0	1365.9
172.5°	1368.6	1369.7	1370.9	1372.0
175°	1373.7	1374.8	1376.0	1377.1
177.5°	1375.7	1376.9	1378.0	1379.2
180°	1377.1	1377.1	1377.1	1377.1

(END OF REPORT)