

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1032052

Luminaire Tested: S123RDIW-B1000D460UB40-4F0-XX-W2A-A

Issue Date: 5/6/2025

Test Information

Test Method: LM-79-2019
Report Number: P1032052
REPORT IS A COMBINATION OF REPORTS P993883 AND P1007351
Test Lab: INNOVATION CENTER
Issue Date: 5/6/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S123RDIW-B1000D460UB40-4F0-XX-W2A-A
Description: Define 3 Regressed Direct/Indirect Wall Mount with 4000K BioUP LEDs {m-DER=0.865}
{m-EER=0.951}
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5767.0 lumens
Efficiency: N/A
Efficacy: 96.1 lumens/watt
Spacing Criteria (0/90/45): 1.22 / 1.2 / 1.34
Luminous Opening: Rectangular w/ Sides (W: 0.25' x L: 4' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 60
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1032052

CATALOG NUMBER: S123RDIW-B1000D460UB40-4F0-XX-W2A-A

Luminous Intensity Polar Plot

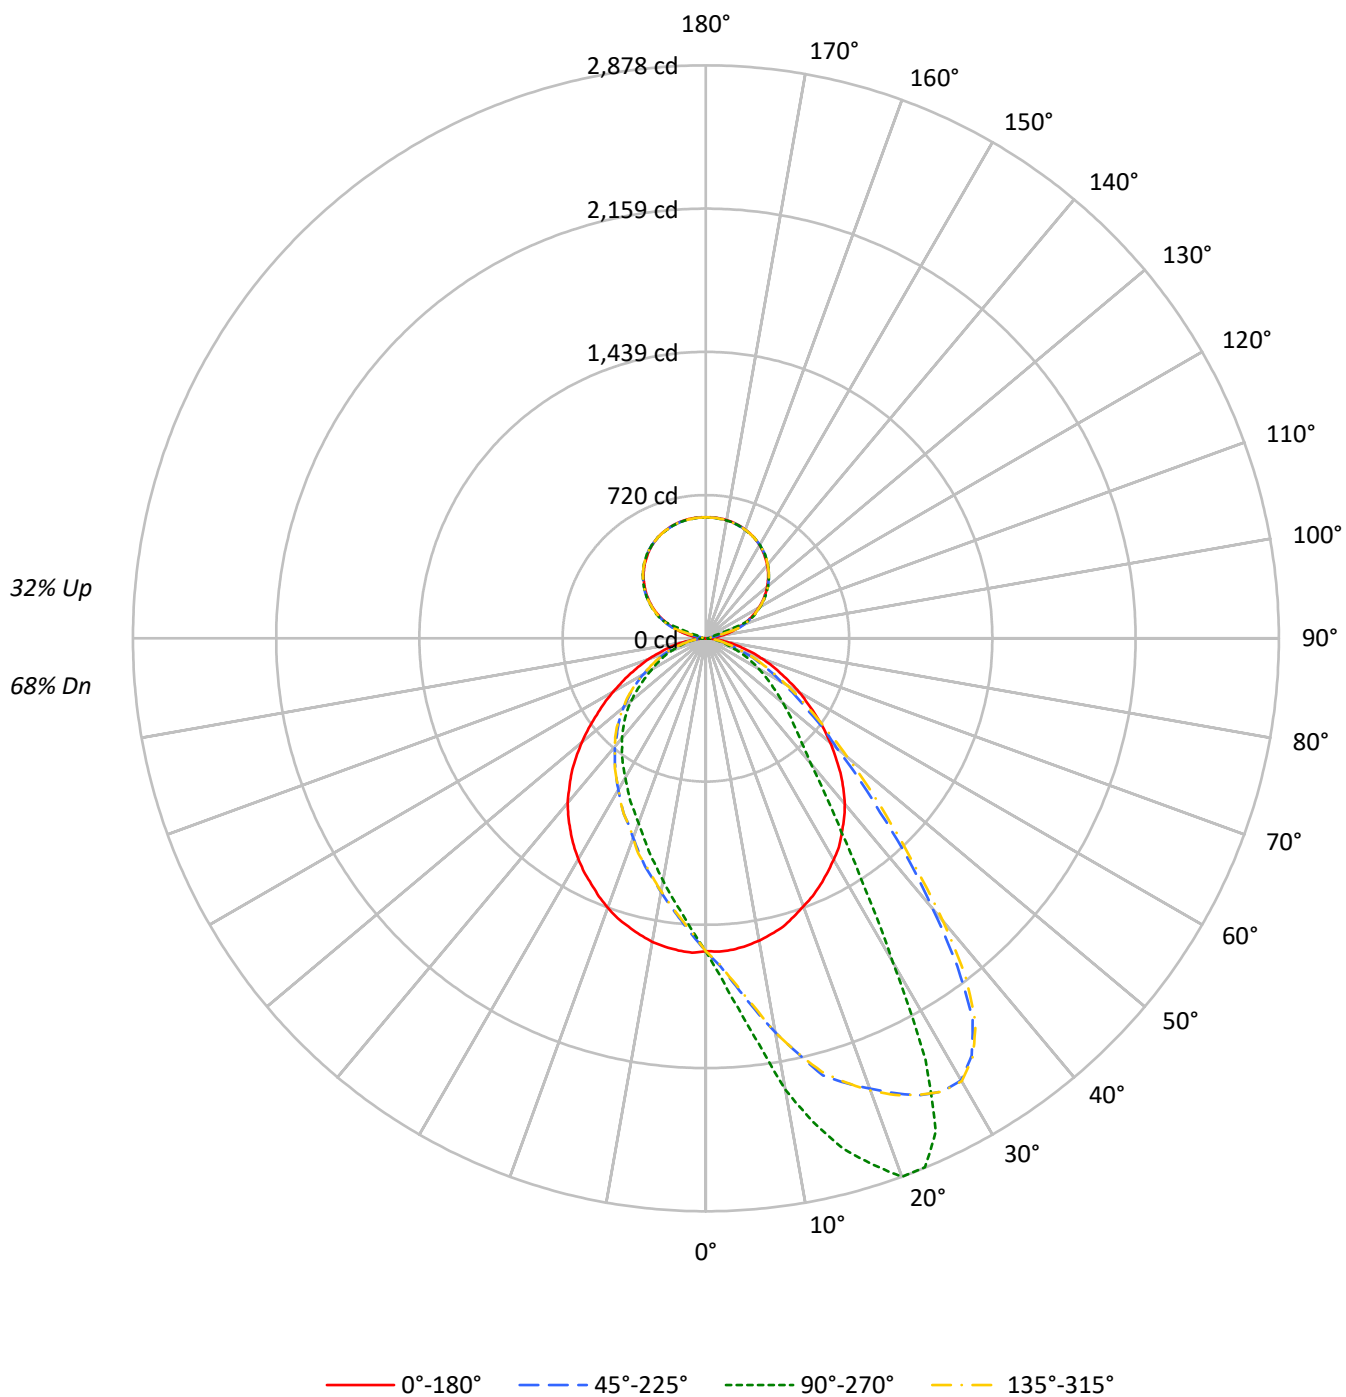

TEST NUMBER: P1032052

CATALOG NUMBER: S123RDIW-B1000D460UB40-4F0-XX-W2A-A

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	111	111	111	111	105	105	105	105	93	93	93	82	82	82	73	73	73	68		
1	103	98	95	91	97	93	90	87	83	81	78	74	72	70	65	64	63	59		
2	94	87	81	76	89	82	77	73	74	70	66	66	63	60	59	56	54	51		
3	86	77	70	64	81	73	67	62	66	61	57	59	55	52	53	50	47	44		
4	79	69	61	55	75	65	59	53	59	53	49	53	49	45	47	44	41	38		
5	73	62	54	48	69	59	52	46	53	47	43	48	43	40	43	39	36	34		
6	68	56	48	42	64	53	46	41	48	42	38	44	39	35	39	35	32	30		
7	63	51	43	37	59	48	41	36	44	38	34	40	35	31	36	32	29	27		
8	59	46	39	33	55	44	37	32	40	35	30	37	32	28	33	29	26	24		
9	55	43	35	30	52	41	34	29	37	31	27	34	29	26	31	27	24	22		
10	51	39	32	27	49	38	31	26	34	29	25	32	27	23	29	25	22	20		

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	16910	16910	16910	16910
5°	16924	19476	16967	14450
10°	16775	23511	16848	12620
15°	16602	26683	16602	11129
20°	16261	28782	16353	9872
25°	16012	27345	15980	9008
30°	15722	18946	15689	8163
35°	15373	12164	15303	7525
40°	14939	8590	14865	6892
45°	14183	6874	14164	6274
50°	13255	5750	13211	5552
55°	12211	4739	12113	4707
60°	11186	3917	11074	4002
65°	9981	3135	10047	3393
70°	8873	2179	9111	2742
75°	7520	1615	7829	2109
80°	5988	1072	6498	1582
85°	4265	508	4649	984

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 30°

Vertical Angle: 45°

Luminance: 22576 cd/sqm

TEST NUMBER: P1032052

CATALOG NUMBER: S123RDIW-B1000D460UB40-4F0-XX-W2A-A

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	154.3	2.7
10°-20°	483.0	8.4
20°-30°	760.7	13.2
30°-40°	791.0	13.7
40°-50°	676.7	11.7
50°-60°	515.9	8.9
60°-70°	330.5	5.7
70°-80°	158.4	2.7
80°-90°	42.9	0.7
90°-100°	21.4	0.4
100°-110°	103.7	1.8
110°-120°	254.0	4.4
120°-130°	322.5	5.6
130°-140°	344.5	6.0
140°-150°	322.2	5.6
150°-160°	259.9	4.5
160°-170°	167.7	2.9
170°-180°	57.8	1.0
0°-30°	1397.9	24.2
0°-40°	2188.9	38.0
0°-60°	3381.5	58.6
0°-90°	3913.2	67.9
90°-120°	379.2	6.6
90°-150°	1368.4	23.7
90°-180°	1854.0	32.1
0°-180°	5767.0	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1571	1571	1571	1571	1571	
5°	1570	1866	1574	1384	1570	149
15°	1500	2651	1500	1106	1500	422
25°	1364	2732	1361	900	1364	628
35°	1190	1185	1185	733	1190	745
45°	955	632	954	577	955	735
55°	674	397	668	394	674	604
65°	413	229	416	248	413	413
75°	198	97	206	126	198	213
85°	44	23	48	44	44	50
90°	0	14	0	14	0	4
95°	28	17	28	17	28	33
105°	135	20	135	20	135	143
115°	252	266	252	266	252	249
125°	356	363	356	363	356	318
135°	443	448	443	448	443	341
145°	511	516	511	516	511	320
155°	563	562	563	562	563	260
165°	594	593	594	593	594	168
175°	608	606	608	606	608	58
180°	608	608	608	608	608	

TEST NUMBER: P1032052

CATALOG NUMBER: S123RDIW-B1000D460UB40-4F0-XX-W2A-A

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
0°	1571.0	1571.0	1571.0	1571.0	1571.0	1571.0	1571.0	1571.0	1571.0	1571.0	1571.0
2.5°	1575.1	1585.8	1593.9	1599.3	1612.7	1620.8	1627.5	1639.6	1639.6	1642.3	1647.7
5°	1569.7	1592.6	1608.7	1630.2	1658.5	1671.9	1690.8	1706.9	1729.8	1741.9	1754.0
7.5°	1557.6	1589.9	1623.5	1655.8	1697.5	1724.4	1743.2	1784.9	1814.5	1850.8	1879.1
10°	1541.5	1585.8	1628.9	1678.7	1735.1	1775.5	1803.7	1858.9	1915.4	1966.5	2009.5
12.5°	1521.3	1575.1	1637.0	1697.5	1776.8	1817.2	1862.9	1931.5	2012.2	2076.8	2134.6
15°	1499.8	1561.6	1631.6	1705.6	1805.1	1861.6	1927.5	2010.9	2101.0	2193.8	2273.2
17.5°	1466.1	1544.1	1622.2	1729.8	1846.8	1880.4	1936.9	2051.2	2162.9	2246.3	2343.1
20°	1432.5	1519.9	1618.1	1715.0	1841.4	1919.4	1971.9	2092.9	2212.7	2313.5	2406.3
22.5°	1401.6	1493.0	1595.3	1717.7	1836.0	1914.0	1980.0	2106.4	2244.9	2357.9	2472.3
25°	1363.9	1463.4	1576.4	1692.1	1836.0	1895.2	1967.8	2114.5	2261.1	2391.5	2532.8
27.5°	1323.6	1424.4	1536.1	1654.4	1786.3	1873.7	1945.0	2102.4	2281.2	2421.1	2566.4
30°	1283.2	1386.8	1494.4	1600.6	1748.6	1832.0	1914.0	2087.6	2292.0	2452.1	2563.7
32.5°	1244.2	1331.6	1437.9	1541.5	1688.1	1779.5	1872.3	2072.8	2296.0	2430.6	2484.4
35°	1190.4	1281.9	1367.9	1478.2	1626.2	1716.3	1825.3	2071.4	2278.6	2362.0	2335.1
37.5°	1140.6	1217.3	1299.3	1397.5	1549.5	1666.5	1779.5	2036.4	2220.7	2226.1	2074.1
40°	1085.5	1148.7	1217.3	1320.9	1485.0	1600.6	1723.0	1982.6	2115.8	2036.4	1768.8
42.5°	1022.3	1078.8	1132.6	1233.4	1412.3	1541.5	1673.3	1915.4	1963.8	1780.9	1502.5
45°	955.0	1000.7	1050.5	1156.8	1335.7	1463.4	1595.3	1811.8	1762.1	1503.8	1238.8
47.5°	885.1	924.1	972.5	1069.3	1253.6	1384.1	1509.2	1663.9	1537.4	1260.3	1038.4
50°	815.1	846.1	893.1	992.7	1170.2	1288.6	1404.3	1505.1	1327.6	1081.4	858.2
52.5°	746.5	770.7	819.2	903.9	1076.1	1189.0	1272.4	1311.4	1131.2	893.1	745.2
55°	673.9	700.8	733.1	819.2	990.0	1073.4	1128.5	1127.2	941.6	757.3	616.0
57.5°	603.9	628.2	656.4	742.5	881.0	937.5	984.6	961.7	785.5	620.1	528.6
60°	542.1	555.5	586.5	659.1	764.0	812.4	839.3	800.3	641.6	523.2	437.1
62.5°	474.8	488.3	513.8	582.4	647.0	672.5	695.4	645.6	530.0	426.4	373.9
65°	412.9	430.4	446.6	501.7	536.7	567.6	564.9	523.2	414.3	347.0	304.0
67.5°	359.1	365.9	379.3	412.9	429.1	451.9	453.3	406.2	333.6	282.5	256.9
70°	301.3	308.0	317.4	333.6	344.3	349.7	347.0	305.3	251.5	220.6	197.7
72.5°	251.5	250.2	256.9	256.9	267.7	266.3	258.3	226.0	191.0	165.4	152.0
75°	197.7	199.1	200.4	197.7	193.7	188.3	181.6	157.4	134.5	122.4	110.3
77.5°	154.7	152.0	153.3	143.9	138.5	133.2	123.7	111.6	92.8	90.1	84.7
80°	110.3	109.0	107.6	103.6	91.5	86.1	79.4	72.6	68.6	65.9	64.6
82.5°	74.0	74.0	71.3	63.2	56.5	52.5	51.1	48.4	44.4	44.4	43.0
85°	44.4	43.0	40.4	32.3	28.2	28.2	28.2	28.2	25.6	25.6	24.2
87.5°	17.5	16.1	12.1	12.1	10.8	10.8	10.8	9.4	9.4	8.1	8.1
90°	0.5	1.5	2.5	3.5	4.5	5.0	5.6	6.9	8.2	9.5	10.8
92.5°	10.4	9.8	9.2	8.6	8.0	7.7	8.1	9.0	9.9	10.8	11.7
95°	27.6	23.5	19.3	15.2	11.1	9.0	9.6	10.7	11.8	12.9	14.0
97.5°	50.1	47.3	44.5	41.7	38.9	37.5	34.9	29.8	24.7	19.6	14.5
100°	76.3	78.3	80.3	82.4	84.4	85.4	77.6	61.9	46.2	30.6	14.9
102.5°	106.2	107.5	108.8	110.1	111.4	112.0	103.3	85.8	68.3	50.9	33.4
105°	134.6	135.7	136.8	137.9	139.0	139.6	135.1	126.0	117.0	107.9	98.9
107.5°	164.9	165.8	166.7	167.6	168.5	169.0	169.7	171.2	172.7	174.2	175.7
110°	195.2	196.0	196.8	197.6	198.4	198.8	199.3	200.4	201.5	202.6	203.7



TEST NUMBER: P1032052

CATALOG NUMBER: S123RDIW-B1000D460UB40-4F0-XX-W2A-A

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
112.5°	224.1	224.8	225.5	226.2	226.9	227.2	227.8	228.9	230.0	231.1	232.2
115°	252.5	253.1	253.7	254.3	254.9	255.2	255.7	256.6	257.5	258.4	259.3
117.5°	280.5	281.2	281.9	282.6	283.3	283.7	284.0	284.5	285.0	285.5	286.0
120°	306.3	307.2	308.1	309.0	309.9	310.4	310.5	310.8	311.1	311.4	311.7
122.5°	332.5	333.2	333.9	334.6	335.3	335.7	335.9	336.3	336.7	337.1	337.5
125°	356.0	356.8	357.6	358.4	359.2	359.6	359.8	360.2	360.6	361.0	361.4
127.5°	379.5	380.3	381.1	381.9	382.7	383.1	383.4	383.9	384.4	384.9	385.4
130°	401.2	402.0	402.8	403.6	404.4	404.8	405.0	405.4	405.8	406.2	406.6
132.5°	422.0	422.8	423.6	424.4	425.2	425.6	425.7	426.0	426.3	426.6	426.9
135°	443.2	443.8	444.4	445.0	445.6	445.9	446.1	446.5	446.9	447.3	447.7
137.5°	461.3	462.1	462.9	463.7	464.5	464.9	465.0	465.2	465.4	465.6	465.8
140°	479.3	479.9	480.5	481.1	481.7	482.0	482.2	482.5	482.8	483.1	483.4
142.5°	496.0	496.6	497.2	497.9	498.5	498.8	498.9	499.2	499.5	499.8	500.1
145°	511.4	512.1	512.8	513.5	514.2	514.6	514.7	514.9	515.1	515.3	515.5
147.5°	526.3	526.8	527.3	527.8	528.3	528.6	528.7	528.9	529.1	529.3	529.5
150°	539.9	540.2	540.5	540.8	541.1	541.2	541.3	541.5	541.7	541.9	542.1
152.5°	552.1	552.2	552.3	552.4	552.5	552.5	552.6	552.7	552.8	552.9	553.0
155°	563.4	563.2	563.0	562.8	562.6	562.5	562.5	562.6	562.7	562.8	562.9
157.5°	572.4	572.4	572.4	572.4	572.4	572.4	572.3	572.2	572.1	572.0	571.9
160°	580.5	580.4	580.3	580.2	580.1	580.1	580.0	579.9	579.8	579.7	579.6
162.5°	588.2	587.9	587.6	587.3	587.0	586.8	586.8	586.7	586.6	586.5	586.4
165°	594.1	593.8	593.5	593.2	592.9	592.7	592.7	592.6	592.5	592.4	592.3
167.5°	599.0	598.6	598.2	597.8	597.4	597.2	597.2	597.2	597.2	597.2	597.2
170°	603.1	602.7	602.3	601.9	601.5	601.3	601.3	601.3	601.3	601.3	601.3
172.5°	605.8	605.3	604.8	604.3	603.8	603.6	603.6	603.7	603.8	603.9	604.0
175°	608.1	607.6	607.1	606.6	606.1	605.8	605.9	606.0	606.1	606.2	606.3
177.5°	609.0	608.5	608.0	607.5	607.0	606.7	606.8	606.9	607.0	607.1	607.2
180°	608.1	608.1	608.1	608.1	608.1	608.1	608.1	608.1	608.1	608.1	608.1

TEST NUMBER: P1032052

CATALOG NUMBER: S123RDIW-B1000D460UB40-4F0-XX-W2A-A

CANDELA DISTRIBUTION (continued):

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°	95°
0°	1571.0	1571.0	1571.0	1571.0	1571.0	1571.0	1571.0	1571.0	1571.0	1571.0	1571.0
2.5°	1658.5	1658.5	1670.6	1682.7	1676.0	1680.0	1694.8	1689.4	1700.2	1698.8	1702.9
5°	1783.6	1798.4	1810.5	1836.0	1840.1	1836.0	1861.6	1868.3	1880.4	1865.6	1872.3
7.5°	1924.8	1955.7	1985.3	2023.0	2035.1	2037.8	2051.2	2070.1	2086.2	2056.6	2071.4
10°	2062.0	2109.1	2169.6	2203.2	2232.8	2243.6	2254.3	2266.5	2285.3	2302.8	2289.3
12.5°	2210.0	2278.6	2336.4	2396.9	2433.2	2429.2	2460.1	2468.2	2483.0	2487.0	2492.4
15°	2331.0	2427.9	2464.2	2554.3	2562.4	2589.3	2624.2	2655.2	2659.2	2651.1	2651.1
17.5°	2446.7	2530.1	2594.7	2667.3	2682.1	2704.9	2749.3	2764.1	2769.5	2768.2	2768.2
20°	2540.8	2596.0	2704.9	2765.5	2789.7	2819.3	2850.2	2869.0	2873.1	2878.5	2870.4
22.5°	2602.7	2686.1	2774.9	2824.7	2844.8	2855.6	2875.8	2881.2	2874.4	2875.8	2877.1
25°	2651.1	2733.2	2787.0	2800.4	2799.1	2785.7	2770.9	2745.3	2742.6	2731.9	2710.3
27.5°	2664.6	2695.5	2688.8	2633.7	2578.5	2573.1	2484.4	2435.9	2380.8	2388.9	2357.9
30°	2592.0	2551.6	2456.1	2316.2	2258.4	2164.2	2064.7	1961.1	1920.8	1876.4	1958.4
32.5°	2414.4	2270.5	2101.0	1919.4	1822.6	1739.2	1632.9	1557.6	1514.6	1478.2	1548.2
35°	2146.7	1922.1	1697.5	1525.3	1446.0	1370.6	1271.1	1233.4	1179.6	1185.0	1191.7
37.5°	1802.4	1554.9	1385.4	1215.9	1163.5	1132.6	1059.9	1002.1	983.3	977.9	977.9
40°	1479.6	1276.5	1125.8	992.7	952.3	926.8	868.9	842.0	821.8	816.5	823.2
42.5°	1224.0	1050.5	933.5	844.7	816.5	784.2	760.0	726.3	722.3	712.9	725.0
45°	1027.6	877.0	789.6	725.0	700.8	688.7	661.8	641.6	633.5	632.2	641.6
47.5°	871.6	754.6	677.9	637.6	618.7	606.6	583.8	575.7	567.6	570.3	566.3
50°	731.7	644.3	594.5	558.2	546.1	534.0	519.2	511.1	507.1	507.1	505.7
52.5°	628.2	555.5	523.2	489.6	484.2	477.5	461.4	456.0	449.3	447.9	453.3
55°	538.0	488.3	456.0	435.8	430.4	417.0	410.2	403.5	399.5	396.8	398.1
57.5°	460.0	422.4	400.8	383.3	373.9	368.6	356.4	355.1	352.4	352.4	351.1
60°	395.5	368.6	343.0	332.2	325.5	318.8	317.4	309.4	305.3	308.0	306.7
62.5°	334.9	313.4	298.6	286.5	282.5	277.1	273.1	270.4	266.3	267.7	267.7
65°	279.8	262.3	251.5	240.8	239.4	234.0	232.7	230.0	230.0	228.7	231.4
67.5°	230.0	217.9	208.5	201.8	197.7	199.1	193.7	189.7	189.7	188.3	192.3
70°	182.9	176.2	166.8	158.7	153.3	153.3	146.6	145.3	145.3	145.3	143.9
72.5°	141.2	129.1	125.1	122.4	122.4	122.4	119.7	119.7	118.4	119.7	118.4
75°	104.9	103.6	100.9	99.5	99.5	98.2	96.8	96.8	96.8	96.8	96.8
77.5°	82.0	82.0	79.4	78.0	78.0	78.0	76.7	76.7	75.3	75.3	75.3
80°	60.5	60.5	57.8	57.8	57.8	56.5	56.5	56.5	57.8	56.5	56.5
82.5°	41.7	41.7	40.4	41.7	40.4	39.0	39.0	39.0	37.7	39.0	39.0
85°	24.2	24.2	22.9	21.5	22.9	22.9	21.5	22.9	21.5	22.9	21.5
87.5°	9.4	8.1	8.1	8.1	6.7	8.1	6.7	6.7	8.1	6.7	8.1
90°	11.2	11.6	12.0	12.4	12.6	12.7	12.9	13.2	13.4	13.6	13.4
92.5°	12.4	13.1	13.8	14.5	14.9	15.0	15.1	15.2	15.3	15.4	15.3
95°	14.7	15.4	16.1	16.8	17.2	17.2	17.2	17.2	17.2	17.2	17.2
97.5°	15.3	16.1	16.9	17.7	18.1	18.1	18.2	18.3	18.4	18.5	18.4
100°	15.7	16.5	17.3	18.1	18.5	18.6	18.7	18.8	18.9	19.0	18.9
102.5°	30.1	26.8	23.5	20.2	18.5	18.6	18.8	19.0	19.2	19.4	19.2
105°	81.1	63.4	45.6	27.9	19.0	19.1	19.3	19.5	19.7	19.9	19.7
107.5°	160.3	144.8	129.4	113.9	106.2	99.6	86.5	73.3	60.2	47.0	60.2
110°	200.4	197.1	193.8	190.5	188.8	181.6	167.3	152.9	138.6	124.2	138.6

TEST NUMBER: P1032052

CATALOG NUMBER: S123RDIW-B1000D460UB40-4F0-XX-W2A-A

CANDELA DISTRIBUTION (continued):

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°	95°
112.5°	233.1	234.0	234.9	235.8	236.3	236.2	236.0	235.8	235.6	235.4	235.6
115°	260.3	261.3	262.3	263.3	263.8	264.0	264.4	264.8	265.2	265.6	265.2
117.5°	286.8	287.6	288.4	289.2	289.6	289.6	289.7	289.8	289.9	290.0	289.9
120°	312.5	313.3	314.1	314.9	315.3	315.3	315.3	315.3	315.3	315.3	315.3
122.5°	338.0	338.5	339.0	339.5	339.7	339.8	339.9	340.0	340.1	340.2	340.1
125°	361.6	361.8	362.0	362.2	362.3	362.4	362.6	362.8	363.0	363.2	363.0
127.5°	385.7	386.0	386.3	386.6	386.7	386.6	386.4	386.2	386.0	385.8	386.0
130°	407.0	407.4	407.8	408.2	408.4	408.3	408.1	407.9	407.7	407.5	407.7
132.5°	427.3	427.7	428.1	428.5	428.7	428.6	428.3	428.0	427.7	427.4	427.7
135°	448.0	448.3	448.6	448.9	449.1	448.9	448.6	448.3	448.0	447.7	448.0
137.5°	466.3	466.8	467.3	467.8	468.0	467.9	467.7	467.5	467.3	467.1	467.3
140°	483.8	484.2	484.6	485.0	485.2	485.1	484.9	484.7	484.5	484.3	484.5
142.5°	500.4	500.7	501.0	501.3	501.5	501.3	501.0	500.7	500.4	500.1	500.4
145°	515.7	515.9	516.1	516.3	516.4	516.4	516.4	516.4	516.4	516.4	516.4
147.5°	529.7	529.9	530.1	530.3	530.4	530.1	529.6	529.1	528.6	528.1	528.6
150°	542.3	542.5	542.7	542.9	543.0	542.9	542.6	542.3	542.0	541.7	542.0
152.5°	553.4	553.8	554.2	554.6	554.8	554.5	554.0	553.5	553.0	552.5	553.0
155°	563.4	563.9	564.4	564.9	565.2	564.9	564.3	563.7	563.1	562.5	563.1
157.5°	572.5	573.1	573.7	574.3	574.6	574.2	573.4	572.6	571.8	571.0	571.8
160°	580.2	580.8	581.4	582.0	582.3	582.0	581.3	580.6	579.9	579.2	579.9
162.5°	587.1	587.8	588.5	589.2	589.6	589.3	588.7	588.0	587.4	586.8	587.4
165°	593.1	593.9	594.7	595.5	595.9	595.5	594.8	594.1	593.4	592.7	593.4
167.5°	598.0	598.8	599.7	600.5	600.9	600.5	599.7	598.8	598.0	597.2	598.0
170°	602.1	602.9	603.7	604.5	604.9	604.5	603.7	602.9	602.1	601.3	602.1
172.5°	604.8	605.6	606.4	607.2	607.6	607.2	606.3	605.4	604.5	603.6	604.5
175°	607.0	607.7	608.4	609.1	609.4	609.0	608.2	607.4	606.6	605.8	606.6
177.5°	608.0	608.8	609.6	610.4	610.8	610.3	609.3	608.3	607.3	606.3	607.3
180°	608.1	608.1	608.1	608.1	608.1	608.1	608.1	608.1	608.1	608.1	608.1

TEST NUMBER: P1032052

CATALOG NUMBER: S123RDIW-B1000D460UB40-4F0-XX-W2A-A

CANDELA DISTRIBUTION (continued):

	100°	105°	110°	112.5°	115°	120°	125°	130°	135°	140°	145°
0°	1571.0	1571.0	1571.0	1571.0	1571.0	1571.0	1571.0	1571.0	1571.0	1571.0	1571.0
2.5°	1696.1	1688.1	1682.7	1678.7	1674.6	1686.7	1670.6	1653.1	1641.0	1632.9	1630.2
5°	1873.7	1856.2	1841.4	1829.3	1832.0	1832.0	1803.7	1772.8	1745.9	1731.1	1715.0
7.5°	2079.5	2060.7	2031.1	2024.3	2019.0	1985.3	1957.1	1900.6	1867.0	1833.3	1803.7
10°	2283.9	2259.7	2231.5	2222.1	2208.6	2166.9	2123.9	2051.2	2009.5	1947.7	1908.7
12.5°	2474.9	2445.3	2417.1	2410.4	2390.2	2353.9	2279.9	2204.6	2133.3	2067.4	1998.8
15°	2635.0	2626.9	2583.9	2557.0	2512.6	2462.8	2446.7	2344.5	2254.3	2185.7	2062.0
17.5°	2769.5	2731.9	2691.5	2674.0	2656.5	2598.7	2540.8	2435.9	2339.1	2238.2	2158.8
20°	2877.1	2835.4	2807.2	2781.6	2773.5	2707.6	2616.2	2523.4	2417.1	2304.1	2200.5
22.5°	2882.5	2877.1	2858.3	2843.5	2827.4	2784.3	2711.7	2596.0	2483.0	2359.3	2223.4
25°	2770.9	2762.8	2816.6	2803.1	2813.9	2797.8	2758.8	2661.9	2530.1	2384.8	2247.6
27.5°	2434.6	2516.6	2601.4	2631.0	2651.1	2709.0	2727.8	2674.0	2567.8	2413.1	2259.7
30°	1977.3	2086.2	2223.4	2297.4	2353.9	2461.5	2601.4	2618.9	2569.1	2445.3	2257.0
32.5°	1552.2	1651.8	1762.1	1849.5	1924.8	2145.4	2333.7	2469.6	2493.8	2429.2	2263.8
35°	1250.9	1294.0	1398.9	1482.3	1584.5	1772.8	1994.7	2214.0	2362.0	2370.0	2243.6
37.5°	1031.7	1054.5	1146.0	1193.1	1253.6	1419.1	1626.2	1912.7	2142.7	2251.7	2187.1
40°	854.1	906.6	959.0	985.9	1029.0	1143.3	1342.4	1567.0	1852.2	2053.9	2099.7
42.5°	741.1	764.0	797.6	835.3	862.2	961.7	1094.9	1300.7	1557.6	1838.7	1965.2
45°	653.7	661.8	696.7	721.0	749.2	819.2	913.3	1085.5	1311.4	1588.5	1803.7
47.5°	581.1	597.2	616.0	630.8	649.7	703.5	784.2	909.3	1108.3	1355.8	1587.2
50°	516.5	525.9	550.1	556.9	570.3	608.0	669.8	765.3	929.4	1127.2	1366.6
52.5°	456.0	473.5	482.9	492.3	504.4	535.3	575.7	653.7	777.5	963.1	1166.2
55°	408.9	414.3	427.7	435.8	445.2	466.7	501.7	559.6	656.4	804.4	996.7
57.5°	363.2	363.2	376.6	383.3	392.8	408.9	439.8	484.2	554.2	664.5	840.7
60°	314.7	316.1	326.9	334.9	337.6	353.8	379.3	414.3	468.1	548.8	692.7
62.5°	271.7	278.4	283.8	286.5	295.9	305.3	326.9	351.1	388.7	460.0	562.2
65°	235.4	236.7	240.8	243.5	247.5	258.3	274.4	290.5	322.8	375.3	458.7
67.5°	193.7	199.1	204.5	204.5	208.5	213.9	230.0	243.5	267.7	298.6	355.1
70°	145.3	148.0	156.0	160.1	165.4	174.9	182.9	191.0	209.8	232.7	275.7
72.5°	121.1	121.1	123.7	125.1	125.1	131.8	143.9	152.0	161.4	177.6	207.1
75°	96.8	96.8	100.9	99.5	102.2	104.9	106.3	111.6	117.0	129.1	146.6
77.5°	76.7	78.0	78.0	79.4	79.4	80.7	82.0	84.7	87.4	94.2	102.2
80°	56.5	57.8	57.8	59.2	59.2	60.5	61.9	63.2	65.9	68.6	72.6
82.5°	39.0	40.4	40.4	41.7	40.4	41.7	43.0	43.0	44.4	47.1	48.4
85°	22.9	22.9	24.2	22.9	22.9	22.9	24.2	24.2	25.6	29.6	29.6
87.5°	6.7	8.1	6.7	8.1	8.1	8.1	8.1	9.4	9.4	10.8	12.1
90°	13.2	12.9	12.7	12.6	12.4	12.0	11.6	11.2	10.8	9.5	8.2
92.5°	15.2	15.1	15.0	14.9	14.5	13.8	13.1	12.4	11.7	10.8	9.9
95°	17.2	17.2	17.2	17.2	16.8	16.1	15.4	14.7	14.0	12.9	11.8
97.5°	18.3	18.2	18.1	18.1	17.7	16.9	16.1	15.3	14.5	19.6	24.7
100°	18.8	18.7	18.6	18.5	18.1	17.3	16.5	15.7	14.9	30.6	46.2
102.5°	19.0	18.8	18.6	18.5	20.2	23.5	26.8	30.1	33.4	50.9	68.3
105°	19.5	19.3	19.1	19.0	27.9	45.6	63.4	81.1	98.9	107.9	117.0
107.5°	73.3	86.5	99.6	106.2	113.9	129.4	144.8	160.3	175.7	174.2	172.7
110°	152.9	167.3	181.6	188.8	190.5	193.8	197.1	200.4	203.7	202.6	201.5

TEST NUMBER: P1032052

CATALOG NUMBER: S123RDIW-B1000D460UB40-4F0-XX-W2A-A

CANDELA DISTRIBUTION (continued):

	100°	105°	110°	112.5°	115°	120°	125°	130°	135°	140°	145°
112.5°	235.8	236.0	236.2	236.3	235.8	234.9	234.0	233.1	232.2	231.1	230.0
115°	264.8	264.4	264.0	263.8	263.3	262.3	261.3	260.3	259.3	258.4	257.5
117.5°	289.8	289.7	289.6	289.6	289.2	288.4	287.6	286.8	286.0	285.5	285.0
120°	315.3	315.3	315.3	315.3	314.9	314.1	313.3	312.5	311.7	311.4	311.1
122.5°	340.0	339.9	339.8	339.7	339.5	339.0	338.5	338.0	337.5	337.1	336.7
125°	362.8	362.6	362.4	362.3	362.2	362.0	361.8	361.6	361.4	361.0	360.6
127.5°	386.2	386.4	386.6	386.7	386.6	386.3	386.0	385.7	385.4	384.9	384.4
130°	407.9	408.1	408.3	408.4	408.2	407.8	407.4	407.0	406.6	406.2	405.8
132.5°	428.0	428.3	428.6	428.7	428.5	428.1	427.7	427.3	426.9	426.6	426.3
135°	448.3	448.6	448.9	449.1	448.9	448.6	448.3	448.0	447.7	447.3	446.9
137.5°	467.5	467.7	467.9	468.0	467.8	467.3	466.8	466.3	465.8	465.6	465.4
140°	484.7	484.9	485.1	485.2	485.0	484.6	484.2	483.8	483.4	483.1	482.8
142.5°	500.7	501.0	501.3	501.5	501.3	501.0	500.7	500.4	500.1	499.8	499.5
145°	516.4	516.4	516.4	516.4	516.3	516.1	515.9	515.7	515.5	515.3	515.1
147.5°	529.1	529.6	530.1	530.4	530.3	530.1	529.9	529.7	529.5	529.3	529.1
150°	542.3	542.6	542.9	543.0	542.9	542.7	542.5	542.3	542.1	541.9	541.7
152.5°	553.5	554.0	554.5	554.8	554.6	554.2	553.8	553.4	553.0	552.9	552.8
155°	563.7	564.3	564.9	565.2	564.9	564.4	563.9	563.4	562.9	562.8	562.7
157.5°	572.6	573.4	574.2	574.6	574.3	573.7	573.1	572.5	571.9	572.0	572.1
160°	580.6	581.3	582.0	582.3	582.0	581.4	580.8	580.2	579.6	579.7	579.8
162.5°	588.0	588.7	589.3	589.6	589.2	588.5	587.8	587.1	586.4	586.5	586.6
165°	594.1	594.8	595.5	595.9	595.5	594.7	593.9	593.1	592.3	592.4	592.5
167.5°	598.8	599.7	600.5	600.9	600.5	599.7	598.8	598.0	597.2	597.2	597.2
170°	602.9	603.7	604.5	604.9	604.5	603.7	602.9	602.1	601.3	601.3	601.3
172.5°	605.4	606.3	607.2	607.6	607.2	606.4	605.6	604.8	604.0	603.9	603.8
175°	607.4	608.2	609.0	609.4	609.1	608.4	607.7	607.0	606.3	606.2	606.1
177.5°	608.3	609.3	610.3	610.8	610.4	609.6	608.8	608.0	607.2	607.1	607.0
180°	608.1	608.1	608.1	608.1	608.1	608.1	608.1	608.1	608.1	608.1	608.1

TEST NUMBER: P1032052

CATALOG NUMBER: S123RDIW-B1000D460UB40-4F0-XX-W2A-A

CANDELA DISTRIBUTION (continued):

	150°	155°	157.5°	160°	165°	170°	175°	180°	185°	190°	195°
0°	1571.0	1571.0	1571.0	1571.0	1571.0	1571.0	1571.0	1571.0	1571.0	1571.0	1571.0
2.5°	1626.2	1619.5	1612.7	1612.7	1598.0	1584.5	1577.8	1580.5	1572.4	1561.6	1550.9
5°	1697.5	1670.6	1665.2	1650.4	1630.2	1602.0	1587.2	1573.7	1557.6	1536.1	1515.9
7.5°	1763.4	1728.4	1709.6	1694.8	1655.8	1616.8	1584.5	1563.0	1534.7	1502.5	1478.2
10°	1849.5	1784.9	1764.7	1731.1	1676.0	1620.8	1583.2	1548.2	1509.2	1471.5	1439.2
12.5°	1918.1	1844.1	1806.4	1772.8	1701.5	1631.6	1568.4	1525.3	1478.2	1436.5	1394.8
15°	1996.1	1912.7	1846.8	1806.4	1716.3	1631.6	1560.3	1499.8	1447.3	1396.2	1359.9
17.5°	2033.8	1928.8	1899.2	1841.4	1710.9	1626.2	1538.8	1474.2	1411.0	1351.8	1308.8
20°	2092.9	1970.5	1896.6	1857.6	1741.9	1616.8	1514.6	1440.6	1374.7	1311.4	1265.7
22.5°	2097.0	1963.8	1915.4	1841.4	1698.8	1588.5	1493.0	1402.9	1326.2	1267.1	1220.0
25°	2087.6	1951.7	1884.5	1825.3	1706.9	1572.4	1450.0	1361.2	1285.9	1217.3	1162.1
27.5°	2083.5	1916.7	1853.5	1794.3	1661.2	1525.3	1424.4	1323.6	1237.5	1176.9	1120.4
30°	2078.1	1879.1	1802.4	1733.8	1611.4	1489.0	1367.9	1280.5	1198.5	1121.8	1065.3
32.5°	2043.2	1828.0	1749.9	1677.3	1545.5	1423.1	1327.6	1234.8	1146.0	1074.7	1023.6
35°	2032.4	1780.9	1678.7	1600.6	1471.5	1362.6	1261.7	1185.0	1101.6	1030.3	969.8
37.5°	2001.5	1732.5	1622.2	1522.6	1388.1	1284.5	1210.6	1133.9	1053.2	976.5	928.1
40°	1947.7	1676.0	1550.9	1448.6	1310.1	1205.2	1136.6	1080.1	1000.7	932.1	873.0
42.5°	1868.3	1618.1	1483.6	1376.0	1222.7	1124.5	1068.0	1014.2	946.9	875.6	827.2
45°	1776.8	1541.5	1416.4	1296.7	1140.6	1045.1	985.9	953.7	891.8	831.3	774.8
47.5°	1651.8	1462.1	1338.4	1214.6	1055.9	963.1	916.0	883.7	840.7	774.8	729.0
50°	1494.4	1359.9	1242.9	1132.6	972.5	883.7	836.6	812.4	776.1	729.0	684.6
52.5°	1319.5	1241.5	1144.7	1042.4	887.8	804.4	761.3	742.5	715.6	671.2	633.5
55°	1143.3	1109.7	1043.8	942.9	799.0	730.4	692.7	668.5	648.3	616.0	583.8
57.5°	985.9	969.8	924.1	846.1	725.0	653.7	621.4	605.3	589.1	564.9	532.7
60°	823.2	840.7	793.6	754.6	644.3	582.4	554.2	536.7	528.6	507.1	486.9
62.5°	682.0	698.1	671.2	641.6	563.6	508.4	491.0	474.8	469.4	450.6	430.4
65°	554.2	574.3	554.2	538.0	491.0	445.2	423.7	415.6	410.2	398.1	382.0
67.5°	441.2	461.4	451.9	431.8	417.0	379.3	367.2	359.1	356.4	347.0	333.6
70°	332.2	360.5	363.2	351.1	337.6	320.1	312.1	309.4	302.6	294.6	286.5
72.5°	239.4	271.7	273.1	273.1	265.0	265.0	256.9	252.9	252.9	244.8	235.4
75°	176.2	197.7	200.4	203.1	207.1	211.2	205.8	205.8	204.5	196.4	192.3
77.5°	117.0	135.9	142.6	152.0	157.4	157.4	160.1	162.8	160.1	156.0	153.3
80°	75.3	88.8	96.8	102.2	110.3	114.3	118.4	119.7	117.0	115.7	111.6
82.5°	49.8	53.8	57.8	64.6	74.0	80.7	80.7	79.4	82.0	80.7	79.4
85°	28.2	30.9	32.3	33.6	39.0	45.7	47.1	48.4	51.1	48.4	45.7
87.5°	10.8	12.1	12.1	12.1	14.8	16.1	20.2	25.6	24.2	21.5	21.5
90°	6.9	5.6	5.0	4.5	3.5	2.5	1.5	0.5	1.5	2.5	3.5
92.5°	9.0	8.1	7.7	8.0	8.6	9.2	9.8	10.4	9.8	9.2	8.6
95°	10.7	9.6	9.0	11.1	15.2	19.3	23.5	27.6	23.5	19.3	15.2
97.5°	29.8	34.9	37.5	38.9	41.7	44.5	47.3	50.1	47.3	44.5	41.7
100°	61.9	77.6	85.4	84.4	82.4	80.3	78.3	76.3	78.3	80.3	82.4
102.5°	85.8	103.3	112.0	111.4	110.1	108.8	107.5	106.2	107.5	108.8	110.1
105°	126.0	135.1	139.6	139.0	137.9	136.8	135.7	134.6	135.7	136.8	137.9
107.5°	171.2	169.7	169.0	168.5	167.6	166.7	165.8	164.9	165.8	166.7	167.6
110°	200.4	199.3	198.8	198.4	197.6	196.8	196.0	195.2	196.0	196.8	197.6

TEST NUMBER: P1032052

CATALOG NUMBER: S123RDIW-B1000D460UB40-4F0-XX-W2A-A

CANDELA DISTRIBUTION (continued):

	150°	155°	157.5°	160°	165°	170°	175°	180°	185°	190°	195°
112.5°	228.9	227.8	227.2	226.9	226.2	225.5	224.8	224.1	224.8	225.5	226.2
115°	256.6	255.7	255.2	254.9	254.3	253.7	253.1	252.5	253.1	253.7	254.3
117.5°	284.5	284.0	283.7	283.3	282.6	281.9	281.2	280.5	281.2	281.9	282.6
120°	310.8	310.5	310.4	309.9	309.0	308.1	307.2	306.3	307.2	308.1	309.0
122.5°	336.3	335.9	335.7	335.3	334.6	333.9	333.2	332.5	333.2	333.9	334.6
125°	360.2	359.8	359.6	359.2	358.4	357.6	356.8	356.0	356.8	357.6	358.4
127.5°	383.9	383.4	383.1	382.7	381.9	381.1	380.3	379.5	380.3	381.1	381.9
130°	405.4	405.0	404.8	404.4	403.6	402.8	402.0	401.2	402.0	402.8	403.6
132.5°	426.0	425.7	425.6	425.2	424.4	423.6	422.8	422.0	422.8	423.6	424.4
135°	446.5	446.1	445.9	445.6	445.0	444.4	443.8	443.2	443.8	444.4	445.0
137.5°	465.2	465.0	464.9	464.5	463.7	462.9	462.1	461.3	462.1	462.9	463.7
140°	482.5	482.2	482.0	481.7	481.1	480.5	479.9	479.3	479.9	480.5	481.1
142.5°	499.2	498.9	498.8	498.5	497.9	497.2	496.6	496.0	496.6	497.2	497.9
145°	514.9	514.7	514.6	514.2	513.5	512.8	512.1	511.4	512.1	512.8	513.5
147.5°	528.9	528.7	528.6	528.3	527.8	527.3	526.8	526.3	526.8	527.3	527.8
150°	541.5	541.3	541.2	541.1	540.8	540.5	540.2	539.9	540.2	540.5	540.8
152.5°	552.7	552.6	552.5	552.5	552.4	552.3	552.2	552.1	552.2	552.3	552.4
155°	562.6	562.5	562.5	562.6	562.8	563.0	563.2	563.4	563.2	563.0	562.8
157.5°	572.2	572.3	572.4	572.4	572.4	572.4	572.4	572.4	572.4	572.4	572.4
160°	579.9	580.0	580.1	580.1	580.2	580.3	580.4	580.5	580.4	580.3	580.2
162.5°	586.7	586.8	586.8	587.0	587.3	587.6	587.9	588.2	587.9	587.6	587.3
165°	592.6	592.7	592.7	592.9	593.2	593.5	593.8	594.1	593.8	593.5	593.2
167.5°	597.2	597.2	597.2	597.4	597.8	598.2	598.6	599.0	598.6	598.2	597.8
170°	601.3	601.3	601.3	601.5	601.9	602.3	602.7	603.1	602.7	602.3	601.9
172.5°	603.7	603.6	603.6	603.8	604.3	604.8	605.3	605.8	605.3	604.8	604.3
175°	606.0	605.9	605.8	606.1	606.6	607.1	607.6	608.1	607.6	607.1	606.6
177.5°	606.9	606.8	606.7	607.0	607.5	608.0	608.5	609.0	608.5	608.0	607.5
180°	608.1	608.1	608.1	608.1	608.1	608.1	608.1	608.1	608.1	608.1	608.1

TEST NUMBER: P1032052

CATALOG NUMBER: S123RDIW-B1000D460UB40-4F0-XX-W2A-A

CANDELA DISTRIBUTION (continued):

	200°	202.5°	205°	210°	215°	220°	225°	230°	235°	240°	245°
0°	1571.0	1571.0	1571.0	1571.0	1571.0	1571.0	1571.0	1571.0	1571.0	1571.0	1571.0
2.5°	1550.9	1544.1	1541.5	1534.7	1518.6	1507.8	1495.7	1487.7	1489.0	1482.3	1486.3
5°	1502.5	1501.1	1491.7	1478.2	1455.4	1443.3	1421.7	1411.0	1405.6	1407.0	1398.9
7.5°	1462.1	1450.0	1443.3	1421.7	1400.2	1374.7	1357.2	1347.8	1339.7	1331.6	1326.2
10°	1416.4	1405.6	1394.8	1372.0	1342.4	1318.2	1294.0	1284.5	1272.4	1267.1	1263.0
12.5°	1367.9	1361.2	1347.8	1320.9	1287.2	1264.4	1236.1	1230.7	1214.6	1203.8	1201.2
15°	1323.6	1319.5	1295.3	1264.4	1230.7	1207.9	1183.7	1167.5	1140.6	1146.0	1136.6
17.5°	1276.5	1259.0	1244.2	1202.5	1186.4	1151.4	1123.1	1115.1	1096.2	1084.1	1072.0
20°	1224.0	1213.3	1194.4	1167.5	1128.5	1088.2	1066.6	1053.2	1042.4	1023.6	1018.2
22.5°	1174.3	1160.8	1144.7	1109.7	1076.1	1042.4	1012.8	1000.7	987.3	973.8	965.8
25°	1135.2	1115.1	1097.6	1054.5	1020.9	992.7	973.8	953.7	934.8	926.8	924.1
27.5°	1074.7	1062.6	1045.1	1004.8	973.8	942.9	925.4	912.0	891.8	882.4	874.3
30°	1035.7	1011.5	991.3	959.0	928.1	894.5	878.3	862.2	850.1	838.0	828.6
32.5°	983.3	964.4	948.3	916.0	885.1	854.1	836.6	812.4	805.7	796.3	785.5
35°	932.1	920.0	902.5	867.6	833.9	812.4	793.6	770.7	762.7	755.9	746.5
37.5°	883.7	866.2	854.1	820.5	790.9	765.3	750.6	731.7	726.3	718.3	711.5
40°	842.0	824.5	812.4	778.8	747.9	721.0	711.5	692.7	684.6	675.2	671.2
42.5°	794.9	780.1	764.0	739.8	707.5	680.6	661.8	651.0	640.3	636.2	628.2
45°	745.2	731.7	719.6	692.7	659.1	640.3	624.1	609.3	601.2	594.5	589.1
47.5°	702.1	690.0	673.9	644.3	617.4	599.9	583.8	569.0	560.9	552.8	546.1
50°	652.4	645.6	628.2	599.9	574.3	554.2	539.4	525.9	520.5	511.1	500.4
52.5°	608.0	595.9	581.1	558.2	535.3	511.1	491.0	482.9	473.5	468.1	458.7
55°	555.5	547.4	531.3	511.1	486.9	466.7	451.9	441.2	429.1	423.7	411.6
57.5°	511.1	496.3	488.3	462.7	439.8	419.7	408.9	398.1	384.7	376.6	371.2
60°	462.7	449.3	437.1	415.6	399.5	378.0	361.8	352.4	343.0	332.2	326.9
62.5°	415.6	404.9	390.1	372.6	352.4	334.9	322.8	309.4	304.0	293.2	289.2
65°	364.5	356.4	344.3	324.2	308.0	293.2	281.1	270.4	265.0	260.9	258.3
67.5°	318.8	308.0	300.0	282.5	265.0	252.9	246.1	239.4	232.7	228.7	224.6
70°	271.7	263.6	255.6	239.4	227.3	216.6	211.2	205.8	201.8	197.7	193.7
72.5°	223.3	219.2	211.2	200.4	191.0	182.9	178.9	172.2	168.1	161.4	158.7
75°	184.3	177.6	173.5	164.1	156.0	149.3	143.9	135.9	130.5	127.8	126.4
77.5°	145.3	142.6	137.2	129.1	125.1	118.4	110.3	107.6	104.9	104.9	103.6
80°	109.0	104.9	100.9	94.2	90.1	84.7	84.7	84.7	83.4	84.7	83.4
82.5°	74.0	71.3	68.6	64.6	63.2	63.2	64.6	64.6	64.6	64.6	64.6
85°	43.0	43.0	43.0	44.4	43.0	43.0	44.4	45.7	44.4	44.4	43.0
87.5°	20.2	20.2	21.5	21.5	22.9	22.9	22.9	22.9	22.9	22.9	24.2
90°	4.5	5.0	5.6	6.9	8.2	9.5	10.8	11.2	11.6	12.0	12.4
92.5°	8.0	7.7	8.1	9.0	9.9	10.8	11.7	12.4	13.1	13.8	14.5
95°	11.1	9.0	9.6	10.7	11.8	12.9	14.0	14.7	15.4	16.1	16.8
97.5°	38.9	37.5	34.9	29.8	24.7	19.6	14.5	15.3	16.1	16.9	17.7
100°	84.4	85.4	77.6	61.9	46.2	30.6	14.9	15.7	16.5	17.3	18.1
102.5°	111.4	112.0	103.3	85.8	68.3	50.9	33.4	30.1	26.8	23.5	20.2
105°	139.0	139.6	135.1	126.0	117.0	107.9	98.9	81.1	63.4	45.6	27.9
107.5°	168.5	169.0	169.7	171.2	172.7	174.2	175.7	160.3	144.8	129.4	113.9
110°	198.4	198.8	199.3	200.4	201.5	202.6	203.7	200.4	197.1	193.8	190.5

TEST NUMBER: P1032052

CATALOG NUMBER: S123RDIW-B1000D460UB40-4F0-XX-W2A-A

CANDELA DISTRIBUTION (continued):

	200°	202.5°	205°	210°	215°	220°	225°	230°	235°	240°	245°
112.5°	226.9	227.2	227.8	228.9	230.0	231.1	232.2	233.1	234.0	234.9	235.8
115°	254.9	255.2	255.7	256.6	257.5	258.4	259.3	260.3	261.3	262.3	263.3
117.5°	283.3	283.7	284.0	284.5	285.0	285.5	286.0	286.8	287.6	288.4	289.2
120°	309.9	310.4	310.5	310.8	311.1	311.4	311.7	312.5	313.3	314.1	314.9
122.5°	335.3	335.7	335.9	336.3	336.7	337.1	337.5	338.0	338.5	339.0	339.5
125°	359.2	359.6	359.8	360.2	360.6	361.0	361.4	361.6	361.8	362.0	362.2
127.5°	382.7	383.1	383.4	383.9	384.4	384.9	385.4	385.7	386.0	386.3	386.6
130°	404.4	404.8	405.0	405.4	405.8	406.2	406.6	407.0	407.4	407.8	408.2
132.5°	425.2	425.6	425.7	426.0	426.3	426.6	426.9	427.3	427.7	428.1	428.5
135°	445.6	445.9	446.1	446.5	446.9	447.3	447.7	448.0	448.3	448.6	448.9
137.5°	464.5	464.9	465.0	465.2	465.4	465.6	465.8	466.3	466.8	467.3	467.8
140°	481.7	482.0	482.2	482.5	482.8	483.1	483.4	483.8	484.2	484.6	485.0
142.5°	498.5	498.8	498.9	499.2	499.5	499.8	500.1	500.4	500.7	501.0	501.3
145°	514.2	514.6	514.7	514.9	515.1	515.3	515.5	515.7	515.9	516.1	516.3
147.5°	528.3	528.6	528.7	528.9	529.1	529.3	529.5	529.7	529.9	530.1	530.3
150°	541.1	541.2	541.3	541.5	541.7	541.9	542.1	542.3	542.5	542.7	542.9
152.5°	552.5	552.5	552.6	552.7	552.8	552.9	553.0	553.4	553.8	554.2	554.6
155°	562.6	562.5	562.5	562.6	562.7	562.8	562.9	563.4	563.9	564.4	564.9
157.5°	572.4	572.4	572.3	572.2	572.1	572.0	571.9	572.5	573.1	573.7	574.3
160°	580.1	580.1	580.0	579.9	579.8	579.7	579.6	580.2	580.8	581.4	582.0
162.5°	587.0	586.8	586.8	586.7	586.6	586.5	586.4	587.1	587.8	588.5	589.2
165°	592.9	592.7	592.7	592.6	592.5	592.4	592.3	593.1	593.9	594.7	595.5
167.5°	597.4	597.2	597.2	597.2	597.2	597.2	597.2	598.0	598.8	599.7	600.5
170°	601.5	601.3	601.3	601.3	601.3	601.3	601.3	602.1	602.9	603.7	604.5
172.5°	603.8	603.6	603.6	603.7	603.8	603.9	604.0	604.8	605.6	606.4	607.2
175°	606.1	605.8	605.9	606.0	606.1	606.2	606.3	607.0	607.7	608.4	609.1
177.5°	607.0	606.7	606.8	606.9	607.0	607.1	607.2	608.0	608.8	609.6	610.4
180°	608.1	608.1	608.1	608.1	608.1	608.1	608.1	608.1	608.1	608.1	608.1

TEST NUMBER: P1032052

CATALOG NUMBER: S123RDIW-B1000D460UB40-4F0-XX-W2A-A

CANDELA DISTRIBUTION (continued):

	247.5°	250°	255°	260°	265°	270°	275°	280°	285°	290°	292.5°
0°	1571.0	1571.0	1571.0	1571.0	1571.0	1571.0	1571.0	1571.0	1571.0	1571.0	1571.0
2.5°	1485.0	1486.3	1482.3	1474.2	1472.9	1475.5	1483.6	1480.9	1474.2	1486.3	1475.5
5°	1402.9	1396.2	1393.5	1396.2	1388.1	1384.1	1392.2	1388.1	1392.2	1393.5	1397.5
7.5°	1323.6	1324.9	1316.8	1318.2	1307.4	1310.1	1310.1	1310.1	1314.1	1316.8	1322.2
10°	1255.0	1257.6	1248.2	1249.6	1241.5	1236.1	1240.2	1248.2	1248.2	1248.2	1250.9
12.5°	1199.8	1187.7	1181.0	1179.6	1170.2	1167.5	1175.6	1178.3	1185.0	1185.0	1189.0
15°	1131.2	1128.5	1123.1	1123.1	1100.3	1105.7	1108.3	1117.8	1131.2	1120.4	1123.1
17.5°	1069.3	1062.6	1055.9	1053.2	1050.5	1042.4	1053.2	1051.8	1059.9	1061.3	1065.3
20°	1014.2	1008.8	995.4	996.7	999.4	987.3	994.0	994.0	1002.1	1010.2	1019.6
22.5°	960.4	955.0	948.3	951.0	942.9	940.2	940.2	946.9	956.3	963.1	961.7
25°	918.7	909.3	905.2	901.2	897.2	899.9	895.8	902.5	909.3	913.3	909.3
27.5°	871.6	867.6	859.5	855.5	848.7	851.4	854.1	859.5	863.5	863.5	867.6
30°	825.9	820.5	817.8	813.8	813.8	808.4	809.7	815.1	819.2	823.2	828.6
32.5°	781.5	777.5	773.4	773.4	770.7	769.4	768.0	776.1	776.1	784.2	784.2
35°	745.2	738.4	738.4	731.7	734.4	733.1	730.4	735.8	737.1	742.5	741.1
37.5°	704.8	704.8	702.1	695.4	690.0	691.4	698.1	698.1	702.1	700.8	704.8
40°	664.5	661.8	661.8	657.7	656.4	655.1	656.4	657.7	664.5	663.1	664.5
42.5°	624.1	625.5	618.7	618.7	618.7	614.7	616.0	617.4	620.1	622.8	626.8
45°	585.1	582.4	581.1	578.4	575.7	577.0	575.7	581.1	579.7	582.4	586.5
47.5°	543.4	539.4	538.0	532.7	532.7	535.3	534.0	538.0	539.4	543.4	540.7
50°	503.1	497.7	493.6	495.0	486.9	489.6	489.6	493.6	497.7	499.0	501.7
52.5°	456.0	454.6	453.3	446.6	445.2	443.9	445.2	446.6	451.9	456.0	457.3
55°	410.2	408.9	400.8	398.1	394.1	394.1	396.8	398.1	407.6	408.9	414.3
57.5°	368.6	364.5	355.1	353.8	353.8	353.8	349.7	355.1	357.8	364.5	364.5
60°	322.8	322.8	314.7	314.7	316.1	314.7	314.7	316.1	316.1	321.5	324.2
62.5°	286.5	285.2	285.2	282.5	281.1	282.5	281.1	281.1	282.5	286.5	290.5
65°	254.2	252.9	251.5	250.2	247.5	247.5	248.8	251.5	251.5	254.2	255.6
67.5°	223.3	223.3	220.6	220.6	219.2	217.9	219.2	217.9	223.3	223.3	224.6
70°	192.3	191.0	187.0	185.6	181.6	182.9	182.9	187.0	188.3	191.0	193.7
72.5°	154.7	154.7	152.0	149.3	150.6	148.0	148.0	149.3	149.3	153.3	154.7
75°	127.8	125.1	123.7	125.1	123.7	126.4	123.7	123.7	126.4	126.4	126.4
77.5°	104.9	104.9	103.6	103.6	104.9	103.6	104.9	104.9	104.9	103.6	104.9
80°	86.1	84.7	84.7	84.7	83.4	83.4	83.4	83.4	83.4	83.4	83.4
82.5°	64.6	64.6	63.2	64.6	64.6	63.2	64.6	63.2	63.2	64.6	64.6
85°	43.0	45.7	43.0	43.0	44.4	44.4	45.7	44.4	45.7	43.0	44.4
87.5°	22.9	24.2	24.2	22.9	22.9	24.2	24.2	24.2	25.6	22.9	24.2
90°	12.6	12.7	12.9	13.2	13.4	13.6	13.4	13.2	12.9	12.7	12.6
92.5°	14.9	15.0	15.1	15.2	15.3	15.4	15.3	15.2	15.1	15.0	14.9
95°	17.2	17.2	17.2	17.2	17.2	17.2	17.2	17.2	17.2	17.2	17.2
97.5°	18.1	18.1	18.2	18.3	18.4	18.5	18.4	18.3	18.2	18.1	18.1
100°	18.5	18.6	18.7	18.8	18.9	19.0	18.9	18.8	18.7	18.6	18.5
102.5°	18.5	18.6	18.8	19.0	19.2	19.4	19.2	19.0	18.8	18.6	18.5
105°	19.0	19.1	19.3	19.5	19.7	19.9	19.7	19.5	19.3	19.1	19.0
107.5°	106.2	99.6	86.5	73.3	60.2	47.0	60.2	73.3	86.5	99.6	106.2
110°	188.8	181.6	167.3	152.9	138.6	124.2	138.6	152.9	167.3	181.6	188.8

TEST NUMBER: P1032052

CATALOG NUMBER: S123RDIW-B1000D460UB40-4F0-XX-W2A-A

CANDELA DISTRIBUTION (continued):

	247.5°	250°	255°	260°	265°	270°	275°	280°	285°	290°	292.5°
112.5°	236.3	236.2	236.0	235.8	235.6	235.4	235.6	235.8	236.0	236.2	236.3
115°	263.8	264.0	264.4	264.8	265.2	265.6	265.2	264.8	264.4	264.0	263.8
117.5°	289.6	289.6	289.7	289.8	289.9	290.0	289.9	289.8	289.7	289.6	289.6
120°	315.3	315.3	315.3	315.3	315.3	315.3	315.3	315.3	315.3	315.3	315.3
122.5°	339.7	339.8	339.9	340.0	340.1	340.2	340.1	340.0	339.9	339.8	339.7
125°	362.3	362.4	362.6	362.8	363.0	363.2	363.0	362.8	362.6	362.4	362.3
127.5°	386.7	386.6	386.4	386.2	386.0	385.8	386.0	386.2	386.4	386.6	386.7
130°	408.4	408.3	408.1	407.9	407.7	407.5	407.7	407.9	408.1	408.3	408.4
132.5°	428.7	428.6	428.3	428.0	427.7	427.4	427.7	428.0	428.3	428.6	428.7
135°	449.1	448.9	448.6	448.3	448.0	447.7	448.0	448.3	448.6	448.9	449.1
137.5°	468.0	467.9	467.7	467.5	467.3	467.1	467.3	467.5	467.7	467.9	468.0
140°	485.2	485.1	484.9	484.7	484.5	484.3	484.5	484.7	484.9	485.1	485.2
142.5°	501.5	501.3	501.0	500.7	500.4	500.1	500.4	500.7	501.0	501.3	501.5
145°	516.4	516.4	516.4	516.4	516.4	516.4	516.4	516.4	516.4	516.4	516.4
147.5°	530.4	530.1	529.6	529.1	528.6	528.1	528.6	529.1	529.6	530.1	530.4
150°	543.0	542.9	542.6	542.3	542.0	541.7	542.0	542.3	542.6	542.9	543.0
152.5°	554.8	554.5	554.0	553.5	553.0	552.5	553.0	553.5	554.0	554.5	554.8
155°	565.2	564.9	564.3	563.7	563.1	562.5	563.1	563.7	564.3	564.9	565.2
157.5°	574.6	574.2	573.4	572.6	571.8	571.0	571.8	572.6	573.4	574.2	574.6
160°	582.3	582.0	581.3	580.6	579.9	579.2	579.9	580.6	581.3	582.0	582.3
162.5°	589.6	589.3	588.7	588.0	587.4	586.8	587.4	588.0	588.7	589.3	589.6
165°	595.9	595.5	594.8	594.1	593.4	592.7	593.4	594.1	594.8	595.5	595.9
167.5°	600.9	600.5	599.7	598.8	598.0	597.2	598.0	598.8	599.7	600.5	600.9
170°	604.9	604.5	603.7	602.9	602.1	601.3	602.1	602.9	603.7	604.5	604.9
172.5°	607.6	607.2	606.3	605.4	604.5	603.6	604.5	605.4	606.3	607.2	607.6
175°	609.4	609.0	608.2	607.4	606.6	605.8	606.6	607.4	608.2	609.0	609.4
177.5°	610.8	610.3	609.3	608.3	607.3	606.3	607.3	608.3	609.3	610.3	610.8
180°	608.1	608.1	608.1	608.1	608.1	608.1	608.1	608.1	608.1	608.1	608.1

TEST NUMBER: P1032052

CATALOG NUMBER: S123RDIW-B1000D460UB40-4F0-XX-W2A-A

CANDELA DISTRIBUTION (continued):

	295°	300°	305°	310°	315°	320°	325°	330°	335°	337.5°	340°
0°	1571.0	1571.0	1571.0	1571.0	1571.0	1571.0	1571.0	1571.0	1571.0	1571.0	1571.0
2.5°	1486.3	1491.7	1486.3	1475.5	1486.3	1493.0	1499.8	1510.5	1515.9	1515.9	1524.0
5°	1401.6	1412.3	1408.3	1405.6	1416.4	1423.1	1433.9	1447.3	1462.1	1471.5	1482.3
7.5°	1326.2	1333.0	1339.7	1339.7	1350.5	1365.3	1381.4	1397.5	1416.4	1429.8	1437.9
10°	1260.3	1265.7	1269.8	1275.1	1291.3	1307.4	1328.9	1349.1	1365.3	1380.0	1393.5
12.5°	1197.1	1205.2	1214.6	1218.6	1230.7	1250.9	1271.1	1295.3	1320.9	1335.7	1349.1
15°	1136.6	1140.6	1151.4	1163.5	1174.3	1195.8	1221.3	1246.9	1268.4	1291.3	1303.4
17.5°	1074.7	1076.1	1104.3	1097.6	1132.6	1152.7	1166.2	1190.4	1225.4	1244.2	1263.0
20°	1014.2	1027.6	1039.7	1046.5	1065.3	1088.2	1127.2	1146.0	1174.3	1191.7	1207.9
22.5°	967.1	987.3	987.3	1003.4	1012.8	1034.4	1062.6	1098.9	1129.9	1142.0	1164.8
25°	925.4	934.8	951.0	956.3	973.8	992.7	1011.5	1050.5	1084.1	1100.3	1116.4
27.5°	871.6	883.7	905.2	905.2	928.1	948.3	971.1	996.7	1030.3	1053.2	1070.7
30°	829.9	842.0	851.4	866.2	875.6	894.5	934.8	953.7	983.3	1003.4	1024.9
32.5°	790.9	800.3	808.4	824.5	835.3	856.8	878.3	912.0	937.5	956.3	979.2
35°	747.9	757.3	768.0	780.1	796.3	816.5	836.6	864.9	890.4	907.9	926.8
37.5°	707.5	714.2	730.4	738.4	751.9	770.7	796.3	825.9	848.7	862.2	881.0
40°	668.5	673.9	686.0	700.8	710.2	725.0	751.9	777.5	805.7	821.8	836.6
42.5°	626.8	633.5	644.3	659.1	673.9	690.0	704.8	734.4	760.0	773.4	789.6
45°	590.5	594.5	602.6	617.4	632.2	644.3	667.2	694.1	718.3	729.0	746.5
47.5°	547.4	551.5	563.6	570.3	586.5	602.6	625.5	652.4	673.9	684.6	700.8
50°	503.1	507.1	515.2	530.0	540.7	558.2	578.4	601.2	628.2	642.9	652.4
52.5°	460.0	468.1	474.8	486.9	500.4	517.9	536.7	558.2	581.1	595.9	606.6
55°	417.0	423.7	431.8	438.5	454.6	470.8	492.3	512.5	532.7	546.1	558.2
57.5°	368.6	378.0	386.0	399.5	411.6	425.0	449.3	465.4	489.6	499.0	509.8
60°	326.9	336.3	343.0	353.8	364.5	382.0	398.1	418.3	438.5	450.6	464.1
62.5°	291.9	295.9	300.0	310.7	321.5	337.6	353.8	373.9	395.5	402.2	412.9
65°	256.9	260.9	267.7	277.1	285.2	294.6	312.1	328.2	348.4	359.1	363.2
67.5°	227.3	231.4	232.7	239.4	246.1	256.9	266.3	282.5	301.3	308.0	316.1
70°	193.7	200.4	201.8	207.1	209.8	216.6	227.3	239.4	254.2	266.3	273.1
72.5°	154.7	164.1	166.8	174.9	178.9	185.6	193.7	203.1	212.5	217.9	223.3
75°	126.4	129.1	130.5	137.2	143.9	153.3	157.4	162.8	170.8	177.6	182.9
77.5°	104.9	106.3	107.6	107.6	109.0	114.3	122.4	129.1	134.5	137.2	141.2
80°	84.7	83.4	83.4	84.7	84.7	84.7	87.4	96.8	99.5	106.3	104.9
82.5°	65.9	63.2	64.6	63.2	63.2	63.2	63.2	64.6	64.6	68.6	71.3
85°	43.0	44.4	43.0	43.0	41.7	43.0	41.7	41.7	40.4	40.4	39.0
87.5°	22.9	24.2	22.9	22.9	21.5	22.9	21.5	21.5	20.2	20.2	17.5
90°	12.4	12.0	11.6	11.2	10.8	9.5	8.2	6.9	5.6	5.0	4.5
92.5°	14.5	13.8	13.1	12.4	11.7	10.8	9.9	9.0	8.1	7.7	8.0
95°	16.8	16.1	15.4	14.7	14.0	12.9	11.8	10.7	9.6	9.0	11.1
97.5°	17.7	16.9	16.1	15.3	14.5	19.6	24.7	29.8	34.9	37.5	38.9
100°	18.1	17.3	16.5	15.7	14.9	30.6	46.2	61.9	77.6	85.4	84.4
102.5°	20.2	23.5	26.8	30.1	33.4	50.9	68.3	85.8	103.3	112.0	111.4
105°	27.9	45.6	63.4	81.1	98.9	107.9	117.0	126.0	135.1	139.6	139.0
107.5°	113.9	129.4	144.8	160.3	175.7	174.2	172.7	171.2	169.7	169.0	168.5
110°	190.5	193.8	197.1	200.4	203.7	202.6	201.5	200.4	199.3	198.8	198.4

TEST NUMBER: P1032052

CATALOG NUMBER: S123RDIW-B1000D460UB40-4F0-XX-W2A-A

CANDELA DISTRIBUTION (continued):

	295°	300°	305°	310°	315°	320°	325°	330°	335°	337.5°	340°
112.5°	235.8	234.9	234.0	233.1	232.2	231.1	230.0	228.9	227.8	227.2	226.9
115°	263.3	262.3	261.3	260.3	259.3	258.4	257.5	256.6	255.7	255.2	254.9
117.5°	289.2	288.4	287.6	286.8	286.0	285.5	285.0	284.5	284.0	283.7	283.3
120°	314.9	314.1	313.3	312.5	311.7	311.4	311.1	310.8	310.5	310.4	309.9
122.5°	339.5	339.0	338.5	338.0	337.5	337.1	336.7	336.3	335.9	335.7	335.3
125°	362.2	362.0	361.8	361.6	361.4	361.0	360.6	360.2	359.8	359.6	359.2
127.5°	386.6	386.3	386.0	385.7	385.4	384.9	384.4	383.9	383.4	383.1	382.7
130°	408.2	407.8	407.4	407.0	406.6	406.2	405.8	405.4	405.0	404.8	404.4
132.5°	428.5	428.1	427.7	427.3	426.9	426.6	426.3	426.0	425.7	425.6	425.2
135°	448.9	448.6	448.3	448.0	447.7	447.3	446.9	446.5	446.1	445.9	445.6
137.5°	467.8	467.3	466.8	466.3	465.8	465.6	465.4	465.2	465.0	464.9	464.5
140°	485.0	484.6	484.2	483.8	483.4	483.1	482.8	482.5	482.2	482.0	481.7
142.5°	501.3	501.0	500.7	500.4	500.1	499.8	499.5	499.2	498.9	498.8	498.5
145°	516.3	516.1	515.9	515.7	515.5	515.3	515.1	514.9	514.7	514.6	514.2
147.5°	530.3	530.1	529.9	529.7	529.5	529.3	529.1	528.9	528.7	528.6	528.3
150°	542.9	542.7	542.5	542.3	542.1	541.9	541.7	541.5	541.3	541.2	541.1
152.5°	554.6	554.2	553.8	553.4	553.0	552.9	552.8	552.7	552.6	552.5	552.5
155°	564.9	564.4	563.9	563.4	562.9	562.8	562.7	562.6	562.5	562.5	562.6
157.5°	574.3	573.7	573.1	572.5	571.9	572.0	572.1	572.2	572.3	572.4	572.4
160°	582.0	581.4	580.8	580.2	579.6	579.7	579.8	579.9	580.0	580.1	580.1
162.5°	589.2	588.5	587.8	587.1	586.4	586.5	586.6	586.7	586.8	586.8	587.0
165°	595.5	594.7	593.9	593.1	592.3	592.4	592.5	592.6	592.7	592.7	592.9
167.5°	600.5	599.7	598.8	598.0	597.2	597.2	597.2	597.2	597.2	597.2	597.4
170°	604.5	603.7	602.9	602.1	601.3	601.3	601.3	601.3	601.3	601.3	601.5
172.5°	607.2	606.4	605.6	604.8	604.0	603.9	603.8	603.7	603.6	603.6	603.8
175°	609.1	608.4	607.7	607.0	606.3	606.2	606.1	606.0	605.9	605.8	606.1
177.5°	610.4	609.6	608.8	608.0	607.2	607.1	607.0	606.9	606.8	606.7	607.0
180°	608.1	608.1	608.1	608.1	608.1	608.1	608.1	608.1	608.1	608.1	608.1

TEST NUMBER: P1032052

CATALOG NUMBER: S123RDIW-B1000D460UB40-4F0-XX-W2A-A

CANDELA DISTRIBUTION (continued):

	345°	350°	355°	360°
0°	1571.0	1571.0	1571.0	1571.0
2.5°	1530.7	1540.1	1558.9	1575.1
5°	1498.4	1513.2	1541.5	1569.7
7.5°	1459.4	1482.3	1518.6	1557.6
10°	1421.7	1451.3	1495.7	1541.5
12.5°	1384.1	1415.0	1462.1	1521.3
15°	1339.7	1372.0	1428.5	1499.8
17.5°	1300.7	1343.7	1394.8	1466.1
20°	1259.0	1291.3	1357.2	1432.5
22.5°	1206.5	1260.3	1322.2	1401.6
25°	1164.8	1211.9	1273.8	1363.9
27.5°	1113.7	1168.9	1244.2	1323.6
30°	1072.0	1117.8	1187.7	1283.2
32.5°	1023.6	1077.4	1150.0	1244.2
35°	980.6	1026.3	1094.9	1190.4
37.5°	929.4	979.2	1055.9	1140.6
40°	885.1	933.5	1006.1	1085.5
42.5°	831.3	882.4	955.0	1022.3
45°	788.2	835.3	893.1	955.0
47.5°	735.8	785.5	842.0	885.1
50°	688.7	734.4	778.8	815.1
52.5°	637.6	679.3	719.6	746.5
55°	590.5	622.8	655.1	673.9
57.5°	535.3	566.3	593.2	603.9
60°	486.9	512.5	530.0	542.1
62.5°	435.8	454.6	468.1	474.8
65°	386.0	399.5	406.2	412.9
67.5°	334.9	347.0	351.1	359.1
70°	281.1	294.6	297.3	301.3
72.5°	240.8	240.8	246.1	251.5
75°	192.3	195.0	197.7	197.7
77.5°	150.6	150.6	153.3	154.7
80°	110.3	111.6	111.6	110.3
82.5°	75.3	78.0	75.3	74.0
85°	41.7	47.1	44.4	44.4
87.5°	17.5	17.5	20.2	17.5
90°	3.5	2.5	1.5	0.5
92.5°	8.6	9.2	9.8	10.4
95°	15.2	19.3	23.5	27.6
97.5°	41.7	44.5	47.3	50.1
100°	82.4	80.3	78.3	76.3
102.5°	110.1	108.8	107.5	106.2
105°	137.9	136.8	135.7	134.6
107.5°	167.6	166.7	165.8	164.9
110°	197.6	196.8	196.0	195.2

TEST NUMBER: P1032052

CATALOG NUMBER: S123RDIW-B1000D460UB40-4F0-XX-W2A-A

CANDELA DISTRIBUTION (continued):

	345°	350°	355°	360°
112.5°	226.2	225.5	224.8	224.1
115°	254.3	253.7	253.1	252.5
117.5°	282.6	281.9	281.2	280.5
120°	309.0	308.1	307.2	306.3
122.5°	334.6	333.9	333.2	332.5
125°	358.4	357.6	356.8	356.0
127.5°	381.9	381.1	380.3	379.5
130°	403.6	402.8	402.0	401.2
132.5°	424.4	423.6	422.8	422.0
135°	445.0	444.4	443.8	443.2
137.5°	463.7	462.9	462.1	461.3
140°	481.1	480.5	479.9	479.3
142.5°	497.9	497.2	496.6	496.0
145°	513.5	512.8	512.1	511.4
147.5°	527.8	527.3	526.8	526.3
150°	540.8	540.5	540.2	539.9
152.5°	552.4	552.3	552.2	552.1
155°	562.8	563.0	563.2	563.4
157.5°	572.4	572.4	572.4	572.4
160°	580.2	580.3	580.4	580.5
162.5°	587.3	587.6	587.9	588.2
165°	593.2	593.5	593.8	594.1
167.5°	597.8	598.2	598.6	599.0
170°	601.9	602.3	602.7	603.1
172.5°	604.3	604.8	605.3	605.8
175°	606.6	607.1	607.6	608.1
177.5°	607.5	608.0	608.5	609.0
180°	608.1	608.1	608.1	608.1

(END OF REPORT)