

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1032291

Luminaire Tested: S123RDIW-B560D1320UB27-4F0-XX-W2A-A1

Issue Date: 5/7/2025

Test Information

Test Method: LM-79-2019
Report Number: P1032291
REPORT IS A COMBINATION OF REPORTS P994424 AND P1007351
Test Lab: INNOVATION CENTER
Issue Date: 5/7/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S123RDIW-B560D1320UB27-4F0-XX-W2A-A1
Description: Define 3 Regressed Direct/Indirect Wall Mount with 2700K BioUP LEDs {m-DER=0.473}
{m-EER=0.52}
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6741.0 lumens
Efficiency: N/A
Efficacy: 102.0 lumens/watt
Spacing Criteria (0/90/45): 1.22 / 1.2 / 1.34
Luminous Opening: Rectangular w/ Sides (W: 0.25' x L: 4' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 66.1
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1032291

CATALOG NUMBER: S123RDIW-B560D1320UB27-4F0-XX-W2A-A1

Luminous Intensity Polar Plot

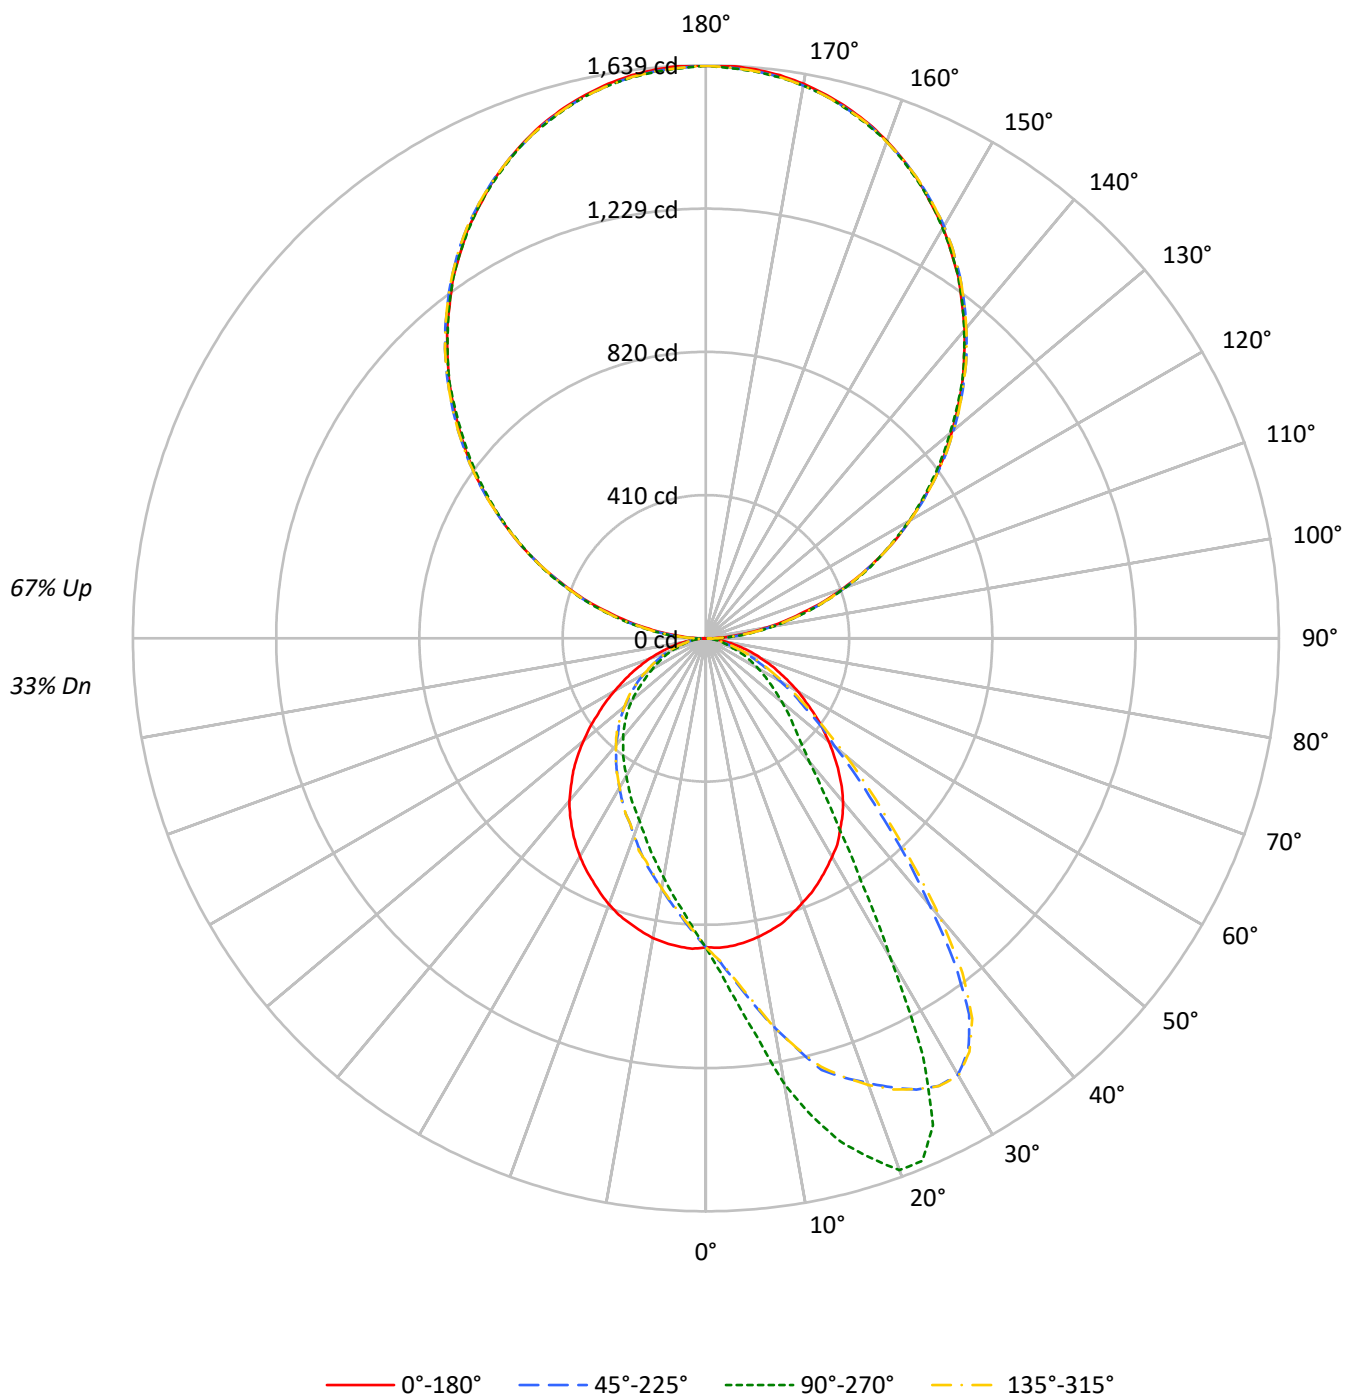

TEST NUMBER: P1032291

CATALOG NUMBER: S123RDIW-B560D1320UB27-4F0-XX-W2A-A1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20							
RC	80				70				50				30				10				0			
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0			
RCR																								
0	103	103	103	103	93	93	93	93	74	74	74	56	56	56	40	40	40	33						
1	94	90	87	83	85	81	78	76	65	63	61	50	49	47	36	35	35	28						
2	86	79	73	69	77	72	67	63	57	54	51	44	42	40	32	31	30	24						
3	79	70	63	58	71	63	57	53	51	47	43	39	37	34	29	27	26	21						
4	72	62	55	49	65	56	50	45	45	41	37	35	32	30	26	24	22	18						
5	66	55	48	42	60	50	44	39	41	36	32	32	29	26	24	21	20	16						
6	61	50	42	36	55	45	38	34	37	32	28	29	25	23	21	19	18	14						
7	56	45	37	32	51	41	34	30	33	28	25	26	23	20	20	17	16	13						
8	52	41	33	28	47	37	31	26	30	26	22	24	21	18	18	16	14	12						
9	49	37	30	25	44	34	28	23	28	23	20	22	19	16	17	14	13	11						
10	45	34	27	22	41	31	25	21	26	21	18	20	17	15	16	13	12	10						

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	9510	9510	9510	9510
5°	9518	10953	9542	8126
10°	9434	13222	9475	7098
15°	9336	15006	9336	6258
20°	9145	16186	9196	5551
25°	9004	15378	8987	5066
30°	8841	10655	8823	4590
35°	8645	6841	8606	4232
40°	8401	4831	8359	3876
45°	7977	3865	7965	3528
50°	7454	3234	7430	3122
55°	6867	2665	6811	2647
60°	6289	2203	6227	2251
65°	5613	1763	5649	1908
70°	4989	1225	5124	1543
75°	4230	909	4401	1186
80°	3366	603	3654	889
85°	2401	286	2613	554

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 30°

Vertical Angle: 45°

Luminance: 12696 cd/sqm

TEST NUMBER: P1032291

CATALOG NUMBER: S123RDIW-B560D1320UB27-4F0-XX-W2A-A1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	86.8	1.3
10°-20°	271.6	4.0
20°-30°	427.8	6.3
30°-40°	444.8	6.6
40°-50°	380.6	5.6
50°-60°	290.1	4.3
60°-70°	185.9	2.8
70°-80°	89.1	1.3
80°-90°	26.9	0.4
90°-100°	105.4	1.6
100°-110°	319.1	4.7
110°-120°	543.2	8.1
120°-130°	714.6	10.6
130°-140°	803.2	11.9
140°-150°	789.7	11.7
150°-160°	664.8	9.9
160°-170°	442.6	6.6
170°-180°	155.0	2.3
0°-30°	786.1	11.7
0°-40°	1231.0	18.3
0°-60°	1901.6	28.2
0°-90°	2203.5	32.7
90°-120°	967.7	14.4
90°-150°	3275.2	48.6
90°-180°	4538.0	67.3
0°-180°	6741.0	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	884	884	884	884	884	
5°	883	1049	885	778	883	84
15°	843	1491	843	622	843	237
25°	767	1536	766	506	767	353
35°	669	666	666	412	669	419
45°	537	356	536	324	537	414
55°	379	223	376	222	379	340
65°	232	129	234	139	232	232
75°	111	54	116	71	111	120
85°	25	13	27	25	25	28
90°	1	39	1	39	1	7
95°	76	100	76	100	76	84
105°	289	306	289	306	289	310
115°	547	548	547	548	547	541
125°	800	791	800	791	800	714
135°	1038	1037	1038	1037	1038	800
145°	1259	1259	1259	1259	1259	787
155°	1442	1440	1442	1440	1442	664
165°	1571	1566	1571	1566	1571	443
175°	1634	1627	1634	1627	1634	155
180°	1638	1638	1638	1638	1638	

TEST NUMBER: P1032291

CATALOG NUMBER: S123RDIW-B560D1320UB27-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
0°	883.5	883.5	883.5	883.5	883.5	883.5	883.5	883.5	883.5	883.5	883.5
2.5°	885.8	891.8	896.4	899.4	907.0	911.5	915.3	922.1	922.1	923.6	926.6
5°	882.8	895.6	904.7	916.8	932.7	940.2	950.8	959.9	972.8	979.6	986.4
7.5°	876.0	894.1	913.0	931.2	954.6	969.7	980.3	1003.8	1020.4	1040.9	1056.7
10°	866.9	891.8	916.0	944.0	975.8	998.5	1014.4	1045.4	1077.2	1105.9	1130.1
12.5°	855.5	885.8	920.6	954.6	999.2	1021.9	1047.7	1086.2	1131.6	1167.9	1200.5
15°	843.4	878.2	917.6	959.2	1015.1	1046.9	1084.0	1130.9	1181.5	1233.7	1278.4
17.5°	824.5	868.4	912.3	972.8	1038.6	1057.5	1089.3	1153.6	1216.3	1263.2	1317.7
20°	805.6	854.8	910.0	964.5	1035.6	1079.4	1108.9	1177.0	1244.3	1301.1	1353.3
22.5°	788.2	839.6	897.1	966.0	1032.5	1076.4	1113.5	1184.6	1262.5	1326.0	1390.3
25°	767.0	823.0	886.5	951.6	1032.5	1065.8	1106.7	1189.1	1271.6	1344.9	1424.4
27.5°	744.3	801.1	863.8	930.4	1004.5	1053.7	1093.8	1182.3	1282.9	1361.6	1443.3
30°	721.6	779.9	840.4	900.2	983.4	1030.3	1076.4	1174.0	1289.0	1379.0	1441.8
32.5°	699.7	748.9	808.6	866.9	949.3	1000.8	1053.0	1165.7	1291.2	1366.9	1397.1
35°	669.4	720.9	769.3	831.3	914.5	965.2	1026.5	1164.9	1281.4	1328.3	1313.2
37.5°	641.5	684.6	730.7	785.9	871.4	937.2	1000.8	1145.2	1248.9	1251.9	1166.4
40°	610.4	646.0	684.6	742.8	835.1	900.2	969.0	1115.0	1189.9	1145.2	994.7
42.5°	574.9	606.7	636.9	693.6	794.3	866.9	941.0	1077.2	1104.4	1001.5	844.9
45°	537.1	562.8	590.8	650.5	751.1	823.0	897.1	1018.9	990.9	845.7	696.7
47.5°	497.7	519.7	546.9	601.4	705.0	778.4	848.7	935.7	864.6	708.8	584.0
50°	458.4	475.8	502.3	558.2	658.1	724.7	789.7	846.4	746.6	608.2	482.6
52.5°	419.8	433.4	460.7	508.3	605.1	668.7	715.6	737.5	636.2	502.3	419.1
55°	379.0	394.1	412.3	460.7	556.7	603.6	634.6	633.9	529.5	425.9	346.4
57.5°	339.6	353.3	369.1	417.6	495.5	527.2	553.7	540.9	441.8	348.7	297.3
60°	304.8	312.4	329.8	370.7	429.7	456.9	472.0	450.1	360.8	294.3	245.8
62.5°	267.0	274.6	289.0	327.5	363.8	378.2	391.1	363.1	298.0	239.8	210.3
65°	232.2	242.1	251.1	282.1	301.8	319.2	317.7	294.3	233.0	195.2	171.0
67.5°	202.0	205.7	213.3	232.2	241.3	254.2	254.9	228.4	187.6	158.9	144.5
70°	169.4	173.2	178.5	187.6	193.6	196.7	195.2	171.7	141.5	124.1	111.2
72.5°	141.5	140.7	144.5	144.5	150.5	149.8	145.2	127.1	107.4	93.0	85.5
75°	111.2	112.0	112.7	111.2	108.9	105.9	102.1	88.5	75.6	68.8	62.0
77.5°	87.0	85.5	86.2	80.9	77.9	74.9	69.6	62.8	52.2	50.7	47.7
80°	62.0	61.3	60.5	58.2	51.4	48.4	44.6	40.8	38.6	37.1	36.3
82.5°	41.6	41.6	40.1	35.6	31.8	29.5	28.7	27.2	25.0	25.0	24.2
85°	25.0	24.2	22.7	18.2	15.9	15.9	15.9	15.9	14.4	14.4	13.6
87.5°	9.8	9.1	6.8	6.8	6.1	6.1	6.1	5.3	5.3	4.5	4.5
90°	1.3	4.2	7.0	9.9	12.8	14.2	16.1	19.8	23.5	27.2	30.9
92.5°	38.6	40.3	42.0	43.7	45.4	46.3	47.2	48.9	50.6	52.3	54.0
95°	75.9	77.9	79.9	81.9	83.9	84.9	86.0	88.3	90.6	92.9	95.2
97.5°	124.8	126.2	127.6	129.1	130.5	131.2	132.1	133.8	135.5	137.2	138.9
100°	175.0	176.7	178.4	180.1	181.8	182.7	183.4	184.8	186.3	187.7	189.1
102.5°	232.8	233.7	234.5	235.4	236.3	236.7	237.7	239.7	241.7	243.7	245.7
105°	289.4	290.0	290.6	291.1	291.7	292.0	293.3	295.9	298.4	301.0	303.6
107.5°	356.3	356.6	356.9	357.2	357.5	357.6	358.2	359.3	360.5	361.6	362.8
110°	418.1	418.7	419.3	419.8	420.4	420.7	421.0	421.5	422.1	422.6	423.2

TEST NUMBER: P1032291

CATALOG NUMBER: S123RDIW-B560D1320UB27-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
112.5°	482.4	482.7	483.0	483.3	483.6	483.7	483.7	483.7	483.7	483.7	483.7
115°	546.7	547.6	548.4	549.3	550.2	550.6	550.3	549.7	549.2	548.6	548.0
117.5°	612.3	612.6	612.9	613.2	613.5	613.6	613.3	612.8	612.2	611.7	611.1
120°	672.8	674.5	676.2	677.9	679.6	680.5	679.8	678.4	676.9	675.5	674.1
122.5°	735.8	737.0	738.1	739.3	740.4	741.0	740.7	740.1	739.6	739.0	738.4
125°	800.2	801.0	801.9	802.7	803.6	804.0	803.7	803.1	802.6	802.0	801.4
127.5°	859.3	861.0	862.7	864.4	866.1	867.0	866.7	866.2	865.6	865.1	864.5
130°	918.5	920.8	923.1	925.4	927.7	928.8	928.4	927.5	926.6	925.8	924.9
132.5°	977.7	980.0	982.3	984.6	986.9	988.0	987.7	987.1	986.6	986.0	985.4
135°	1038.1	1039.8	1041.6	1043.3	1045.0	1045.9	1045.8	1045.5	1045.2	1044.9	1044.6
137.5°	1093.5	1094.9	1096.3	1097.8	1099.2	1099.9	1100.3	1101.2	1102.1	1102.9	1103.8
140°	1151.3	1152.7	1154.2	1155.6	1157.1	1157.8	1157.9	1158.2	1158.5	1158.8	1159.1
142.5°	1204.1	1205.5	1206.9	1208.4	1209.8	1210.5	1210.8	1211.4	1211.9	1212.5	1213.1
145°	1259.4	1260.0	1260.6	1261.1	1261.7	1262.0	1262.4	1263.3	1264.1	1265.0	1265.8
147.5°	1307.0	1308.2	1309.3	1310.5	1311.6	1312.2	1312.6	1313.5	1314.3	1315.2	1316.0
150°	1357.2	1357.8	1358.3	1358.9	1359.4	1359.7	1360.0	1360.6	1361.1	1361.7	1362.3
152.5°	1398.3	1399.2	1400.0	1400.9	1401.8	1402.2	1402.3	1402.6	1402.9	1403.2	1403.5
155°	1442.1	1442.1	1442.1	1442.1	1442.1	1442.1	1442.2	1442.5	1442.8	1443.1	1443.4
157.5°	1479.4	1479.1	1478.8	1478.5	1478.2	1478.1	1478.2	1478.5	1478.8	1479.1	1479.4
160°	1514.1	1513.5	1512.9	1512.4	1511.8	1511.5	1511.5	1511.5	1511.5	1511.5	1511.5
162.5°	1545.0	1544.1	1543.3	1542.4	1541.5	1541.1	1541.2	1541.5	1541.8	1542.1	1542.4
165°	1570.7	1569.9	1569.0	1568.2	1567.3	1566.9	1566.9	1566.9	1566.9	1566.9	1566.9
167.5°	1592.6	1591.4	1590.3	1589.1	1588.0	1587.4	1587.5	1587.8	1588.1	1588.4	1588.7
170°	1610.6	1609.5	1608.3	1607.2	1606.1	1605.5	1605.5	1605.5	1605.5	1605.5	1605.5
172.5°	1624.8	1623.6	1622.5	1621.3	1620.2	1619.6	1619.6	1619.6	1619.6	1619.6	1619.6
175°	1633.8	1632.6	1631.5	1630.3	1629.2	1628.6	1628.6	1628.6	1628.6	1628.6	1628.6
177.5°	1638.9	1637.8	1636.6	1635.5	1634.4	1633.8	1633.8	1633.8	1633.8	1633.8	1633.8
180°	1637.6	1637.6	1637.6	1637.6	1637.6	1637.6	1637.6	1637.6	1637.6	1637.6	1637.6

TEST NUMBER: P1032291

CATALOG NUMBER: S123RDIW-B560D1320UB27-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°	95°
0°	883.5	883.5	883.5	883.5	883.5	883.5	883.5	883.5	883.5	883.5	883.5
2.5°	932.7	932.7	939.5	946.3	942.5	944.8	953.1	950.1	956.1	955.4	957.6
5°	1003.0	1011.4	1018.2	1032.5	1034.8	1032.5	1046.9	1050.7	1057.5	1049.2	1053.0
7.5°	1082.5	1099.9	1116.5	1137.7	1144.5	1146.0	1153.6	1164.2	1173.2	1156.6	1164.9
10°	1159.6	1186.1	1220.1	1239.0	1255.7	1261.7	1267.8	1274.6	1285.2	1295.0	1287.5
12.5°	1242.8	1281.4	1313.9	1348.0	1368.4	1366.1	1383.5	1388.1	1396.4	1398.6	1401.7
15°	1310.9	1365.4	1385.8	1436.5	1441.0	1456.1	1475.8	1493.2	1495.5	1490.9	1490.9
17.5°	1376.0	1422.9	1459.2	1500.0	1508.3	1521.2	1546.2	1554.5	1557.5	1556.7	1556.7
20°	1428.9	1459.9	1521.2	1555.2	1568.8	1585.5	1602.9	1613.5	1615.7	1618.8	1614.2
22.5°	1463.7	1510.6	1560.5	1588.5	1599.9	1605.9	1617.3	1620.3	1616.5	1617.3	1618.0
25°	1490.9	1537.1	1567.3	1574.9	1574.1	1566.6	1558.3	1543.9	1542.4	1536.3	1524.2
27.5°	1498.5	1515.9	1512.1	1481.1	1450.1	1447.1	1397.1	1369.9	1338.9	1343.4	1326.0
30°	1457.6	1435.0	1381.2	1302.6	1270.1	1217.1	1161.1	1102.9	1080.2	1055.2	1101.4
32.5°	1357.8	1276.9	1181.5	1079.4	1025.0	978.1	918.3	876.0	851.7	831.3	870.7
35°	1207.3	1080.9	954.6	857.8	813.2	770.8	714.8	693.6	663.4	666.4	670.2
37.5°	1013.6	874.4	779.1	683.8	654.3	636.9	596.1	563.5	553.0	549.9	549.9
40°	832.1	717.9	633.1	558.2	535.6	521.2	488.7	473.5	462.2	459.2	462.9
42.5°	688.4	590.8	525.0	475.0	459.2	441.0	427.4	408.5	406.2	400.9	407.7
45°	577.9	493.2	444.0	407.7	394.1	387.3	372.2	360.8	356.3	355.5	360.8
47.5°	490.2	424.4	381.2	358.5	348.0	341.2	328.3	323.8	319.2	320.7	318.5
50°	411.5	362.3	334.3	313.9	307.1	300.3	292.0	287.4	285.2	285.2	284.4
52.5°	353.3	312.4	294.3	275.3	272.3	268.5	259.5	256.4	252.6	251.9	254.9
55°	302.6	274.6	256.4	245.1	242.1	234.5	230.7	226.9	224.7	223.1	223.9
57.5°	258.7	237.5	225.4	215.6	210.3	207.3	200.5	199.7	198.2	198.2	197.4
60°	222.4	207.3	192.9	186.8	183.1	179.3	178.5	174.0	171.7	173.2	172.5
62.5°	188.4	176.2	167.9	161.1	158.9	155.8	153.6	152.0	149.8	150.5	150.5
65°	157.3	147.5	141.5	135.4	134.6	131.6	130.9	129.4	129.4	128.6	130.1
67.5°	129.4	122.5	117.2	113.5	111.2	112.0	108.9	106.7	106.7	105.9	108.2
70°	102.9	99.1	93.8	89.3	86.2	86.2	82.5	81.7	81.7	81.7	80.9
72.5°	79.4	72.6	70.3	68.8	68.8	68.8	67.3	67.3	66.6	67.3	66.6
75°	59.0	58.2	56.7	56.0	56.0	55.2	54.5	54.5	54.5	54.5	54.5
77.5°	46.1	46.1	44.6	43.9	43.9	43.9	43.1	43.1	42.4	42.4	42.4
80°	34.0	34.0	32.5	32.5	32.5	31.8	31.8	31.8	32.5	31.8	31.8
82.5°	23.4	23.4	22.7	23.4	22.7	21.9	21.9	21.9	21.2	21.9	21.9
85°	13.6	13.6	12.9	12.1	12.9	12.9	12.1	12.9	12.1	12.9	12.1
87.5°	5.3	4.5	4.5	4.5	3.8	4.5	3.8	3.8	4.5	3.8	4.5
90°	32.0	33.2	34.3	35.4	36.0	36.3	36.9	37.4	38.0	38.6	38.0
92.5°	54.9	55.7	56.6	57.5	57.9	57.6	57.0	56.5	55.9	55.3	55.9
95°	96.3	97.5	98.6	99.7	100.3	100.3	100.3	100.3	100.3	100.3	100.3
97.5°	140.3	141.8	143.2	144.7	145.4	145.3	145.0	144.7	144.4	144.1	144.4
100°	190.0	190.8	191.7	192.6	193.0	193.3	193.8	194.4	194.9	195.5	194.9
102.5°	246.6	247.4	248.3	249.2	249.6	249.5	249.2	248.9	248.6	248.3	248.6
105°	303.6	303.6	303.6	303.6	303.6	303.9	304.5	305.0	305.6	306.2	305.6
107.5°	363.6	364.5	365.3	366.2	366.6	366.5	366.2	365.9	365.6	365.3	365.6
110°	424.4	425.5	426.7	427.8	428.4	428.1	427.5	427.0	426.4	425.8	426.4

TEST NUMBER: P1032291

CATALOG NUMBER: S123RDIW-B560D1320UB27-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°	95°
112.5°	485.1	486.5	488.0	489.4	490.1	490.1	490.1	490.1	490.1	490.1	490.1
115°	548.3	548.6	548.9	549.2	549.3	549.2	548.9	548.6	548.3	548.0	548.3
117.5°	611.1	611.1	611.1	611.1	611.1	610.7	609.8	608.9	608.1	607.2	608.1
120°	673.8	673.5	673.2	672.9	672.8	672.5	671.9	671.4	670.8	670.2	670.8
122.5°	737.5	736.7	735.8	734.9	734.5	734.1	733.2	732.4	731.5	730.7	731.5
125°	800.3	799.1	798.0	796.9	796.3	795.7	794.6	793.5	792.3	791.2	792.3
127.5°	862.8	861.1	859.4	857.7	856.8	856.2	855.1	853.9	852.8	851.6	852.8
130°	923.8	922.6	921.5	920.4	919.8	918.8	916.8	914.8	912.8	910.8	912.8
132.5°	984.0	982.6	981.1	979.7	979.0	978.3	976.8	975.4	973.9	972.5	973.9
135°	1043.4	1042.3	1041.1	1040.0	1039.4	1039.1	1038.6	1038.0	1037.5	1036.9	1037.5
137.5°	1102.4	1100.9	1099.5	1098.0	1097.3	1096.9	1096.0	1095.2	1094.3	1093.5	1094.3
140°	1158.8	1158.5	1158.2	1157.9	1157.8	1156.8	1154.8	1152.8	1150.8	1148.8	1150.8
142.5°	1212.8	1212.5	1212.2	1211.9	1211.8	1211.1	1209.7	1208.2	1206.8	1205.4	1206.8
145°	1265.5	1265.3	1265.0	1264.7	1264.6	1264.0	1262.9	1261.7	1260.6	1259.4	1260.6
147.5°	1316.0	1316.0	1316.0	1316.0	1316.0	1315.1	1313.4	1311.7	1310.0	1308.3	1310.0
150°	1362.3	1362.3	1362.3	1362.3	1362.3	1361.4	1359.7	1358.0	1356.3	1354.6	1356.3
152.5°	1404.1	1404.7	1405.2	1405.8	1406.1	1405.4	1403.9	1402.5	1401.0	1399.6	1401.0
155°	1444.5	1445.7	1446.8	1447.9	1448.5	1447.5	1445.5	1443.5	1441.5	1439.5	1441.5
157.5°	1480.5	1481.7	1482.8	1483.9	1484.5	1483.6	1481.9	1480.2	1478.5	1476.8	1478.5
160°	1512.9	1514.4	1515.8	1517.3	1518.0	1517.4	1516.3	1515.1	1514.0	1512.8	1514.0
162.5°	1543.8	1545.3	1546.7	1548.2	1548.9	1547.9	1545.9	1543.8	1541.8	1539.8	1541.8
165°	1568.6	1570.3	1572.0	1573.7	1574.6	1573.6	1571.6	1569.6	1567.6	1565.6	1567.6
167.5°	1590.4	1592.2	1593.9	1595.6	1596.5	1595.6	1593.9	1592.2	1590.4	1588.7	1590.4
170°	1607.5	1609.5	1611.5	1613.5	1614.5	1613.5	1611.5	1609.5	1607.5	1605.5	1607.5
172.5°	1621.3	1623.0	1624.7	1626.4	1627.3	1626.3	1624.3	1622.3	1620.3	1618.3	1620.3
175°	1630.3	1632.0	1633.7	1635.4	1636.3	1635.3	1633.3	1631.3	1629.3	1627.3	1629.3
177.5°	1635.5	1637.2	1638.9	1640.6	1641.5	1640.5	1638.5	1636.5	1634.5	1632.5	1634.5
180°	1637.6	1637.6	1637.6	1637.6	1637.6	1637.6	1637.6	1637.6	1637.6	1637.6	1637.6

TEST NUMBER: P1032291

CATALOG NUMBER: S123RDIW-B560D1320UB27-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	100°	105°	110°	112.5°	115°	120°	125°	130°	135°	140°	145°
0°	883.5	883.5	883.5	883.5	883.5	883.5	883.5	883.5	883.5	883.5	883.5
2.5°	953.9	949.3	946.3	944.0	941.8	948.6	939.5	929.7	922.8	918.3	916.8
5°	1053.7	1043.9	1035.6	1028.7	1030.3	1030.3	1014.4	997.0	981.9	973.5	964.5
7.5°	1169.4	1158.9	1142.2	1138.4	1135.4	1116.5	1100.6	1068.8	1049.9	1031.0	1014.4
10°	1284.4	1270.8	1254.9	1249.6	1242.1	1218.6	1194.4	1153.6	1130.1	1095.3	1073.4
12.5°	1391.8	1375.2	1359.3	1355.5	1344.2	1323.8	1282.2	1239.8	1199.7	1162.6	1124.1
15°	1481.9	1477.3	1453.1	1438.0	1413.0	1385.0	1376.0	1318.5	1267.8	1229.2	1159.6
17.5°	1557.5	1536.3	1513.6	1503.8	1494.0	1461.4	1428.9	1369.9	1315.4	1258.7	1214.1
20°	1618.0	1594.6	1578.7	1564.3	1559.8	1522.7	1471.3	1419.1	1359.3	1295.8	1237.5
22.5°	1621.0	1618.0	1607.4	1599.1	1590.0	1565.8	1525.0	1459.9	1396.4	1326.8	1250.4
25°	1558.3	1553.7	1584.0	1576.4	1582.5	1573.4	1551.4	1497.0	1422.9	1341.2	1264.0
27.5°	1369.1	1415.3	1462.9	1479.6	1490.9	1523.5	1534.0	1503.8	1444.0	1357.0	1270.8
30°	1112.0	1173.2	1250.4	1292.0	1323.8	1384.3	1462.9	1472.8	1444.8	1375.2	1269.3
32.5°	872.9	928.9	990.9	1040.1	1082.5	1206.5	1312.4	1388.8	1402.4	1366.1	1273.1
35°	703.5	727.7	786.7	833.6	891.1	997.0	1121.8	1245.1	1328.3	1332.8	1261.7
37.5°	580.2	593.0	644.5	671.0	705.0	798.0	914.5	1075.6	1205.0	1266.3	1230.0
40°	480.3	509.8	539.3	554.5	578.7	643.0	754.9	881.2	1041.6	1155.1	1180.8
42.5°	416.8	429.7	448.6	469.7	484.9	540.9	615.7	731.5	876.0	1034.0	1105.1
45°	367.6	372.2	391.8	405.4	421.3	460.7	513.6	610.4	737.5	893.3	1014.4
47.5°	326.8	335.9	346.4	354.8	365.4	395.6	441.0	511.3	623.3	762.5	892.6
50°	290.5	295.8	309.4	313.2	320.7	341.9	376.7	430.4	522.7	633.9	768.5
52.5°	256.4	266.3	271.6	276.9	283.7	301.1	323.8	367.6	437.2	541.6	655.8
55°	230.0	233.0	240.5	245.1	250.4	262.5	282.1	314.7	369.1	452.3	560.5
57.5°	204.2	204.2	211.8	215.6	220.9	230.0	247.4	272.3	311.7	373.7	472.8
60°	177.0	177.8	183.8	188.4	189.9	198.9	213.3	233.0	263.2	308.6	389.6
62.5°	152.8	156.6	159.6	161.1	166.4	171.7	183.8	197.4	218.6	258.7	316.2
65°	132.4	133.1	135.4	136.9	139.2	145.2	154.3	163.4	181.5	211.0	257.9
67.5°	108.9	112.0	115.0	115.0	117.2	120.3	129.4	136.9	150.5	167.9	199.7
70°	81.7	83.2	87.7	90.0	93.0	98.3	102.9	107.4	118.0	130.9	155.1
72.5°	68.1	68.1	69.6	70.3	70.3	74.1	80.9	85.5	90.8	99.8	116.5
75°	54.5	54.5	56.7	56.0	57.5	59.0	59.8	62.8	65.8	72.6	82.5
77.5°	43.1	43.9	43.9	44.6	44.6	45.4	46.1	47.7	49.2	53.0	57.5
80°	31.8	32.5	32.5	33.3	33.3	34.0	34.8	35.6	37.1	38.6	40.8
82.5°	21.9	22.7	22.7	23.4	22.7	23.4	24.2	24.2	25.0	26.5	27.2
85°	12.9	12.9	13.6	12.9	12.9	12.9	13.6	13.6	14.4	16.6	16.6
87.5°	3.8	4.5	3.8	4.5	4.5	4.5	4.5	5.3	5.3	6.1	6.8
90°	37.4	36.9	36.3	36.0	35.4	34.3	33.2	32.0	30.9	27.2	23.5
92.5°	56.5	57.0	57.6	57.9	57.5	56.6	55.7	54.9	54.0	52.3	50.6
95°	100.3	100.3	100.3	100.3	99.7	98.6	97.5	96.3	95.2	92.9	90.6
97.5°	144.7	145.0	145.3	145.4	144.7	143.2	141.8	140.3	138.9	137.2	135.5
100°	194.4	193.8	193.3	193.0	192.6	191.7	190.8	190.0	189.1	187.7	186.3
102.5°	248.9	249.2	249.5	249.6	249.2	248.3	247.4	246.6	245.7	243.7	241.7
105°	305.0	304.5	303.9	303.6	303.6	303.6	303.6	303.6	303.6	301.0	298.4
107.5°	365.9	366.2	366.5	366.6	366.2	365.3	364.5	363.6	362.8	361.6	360.5
110°	427.0	427.5	428.1	428.4	427.8	426.7	425.5	424.4	423.2	422.6	422.1

TEST NUMBER: P1032291

CATALOG NUMBER: S123RDIW-B560D1320UB27-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	100°	105°	110°	112.5°	115°	120°	125°	130°	135°	140°	145°
112.5°	490.1	490.1	490.1	490.1	489.4	488.0	486.5	485.1	483.7	483.7	483.7
115°	548.6	548.9	549.2	549.3	549.2	548.9	548.6	548.3	548.0	548.6	549.2
117.5°	608.9	609.8	610.7	611.1	611.1	611.1	611.1	611.1	611.1	611.7	612.2
120°	671.4	671.9	672.5	672.8	672.9	673.2	673.5	673.8	674.1	675.5	676.9
122.5°	732.4	733.2	734.1	734.5	734.9	735.8	736.7	737.5	738.4	739.0	739.6
125°	793.5	794.6	795.7	796.3	796.9	798.0	799.1	800.3	801.4	802.0	802.6
127.5°	853.9	855.1	856.2	856.8	857.7	859.4	861.1	862.8	864.5	865.1	865.6
130°	914.8	916.8	918.8	919.8	920.4	921.5	922.6	923.8	924.9	925.8	926.6
132.5°	975.4	976.8	978.3	979.0	979.7	981.1	982.6	984.0	985.4	986.0	986.6
135°	1038.0	1038.6	1039.1	1039.4	1040.0	1041.1	1042.3	1043.4	1044.6	1044.9	1045.2
137.5°	1095.2	1096.0	1096.9	1097.3	1098.0	1099.5	1100.9	1102.4	1103.8	1102.9	1102.1
140°	1152.8	1154.8	1156.8	1157.8	1157.9	1158.2	1158.5	1158.8	1159.1	1158.8	1158.5
142.5°	1208.2	1209.7	1211.1	1211.8	1211.9	1212.2	1212.5	1212.8	1213.1	1212.5	1211.9
145°	1261.7	1262.9	1264.0	1264.6	1264.7	1265.0	1265.3	1265.5	1265.8	1265.0	1264.1
147.5°	1311.7	1313.4	1315.1	1316.0	1316.0	1316.0	1316.0	1316.0	1316.0	1315.2	1314.3
150°	1358.0	1359.7	1361.4	1362.3	1362.3	1362.3	1362.3	1362.3	1362.3	1361.7	1361.1
152.5°	1402.5	1403.9	1405.4	1406.1	1405.8	1405.2	1404.7	1404.1	1403.5	1403.2	1402.9
155°	1443.5	1445.5	1447.5	1448.5	1447.9	1446.8	1445.7	1444.5	1443.4	1443.1	1442.8
157.5°	1480.2	1481.9	1483.6	1484.5	1483.9	1482.8	1481.7	1480.5	1479.4	1479.1	1478.8
160°	1515.1	1516.3	1517.4	1518.0	1517.3	1515.8	1514.4	1512.9	1511.5	1511.5	1511.5
162.5°	1543.8	1545.9	1547.9	1548.9	1548.2	1546.7	1545.3	1543.8	1542.4	1542.1	1541.8
165°	1569.6	1571.6	1573.6	1574.6	1573.7	1572.0	1570.3	1568.6	1566.9	1566.9	1566.9
167.5°	1592.2	1593.9	1595.6	1596.5	1595.6	1593.9	1592.2	1590.4	1588.7	1588.4	1588.1
170°	1609.5	1611.5	1613.5	1614.5	1613.5	1611.5	1609.5	1607.5	1605.5	1605.5	1605.5
172.5°	1622.3	1624.3	1626.3	1627.3	1626.4	1624.7	1623.0	1621.3	1619.6	1619.6	1619.6
175°	1631.3	1633.3	1635.3	1636.3	1635.4	1633.7	1632.0	1630.3	1628.6	1628.6	1628.6
177.5°	1636.5	1638.5	1640.5	1641.5	1640.6	1638.9	1637.2	1635.5	1633.8	1633.8	1633.8
180°	1637.6	1637.6	1637.6	1637.6	1637.6	1637.6	1637.6	1637.6	1637.6	1637.6	1637.6

TEST NUMBER: P1032291

CATALOG NUMBER: S123RDIW-B560D1320UB27-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	150°	155°	157.5°	160°	165°	170°	175°	180°	185°	190°	195°
0°	883.5	883.5	883.5	883.5	883.5	883.5	883.5	883.5	883.5	883.5	883.5
2.5°	914.5	910.7	907.0	907.0	898.6	891.1	887.3	888.8	884.3	878.2	872.2
5°	954.6	939.5	936.5	928.1	916.8	900.9	892.6	885.0	876.0	863.8	852.5
7.5°	991.7	972.0	961.4	953.1	931.2	909.2	891.1	879.0	863.1	844.9	831.3
10°	1040.1	1003.8	992.4	973.5	942.5	911.5	890.3	870.7	848.7	827.5	809.4
12.5°	1078.7	1037.1	1015.9	997.0	956.9	917.6	882.0	857.8	831.3	807.9	784.4
15°	1122.5	1075.6	1038.6	1015.9	965.2	917.6	877.5	843.4	813.9	785.2	764.8
17.5°	1143.7	1084.7	1068.1	1035.6	962.2	914.5	865.4	829.1	793.5	760.2	736.0
20°	1177.0	1108.2	1066.6	1044.6	979.6	909.2	851.7	810.1	773.1	737.5	711.8
22.5°	1179.3	1104.4	1077.2	1035.6	955.4	893.3	839.6	789.0	745.8	712.6	686.1
25°	1174.0	1097.6	1059.8	1026.5	959.9	884.3	815.4	765.5	723.2	684.6	653.6
27.5°	1171.7	1077.9	1042.4	1009.1	934.2	857.8	801.1	744.3	695.9	661.9	630.1
30°	1168.7	1056.7	1013.6	975.0	906.2	837.4	769.3	720.1	674.0	630.9	599.1
32.5°	1149.0	1028.0	984.1	943.3	869.1	800.3	746.6	694.4	644.5	604.4	575.6
35°	1143.0	1001.5	944.0	900.2	827.5	766.3	709.5	666.4	619.5	579.4	545.4
37.5°	1125.6	974.3	912.3	856.3	780.6	722.4	680.8	637.7	592.3	549.2	521.9
40°	1095.3	942.5	872.2	814.7	736.8	677.8	639.2	607.4	562.8	524.2	490.9
42.5°	1050.7	910.0	834.3	773.8	687.6	632.4	600.6	570.4	532.5	492.4	465.2
45°	999.2	866.9	796.5	729.2	641.5	587.7	554.5	536.3	501.5	467.5	435.7
47.5°	928.9	822.2	752.7	683.1	593.8	541.6	515.1	497.0	472.8	435.7	410.0
50°	840.4	764.8	698.9	636.9	546.9	497.0	470.5	456.9	436.5	410.0	385.0
52.5°	742.1	698.2	643.7	586.2	499.2	452.3	428.1	417.6	402.4	377.5	356.3
55°	643.0	624.1	587.0	530.3	449.3	410.7	389.6	375.9	364.6	346.4	328.3
57.5°	554.5	545.4	519.7	475.8	407.7	367.6	349.5	340.4	331.3	317.7	299.5
60°	462.9	472.8	446.3	424.4	362.3	327.5	311.7	301.8	297.3	285.2	273.8
62.5°	383.5	392.6	377.5	360.8	316.9	285.9	276.1	267.0	264.0	253.4	242.1
65°	311.7	323.0	311.7	302.6	276.1	250.4	238.3	233.7	230.7	223.9	214.8
67.5°	248.1	259.5	254.2	242.8	234.5	213.3	206.5	202.0	200.5	195.2	187.6
70°	186.8	202.7	204.2	197.4	189.9	180.0	175.5	174.0	170.2	165.7	161.1
72.5°	134.6	152.8	153.6	153.6	149.0	149.0	144.5	142.2	142.2	137.7	132.4
75°	99.1	111.2	112.7	114.2	116.5	118.8	115.7	115.7	115.0	110.4	108.2
77.5°	65.8	76.4	80.2	85.5	88.5	88.5	90.0	91.5	90.0	87.7	86.2
80°	42.4	49.9	54.5	57.5	62.0	64.3	66.6	67.3	65.8	65.1	62.8
82.5°	28.0	30.3	32.5	36.3	41.6	45.4	45.4	44.6	46.1	45.4	44.6
85°	15.9	17.4	18.2	18.9	21.9	25.7	26.5	27.2	28.7	27.2	25.7
87.5°	6.1	6.8	6.8	6.8	8.3	9.1	11.3	14.4	13.6	12.1	12.1
90°	19.8	16.1	14.2	12.8	9.9	7.0	4.2	1.3	4.2	7.0	9.9
92.5°	48.9	47.2	46.3	45.4	43.7	42.0	40.3	38.6	40.3	42.0	43.7
95°	88.3	86.0	84.9	83.9	81.9	79.9	77.9	75.9	77.9	79.9	81.9
97.5°	133.8	132.1	131.2	130.5	129.1	127.6	126.2	124.8	126.2	127.6	129.1
100°	184.8	183.4	182.7	181.8	180.1	178.4	176.7	175.0	176.7	178.4	180.1
102.5°	239.7	237.7	236.7	236.3	235.4	234.5	233.7	232.8	233.7	234.5	235.4
105°	295.9	293.3	292.0	291.7	291.1	290.6	290.0	289.4	290.0	290.6	291.1
107.5°	359.3	358.2	357.6	357.5	357.2	356.9	356.6	356.3	356.6	356.9	357.2
110°	421.5	421.0	420.7	420.4	419.8	419.3	418.7	418.1	418.7	419.3	419.8

TEST NUMBER: P1032291

CATALOG NUMBER: S123RDIW-B560D1320UB27-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	150°	155°	157.5°	160°	165°	170°	175°	180°	185°	190°	195°
112.5°	483.7	483.7	483.7	483.6	483.3	483.0	482.7	482.4	482.7	483.0	483.3
115°	549.7	550.3	550.6	550.2	549.3	548.4	547.6	546.7	547.6	548.4	549.3
117.5°	612.8	613.3	613.6	613.5	613.2	612.9	612.6	612.3	612.6	612.9	613.2
120°	678.4	679.8	680.5	679.6	677.9	676.2	674.5	672.8	674.5	676.2	677.9
122.5°	740.1	740.7	741.0	740.4	739.3	738.1	737.0	735.8	737.0	738.1	739.3
125°	803.1	803.7	804.0	803.6	802.7	801.9	801.0	800.2	801.0	801.9	802.7
127.5°	866.2	866.7	867.0	866.1	864.4	862.7	861.0	859.3	861.0	862.7	864.4
130°	927.5	928.4	928.8	927.7	925.4	923.1	920.8	918.5	920.8	923.1	925.4
132.5°	987.1	987.7	988.0	986.9	984.6	982.3	980.0	977.7	980.0	982.3	984.6
135°	1045.5	1045.8	1045.9	1045.0	1043.3	1041.6	1039.8	1038.1	1039.8	1041.6	1043.3
137.5°	1101.2	1100.3	1099.9	1099.2	1097.8	1096.3	1094.9	1093.5	1094.9	1096.3	1097.8
140°	1158.2	1157.9	1157.8	1157.1	1155.6	1154.2	1152.7	1151.3	1152.7	1154.2	1155.6
142.5°	1211.4	1210.8	1210.5	1209.8	1208.4	1206.9	1205.5	1204.1	1205.5	1206.9	1208.4
145°	1263.3	1262.4	1262.0	1261.7	1261.1	1260.6	1260.0	1259.4	1260.0	1260.6	1261.1
147.5°	1313.5	1312.6	1312.2	1311.6	1310.5	1309.3	1308.2	1307.0	1308.2	1309.3	1310.5
150°	1360.6	1360.0	1359.7	1359.4	1358.9	1358.3	1357.8	1357.2	1357.8	1358.3	1358.9
152.5°	1402.6	1402.3	1402.2	1401.8	1400.9	1400.0	1399.2	1398.3	1399.2	1400.0	1400.9
155°	1442.5	1442.2	1442.1	1442.1	1442.1	1442.1	1442.1	1442.1	1442.1	1442.1	1442.1
157.5°	1478.5	1478.2	1478.1	1478.2	1478.5	1478.8	1479.1	1479.4	1479.1	1478.8	1478.5
160°	1511.5	1511.5	1511.5	1511.8	1512.4	1512.9	1513.5	1514.1	1513.5	1512.9	1512.4
162.5°	1541.5	1541.2	1541.1	1541.5	1542.4	1543.3	1544.1	1545.0	1544.1	1543.3	1542.4
165°	1566.9	1566.9	1566.9	1567.3	1568.2	1569.0	1569.9	1570.7	1569.9	1569.0	1568.2
167.5°	1587.8	1587.5	1587.4	1588.0	1589.1	1590.3	1591.4	1592.6	1591.4	1590.3	1589.1
170°	1605.5	1605.5	1605.5	1606.1	1607.2	1608.3	1609.5	1610.6	1609.5	1608.3	1607.2
172.5°	1619.6	1619.6	1619.6	1620.2	1621.3	1622.5	1623.6	1624.8	1623.6	1622.5	1621.3
175°	1628.6	1628.6	1628.6	1629.2	1630.3	1631.5	1632.6	1633.8	1632.6	1631.5	1630.3
177.5°	1633.8	1633.8	1633.8	1634.4	1635.5	1636.6	1637.8	1638.9	1637.8	1636.6	1635.5
180°	1637.6	1637.6	1637.6	1637.6	1637.6	1637.6	1637.6	1637.6	1637.6	1637.6	1637.6

TEST NUMBER: P1032291

CATALOG NUMBER: S123RDIW-B560D1320UB27-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	200°	202.5°	205°	210°	215°	220°	225°	230°	235°	240°	245°
0°	883.5	883.5	883.5	883.5	883.5	883.5	883.5	883.5	883.5	883.5	883.5
2.5°	872.2	868.4	866.9	863.1	854.0	848.0	841.2	836.6	837.4	833.6	835.9
5°	844.9	844.2	838.9	831.3	818.5	811.7	799.6	793.5	790.5	791.2	786.7
7.5°	822.2	815.4	811.7	799.6	787.4	773.1	763.2	757.9	753.4	748.9	745.8
10°	796.5	790.5	784.4	771.6	754.9	741.3	727.7	722.4	715.6	712.6	710.3
12.5°	769.3	765.5	757.9	742.8	723.9	711.0	695.2	692.1	683.1	677.0	675.5
15°	744.3	742.1	728.4	711.0	692.1	679.3	665.7	656.6	641.5	644.5	639.2
17.5°	717.9	708.0	699.7	676.3	667.2	647.5	631.6	627.1	616.5	609.7	602.9
20°	688.4	682.3	671.7	656.6	634.6	612.0	599.9	592.3	586.2	575.6	572.6
22.5°	660.4	652.8	643.7	624.1	605.1	586.2	569.6	562.8	555.2	547.7	543.1
25°	638.4	627.1	617.2	593.0	574.1	558.2	547.7	536.3	525.7	521.2	519.7
27.5°	604.4	597.6	587.7	565.1	547.7	530.3	520.4	512.9	501.5	496.2	491.7
30°	582.5	568.8	557.5	539.3	521.9	503.0	494.0	484.9	478.1	471.3	466.0
32.5°	553.0	542.4	533.3	515.1	497.7	480.3	470.5	456.9	453.1	447.8	441.8
35°	524.2	517.4	507.6	487.9	469.0	456.9	446.3	433.4	428.9	425.1	419.8
37.5°	497.0	487.1	480.3	461.4	444.8	430.4	422.1	411.5	408.5	403.9	400.2
40°	473.5	463.7	456.9	438.0	420.6	405.4	400.2	389.6	385.0	379.7	377.5
42.5°	447.1	438.7	429.7	416.0	397.9	382.8	372.2	366.1	360.1	357.8	353.3
45°	419.1	411.5	404.7	389.6	370.7	360.1	351.0	342.7	338.1	334.3	331.3
47.5°	394.9	388.1	379.0	362.3	347.2	337.4	328.3	320.0	315.4	310.9	307.1
50°	366.9	363.1	353.3	337.4	323.0	311.7	303.3	295.8	292.7	287.4	281.4
52.5°	341.9	335.1	326.8	313.9	301.1	287.4	276.1	271.6	266.3	263.2	257.9
55°	312.4	307.9	298.8	287.4	273.8	262.5	254.2	248.1	241.3	238.3	231.5
57.5°	287.4	279.1	274.6	260.2	247.4	236.0	230.0	223.9	216.3	211.8	208.8
60°	260.2	252.6	245.8	233.7	224.7	212.6	203.5	198.2	192.9	186.8	183.8
62.5°	233.7	227.7	219.4	209.5	198.2	188.4	181.5	174.0	171.0	164.9	162.6
65°	205.0	200.5	193.6	182.3	173.2	164.9	158.1	152.0	149.0	146.7	145.2
67.5°	179.3	173.2	168.7	158.9	149.0	142.2	138.4	134.6	130.9	128.6	126.3
70°	152.8	148.3	143.7	134.6	127.8	121.8	118.8	115.7	113.5	111.2	108.9
72.5°	125.6	123.3	118.8	112.7	107.4	102.9	100.6	96.8	94.6	90.8	89.3
75°	103.6	99.8	97.6	92.3	87.7	84.0	80.9	76.4	73.4	71.9	71.1
77.5°	81.7	80.2	77.2	72.6	70.3	66.6	62.0	60.5	59.0	59.0	58.2
80°	61.3	59.0	56.7	53.0	50.7	47.7	47.7	47.7	46.9	47.7	46.9
82.5°	41.6	40.1	38.6	36.3	35.6	35.6	36.3	36.3	36.3	36.3	36.3
85°	24.2	24.2	24.2	25.0	24.2	24.2	25.0	25.7	25.0	25.0	24.2
87.5°	11.3	11.3	12.1	12.1	12.9	12.9	12.9	12.9	12.9	12.9	13.6
90°	12.8	14.2	16.1	19.8	23.5	27.2	30.9	32.0	33.2	34.3	35.4
92.5°	45.4	46.3	47.2	48.9	50.6	52.3	54.0	54.9	55.7	56.6	57.5
95°	83.9	84.9	86.0	88.3	90.6	92.9	95.2	96.3	97.5	98.6	99.7
97.5°	130.5	131.2	132.1	133.8	135.5	137.2	138.9	140.3	141.8	143.2	144.7
100°	181.8	182.7	183.4	184.8	186.3	187.7	189.1	190.0	190.8	191.7	192.6
102.5°	236.3	236.7	237.7	239.7	241.7	243.7	245.7	246.6	247.4	248.3	249.2
105°	291.7	292.0	293.3	295.9	298.4	301.0	303.6	303.6	303.6	303.6	303.6
107.5°	357.5	357.6	358.2	359.3	360.5	361.6	362.8	363.6	364.5	365.3	366.2
110°	420.4	420.7	421.0	421.5	422.1	422.6	423.2	424.4	425.5	426.7	427.8

TEST NUMBER: P1032291

CATALOG NUMBER: S123RDIW-B560D1320UB27-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	200°	202.5°	205°	210°	215°	220°	225°	230°	235°	240°	245°
112.5°	483.6	483.7	483.7	483.7	483.7	483.7	483.7	485.1	486.5	488.0	489.4
115°	550.2	550.6	550.3	549.7	549.2	548.6	548.0	548.3	548.6	548.9	549.2
117.5°	613.5	613.6	613.3	612.8	612.2	611.7	611.1	611.1	611.1	611.1	611.1
120°	679.6	680.5	679.8	678.4	676.9	675.5	674.1	673.8	673.5	673.2	672.9
122.5°	740.4	741.0	740.7	740.1	739.6	739.0	738.4	737.5	736.7	735.8	734.9
125°	803.6	804.0	803.7	803.1	802.6	802.0	801.4	800.3	799.1	798.0	796.9
127.5°	866.1	867.0	866.7	866.2	865.6	865.1	864.5	862.8	861.1	859.4	857.7
130°	927.7	928.8	928.4	927.5	926.6	925.8	924.9	923.8	922.6	921.5	920.4
132.5°	986.9	988.0	987.7	987.1	986.6	986.0	985.4	984.0	982.6	981.1	979.7
135°	1045.0	1045.9	1045.8	1045.5	1045.2	1044.9	1044.6	1043.4	1042.3	1041.1	1040.0
137.5°	1099.2	1099.9	1100.3	1101.2	1102.1	1102.9	1103.8	1102.4	1100.9	1099.5	1098.0
140°	1157.1	1157.8	1157.9	1158.2	1158.5	1158.8	1159.1	1158.8	1158.5	1158.2	1157.9
142.5°	1209.8	1210.5	1210.8	1211.4	1211.9	1212.5	1213.1	1212.8	1212.5	1212.2	1211.9
145°	1261.7	1262.0	1262.4	1263.3	1264.1	1265.0	1265.8	1265.5	1265.3	1265.0	1264.7
147.5°	1311.6	1312.2	1312.6	1313.5	1314.3	1315.2	1316.0	1316.0	1316.0	1316.0	1316.0
150°	1359.4	1359.7	1360.0	1360.6	1361.1	1361.7	1362.3	1362.3	1362.3	1362.3	1362.3
152.5°	1401.8	1402.2	1402.3	1402.6	1402.9	1403.2	1403.5	1404.1	1404.7	1405.2	1405.8
155°	1442.1	1442.1	1442.2	1442.5	1442.8	1443.1	1443.4	1444.5	1445.7	1446.8	1447.9
157.5°	1478.2	1478.1	1478.2	1478.5	1478.8	1479.1	1479.4	1480.5	1481.7	1482.8	1483.9
160°	1511.8	1511.5	1511.5	1511.5	1511.5	1511.5	1511.5	1512.9	1514.4	1515.8	1517.3
162.5°	1541.5	1541.1	1541.2	1541.5	1541.8	1542.1	1542.4	1543.8	1545.3	1546.7	1548.2
165°	1567.3	1566.9	1566.9	1566.9	1566.9	1566.9	1566.9	1568.6	1570.3	1572.0	1573.7
167.5°	1588.0	1587.4	1587.5	1587.8	1588.1	1588.4	1588.7	1590.4	1592.2	1593.9	1595.6
170°	1606.1	1605.5	1605.5	1605.5	1605.5	1605.5	1605.5	1607.5	1609.5	1611.5	1613.5
172.5°	1620.2	1619.6	1619.6	1619.6	1619.6	1619.6	1619.6	1621.3	1623.0	1624.7	1626.4
175°	1629.2	1628.6	1628.6	1628.6	1628.6	1628.6	1628.6	1630.3	1632.0	1633.7	1635.4
177.5°	1634.4	1633.8	1633.8	1633.8	1633.8	1633.8	1633.8	1635.5	1637.2	1638.9	1640.6
180°	1637.6	1637.6	1637.6	1637.6	1637.6	1637.6	1637.6	1637.6	1637.6	1637.6	1637.6

TEST NUMBER: P1032291

CATALOG NUMBER: S123RDIW-B560D1320UB27-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	247.5°	250°	255°	260°	265°	270°	275°	280°	285°	290°	292.5°
0°	883.5	883.5	883.5	883.5	883.5	883.5	883.5	883.5	883.5	883.5	883.5
2.5°	835.1	835.9	833.6	829.1	828.3	829.8	834.3	832.8	829.1	835.9	829.8
5°	789.0	785.2	783.7	785.2	780.6	778.4	782.9	780.6	782.9	783.7	785.9
7.5°	744.3	745.1	740.5	741.3	735.3	736.8	736.8	736.8	739.0	740.5	743.6
10°	705.8	707.3	702.0	702.7	698.2	695.2	697.4	702.0	702.0	702.0	703.5
12.5°	674.7	667.9	664.1	663.4	658.1	656.6	661.1	662.6	666.4	666.4	668.7
15°	636.2	634.6	631.6	631.6	618.8	621.8	623.3	628.6	636.2	630.1	631.6
17.5°	601.4	597.6	593.8	592.3	590.8	586.2	592.3	591.5	596.1	596.8	599.1
20°	570.4	567.3	559.8	560.5	562.0	555.2	559.0	559.0	563.5	568.1	573.4
22.5°	540.1	537.1	533.3	534.8	530.3	528.7	528.7	532.5	537.8	541.6	540.9
25°	516.6	511.3	509.1	506.8	504.5	506.1	503.8	507.6	511.3	513.6	511.3
27.5°	490.2	487.9	483.4	481.1	477.3	478.8	480.3	483.4	485.6	485.6	487.9
30°	464.5	461.4	459.9	457.6	457.6	454.6	455.4	458.4	460.7	462.9	466.0
32.5°	439.5	437.2	434.9	434.9	433.4	432.7	431.9	436.5	436.5	441.0	441.0
35°	419.1	415.3	415.3	411.5	413.0	412.3	410.7	413.8	414.5	417.6	416.8
37.5°	396.4	396.4	394.9	391.1	388.1	388.8	392.6	392.6	394.9	394.1	396.4
40°	373.7	372.2	372.2	369.9	369.1	368.4	369.1	369.9	373.7	372.9	373.7
42.5°	351.0	351.7	348.0	348.0	348.0	345.7	346.4	347.2	348.7	350.2	352.5
45°	329.0	327.5	326.8	325.3	323.8	324.5	323.8	326.8	326.0	327.5	329.8
47.5°	305.6	303.3	302.6	299.5	299.5	301.1	300.3	302.6	303.3	305.6	304.1
50°	282.9	279.9	277.6	278.4	273.8	275.3	275.3	277.6	279.9	280.6	282.1
52.5°	256.4	255.7	254.9	251.1	250.4	249.6	250.4	251.1	254.2	256.4	257.2
55°	230.7	230.0	225.4	223.9	221.6	221.6	223.1	223.9	229.2	230.0	233.0
57.5°	207.3	205.0	199.7	198.9	198.9	198.9	196.7	199.7	201.2	205.0	205.0
60°	181.5	181.5	177.0	177.0	177.8	177.0	177.0	177.8	177.8	180.8	182.3
62.5°	161.1	160.4	160.4	158.9	158.1	158.9	158.1	158.1	158.9	161.1	163.4
65°	143.0	142.2	141.5	140.7	139.2	139.2	139.9	141.5	141.5	143.0	143.7
67.5°	125.6	125.6	124.1	124.1	123.3	122.5	123.3	122.5	125.6	125.6	126.3
70°	108.2	107.4	105.1	104.4	102.1	102.9	102.9	105.1	105.9	107.4	108.9
72.5°	87.0	87.0	85.5	84.0	84.7	83.2	83.2	84.0	84.0	86.2	87.0
75°	71.9	70.3	69.6	70.3	69.6	71.1	69.6	69.6	71.1	71.1	71.1
77.5°	59.0	59.0	58.2	58.2	59.0	58.2	59.0	59.0	59.0	58.2	59.0
80°	48.4	47.7	47.7	47.7	46.9	46.9	46.9	46.9	46.9	46.9	46.9
82.5°	36.3	36.3	35.6	36.3	36.3	35.6	36.3	35.6	35.6	36.3	36.3
85°	24.2	25.7	24.2	24.2	25.0	25.0	25.7	25.0	25.7	24.2	25.0
87.5°	12.9	13.6	13.6	12.9	12.9	13.6	13.6	13.6	14.4	12.9	13.6
90°	36.0	36.3	36.9	37.4	38.0	38.6	38.0	37.4	36.9	36.3	36.0
92.5°	57.9	57.6	57.0	56.5	55.9	55.3	55.9	56.5	57.0	57.6	57.9
95°	100.3	100.3	100.3	100.3	100.3	100.3	100.3	100.3	100.3	100.3	100.3
97.5°	145.4	145.3	145.0	144.7	144.4	144.1	144.4	144.7	145.0	145.3	145.4
100°	193.0	193.3	193.8	194.4	194.9	195.5	194.9	194.4	193.8	193.3	193.0
102.5°	249.6	249.5	249.2	248.9	248.6	248.3	248.6	248.9	249.2	249.5	249.6
105°	303.6	303.9	304.5	305.0	305.6	306.2	305.6	305.0	304.5	303.9	303.6
107.5°	366.6	366.5	366.2	365.9	365.6	365.3	365.6	365.9	366.2	366.5	366.6
110°	428.4	428.1	427.5	427.0	426.4	425.8	426.4	427.0	427.5	428.1	428.4

TEST NUMBER: P1032291

CATALOG NUMBER: S123RDIW-B560D1320UB27-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	247.5°	250°	255°	260°	265°	270°	275°	280°	285°	290°	292.5°
112.5°	490.1	490.1	490.1	490.1	490.1	490.1	490.1	490.1	490.1	490.1	490.1
115°	549.3	549.2	548.9	548.6	548.3	548.0	548.3	548.6	548.9	549.2	549.3
117.5°	611.1	610.7	609.8	608.9	608.1	607.2	608.1	608.9	609.8	610.7	611.1
120°	672.8	672.5	671.9	671.4	670.8	670.2	670.8	671.4	671.9	672.5	672.8
122.5°	734.5	734.1	733.2	732.4	731.5	730.7	731.5	732.4	733.2	734.1	734.5
125°	796.3	795.7	794.6	793.5	792.3	791.2	792.3	793.5	794.6	795.7	796.3
127.5°	856.8	856.2	855.1	853.9	852.8	851.6	852.8	853.9	855.1	856.2	856.8
130°	919.8	918.8	916.8	914.8	912.8	910.8	912.8	914.8	916.8	918.8	919.8
132.5°	979.0	978.3	976.8	975.4	973.9	972.5	973.9	975.4	976.8	978.3	979.0
135°	1039.4	1039.1	1038.6	1038.0	1037.5	1036.9	1037.5	1038.0	1038.6	1039.1	1039.4
137.5°	1097.3	1096.9	1096.0	1095.2	1094.3	1093.5	1094.3	1095.2	1096.0	1096.9	1097.3
140°	1157.8	1156.8	1154.8	1152.8	1150.8	1148.8	1150.8	1152.8	1154.8	1156.8	1157.8
142.5°	1211.8	1211.1	1209.7	1208.2	1206.8	1205.4	1206.8	1208.2	1209.7	1211.1	1211.8
145°	1264.6	1264.0	1262.9	1261.7	1260.6	1259.4	1260.6	1261.7	1262.9	1264.0	1264.6
147.5°	1316.0	1315.1	1313.4	1311.7	1310.0	1308.3	1310.0	1311.7	1313.4	1315.1	1316.0
150°	1362.3	1361.4	1359.7	1358.0	1356.3	1354.6	1356.3	1358.0	1359.7	1361.4	1362.3
152.5°	1406.1	1405.4	1403.9	1402.5	1401.0	1399.6	1401.0	1402.5	1403.9	1405.4	1406.1
155°	1448.5	1447.5	1445.5	1443.5	1441.5	1439.5	1441.5	1443.5	1445.5	1447.5	1448.5
157.5°	1484.5	1483.6	1481.9	1480.2	1478.5	1476.8	1478.5	1480.2	1481.9	1483.6	1484.5
160°	1518.0	1517.4	1516.3	1515.1	1514.0	1512.8	1514.0	1515.1	1516.3	1517.4	1518.0
162.5°	1548.9	1547.9	1545.9	1543.8	1541.8	1539.8	1541.8	1543.8	1545.9	1547.9	1548.9
165°	1574.6	1573.6	1571.6	1569.6	1567.6	1565.6	1567.6	1569.6	1571.6	1573.6	1574.6
167.5°	1596.5	1595.6	1593.9	1592.2	1590.4	1588.7	1590.4	1592.2	1593.9	1595.6	1596.5
170°	1614.5	1613.5	1611.5	1609.5	1607.5	1605.5	1607.5	1609.5	1611.5	1613.5	1614.5
172.5°	1627.3	1626.3	1624.3	1622.3	1620.3	1618.3	1620.3	1622.3	1624.3	1626.3	1627.3
175°	1636.3	1635.3	1633.3	1631.3	1629.3	1627.3	1629.3	1631.3	1633.3	1635.3	1636.3
177.5°	1641.5	1640.5	1638.5	1636.5	1634.5	1632.5	1634.5	1636.5	1638.5	1640.5	1641.5
180°	1637.6	1637.6	1637.6	1637.6	1637.6	1637.6	1637.6	1637.6	1637.6	1637.6	1637.6

TEST NUMBER: P1032291

CATALOG NUMBER: S123RDIW-B560D1320UB27-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	295°	300°	305°	310°	315°	320°	325°	330°	335°	337.5°	340°
0°	883.5	883.5	883.5	883.5	883.5	883.5	883.5	883.5	883.5	883.5	883.5
2.5°	835.9	838.9	835.9	829.8	835.9	839.6	843.4	849.5	852.5	852.5	857.0
5°	788.2	794.3	792.0	790.5	796.5	800.3	806.4	813.9	822.2	827.5	833.6
7.5°	745.8	749.6	753.4	753.4	759.5	767.8	776.9	785.9	796.5	804.1	808.6
10°	708.8	711.8	714.1	717.1	726.2	735.3	747.4	758.7	767.8	776.1	783.7
12.5°	673.2	677.8	683.1	685.3	692.1	703.5	714.8	728.4	742.8	751.1	758.7
15°	639.2	641.5	647.5	654.3	660.4	672.5	686.8	701.2	713.3	726.2	733.0
17.5°	604.4	605.1	621.0	617.2	636.9	648.3	655.8	669.4	689.1	699.7	710.3
20°	570.4	577.9	584.7	588.5	599.1	612.0	633.9	644.5	660.4	670.2	679.3
22.5°	543.9	555.2	555.2	564.3	569.6	581.7	597.6	618.0	635.4	642.2	655.1
25°	520.4	525.7	534.8	537.8	547.7	558.2	568.8	590.8	609.7	618.8	627.8
27.5°	490.2	497.0	509.1	509.1	521.9	533.3	546.1	560.5	579.4	592.3	602.1
30°	466.7	473.5	478.8	487.1	492.4	503.0	525.7	536.3	553.0	564.3	576.4
32.5°	444.8	450.1	454.6	463.7	469.7	481.8	494.0	512.9	527.2	537.8	550.7
35°	420.6	425.9	431.9	438.7	447.8	459.2	470.5	486.4	500.8	510.6	521.2
37.5°	397.9	401.7	410.7	415.3	422.8	433.4	447.8	464.5	477.3	484.9	495.5
40°	375.9	379.0	385.8	394.1	399.4	407.7	422.8	437.2	453.1	462.2	470.5
42.5°	352.5	356.3	362.3	370.7	379.0	388.1	396.4	413.0	427.4	434.9	444.0
45°	332.1	334.3	338.9	347.2	355.5	362.3	375.2	390.3	403.9	410.0	419.8
47.5°	307.9	310.1	316.9	320.7	329.8	338.9	351.7	366.9	379.0	385.0	394.1
50°	282.9	285.2	289.7	298.0	304.1	313.9	325.3	338.1	353.3	361.6	366.9
52.5°	258.7	263.2	267.0	273.8	281.4	291.2	301.8	313.9	326.8	335.1	341.2
55°	234.5	238.3	242.8	246.6	255.7	264.8	276.9	288.2	299.5	307.1	313.9
57.5°	207.3	212.6	217.1	224.7	231.5	239.0	252.6	261.7	275.3	280.6	286.7
60°	183.8	189.1	192.9	198.9	205.0	214.8	223.9	235.3	246.6	253.4	261.0
62.5°	164.1	166.4	168.7	174.7	180.8	189.9	198.9	210.3	222.4	226.2	232.2
65°	144.5	146.7	150.5	155.8	160.4	165.7	175.5	184.6	195.9	202.0	204.2
67.5°	127.8	130.1	130.9	134.6	138.4	144.5	149.8	158.9	169.4	173.2	177.8
70°	108.9	112.7	113.5	116.5	118.0	121.8	127.8	134.6	143.0	149.8	153.6
72.5°	87.0	92.3	93.8	98.3	100.6	104.4	108.9	114.2	119.5	122.5	125.6
75°	71.1	72.6	73.4	77.2	80.9	86.2	88.5	91.5	96.1	99.8	102.9
77.5°	59.0	59.8	60.5	60.5	61.3	64.3	68.8	72.6	75.6	77.2	79.4
80°	47.7	46.9	46.9	47.7	47.7	47.7	49.2	54.5	56.0	59.8	59.0
82.5°	37.1	35.6	36.3	35.6	35.6	35.6	35.6	36.3	36.3	38.6	40.1
85°	24.2	25.0	24.2	24.2	23.4	24.2	23.4	23.4	22.7	22.7	21.9
87.5°	12.9	13.6	12.9	12.9	12.1	12.9	12.1	12.1	11.3	11.3	9.8
90°	35.4	34.3	33.2	32.0	30.9	27.2	23.5	19.8	16.1	14.2	12.8
92.5°	57.5	56.6	55.7	54.9	54.0	52.3	50.6	48.9	47.2	46.3	45.4
95°	99.7	98.6	97.5	96.3	95.2	92.9	90.6	88.3	86.0	84.9	83.9
97.5°	144.7	143.2	141.8	140.3	138.9	137.2	135.5	133.8	132.1	131.2	130.5
100°	192.6	191.7	190.8	190.0	189.1	187.7	186.3	184.8	183.4	182.7	181.8
102.5°	249.2	248.3	247.4	246.6	245.7	243.7	241.7	239.7	237.7	236.7	236.3
105°	303.6	303.6	303.6	303.6	303.6	301.0	298.4	295.9	293.3	292.0	291.7
107.5°	366.2	365.3	364.5	363.6	362.8	361.6	360.5	359.3	358.2	357.6	357.5
110°	427.8	426.7	425.5	424.4	423.2	422.6	422.1	421.5	421.0	420.7	420.4

TEST NUMBER: P1032291

CATALOG NUMBER: S123RDIW-B560D1320UB27-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	295°	300°	305°	310°	315°	320°	325°	330°	335°	337.5°	340°
112.5°	489.4	488.0	486.5	485.1	483.7	483.7	483.7	483.7	483.7	483.7	483.6
115°	549.2	548.9	548.6	548.3	548.0	548.6	549.2	549.7	550.3	550.6	550.2
117.5°	611.1	611.1	611.1	611.1	611.1	611.7	612.2	612.8	613.3	613.6	613.5
120°	672.9	673.2	673.5	673.8	674.1	675.5	676.9	678.4	679.8	680.5	679.6
122.5°	734.9	735.8	736.7	737.5	738.4	739.0	739.6	740.1	740.7	741.0	740.4
125°	796.9	798.0	799.1	800.3	801.4	802.0	802.6	803.1	803.7	804.0	803.6
127.5°	857.7	859.4	861.1	862.8	864.5	865.1	865.6	866.2	866.7	867.0	866.1
130°	920.4	921.5	922.6	923.8	924.9	925.8	926.6	927.5	928.4	928.8	927.7
132.5°	979.7	981.1	982.6	984.0	985.4	986.0	986.6	987.1	987.7	988.0	986.9
135°	1040.0	1041.1	1042.3	1043.4	1044.6	1044.9	1045.2	1045.5	1045.8	1045.9	1045.0
137.5°	1098.0	1099.5	1100.9	1102.4	1103.8	1102.9	1102.1	1101.2	1100.3	1099.9	1099.2
140°	1157.9	1158.2	1158.5	1158.8	1159.1	1158.8	1158.5	1158.2	1157.9	1157.8	1157.1
142.5°	1211.9	1212.2	1212.5	1212.8	1213.1	1212.5	1211.9	1211.4	1210.8	1210.5	1209.8
145°	1264.7	1265.0	1265.3	1265.5	1265.8	1265.0	1264.1	1263.3	1262.4	1262.0	1261.7
147.5°	1316.0	1316.0	1316.0	1316.0	1316.0	1315.2	1314.3	1313.5	1312.6	1312.2	1311.6
150°	1362.3	1362.3	1362.3	1362.3	1362.3	1361.7	1361.1	1360.6	1360.0	1359.7	1359.4
152.5°	1405.8	1405.2	1404.7	1404.1	1403.5	1403.2	1402.9	1402.6	1402.3	1402.2	1401.8
155°	1447.9	1446.8	1445.7	1444.5	1443.4	1443.1	1442.8	1442.5	1442.2	1442.1	1442.1
157.5°	1483.9	1482.8	1481.7	1480.5	1479.4	1479.1	1478.8	1478.5	1478.2	1478.1	1478.2
160°	1517.3	1515.8	1514.4	1512.9	1511.5	1511.5	1511.5	1511.5	1511.5	1511.5	1511.8
162.5°	1548.2	1546.7	1545.3	1543.8	1542.4	1542.1	1541.8	1541.5	1541.2	1541.1	1541.5
165°	1573.7	1572.0	1570.3	1568.6	1566.9	1566.9	1566.9	1566.9	1566.9	1566.9	1567.3
167.5°	1595.6	1593.9	1592.2	1590.4	1588.7	1588.4	1588.1	1587.8	1587.5	1587.4	1588.0
170°	1613.5	1611.5	1609.5	1607.5	1605.5	1605.5	1605.5	1605.5	1605.5	1605.5	1606.1
172.5°	1626.4	1624.7	1623.0	1621.3	1619.6	1619.6	1619.6	1619.6	1619.6	1619.6	1620.2
175°	1635.4	1633.7	1632.0	1630.3	1628.6	1628.6	1628.6	1628.6	1628.6	1628.6	1629.2
177.5°	1640.6	1638.9	1637.2	1635.5	1633.8	1633.8	1633.8	1633.8	1633.8	1633.8	1634.4
180°	1637.6	1637.6	1637.6	1637.6	1637.6	1637.6	1637.6	1637.6	1637.6	1637.6	1637.6

TEST NUMBER: P1032291

CATALOG NUMBER: S123RDIW-B560D1320UB27-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	345°	350°	355°	360°
0°	883.5	883.5	883.5	883.5
2.5°	860.8	866.1	876.7	885.8
5°	842.7	851.0	866.9	882.8
7.5°	820.7	833.6	854.0	876.0
10°	799.6	816.2	841.2	866.9
12.5°	778.4	795.8	822.2	855.5
15°	753.4	771.6	803.3	843.4
17.5°	731.5	755.7	784.4	824.5
20°	708.0	726.2	763.2	805.6
22.5°	678.5	708.8	743.6	788.2
25°	655.1	681.5	716.3	767.0
27.5°	626.3	657.3	699.7	744.3
30°	602.9	628.6	667.9	721.6
32.5°	575.6	605.9	646.8	699.7
35°	551.4	577.2	615.7	669.4
37.5°	522.7	550.7	593.8	641.5
40°	497.7	525.0	565.8	610.4
42.5°	467.5	496.2	537.1	574.9
45°	443.3	469.7	502.3	537.1
47.5°	413.8	441.8	473.5	497.7
50°	387.3	413.0	438.0	458.4
52.5°	358.5	382.0	404.7	419.8
55°	332.1	350.2	368.4	379.0
57.5°	301.1	318.5	333.6	339.6
60°	273.8	288.2	298.0	304.8
62.5°	245.1	255.7	263.2	267.0
65°	217.1	224.7	228.4	232.2
67.5°	188.4	195.2	197.4	202.0
70°	158.1	165.7	167.2	169.4
72.5°	135.4	135.4	138.4	141.5
75°	108.2	109.7	111.2	111.2
77.5°	84.7	84.7	86.2	87.0
80°	62.0	62.8	62.8	62.0
82.5°	42.4	43.9	42.4	41.6
85°	23.4	26.5	25.0	25.0
87.5°	9.8	9.8	11.3	9.8
90°	9.9	7.0	4.2	1.3
92.5°	43.7	42.0	40.3	38.6
95°	81.9	79.9	77.9	75.9
97.5°	129.1	127.6	126.2	124.8
100°	180.1	178.4	176.7	175.0
102.5°	235.4	234.5	233.7	232.8
105°	291.1	290.6	290.0	289.4
107.5°	357.2	356.9	356.6	356.3
110°	419.8	419.3	418.7	418.1

TEST NUMBER: P1032291

CATALOG NUMBER: S123RDIW-B560D1320UB27-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	345°	350°	355°	360°
112.5°	483.3	483.0	482.7	482.4
115°	549.3	548.4	547.6	546.7
117.5°	613.2	612.9	612.6	612.3
120°	677.9	676.2	674.5	672.8
122.5°	739.3	738.1	737.0	735.8
125°	802.7	801.9	801.0	800.2
127.5°	864.4	862.7	861.0	859.3
130°	925.4	923.1	920.8	918.5
132.5°	984.6	982.3	980.0	977.7
135°	1043.3	1041.6	1039.8	1038.1
137.5°	1097.8	1096.3	1094.9	1093.5
140°	1155.6	1154.2	1152.7	1151.3
142.5°	1208.4	1206.9	1205.5	1204.1
145°	1261.1	1260.6	1260.0	1259.4
147.5°	1310.5	1309.3	1308.2	1307.0
150°	1358.9	1358.3	1357.8	1357.2
152.5°	1400.9	1400.0	1399.2	1398.3
155°	1442.1	1442.1	1442.1	1442.1
157.5°	1478.5	1478.8	1479.1	1479.4
160°	1512.4	1512.9	1513.5	1514.1
162.5°	1542.4	1543.3	1544.1	1545.0
165°	1568.2	1569.0	1569.9	1570.7
167.5°	1589.1	1590.3	1591.4	1592.6
170°	1607.2	1608.3	1609.5	1610.6
172.5°	1621.3	1622.5	1623.6	1624.8
175°	1630.3	1631.5	1632.6	1633.8
177.5°	1635.5	1636.6	1637.8	1638.9
180°	1637.6	1637.6	1637.6	1637.6

(END OF REPORT)