

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1032429

Luminaire Tested: S123RDIW-B775D460UB30-4F0-XX-W2A-A1

Issue Date: 5/7/2025

Test Information

Test Method: LM-79-2019
Report Number: P1032429
REPORT IS A COMBINATION OF REPORTS P994752 AND P1007351
Test Lab: INNOVATION CENTER
Issue Date: 5/7/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S123RDIW-B775D460UB30-4F0-XX-W2A-A1
Description: Define 3 Regressed Direct/Indirect Wall Mount with 3000K BioUP LEDs {m-DER=0.589}
{m-EER=0.647}
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 4677.9 lumens
Efficiency: N/A
Efficacy: 95.3 lumens/watt
Spacing Criteria (0/90/45): 1.22 / 1.2 / 1.34
Luminous Opening: Rectangular w/ Sides (W: 0.25' x L: 4' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 49.1
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1032429

CATALOG NUMBER: S123RDIW-B775D460UB30-4F0-XX-W2A-A1

Luminous Intensity Polar Plot

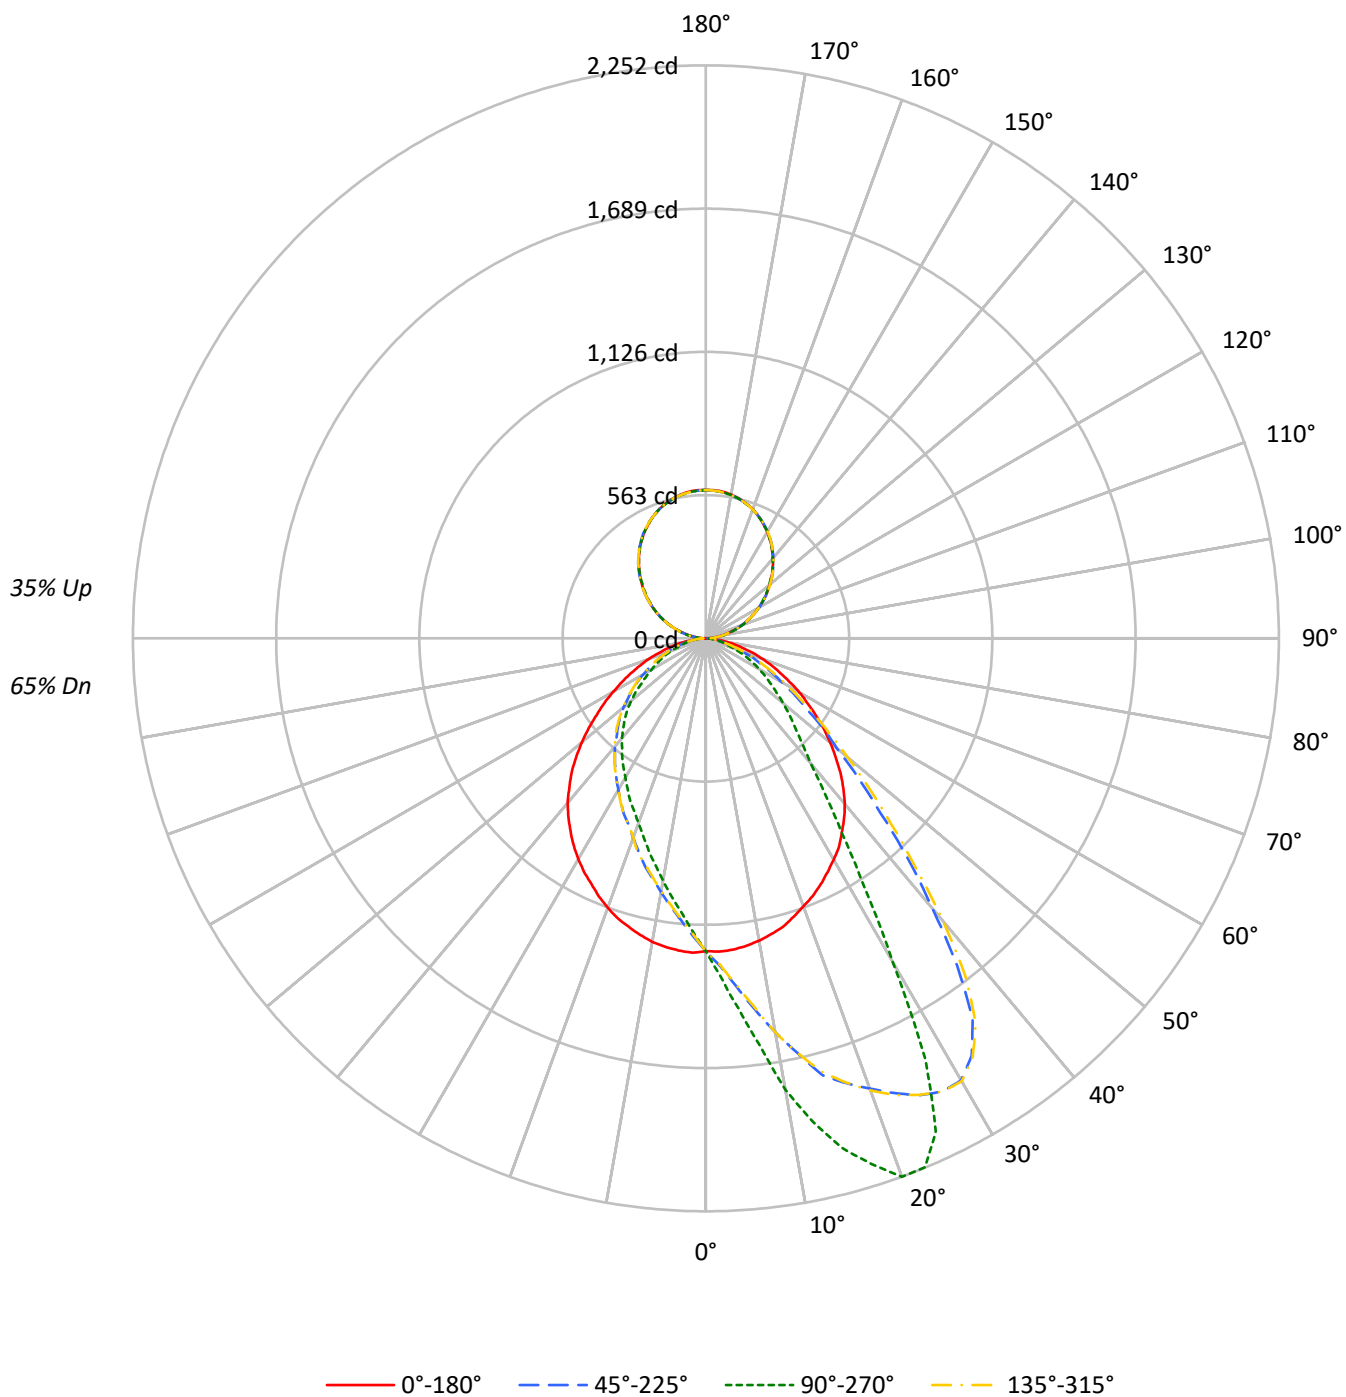

TEST NUMBER: P1032429

CATALOG NUMBER: S123RDIW-B775D460UB30-4F0-XX-W2A-A1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	111	111	111	111	104	104	104	104	92	92	92	81	81	81	70	70	70	65			
1	102	98	94	91	96	92	89	86	82	79	77	72	70	69	63	62	61	57			
2	94	86	81	76	88	82	76	72	73	69	65	64	61	59	57	55	53	49			
3	86	77	70	64	81	73	66	61	65	60	56	58	54	51	51	48	46	42			
4	79	68	61	55	74	65	58	53	58	53	48	52	48	44	46	43	40	37			
5	73	61	53	48	68	58	51	46	52	47	42	47	42	39	42	38	35	32			
6	67	55	47	42	63	53	45	40	48	42	37	43	38	34	38	34	31	29			
7	63	50	42	37	59	48	41	36	43	37	33	39	34	31	35	31	28	26			
8	58	46	38	33	55	44	37	32	40	34	30	36	31	28	32	28	25	23			
9	54	42	35	30	51	40	33	29	37	31	27	33	28	25	30	26	23	21			
10	51	39	32	27	48	37	31	26	34	28	24	31	26	23	28	24	21	19			

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	13232	13232	13232	13232
5°	13242	15240	13276	11306
10°	13125	18396	13182	9875
15°	12990	20879	12990	8707
20°	12724	22521	12795	7724
25°	12529	21397	12504	7048
30°	12302	14825	12277	6387
35°	12028	9518	11974	5888
40°	11689	6721	11631	5393
45°	11098	5379	11082	4909
50°	10371	4500	10337	4344
55°	9554	3708	9478	3683
60°	8751	3065	8664	3132
65°	7810	2453	7861	2656
70°	6944	1705	7130	2146
75°	5885	1265	6124	1650
80°	4685	838	5087	1238
85°	3333	397	3640	769

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 30°

Vertical Angle: 45°

Luminance: 17665 cd/sqm

TEST NUMBER: P1032429

CATALOG NUMBER: S123RDIW-B775D460UB30-4F0-XX-W2A-A1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	120.7	2.6
10°-20°	377.9	8.1
20°-30°	595.2	12.7
30°-40°	618.9	13.2
40°-50°	529.5	11.3
50°-60°	403.7	8.6
60°-70°	258.6	5.5
70°-80°	123.9	2.6
80°-90°	33.8	0.7
90°-100°	37.5	0.8
100°-110°	113.6	2.4
110°-120°	193.4	4.1
120°-130°	254.5	5.4
130°-140°	286.0	6.1
140°-150°	281.2	6.0
150°-160°	236.7	5.1
160°-170°	157.6	3.4
170°-180°	55.2	1.2
0°-30°	1093.8	23.4
0°-40°	1712.7	36.6
0°-60°	2645.9	56.6
0°-90°	3062.2	65.5
90°-120°	344.5	7.4
90°-150°	1166.2	24.9
90°-180°	1616.0	34.5
0°-180°	4677.9	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1229	1229	1229	1229	1229	
5°	1228	1460	1231	1083	1228	116
15°	1174	2074	1174	865	1174	330
25°	1067	2138	1065	704	1067	492
35°	931	927	927	574	931	583
45°	747	495	746	452	747	575
55°	527	310	523	308	527	472
65°	323	179	325	194	323	323
75°	155	76	161	99	155	167
85°	35	18	38	35	35	39
90°	0	14	0	14	0	4
95°	27	36	27	36	27	30
105°	103	109	103	109	103	110
115°	195	195	195	195	195	193
125°	285	282	285	282	285	254
135°	370	369	370	369	370	285
145°	448	448	448	448	448	280
155°	514	513	514	513	514	236
165°	559	558	559	558	559	158
175°	582	580	582	580	582	55
180°	583	583	583	583	583	

TEST NUMBER: P1032429

CATALOG NUMBER: S123RDIW-B775D460UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
0°	1229.3	1229.3	1229.3	1229.3	1229.3	1229.3	1229.3	1229.3	1229.3	1229.3	1229.3
2.5°	1232.4	1240.9	1247.2	1251.4	1261.9	1268.2	1273.5	1283.0	1283.0	1285.1	1289.3
5°	1228.2	1246.1	1258.8	1275.6	1297.7	1308.2	1323.0	1335.6	1353.5	1363.0	1372.4
7.5°	1218.8	1244.0	1270.3	1295.6	1328.2	1349.3	1364.0	1396.6	1419.8	1448.2	1470.3
10°	1206.1	1240.9	1274.5	1313.5	1357.7	1389.3	1411.4	1454.5	1498.7	1538.7	1572.4
12.5°	1190.3	1232.4	1280.9	1328.2	1390.3	1421.9	1457.7	1511.4	1574.5	1625.0	1670.3
15°	1173.5	1221.9	1276.7	1334.5	1412.4	1456.6	1508.2	1573.4	1644.0	1716.6	1778.7
17.5°	1147.2	1208.2	1269.3	1353.5	1445.0	1471.4	1515.6	1605.0	1692.4	1757.6	1833.4
20°	1120.9	1189.3	1266.1	1341.9	1440.8	1501.9	1542.9	1637.7	1731.3	1810.3	1882.9
22.5°	1096.7	1168.2	1248.2	1344.0	1436.6	1497.7	1549.2	1648.2	1756.6	1845.0	1934.4
25°	1067.2	1145.1	1233.5	1324.0	1436.6	1482.9	1539.8	1654.5	1769.2	1871.3	1981.8
27.5°	1035.6	1114.6	1201.9	1294.5	1397.7	1466.1	1521.9	1645.0	1785.0	1894.5	2008.1
30°	1004.1	1085.1	1169.3	1252.4	1368.2	1433.5	1497.7	1633.4	1793.4	1918.7	2006.0
32.5°	973.5	1041.9	1125.1	1206.1	1320.9	1392.4	1465.0	1621.9	1796.6	1901.8	1943.9
35°	931.4	1003.0	1070.4	1156.7	1272.4	1343.0	1428.2	1620.8	1782.9	1848.1	1827.1
37.5°	892.5	952.5	1016.7	1093.5	1212.5	1304.0	1392.4	1593.4	1737.6	1741.8	1622.9
40°	849.3	898.8	952.5	1033.5	1161.9	1252.4	1348.2	1551.3	1655.5	1593.4	1384.0
42.5°	799.9	844.1	886.2	965.1	1105.1	1206.1	1309.3	1498.7	1536.6	1393.5	1175.6
45°	747.3	783.0	822.0	905.1	1045.1	1145.1	1248.2	1417.7	1378.7	1176.7	969.3
47.5°	692.5	723.0	760.9	836.7	980.9	1083.0	1180.9	1301.9	1203.0	986.2	812.5
50°	637.8	662.0	698.8	776.7	915.7	1008.3	1098.8	1177.7	1038.8	846.2	671.5
52.5°	584.1	603.1	641.0	707.3	842.0	930.4	995.6	1026.2	885.1	698.8	583.1
55°	527.3	548.3	573.6	641.0	774.6	839.9	883.0	882.0	736.7	592.5	482.0
57.5°	472.6	491.5	513.6	581.0	689.4	733.6	770.4	752.5	614.6	485.2	413.6
60°	424.1	434.7	458.9	515.7	597.8	635.7	656.7	626.2	502.0	409.4	342.1
62.5°	371.5	382.0	402.0	455.7	506.2	526.2	544.1	505.2	414.7	333.6	292.6
65°	323.1	336.8	349.4	392.6	419.9	444.1	442.0	409.4	324.2	271.5	237.9
67.5°	281.0	286.3	296.8	323.1	335.7	353.6	354.7	317.8	261.0	221.0	201.0
70°	235.8	241.0	248.4	261.0	269.4	273.6	271.5	238.9	196.8	172.6	154.7
72.5°	196.8	195.8	201.0	201.0	209.4	208.4	202.1	176.8	149.5	129.5	118.9
75°	154.7	155.8	156.8	154.7	151.6	147.3	142.1	123.1	105.2	95.8	86.3
77.5°	121.0	118.9	120.0	112.6	108.4	104.2	96.8	87.4	72.6	70.5	66.3
80°	86.3	85.3	84.2	81.0	71.6	67.4	62.1	56.8	53.7	51.6	50.5
82.5°	57.9	57.9	55.8	49.5	44.2	41.0	40.0	37.9	34.7	34.7	33.7
85°	34.7	33.7	31.6	25.3	22.1	22.1	22.1	22.1	20.0	20.0	18.9
87.5°	13.7	12.6	9.5	9.5	8.4	8.4	8.4	7.4	7.4	6.3	6.3
90°	0.5	1.5	2.5	3.5	4.5	5.0	5.7	7.0	8.3	9.7	11.0
92.5°	13.7	14.3	14.9	15.6	16.2	16.5	16.8	17.4	18.0	18.6	19.2
95°	27.0	27.7	28.4	29.1	29.8	30.2	30.6	31.4	32.3	33.1	33.9
97.5°	44.4	44.9	45.4	45.9	46.4	46.7	47.0	47.6	48.3	48.9	49.5
100°	62.3	62.9	63.5	64.1	64.7	65.0	65.3	65.8	66.3	66.8	67.3
102.5°	82.9	83.2	83.5	83.8	84.1	84.3	84.7	85.4	86.1	86.8	87.5
105°	103.1	103.3	103.5	103.7	103.9	104.0	104.5	105.4	106.3	107.2	108.1
107.5°	126.9	127.0	127.1	127.2	127.3	127.3	127.5	127.9	128.4	128.8	129.2
110°	148.9	149.1	149.3	149.5	149.7	149.8	149.9	150.1	150.3	150.5	150.7

TEST NUMBER: P1032429

CATALOG NUMBER: S123RDIW-B775D460UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
112.5°	171.8	171.9	172.0	172.1	172.2	172.2	172.2	172.2	172.2	172.2	172.2
115°	194.7	195.0	195.3	195.6	195.9	196.1	196.0	195.8	195.5	195.3	195.1
117.5°	218.0	218.1	218.2	218.3	218.4	218.5	218.4	218.2	218.0	217.8	217.6
120°	239.6	240.2	240.8	241.4	242.0	242.3	242.0	241.5	241.0	240.5	240.0
122.5°	262.0	262.4	262.8	263.3	263.7	263.9	263.8	263.6	263.3	263.1	262.9
125°	284.9	285.2	285.5	285.8	286.1	286.3	286.2	286.0	285.8	285.6	285.4
127.5°	306.0	306.6	307.2	307.8	308.4	308.7	308.6	308.4	308.2	308.0	307.8
130°	327.1	327.9	328.7	329.5	330.3	330.7	330.6	330.3	330.0	329.7	329.4
132.5°	348.1	348.9	349.7	350.6	351.4	351.8	351.7	351.5	351.3	351.1	350.9
135°	369.7	370.3	370.9	371.5	372.1	372.4	372.4	372.3	372.2	372.1	372.0
137.5°	389.4	389.9	390.4	390.9	391.4	391.7	391.8	392.1	392.4	392.7	393.0
140°	410.0	410.5	411.0	411.5	412.0	412.3	412.3	412.4	412.5	412.6	412.7
142.5°	428.8	429.3	429.8	430.3	430.8	431.1	431.2	431.4	431.6	431.8	432.0
145°	448.5	448.7	448.9	449.1	449.3	449.4	449.6	449.9	450.2	450.5	450.8
147.5°	465.4	465.8	466.2	466.6	467.0	467.2	467.4	467.7	468.0	468.3	468.6
150°	483.3	483.5	483.7	483.9	484.1	484.2	484.3	484.5	484.7	484.9	485.1
152.5°	497.9	498.2	498.5	498.8	499.1	499.3	499.4	499.5	499.6	499.7	499.8
155°	513.5	513.5	513.5	513.5	513.5	513.5	513.6	513.7	513.8	513.9	514.0
157.5°	526.8	526.7	526.6	526.5	526.4	526.3	526.4	526.5	526.6	526.7	526.8
160°	539.2	539.0	538.8	538.5	538.3	538.2	538.2	538.2	538.2	538.2	538.2
162.5°	550.2	549.9	549.6	549.3	549.0	548.8	548.8	548.9	549.0	549.1	549.2
165°	559.3	559.0	558.7	558.4	558.1	557.9	557.9	557.9	557.9	557.9	557.9
167.5°	567.1	566.7	566.3	565.9	565.5	565.3	565.3	565.4	565.5	565.6	565.7
170°	573.5	573.1	572.7	572.3	571.9	571.7	571.7	571.7	571.7	571.7	571.7
172.5°	578.6	578.2	577.8	577.3	576.9	576.7	576.7	576.7	576.7	576.7	576.7
175°	581.8	581.4	581.0	580.5	580.1	579.9	579.9	579.9	579.9	579.9	579.9
177.5°	583.6	583.2	582.8	582.4	582.0	581.8	581.8	581.8	581.8	581.8	581.8
180°	583.1	583.1	583.1	583.1	583.1	583.1	583.1	583.1	583.1	583.1	583.1

TEST NUMBER: P1032429

CATALOG NUMBER: S123RDIW-B775D460UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°	95°
0°	1229.3	1229.3	1229.3	1229.3	1229.3	1229.3	1229.3	1229.3	1229.3	1229.3	1229.3
2.5°	1297.7	1297.7	1307.2	1316.6	1311.4	1314.5	1326.1	1321.9	1330.3	1329.3	1332.4
5°	1395.6	1407.2	1416.6	1436.6	1439.8	1436.6	1456.6	1461.9	1471.4	1459.8	1465.0
7.5°	1506.1	1530.3	1553.5	1582.9	1592.4	1594.5	1605.0	1619.8	1632.4	1609.2	1620.8
10°	1613.4	1650.3	1697.6	1724.0	1747.1	1755.5	1763.9	1773.4	1788.2	1801.8	1791.3
12.5°	1729.2	1782.9	1828.1	1875.5	1903.9	1900.8	1925.0	1931.3	1942.9	1946.0	1950.2
15°	1823.9	1899.7	1928.1	1998.6	2005.0	2026.0	2053.4	2077.6	2080.7	2074.4	2074.4
17.5°	1914.5	1979.7	2030.2	2087.1	2098.6	2116.5	2151.3	2162.8	2167.0	2166.0	2166.0
20°	1988.1	2031.3	2116.5	2163.9	2182.8	2206.0	2230.2	2244.9	2248.1	2252.3	2246.0
22.5°	2036.5	2101.8	2171.3	2210.2	2226.0	2234.4	2250.2	2254.4	2249.1	2250.2	2251.2
25°	2074.4	2138.6	2180.7	2191.3	2190.2	2179.7	2168.1	2148.1	2146.0	2137.6	2120.7
27.5°	2085.0	2109.2	2103.9	2060.7	2017.6	2013.4	1943.9	1906.0	1862.9	1869.2	1845.0
30°	2028.1	1996.5	1921.8	1812.4	1767.1	1693.4	1615.5	1534.5	1502.9	1468.2	1532.4
32.5°	1889.2	1776.6	1644.0	1501.9	1426.1	1360.8	1277.7	1218.8	1185.1	1156.7	1211.4
35°	1679.7	1504.0	1328.2	1193.5	1131.4	1072.5	994.6	965.1	923.0	927.2	932.5
37.5°	1410.3	1216.7	1084.0	951.4	910.4	886.2	829.3	784.1	769.4	765.1	765.1
40°	1157.7	998.8	880.9	776.7	745.2	725.2	679.9	658.8	643.1	638.9	644.1
42.5°	957.8	822.0	730.4	661.0	638.9	613.6	594.6	568.3	565.2	557.8	567.3
45°	804.1	686.2	617.8	567.3	548.3	538.9	517.8	502.0	495.7	494.7	502.0
47.5°	682.0	590.4	530.4	498.9	484.1	474.7	456.8	450.5	444.1	446.2	443.1
50°	572.5	504.1	465.2	436.8	427.3	417.8	406.3	399.9	396.8	396.8	395.7
52.5°	491.5	434.7	409.4	383.1	378.9	373.6	361.0	356.8	351.5	350.5	354.7
55°	421.0	382.0	356.8	341.0	336.8	326.3	321.0	315.7	312.6	310.5	311.5
57.5°	359.9	330.5	313.6	300.0	292.6	288.4	278.9	277.9	275.7	275.7	274.7
60°	309.4	288.4	268.4	260.0	254.7	249.4	248.4	242.1	238.9	241.0	240.0
62.5°	262.1	245.2	233.6	224.2	221.0	216.8	213.7	211.5	208.4	209.4	209.4
65°	218.9	205.2	196.8	188.4	187.3	183.1	182.1	180.0	180.0	178.9	181.0
67.5°	180.0	170.5	163.1	157.9	154.7	155.8	151.6	148.4	148.4	147.3	150.5
70°	143.1	137.9	130.5	124.2	120.0	120.0	114.7	113.7	113.7	113.7	112.6
72.5°	110.5	101.0	97.9	95.8	95.8	95.8	93.7	93.7	92.6	93.7	92.6
75°	82.1	81.0	78.9	77.9	77.9	76.8	75.8	75.8	75.8	75.8	75.8
77.5°	64.2	64.2	62.1	61.0	61.0	61.0	60.0	60.0	58.9	58.9	58.9
80°	47.4	47.4	45.3	45.3	45.3	44.2	44.2	44.2	45.3	44.2	44.2
82.5°	32.6	32.6	31.6	32.6	31.6	30.5	30.5	30.5	29.5	30.5	30.5
85°	18.9	18.9	17.9	16.8	17.9	17.9	16.8	17.9	16.8	17.9	16.8
87.5°	7.4	6.3	6.3	6.3	5.3	6.3	5.3	5.3	6.3	5.3	6.3
90°	11.4	11.8	12.2	12.6	12.8	12.9	13.1	13.3	13.5	13.7	13.5
92.5°	19.5	19.8	20.1	20.4	20.6	20.5	20.3	20.1	19.9	19.7	19.9
95°	34.3	34.7	35.1	35.5	35.7	35.7	35.7	35.7	35.7	35.7	35.7
97.5°	50.0	50.5	51.0	51.5	51.8	51.7	51.6	51.5	51.4	51.3	51.4
100°	67.6	67.9	68.2	68.5	68.7	68.8	69.0	69.2	69.4	69.6	69.4
102.5°	87.8	88.1	88.4	88.7	88.9	88.8	88.7	88.6	88.5	88.4	88.5
105°	108.1	108.1	108.1	108.1	108.1	108.2	108.4	108.6	108.8	109.0	108.8
107.5°	129.5	129.8	130.1	130.4	130.6	130.5	130.4	130.3	130.2	130.1	130.2
110°	151.1	151.5	151.9	152.3	152.5	152.4	152.2	152.0	151.8	151.6	151.8

TEST NUMBER: P1032429

CATALOG NUMBER: S123RDIW-B775D460UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°	95°
112.5°	172.7	173.2	173.7	174.2	174.5	174.5	174.5	174.5	174.5	174.5	174.5
115°	195.2	195.3	195.4	195.5	195.6	195.5	195.4	195.3	195.2	195.1	195.2
117.5°	217.6	217.6	217.6	217.6	217.6	217.4	217.1	216.8	216.5	216.2	216.5
120°	239.9	239.8	239.7	239.6	239.6	239.5	239.3	239.1	238.9	238.7	238.9
122.5°	262.6	262.3	262.0	261.7	261.6	261.4	261.1	260.8	260.5	260.2	260.5
125°	285.0	284.6	284.2	283.8	283.6	283.4	283.0	282.5	282.1	281.7	282.1
127.5°	307.2	306.6	306.0	305.4	305.1	304.9	304.5	304.0	303.6	303.2	303.6
130°	329.0	328.6	328.1	327.7	327.5	327.1	326.4	325.7	325.0	324.3	325.0
132.5°	350.4	349.9	349.4	348.9	348.6	348.3	347.8	347.3	346.8	346.3	346.8
135°	371.6	371.2	370.7	370.3	370.1	370.0	369.8	369.6	369.4	369.2	369.4
137.5°	392.5	392.0	391.5	391.0	390.7	390.6	390.3	390.0	389.7	389.4	389.7
140°	412.6	412.5	412.4	412.3	412.3	411.9	411.2	410.5	409.8	409.1	409.8
142.5°	431.9	431.8	431.7	431.6	431.5	431.2	430.7	430.2	429.7	429.2	429.7
145°	450.7	450.6	450.5	450.4	450.3	450.1	449.7	449.3	448.9	448.5	448.9
147.5°	468.6	468.6	468.6	468.6	468.6	468.3	467.7	467.1	466.5	465.9	466.5
150°	485.1	485.1	485.1	485.1	485.1	484.8	484.2	483.6	483.0	482.4	483.0
152.5°	500.0	500.2	500.4	500.6	500.7	500.4	499.9	499.4	498.9	498.4	498.9
155°	514.4	514.8	515.2	515.6	515.8	515.4	514.7	514.0	513.3	512.6	513.3
157.5°	527.2	527.6	528.0	528.4	528.6	528.3	527.7	527.1	526.5	525.9	526.5
160°	538.7	539.2	539.7	540.2	540.5	540.3	539.9	539.5	539.1	538.7	539.1
162.5°	549.7	550.2	550.7	551.2	551.5	551.1	550.4	549.7	549.0	548.3	549.0
165°	558.5	559.1	559.8	560.4	560.7	560.3	559.6	558.9	558.2	557.5	558.2
167.5°	566.3	566.9	567.6	568.2	568.5	568.2	567.6	566.9	566.3	565.7	566.3
170°	572.4	573.1	573.8	574.5	574.9	574.5	573.8	573.1	572.4	571.7	572.4
172.5°	577.3	577.9	578.6	579.2	579.5	579.1	578.4	577.7	577.0	576.3	577.0
175°	580.5	581.1	581.8	582.4	582.7	582.3	581.6	580.9	580.2	579.5	580.2
177.5°	582.4	583.0	583.6	584.2	584.5	584.1	583.4	582.7	582.0	581.3	582.0
180°	583.1	583.1	583.1	583.1	583.1	583.1	583.1	583.1	583.1	583.1	583.1

TEST NUMBER: P1032429

CATALOG NUMBER: S123RDIW-B775D460UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	100°	105°	110°	112.5°	115°	120°	125°	130°	135°	140°	145°
0°	1229.3	1229.3	1229.3	1229.3	1229.3	1229.3	1229.3	1229.3	1229.3	1229.3	1229.3
2.5°	1327.2	1320.9	1316.6	1313.5	1310.3	1319.8	1307.2	1293.5	1284.0	1277.7	1275.6
5°	1466.1	1452.4	1440.8	1431.4	1433.5	1433.5	1411.4	1387.2	1366.1	1354.5	1341.9
7.5°	1627.1	1612.4	1589.2	1584.0	1579.8	1553.5	1531.4	1487.1	1460.8	1434.5	1411.4
10°	1787.1	1768.2	1746.1	1738.7	1728.2	1695.5	1661.9	1605.0	1572.4	1524.0	1493.5
12.5°	1936.6	1913.4	1891.3	1886.0	1870.2	1841.8	1783.9	1725.0	1669.2	1617.7	1564.0
15°	2061.8	2055.5	2021.8	2000.8	1966.0	1927.1	1914.5	1834.5	1763.9	1710.3	1613.4
17.5°	2167.0	2137.6	2106.0	2092.3	2078.6	2033.4	1988.1	1906.0	1830.3	1751.3	1689.2
20°	2251.2	2218.6	2196.5	2176.5	2170.2	2118.6	2047.1	1974.4	1891.3	1802.9	1721.8
22.5°	2255.5	2251.2	2236.5	2224.9	2212.3	2178.6	2121.8	2031.3	1942.9	1846.0	1739.7
25°	2168.1	2161.8	2203.9	2193.4	2201.8	2189.1	2158.6	2082.8	1979.7	1866.0	1758.7
27.5°	1905.0	1969.2	2035.5	2058.6	2074.4	2119.7	2134.4	2092.3	2009.2	1888.1	1768.2
30°	1547.1	1632.4	1739.7	1797.6	1841.8	1926.0	2035.5	2049.2	2010.2	1913.4	1766.1
32.5°	1214.6	1292.4	1378.7	1447.2	1506.1	1678.7	1826.0	1932.3	1951.3	1900.8	1771.3
35°	978.8	1012.5	1094.6	1159.8	1239.8	1387.2	1560.8	1732.4	1848.1	1854.5	1755.5
37.5°	807.2	825.1	896.7	933.5	980.9	1110.4	1272.4	1496.6	1676.6	1761.8	1711.3
40°	668.3	709.4	750.4	771.5	805.1	894.6	1050.4	1226.1	1449.3	1607.1	1642.9
42.5°	579.9	597.8	624.1	653.6	674.6	752.5	856.7	1017.7	1218.8	1438.7	1537.7
45°	511.5	517.8	545.2	564.1	586.2	641.0	714.6	849.3	1026.2	1243.0	1411.4
47.5°	454.7	467.3	482.0	493.6	508.3	550.4	613.6	711.5	867.2	1060.9	1241.9
50°	404.2	411.5	430.5	435.7	446.2	475.7	524.1	598.9	727.3	882.0	1069.3
52.5°	356.8	370.5	377.8	385.2	394.7	418.9	450.5	511.5	608.3	753.6	912.5
55°	320.0	324.2	334.7	341.0	348.4	365.2	392.6	437.8	513.6	629.4	779.9
57.5°	284.2	284.2	294.7	300.0	307.3	320.0	344.2	378.9	433.6	519.9	657.8
60°	246.3	247.3	255.8	262.1	264.2	276.8	296.8	324.2	366.3	429.4	542.0
62.5°	212.6	217.9	222.1	224.2	231.5	238.9	255.8	274.7	304.2	359.9	439.9
65°	184.2	185.2	188.4	190.5	193.7	202.1	214.7	227.3	252.6	293.6	358.9
67.5°	151.6	155.8	160.0	160.0	163.1	167.3	180.0	190.5	209.4	233.6	277.9
70°	113.7	115.8	122.1	125.2	129.5	136.8	143.1	149.5	164.2	182.1	215.8
72.5°	94.7	94.7	96.8	97.9	97.9	103.1	112.6	118.9	126.3	138.9	162.1
75°	75.8	75.8	78.9	77.9	80.0	82.1	83.1	87.4	91.6	101.0	114.7
77.5°	60.0	61.0	61.0	62.1	62.1	63.1	64.2	66.3	68.4	73.7	80.0
80°	44.2	45.3	45.3	46.3	46.3	47.4	48.4	49.5	51.6	53.7	56.8
82.5°	30.5	31.6	31.6	32.6	31.6	32.6	33.7	33.7	34.7	36.8	37.9
85°	17.9	17.9	18.9	17.9	17.9	17.9	18.9	18.9	20.0	23.2	23.2
87.5°	5.3	6.3	5.3	6.3	6.3	6.3	6.3	7.4	7.4	8.4	9.5
90°	13.3	13.1	12.9	12.8	12.6	12.2	11.8	11.4	11.0	9.7	8.3
92.5°	20.1	20.3	20.5	20.6	20.4	20.1	19.8	19.5	19.2	18.6	18.0
95°	35.7	35.7	35.7	35.7	35.5	35.1	34.7	34.3	33.9	33.1	32.3
97.5°	51.5	51.6	51.7	51.8	51.5	51.0	50.5	50.0	49.5	48.9	48.3
100°	69.2	69.0	68.8	68.7	68.5	68.2	67.9	67.6	67.3	66.8	66.3
102.5°	88.6	88.7	88.8	88.9	88.7	88.4	88.1	87.8	87.5	86.8	86.1
105°	108.6	108.4	108.2	108.1	108.1	108.1	108.1	108.1	108.1	107.2	106.3
107.5°	130.3	130.4	130.5	130.6	130.4	130.1	129.8	129.5	129.2	128.8	128.4
110°	152.0	152.2	152.4	152.5	152.3	151.9	151.5	151.1	150.7	150.5	150.3

TEST NUMBER: P1032429

CATALOG NUMBER: S123RDIW-B775D460UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	100°	105°	110°	112.5°	115°	120°	125°	130°	135°	140°	145°
112.5°	174.5	174.5	174.5	174.5	174.2	173.7	173.2	172.7	172.2	172.2	172.2
115°	195.3	195.4	195.5	195.6	195.5	195.4	195.3	195.2	195.1	195.3	195.5
117.5°	216.8	217.1	217.4	217.6	217.6	217.6	217.6	217.6	217.6	217.8	218.0
120°	239.1	239.3	239.5	239.6	239.6	239.7	239.8	239.9	240.0	240.5	241.0
122.5°	260.8	261.1	261.4	261.6	261.7	262.0	262.3	262.6	262.9	263.1	263.3
125°	282.5	283.0	283.4	283.6	283.8	284.2	284.6	285.0	285.4	285.6	285.8
127.5°	304.0	304.5	304.9	305.1	305.4	306.0	306.6	307.2	307.8	308.0	308.2
130°	325.7	326.4	327.1	327.5	327.7	328.1	328.6	329.0	329.4	329.7	330.0
132.5°	347.3	347.8	348.3	348.6	348.9	349.4	349.9	350.4	350.9	351.1	351.3
135°	369.6	369.8	370.0	370.1	370.3	370.7	371.2	371.6	372.0	372.1	372.2
137.5°	390.0	390.3	390.6	390.7	391.0	391.5	392.0	392.5	393.0	392.7	392.4
140°	410.5	411.2	411.9	412.3	412.3	412.4	412.5	412.6	412.7	412.6	412.5
142.5°	430.2	430.7	431.2	431.5	431.6	431.7	431.8	431.9	432.0	431.8	431.6
145°	449.3	449.7	450.1	450.3	450.4	450.5	450.6	450.7	450.8	450.5	450.2
147.5°	467.1	467.7	468.3	468.6	468.6	468.6	468.6	468.6	468.6	468.3	468.0
150°	483.6	484.2	484.8	485.1	485.1	485.1	485.1	485.1	485.1	484.9	484.7
152.5°	499.4	499.9	500.4	500.7	500.6	500.4	500.2	500.0	499.8	499.7	499.6
155°	514.0	514.7	515.4	515.8	515.6	515.2	514.8	514.4	514.0	513.9	513.8
157.5°	527.1	527.7	528.3	528.6	528.4	528.0	527.6	527.2	526.8	526.7	526.6
160°	539.5	539.9	540.3	540.5	540.2	539.7	539.2	538.7	538.2	538.2	538.2
162.5°	549.7	550.4	551.1	551.5	551.2	550.7	550.2	549.7	549.2	549.1	549.0
165°	558.9	559.6	560.3	560.7	560.4	559.8	559.1	558.5	557.9	557.9	557.9
167.5°	566.9	567.6	568.2	568.5	568.2	567.6	566.9	566.3	565.7	565.6	565.5
170°	573.1	573.8	574.5	574.9	574.5	573.8	573.1	572.4	571.7	571.7	571.7
172.5°	577.7	578.4	579.1	579.5	579.2	578.6	577.9	577.3	576.7	576.7	576.7
175°	580.9	581.6	582.3	582.7	582.4	581.8	581.1	580.5	579.9	579.9	579.9
177.5°	582.7	583.4	584.1	584.5	584.2	583.6	583.0	582.4	581.8	581.8	581.8
180°	583.1	583.1	583.1	583.1	583.1	583.1	583.1	583.1	583.1	583.1	583.1

TEST NUMBER: P1032429

CATALOG NUMBER: S123RDIW-B775D460UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	150°	155°	157.5°	160°	165°	170°	175°	180°	185°	190°	195°
0°	1229.3	1229.3	1229.3	1229.3	1229.3	1229.3	1229.3	1229.3	1229.3	1229.3	1229.3
2.5°	1272.4	1267.2	1261.9	1261.9	1250.3	1239.8	1234.6	1236.7	1230.3	1221.9	1213.5
5°	1328.2	1307.2	1303.0	1291.4	1275.6	1253.5	1241.9	1231.4	1218.8	1201.9	1186.1
7.5°	1379.8	1352.4	1337.7	1326.1	1295.6	1265.1	1239.8	1223.0	1200.9	1175.6	1156.7
10°	1447.2	1396.6	1380.8	1354.5	1311.4	1268.2	1238.8	1211.4	1180.9	1151.4	1126.1
12.5°	1500.8	1442.9	1413.5	1387.2	1331.4	1276.7	1227.2	1193.5	1156.7	1124.0	1091.4
15°	1561.9	1496.6	1445.0	1413.5	1343.0	1276.7	1220.9	1173.5	1132.5	1092.5	1064.1
17.5°	1591.3	1509.2	1486.1	1440.8	1338.7	1272.4	1204.0	1153.5	1104.0	1057.7	1024.1
20°	1637.7	1541.9	1484.0	1453.5	1363.0	1265.1	1185.1	1127.2	1075.6	1026.2	990.4
22.5°	1640.8	1536.6	1498.7	1440.8	1329.3	1243.0	1168.2	1097.7	1037.7	991.4	954.6
25°	1633.4	1527.1	1474.5	1428.2	1335.6	1230.3	1134.6	1065.1	1006.2	952.5	909.3
27.5°	1630.3	1499.8	1450.3	1404.0	1299.8	1193.5	1114.6	1035.6	968.3	920.9	876.7
30°	1626.1	1470.3	1410.3	1356.6	1260.9	1165.1	1070.4	1002.0	937.8	877.8	833.6
32.5°	1598.7	1430.3	1369.3	1312.4	1209.3	1113.5	1038.8	966.2	896.7	840.9	800.9
35°	1590.3	1393.5	1313.5	1252.4	1151.4	1066.2	987.2	927.2	862.0	806.2	758.8
37.5°	1566.1	1355.6	1269.3	1191.4	1086.2	1005.1	947.2	887.2	824.1	764.1	726.2
40°	1524.0	1311.4	1213.5	1133.5	1025.1	943.0	889.3	845.1	783.0	729.4	683.1
42.5°	1461.9	1266.1	1160.9	1076.7	956.7	879.9	835.7	793.6	740.9	685.2	647.3
45°	1390.3	1206.1	1108.3	1014.6	892.5	817.8	771.5	746.2	697.8	650.4	606.2
47.5°	1292.4	1144.0	1047.2	950.4	826.2	753.6	716.7	691.5	657.8	606.2	570.4
50°	1169.3	1064.1	972.5	886.2	760.9	691.5	654.6	635.7	607.3	570.4	535.7
52.5°	1032.5	971.4	895.7	815.7	694.6	629.4	595.7	581.0	559.9	525.2	495.7
55°	894.6	868.3	816.7	737.8	625.2	571.5	542.0	523.1	507.3	482.0	456.8
57.5°	771.5	758.8	723.0	662.0	567.3	511.5	486.2	473.6	461.0	442.0	416.8
60°	644.1	657.8	621.0	590.4	504.1	455.7	433.6	419.9	413.6	396.8	381.0
62.5°	533.6	546.2	525.2	502.0	441.0	397.8	384.2	371.5	367.3	352.6	336.8
65°	433.6	449.4	433.6	421.0	384.2	348.4	331.5	325.2	321.0	311.5	298.9
67.5°	345.2	361.0	353.6	337.8	326.3	296.8	287.3	281.0	278.9	271.5	261.0
70°	260.0	282.1	284.2	274.7	264.2	250.5	244.2	242.1	236.8	230.5	224.2
72.5°	187.3	212.6	213.7	213.7	207.3	207.3	201.0	197.9	197.9	191.6	184.2
75°	137.9	154.7	156.8	158.9	162.1	165.2	161.0	161.0	160.0	153.7	150.5
77.5°	91.6	106.3	111.6	118.9	123.1	123.1	125.2	127.3	125.2	122.1	120.0
80°	58.9	69.5	75.8	80.0	86.3	89.5	92.6	93.7	91.6	90.5	87.4
82.5°	38.9	42.1	45.3	50.5	57.9	63.1	63.1	62.1	64.2	63.1	62.1
85°	22.1	24.2	25.3	26.3	30.5	35.8	36.8	37.9	40.0	37.9	35.8
87.5°	8.4	9.5	9.5	9.5	11.6	12.6	15.8	20.0	18.9	16.8	16.8
90°	7.0	5.7	5.0	4.5	3.5	2.5	1.5	0.5	1.5	2.5	3.5
92.5°	17.4	16.8	16.5	16.2	15.6	14.9	14.3	13.7	14.3	14.9	15.6
95°	31.4	30.6	30.2	29.8	29.1	28.4	27.7	27.0	27.7	28.4	29.1
97.5°	47.6	47.0	46.7	46.4	45.9	45.4	44.9	44.4	44.9	45.4	45.9
100°	65.8	65.3	65.0	64.7	64.1	63.5	62.9	62.3	62.9	63.5	64.1
102.5°	85.4	84.7	84.3	84.1	83.8	83.5	83.2	82.9	83.2	83.5	83.8
105°	105.4	104.5	104.0	103.9	103.7	103.5	103.3	103.1	103.3	103.5	103.7
107.5°	127.9	127.5	127.3	127.3	127.2	127.1	127.0	126.9	127.0	127.1	127.2
110°	150.1	149.9	149.8	149.7	149.5	149.3	149.1	148.9	149.1	149.3	149.5

TEST NUMBER: P1032429

CATALOG NUMBER: S123RDIW-B775D460UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	150°	155°	157.5°	160°	165°	170°	175°	180°	185°	190°	195°
112.5°	172.2	172.2	172.2	172.2	172.1	172.0	171.9	171.8	171.9	172.0	172.1
115°	195.8	196.0	196.1	195.9	195.6	195.3	195.0	194.7	195.0	195.3	195.6
117.5°	218.2	218.4	218.5	218.4	218.3	218.2	218.1	218.0	218.1	218.2	218.3
120°	241.5	242.0	242.3	242.0	241.4	240.8	240.2	239.6	240.2	240.8	241.4
122.5°	263.6	263.8	263.9	263.7	263.3	262.8	262.4	262.0	262.4	262.8	263.3
125°	286.0	286.2	286.3	286.1	285.8	285.5	285.2	284.9	285.2	285.5	285.8
127.5°	308.4	308.6	308.7	308.4	307.8	307.2	306.6	306.0	306.6	307.2	307.8
130°	330.3	330.6	330.7	330.3	329.5	328.7	327.9	327.1	327.9	328.7	329.5
132.5°	351.5	351.7	351.8	351.4	350.6	349.7	348.9	348.1	348.9	349.7	350.6
135°	372.3	372.4	372.4	372.1	371.5	370.9	370.3	369.7	370.3	370.9	371.5
137.5°	392.1	391.8	391.7	391.4	390.9	390.4	389.9	389.4	389.9	390.4	390.9
140°	412.4	412.3	412.3	412.0	411.5	411.0	410.5	410.0	410.5	411.0	411.5
142.5°	431.4	431.2	431.1	430.8	430.3	429.8	429.3	428.8	429.3	429.8	430.3
145°	449.9	449.6	449.4	449.3	449.1	448.9	448.7	448.5	448.7	448.9	449.1
147.5°	467.7	467.4	467.2	467.0	466.6	466.2	465.8	465.4	465.8	466.2	466.6
150°	484.5	484.3	484.2	484.1	483.9	483.7	483.5	483.3	483.5	483.7	483.9
152.5°	499.5	499.4	499.3	499.1	498.8	498.5	498.2	497.9	498.2	498.5	498.8
155°	513.7	513.6	513.5	513.5	513.5	513.5	513.5	513.5	513.5	513.5	513.5
157.5°	526.5	526.4	526.3	526.4	526.5	526.6	526.7	526.8	526.7	526.6	526.5
160°	538.2	538.2	538.2	538.3	538.5	538.8	539.0	539.2	539.0	538.8	538.5
162.5°	548.9	548.8	548.8	549.0	549.3	549.6	549.9	550.2	549.9	549.6	549.3
165°	557.9	557.9	557.9	558.1	558.4	558.7	559.0	559.3	559.0	558.7	558.4
167.5°	565.4	565.3	565.3	565.5	565.9	566.3	566.7	567.1	566.7	566.3	565.9
170°	571.7	571.7	571.7	571.9	572.3	572.7	573.1	573.5	573.1	572.7	572.3
172.5°	576.7	576.7	576.7	576.9	577.3	577.8	578.2	578.6	578.2	577.8	577.3
175°	579.9	579.9	579.9	580.1	580.5	581.0	581.4	581.8	581.4	581.0	580.5
177.5°	581.8	581.8	581.8	582.0	582.4	582.8	583.2	583.6	583.2	582.8	582.4
180°	583.1	583.1	583.1	583.1	583.1	583.1	583.1	583.1	583.1	583.1	583.1

TEST NUMBER: P1032429

CATALOG NUMBER: S123RDIW-B775D460UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	200°	202.5°	205°	210°	215°	220°	225°	230°	235°	240°	245°
0°	1229.3	1229.3	1229.3	1229.3	1229.3	1229.3	1229.3	1229.3	1229.3	1229.3	1229.3
2.5°	1213.5	1208.2	1206.1	1200.9	1188.2	1179.8	1170.4	1164.0	1165.1	1159.8	1163.0
5°	1175.6	1174.6	1167.2	1156.7	1138.8	1129.3	1112.5	1104.0	1099.8	1100.9	1094.6
7.5°	1144.0	1134.6	1129.3	1112.5	1095.6	1075.6	1061.9	1054.6	1048.3	1041.9	1037.7
10°	1108.3	1099.8	1091.4	1073.5	1050.4	1031.4	1012.5	1005.1	995.6	991.4	988.3
12.5°	1070.4	1065.1	1054.6	1033.5	1007.2	989.3	967.2	963.0	950.4	942.0	939.9
15°	1035.6	1032.5	1013.5	989.3	963.0	945.1	926.2	913.5	892.5	896.7	889.3
17.5°	998.8	985.1	973.5	940.9	928.3	900.9	878.8	872.5	857.8	848.3	838.8
20°	957.8	949.3	934.6	913.5	883.0	851.5	834.6	824.1	815.7	800.9	796.7
22.5°	918.8	908.3	895.7	868.3	842.0	815.7	792.5	783.0	772.5	762.0	755.7
25°	888.3	872.5	858.8	825.1	798.8	776.7	762.0	746.2	731.5	725.2	723.0
27.5°	840.9	831.5	817.8	786.2	762.0	737.8	724.1	713.6	697.8	690.4	684.1
30°	810.4	791.5	775.7	750.4	726.2	699.9	687.3	674.6	665.2	655.7	648.3
32.5°	769.4	754.6	742.0	716.7	692.5	668.3	654.6	635.7	630.4	623.1	614.6
35°	729.4	719.9	706.2	678.8	652.5	635.7	621.0	603.1	596.8	591.5	584.1
37.5°	691.5	677.8	668.3	642.0	618.9	598.9	587.3	572.5	568.3	562.0	556.8
40°	658.8	645.2	635.7	609.4	585.2	564.1	556.8	542.0	535.7	528.3	525.2
42.5°	622.0	610.4	597.8	578.9	553.6	532.6	517.8	509.4	501.0	497.8	491.5
45°	583.1	572.5	563.1	542.0	515.7	501.0	488.3	476.8	470.5	465.2	461.0
47.5°	549.4	539.9	527.3	504.1	483.1	469.4	456.8	445.2	438.9	432.6	427.3
50°	510.5	505.2	491.5	469.4	449.4	433.6	422.0	411.5	407.3	399.9	391.5
52.5°	475.7	466.2	454.7	436.8	418.9	399.9	384.2	377.8	370.5	366.3	358.9
55°	434.7	428.4	415.7	399.9	381.0	365.2	353.6	345.2	335.7	331.5	322.1
57.5°	399.9	388.4	382.0	362.1	344.2	328.4	320.0	311.5	301.0	294.7	290.5
60°	362.1	351.5	342.1	325.2	312.6	295.7	283.1	275.7	268.4	260.0	255.8
62.5°	325.2	316.8	305.2	291.5	275.7	262.1	252.6	242.1	237.9	229.4	226.3
65°	285.2	278.9	269.4	253.6	241.0	229.4	220.0	211.5	207.3	204.2	202.1
67.5°	249.4	241.0	234.7	221.0	207.3	197.9	192.6	187.3	182.1	178.9	175.8
70°	212.6	206.3	200.0	187.3	177.9	169.4	165.2	161.0	157.9	154.7	151.6
72.5°	174.7	171.6	165.2	156.8	149.5	143.1	140.0	134.7	131.6	126.3	124.2
75°	144.2	138.9	135.8	128.4	122.1	116.8	112.6	106.3	102.1	100.0	98.9
77.5°	113.7	111.6	107.4	101.0	97.9	92.6	86.3	84.2	82.1	82.1	81.0
80°	85.3	82.1	78.9	73.7	70.5	66.3	66.3	66.3	65.3	66.3	65.3
82.5°	57.9	55.8	53.7	50.5	49.5	49.5	50.5	50.5	50.5	50.5	50.5
85°	33.7	33.7	33.7	34.7	33.7	33.7	34.7	35.8	34.7	34.7	33.7
87.5°	15.8	15.8	16.8	16.8	17.9	17.9	17.9	17.9	17.9	17.9	18.9
90°	4.5	5.0	5.7	7.0	8.3	9.7	11.0	11.4	11.8	12.2	12.6
92.5°	16.2	16.5	16.8	17.4	18.0	18.6	19.2	19.5	19.8	20.1	20.4
95°	29.8	30.2	30.6	31.4	32.3	33.1	33.9	34.3	34.7	35.1	35.5
97.5°	46.4	46.7	47.0	47.6	48.3	48.9	49.5	50.0	50.5	51.0	51.5
100°	64.7	65.0	65.3	65.8	66.3	66.8	67.3	67.6	67.9	68.2	68.5
102.5°	84.1	84.3	84.7	85.4	86.1	86.8	87.5	87.8	88.1	88.4	88.7
105°	103.9	104.0	104.5	105.4	106.3	107.2	108.1	108.1	108.1	108.1	108.1
107.5°	127.3	127.3	127.5	127.9	128.4	128.8	129.2	129.5	129.8	130.1	130.4
110°	149.7	149.8	149.9	150.1	150.3	150.5	150.7	151.1	151.5	151.9	152.3

TEST NUMBER: P1032429

CATALOG NUMBER: S123RDIW-B775D460UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	200°	202.5°	205°	210°	215°	220°	225°	230°	235°	240°	245°
112.5°	172.2	172.2	172.2	172.2	172.2	172.2	172.2	172.7	173.2	173.7	174.2
115°	195.9	196.1	196.0	195.8	195.5	195.3	195.1	195.2	195.3	195.4	195.5
117.5°	218.4	218.5	218.4	218.2	218.0	217.8	217.6	217.6	217.6	217.6	217.6
120°	242.0	242.3	242.0	241.5	241.0	240.5	240.0	239.9	239.8	239.7	239.6
122.5°	263.7	263.9	263.8	263.6	263.3	263.1	262.9	262.6	262.3	262.0	261.7
125°	286.1	286.3	286.2	286.0	285.8	285.6	285.4	285.0	284.6	284.2	283.8
127.5°	308.4	308.7	308.6	308.4	308.2	308.0	307.8	307.2	306.6	306.0	305.4
130°	330.3	330.7	330.6	330.3	330.0	329.7	329.4	329.0	328.6	328.1	327.7
132.5°	351.4	351.8	351.7	351.5	351.3	351.1	350.9	350.4	349.9	349.4	348.9
135°	372.1	372.4	372.4	372.3	372.2	372.1	372.0	371.6	371.2	370.7	370.3
137.5°	391.4	391.7	391.8	392.1	392.4	392.7	393.0	392.5	392.0	391.5	391.0
140°	412.0	412.3	412.3	412.4	412.5	412.6	412.7	412.6	412.5	412.4	412.3
142.5°	430.8	431.1	431.2	431.4	431.6	431.8	432.0	431.9	431.8	431.7	431.6
145°	449.3	449.4	449.6	449.9	450.2	450.5	450.8	450.7	450.6	450.5	450.4
147.5°	467.0	467.2	467.4	467.7	468.0	468.3	468.6	468.6	468.6	468.6	468.6
150°	484.1	484.2	484.3	484.5	484.7	484.9	485.1	485.1	485.1	485.1	485.1
152.5°	499.1	499.3	499.4	499.5	499.6	499.7	499.8	500.0	500.2	500.4	500.6
155°	513.5	513.5	513.6	513.7	513.8	513.9	514.0	514.4	514.8	515.2	515.6
157.5°	526.4	526.3	526.4	526.5	526.6	526.7	526.8	527.2	527.6	528.0	528.4
160°	538.3	538.2	538.2	538.2	538.2	538.2	538.2	538.7	539.2	539.7	540.2
162.5°	549.0	548.8	548.8	548.9	549.0	549.1	549.2	549.7	550.2	550.7	551.2
165°	558.1	557.9	557.9	557.9	557.9	557.9	557.9	558.5	559.1	559.8	560.4
167.5°	565.5	565.3	565.3	565.4	565.5	565.6	565.7	566.3	566.9	567.6	568.2
170°	571.9	571.7	571.7	571.7	571.7	571.7	571.7	572.4	573.1	573.8	574.5
172.5°	576.9	576.7	576.7	576.7	576.7	576.7	576.7	577.3	577.9	578.6	579.2
175°	580.1	579.9	579.9	579.9	579.9	579.9	579.9	580.5	581.1	581.8	582.4
177.5°	582.0	581.8	581.8	581.8	581.8	581.8	581.8	582.4	583.0	583.6	584.2
180°	583.1	583.1	583.1	583.1	583.1	583.1	583.1	583.1	583.1	583.1	583.1

TEST NUMBER: P1032429

CATALOG NUMBER: S123RDIW-B775D460UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	247.5°	250°	255°	260°	265°	270°	275°	280°	285°	290°	292.5°
0°	1229.3	1229.3	1229.3	1229.3	1229.3	1229.3	1229.3	1229.3	1229.3	1229.3	1229.3
2.5°	1161.9	1163.0	1159.8	1153.5	1152.5	1154.6	1160.9	1158.8	1153.5	1163.0	1154.6
5°	1097.7	1092.5	1090.4	1092.5	1086.2	1083.0	1089.3	1086.2	1089.3	1090.4	1093.5
7.5°	1035.6	1036.7	1030.4	1031.4	1023.0	1025.1	1025.1	1025.1	1028.3	1030.4	1034.6
10°	982.0	984.1	976.7	977.7	971.4	967.2	970.4	976.7	976.7	976.7	978.8
12.5°	938.8	929.3	924.1	923.0	915.7	913.5	919.9	922.0	927.2	927.2	930.4
15°	885.1	883.0	878.8	878.8	860.9	865.1	867.2	874.6	885.1	876.7	878.8
17.5°	836.7	831.5	826.2	824.1	822.0	815.7	824.1	823.0	829.3	830.4	833.6
20°	793.6	789.4	778.8	779.9	782.0	772.5	777.8	777.8	784.1	790.4	797.8
22.5°	751.5	747.3	742.0	744.1	737.8	735.7	735.7	740.9	748.3	753.6	752.5
25°	718.8	711.5	708.3	705.2	702.0	704.1	700.9	706.2	711.5	714.6	711.5
27.5°	682.0	678.8	672.5	669.4	664.1	666.2	668.3	672.5	675.7	675.7	678.8
30°	646.2	642.0	639.9	636.7	636.7	632.5	633.6	637.8	641.0	644.1	648.3
32.5°	611.5	608.3	605.2	605.2	603.1	602.0	601.0	607.3	607.3	613.6	613.6
35°	583.1	577.8	577.8	572.5	574.7	573.6	571.5	575.7	576.8	581.0	579.9
37.5°	551.5	551.5	549.4	544.1	539.9	541.0	546.2	546.2	549.4	548.3	551.5
40°	519.9	517.8	517.8	514.7	513.6	512.6	513.6	514.7	519.9	518.9	519.9
42.5°	488.3	489.4	484.1	484.1	484.1	481.0	482.0	483.1	485.2	487.3	490.5
45°	457.8	455.7	454.7	452.6	450.5	451.5	450.5	454.7	453.6	455.7	458.9
47.5°	425.2	422.0	421.0	416.8	416.8	418.9	417.8	421.0	422.0	425.2	423.1
50°	393.6	389.4	386.3	387.3	381.0	383.1	383.1	386.3	389.4	390.5	392.6
52.5°	356.8	355.7	354.7	349.4	348.4	347.3	348.4	349.4	353.6	356.8	357.8
55°	321.0	320.0	313.6	311.5	308.4	308.4	310.5	311.5	318.9	320.0	324.2
57.5°	288.4	285.2	277.9	276.8	276.8	276.8	273.6	277.9	280.0	285.2	285.2
60°	252.6	252.6	246.3	246.3	247.3	246.3	246.3	247.3	247.3	251.5	253.6
62.5°	224.2	223.1	223.1	221.0	220.0	221.0	220.0	220.0	221.0	224.2	227.3
65°	198.9	197.9	196.8	195.8	193.7	193.7	194.7	196.8	196.8	198.9	200.0
67.5°	174.7	174.7	172.6	172.6	171.6	170.5	171.6	170.5	174.7	174.7	175.8
70°	150.5	149.5	146.3	145.2	142.1	143.1	143.1	146.3	147.3	149.5	151.6
72.5°	121.0	121.0	118.9	116.8	117.9	115.8	115.8	116.8	116.8	120.0	121.0
75°	100.0	97.9	96.8	97.9	96.8	98.9	96.8	96.8	98.9	98.9	98.9
77.5°	82.1	82.1	81.0	81.0	82.1	81.0	82.1	82.1	82.1	81.0	82.1
80°	67.4	66.3	66.3	66.3	65.3	65.3	65.3	65.3	65.3	65.3	65.3
82.5°	50.5	50.5	49.5	50.5	50.5	49.5	50.5	49.5	49.5	50.5	50.5
85°	33.7	35.8	33.7	33.7	34.7	34.7	35.8	34.7	35.8	33.7	34.7
87.5°	17.9	18.9	18.9	17.9	17.9	18.9	18.9	18.9	20.0	17.9	18.9
90°	12.8	12.9	13.1	13.3	13.5	13.7	13.5	13.3	13.1	12.9	12.8
92.5°	20.6	20.5	20.3	20.1	19.9	19.7	19.9	20.1	20.3	20.5	20.6
95°	35.7	35.7	35.7	35.7	35.7	35.7	35.7	35.7	35.7	35.7	35.7
97.5°	51.8	51.7	51.6	51.5	51.4	51.3	51.4	51.5	51.6	51.7	51.8
100°	68.7	68.8	69.0	69.2	69.4	69.6	69.4	69.2	69.0	68.8	68.7
102.5°	88.9	88.8	88.7	88.6	88.5	88.4	88.5	88.6	88.7	88.8	88.9
105°	108.1	108.2	108.4	108.6	108.8	109.0	108.8	108.6	108.4	108.2	108.1
107.5°	130.6	130.5	130.4	130.3	130.2	130.1	130.2	130.3	130.4	130.5	130.6
110°	152.5	152.4	152.2	152.0	151.8	151.6	151.8	152.0	152.2	152.4	152.5

TEST NUMBER: P1032429

CATALOG NUMBER: S123RDIW-B775D460UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	247.5°	250°	255°	260°	265°	270°	275°	280°	285°	290°	292.5°
112.5°	174.5	174.5	174.5	174.5	174.5	174.5	174.5	174.5	174.5	174.5	174.5
115°	195.6	195.5	195.4	195.3	195.2	195.1	195.2	195.3	195.4	195.5	195.6
117.5°	217.6	217.4	217.1	216.8	216.5	216.2	216.5	216.8	217.1	217.4	217.6
120°	239.6	239.5	239.3	239.1	238.9	238.7	238.9	239.1	239.3	239.5	239.6
122.5°	261.6	261.4	261.1	260.8	260.5	260.2	260.5	260.8	261.1	261.4	261.6
125°	283.6	283.4	283.0	282.5	282.1	281.7	282.1	282.5	283.0	283.4	283.6
127.5°	305.1	304.9	304.5	304.0	303.6	303.2	303.6	304.0	304.5	304.9	305.1
130°	327.5	327.1	326.4	325.7	325.0	324.3	325.0	325.7	326.4	327.1	327.5
132.5°	348.6	348.3	347.8	347.3	346.8	346.3	346.8	347.3	347.8	348.3	348.6
135°	370.1	370.0	369.8	369.6	369.4	369.2	369.4	369.6	369.8	370.0	370.1
137.5°	390.7	390.6	390.3	390.0	389.7	389.4	389.7	390.0	390.3	390.6	390.7
140°	412.3	411.9	411.2	410.5	409.8	409.1	409.8	410.5	411.2	411.9	412.3
142.5°	431.5	431.2	430.7	430.2	429.7	429.2	429.7	430.2	430.7	431.2	431.5
145°	450.3	450.1	449.7	449.3	448.9	448.5	448.9	449.3	449.7	450.1	450.3
147.5°	468.6	468.3	467.7	467.1	466.5	465.9	466.5	467.1	467.7	468.3	468.6
150°	485.1	484.8	484.2	483.6	483.0	482.4	483.0	483.6	484.2	484.8	485.1
152.5°	500.7	500.4	499.9	499.4	498.9	498.4	498.9	499.4	499.9	500.4	500.7
155°	515.8	515.4	514.7	514.0	513.3	512.6	513.3	514.0	514.7	515.4	515.8
157.5°	528.6	528.3	527.7	527.1	526.5	525.9	526.5	527.1	527.7	528.3	528.6
160°	540.5	540.3	539.9	539.5	539.1	538.7	539.1	539.5	539.9	540.3	540.5
162.5°	551.5	551.1	550.4	549.7	549.0	548.3	549.0	549.7	550.4	551.1	551.5
165°	560.7	560.3	559.6	558.9	558.2	557.5	558.2	558.9	559.6	560.3	560.7
167.5°	568.5	568.2	567.6	566.9	566.3	565.7	566.3	566.9	567.6	568.2	568.5
170°	574.9	574.5	573.8	573.1	572.4	571.7	572.4	573.1	573.8	574.5	574.9
172.5°	579.5	579.1	578.4	577.7	577.0	576.3	577.0	577.7	578.4	579.1	579.5
175°	582.7	582.3	581.6	580.9	580.2	579.5	580.2	580.9	581.6	582.3	582.7
177.5°	584.5	584.1	583.4	582.7	582.0	581.3	582.0	582.7	583.4	584.1	584.5
180°	583.1	583.1	583.1	583.1	583.1	583.1	583.1	583.1	583.1	583.1	583.1

TEST NUMBER: P1032429

CATALOG NUMBER: S123RDIW-B775D460UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	295°	300°	305°	310°	315°	320°	325°	330°	335°	337.5°	340°
0°	1229.3	1229.3	1229.3	1229.3	1229.3	1229.3	1229.3	1229.3	1229.3	1229.3	1229.3
2.5°	1163.0	1167.2	1163.0	1154.6	1163.0	1168.2	1173.5	1181.9	1186.1	1186.1	1192.5
5°	1096.7	1105.1	1101.9	1099.8	1108.3	1113.5	1121.9	1132.5	1144.0	1151.4	1159.8
7.5°	1037.7	1043.0	1048.3	1048.3	1056.7	1068.3	1080.9	1093.5	1108.3	1118.8	1125.1
10°	986.2	990.4	993.5	997.7	1010.4	1023.0	1039.8	1055.6	1068.3	1079.8	1090.4
12.5°	936.7	943.0	950.4	953.5	963.0	978.8	994.6	1013.5	1033.5	1045.1	1055.6
15°	889.3	892.5	900.9	910.4	918.8	935.6	955.6	975.6	992.5	1010.4	1019.8
17.5°	840.9	842.0	864.1	858.8	886.2	902.0	912.5	931.4	958.8	973.5	988.3
20°	793.6	804.1	813.6	818.8	833.6	851.5	882.0	896.7	918.8	932.5	945.1
22.5°	756.7	772.5	772.5	785.1	792.5	809.4	831.5	859.9	884.1	893.6	911.4
25°	724.1	731.5	744.1	748.3	762.0	776.7	791.5	822.0	848.3	860.9	873.6
27.5°	682.0	691.5	708.3	708.3	726.2	742.0	759.9	779.9	806.2	824.1	837.8
30°	649.4	658.8	666.2	677.8	685.2	699.9	731.5	746.2	769.4	785.1	802.0
32.5°	618.9	626.2	632.5	645.2	653.6	670.4	687.3	713.6	733.6	748.3	766.2
35°	585.2	592.5	601.0	610.4	623.1	638.9	654.6	676.7	696.7	710.4	725.2
37.5°	553.6	558.9	571.5	577.8	588.3	603.1	623.1	646.2	664.1	674.6	689.4
40°	523.1	527.3	536.8	548.3	555.7	567.3	588.3	608.3	630.4	643.1	654.6
42.5°	490.5	495.7	504.1	515.7	527.3	539.9	551.5	574.7	594.6	605.2	617.8
45°	462.0	465.2	471.5	483.1	494.7	504.1	522.0	543.1	562.0	570.4	584.1
47.5°	428.4	431.5	441.0	446.2	458.9	471.5	489.4	510.5	527.3	535.7	548.3
50°	393.6	396.8	403.1	414.7	423.1	436.8	452.6	470.5	491.5	503.1	510.5
52.5°	359.9	366.3	371.5	381.0	391.5	405.2	419.9	436.8	454.7	466.2	474.7
55°	326.3	331.5	337.8	343.1	355.7	368.4	385.2	401.0	416.8	427.3	436.8
57.5°	288.4	295.7	302.1	312.6	322.1	332.6	351.5	364.2	383.1	390.5	398.9
60°	255.8	263.1	268.4	276.8	285.2	298.9	311.5	327.3	343.1	352.6	363.1
62.5°	228.4	231.5	234.7	243.1	251.5	264.2	276.8	292.6	309.4	314.7	323.1
65°	201.0	204.2	209.4	216.8	223.1	230.5	244.2	256.8	272.6	281.0	284.2
67.5°	177.9	181.0	182.1	187.3	192.6	201.0	208.4	221.0	235.8	241.0	247.3
70°	151.6	156.8	157.9	162.1	164.2	169.4	177.9	187.3	198.9	208.4	213.7
72.5°	121.0	128.4	130.5	136.8	140.0	145.2	151.6	158.9	166.3	170.5	174.7
75°	98.9	101.0	102.1	107.4	112.6	120.0	123.1	127.3	133.7	138.9	143.1
77.5°	82.1	83.1	84.2	84.2	85.3	89.5	95.8	101.0	105.2	107.4	110.5
80°	66.3	65.3	65.3	66.3	66.3	66.3	68.4	75.8	77.9	83.1	82.1
82.5°	51.6	49.5	50.5	49.5	49.5	49.5	49.5	50.5	50.5	53.7	55.8
85°	33.7	34.7	33.7	33.7	32.6	33.7	32.6	32.6	31.6	31.6	30.5
87.5°	17.9	18.9	17.9	17.9	16.8	17.9	16.8	16.8	15.8	15.8	13.7
90°	12.6	12.2	11.8	11.4	11.0	9.7	8.3	7.0	5.7	5.0	4.5
92.5°	20.4	20.1	19.8	19.5	19.2	18.6	18.0	17.4	16.8	16.5	16.2
95°	35.5	35.1	34.7	34.3	33.9	33.1	32.3	31.4	30.6	30.2	29.8
97.5°	51.5	51.0	50.5	50.0	49.5	48.9	48.3	47.6	47.0	46.7	46.4
100°	68.5	68.2	67.9	67.6	67.3	66.8	66.3	65.8	65.3	65.0	64.7
102.5°	88.7	88.4	88.1	87.8	87.5	86.8	86.1	85.4	84.7	84.3	84.1
105°	108.1	108.1	108.1	108.1	108.1	107.2	106.3	105.4	104.5	104.0	103.9
107.5°	130.4	130.1	129.8	129.5	129.2	128.8	128.4	127.9	127.5	127.3	127.3
110°	152.3	151.9	151.5	151.1	150.7	150.5	150.3	150.1	149.9	149.8	149.7

TEST NUMBER: P1032429

CATALOG NUMBER: S123RDIW-B775D460UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	295°	300°	305°	310°	315°	320°	325°	330°	335°	337.5°	340°
112.5°	174.2	173.7	173.2	172.7	172.2	172.2	172.2	172.2	172.2	172.2	172.2
115°	195.5	195.4	195.3	195.2	195.1	195.3	195.5	195.8	196.0	196.1	195.9
117.5°	217.6	217.6	217.6	217.6	217.6	217.8	218.0	218.2	218.4	218.5	218.4
120°	239.6	239.7	239.8	239.9	240.0	240.5	241.0	241.5	242.0	242.3	242.0
122.5°	261.7	262.0	262.3	262.6	262.9	263.1	263.3	263.6	263.8	263.9	263.7
125°	283.8	284.2	284.6	285.0	285.4	285.6	285.8	286.0	286.2	286.3	286.1
127.5°	305.4	306.0	306.6	307.2	307.8	308.0	308.2	308.4	308.6	308.7	308.4
130°	327.7	328.1	328.6	329.0	329.4	329.7	330.0	330.3	330.6	330.7	330.3
132.5°	348.9	349.4	349.9	350.4	350.9	351.1	351.3	351.5	351.7	351.8	351.4
135°	370.3	370.7	371.2	371.6	372.0	372.1	372.2	372.3	372.4	372.4	372.1
137.5°	391.0	391.5	392.0	392.5	393.0	392.7	392.4	392.1	391.8	391.7	391.4
140°	412.3	412.4	412.5	412.6	412.7	412.6	412.5	412.4	412.3	412.3	412.0
142.5°	431.6	431.7	431.8	431.9	432.0	431.8	431.6	431.4	431.2	431.1	430.8
145°	450.4	450.5	450.6	450.7	450.8	450.5	450.2	449.9	449.6	449.4	449.3
147.5°	468.6	468.6	468.6	468.6	468.6	468.3	468.0	467.7	467.4	467.2	467.0
150°	485.1	485.1	485.1	485.1	485.1	484.9	484.7	484.5	484.3	484.2	484.1
152.5°	500.6	500.4	500.2	500.0	499.8	499.7	499.6	499.5	499.4	499.3	499.1
155°	515.6	515.2	514.8	514.4	514.0	513.9	513.8	513.7	513.6	513.5	513.5
157.5°	528.4	528.0	527.6	527.2	526.8	526.7	526.6	526.5	526.4	526.3	526.4
160°	540.2	539.7	539.2	538.7	538.2	538.2	538.2	538.2	538.2	538.2	538.3
162.5°	551.2	550.7	550.2	549.7	549.2	549.1	549.0	548.9	548.8	548.8	549.0
165°	560.4	559.8	559.1	558.5	557.9	557.9	557.9	557.9	557.9	557.9	558.1
167.5°	568.2	567.6	566.9	566.3	565.7	565.6	565.5	565.4	565.3	565.3	565.5
170°	574.5	573.8	573.1	572.4	571.7	571.7	571.7	571.7	571.7	571.7	571.9
172.5°	579.2	578.6	577.9	577.3	576.7	576.7	576.7	576.7	576.7	576.7	576.9
175°	582.4	581.8	581.1	580.5	579.9	579.9	579.9	579.9	579.9	579.9	580.1
177.5°	584.2	583.6	583.0	582.4	581.8	581.8	581.8	581.8	581.8	581.8	582.0
180°	583.1	583.1	583.1	583.1	583.1	583.1	583.1	583.1	583.1	583.1	583.1

TEST NUMBER: P1032429

CATALOG NUMBER: S123RDIW-B775D460UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	345°	350°	355°	360°
0°	1229.3	1229.3	1229.3	1229.3
2.5°	1197.7	1205.1	1219.8	1232.4
5°	1172.5	1184.0	1206.1	1228.2
7.5°	1141.9	1159.8	1188.2	1218.8
10°	1112.5	1135.6	1170.4	1206.1
12.5°	1083.0	1107.2	1144.0	1190.3
15°	1048.3	1073.5	1117.7	1173.5
17.5°	1017.7	1051.4	1091.4	1147.2
20°	985.1	1010.4	1061.9	1120.9
22.5°	944.1	986.2	1034.6	1096.7
25°	911.4	948.3	996.7	1067.2
27.5°	871.4	914.6	973.5	1035.6
30°	838.8	874.6	929.3	1004.1
32.5°	800.9	843.0	899.9	973.5
35°	767.3	803.0	856.7	931.4
37.5°	727.3	766.2	826.2	892.5
40°	692.5	730.4	787.3	849.3
42.5°	650.4	690.4	747.3	799.9
45°	616.7	653.6	698.8	747.3
47.5°	575.7	614.6	658.8	692.5
50°	538.9	574.7	609.4	637.8
52.5°	498.9	531.5	563.1	584.1
55°	462.0	487.3	512.6	527.3
57.5°	418.9	443.1	464.1	472.6
60°	381.0	401.0	414.7	424.1
62.5°	341.0	355.7	366.3	371.5
65°	302.1	312.6	317.8	323.1
67.5°	262.1	271.5	274.7	281.0
70°	220.0	230.5	232.6	235.8
72.5°	188.4	188.4	192.6	196.8
75°	150.5	152.6	154.7	154.7
77.5°	117.9	117.9	120.0	121.0
80°	86.3	87.4	87.4	86.3
82.5°	58.9	61.0	58.9	57.9
85°	32.6	36.8	34.7	34.7
87.5°	13.7	13.7	15.8	13.7
90°	3.5	2.5	1.5	0.5
92.5°	15.6	14.9	14.3	13.7
95°	29.1	28.4	27.7	27.0
97.5°	45.9	45.4	44.9	44.4
100°	64.1	63.5	62.9	62.3
102.5°	83.8	83.5	83.2	82.9
105°	103.7	103.5	103.3	103.1
107.5°	127.2	127.1	127.0	126.9
110°	149.5	149.3	149.1	148.9

TEST NUMBER: P1032429

CATALOG NUMBER: S123RDIW-B775D460UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	345°	350°	355°	360°
112.5°	172.1	172.0	171.9	171.8
115°	195.6	195.3	195.0	194.7
117.5°	218.3	218.2	218.1	218.0
120°	241.4	240.8	240.2	239.6
122.5°	263.3	262.8	262.4	262.0
125°	285.8	285.5	285.2	284.9
127.5°	307.8	307.2	306.6	306.0
130°	329.5	328.7	327.9	327.1
132.5°	350.6	349.7	348.9	348.1
135°	371.5	370.9	370.3	369.7
137.5°	390.9	390.4	389.9	389.4
140°	411.5	411.0	410.5	410.0
142.5°	430.3	429.8	429.3	428.8
145°	449.1	448.9	448.7	448.5
147.5°	466.6	466.2	465.8	465.4
150°	483.9	483.7	483.5	483.3
152.5°	498.8	498.5	498.2	497.9
155°	513.5	513.5	513.5	513.5
157.5°	526.5	526.6	526.7	526.8
160°	538.5	538.8	539.0	539.2
162.5°	549.3	549.6	549.9	550.2
165°	558.4	558.7	559.0	559.3
167.5°	565.9	566.3	566.7	567.1
170°	572.3	572.7	573.1	573.5
172.5°	577.3	577.8	578.2	578.6
175°	580.5	581.0	581.4	581.8
177.5°	582.4	582.8	583.2	583.6
180°	583.1	583.1	583.1	583.1

(END OF REPORT)