

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1032603

Luminaire Tested: S124DIW-B1195D770UB2750-4F0-XX-W2A-A_5000K

Issue Date: 5/7/2025

Test Information

Test Method: LM-79-2019
Report Number: P1032603
REPORT IS A COMBINATION OF REPORTS P997228 AND P1007351
Test Lab: INNOVATION CENTER
Issue Date: 5/7/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S124DIW-B1195D770UB2750-4F0-XX-W2A-A_5000K
Description: Define 4 Direct/Indirect Wall Mount with 5000K BioUP LEDs {m-DER=1.015} {m-EER=1.115}
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 8131.0 lumens
Efficiency: N/A
Efficacy: 96.2 lumens/watt
Spacing Criteria (0/90/45): 1.22 / 1.3 / 1.41
Luminous Opening: Rectangular w/ Sides (W: 0.33' x L: 4' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 84.5
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1032603

CATALOG NUMBER: S124DIW-B1195D770UB2750-4F0-XX-W2A-A_5000K

Luminous Intensity Polar Plot

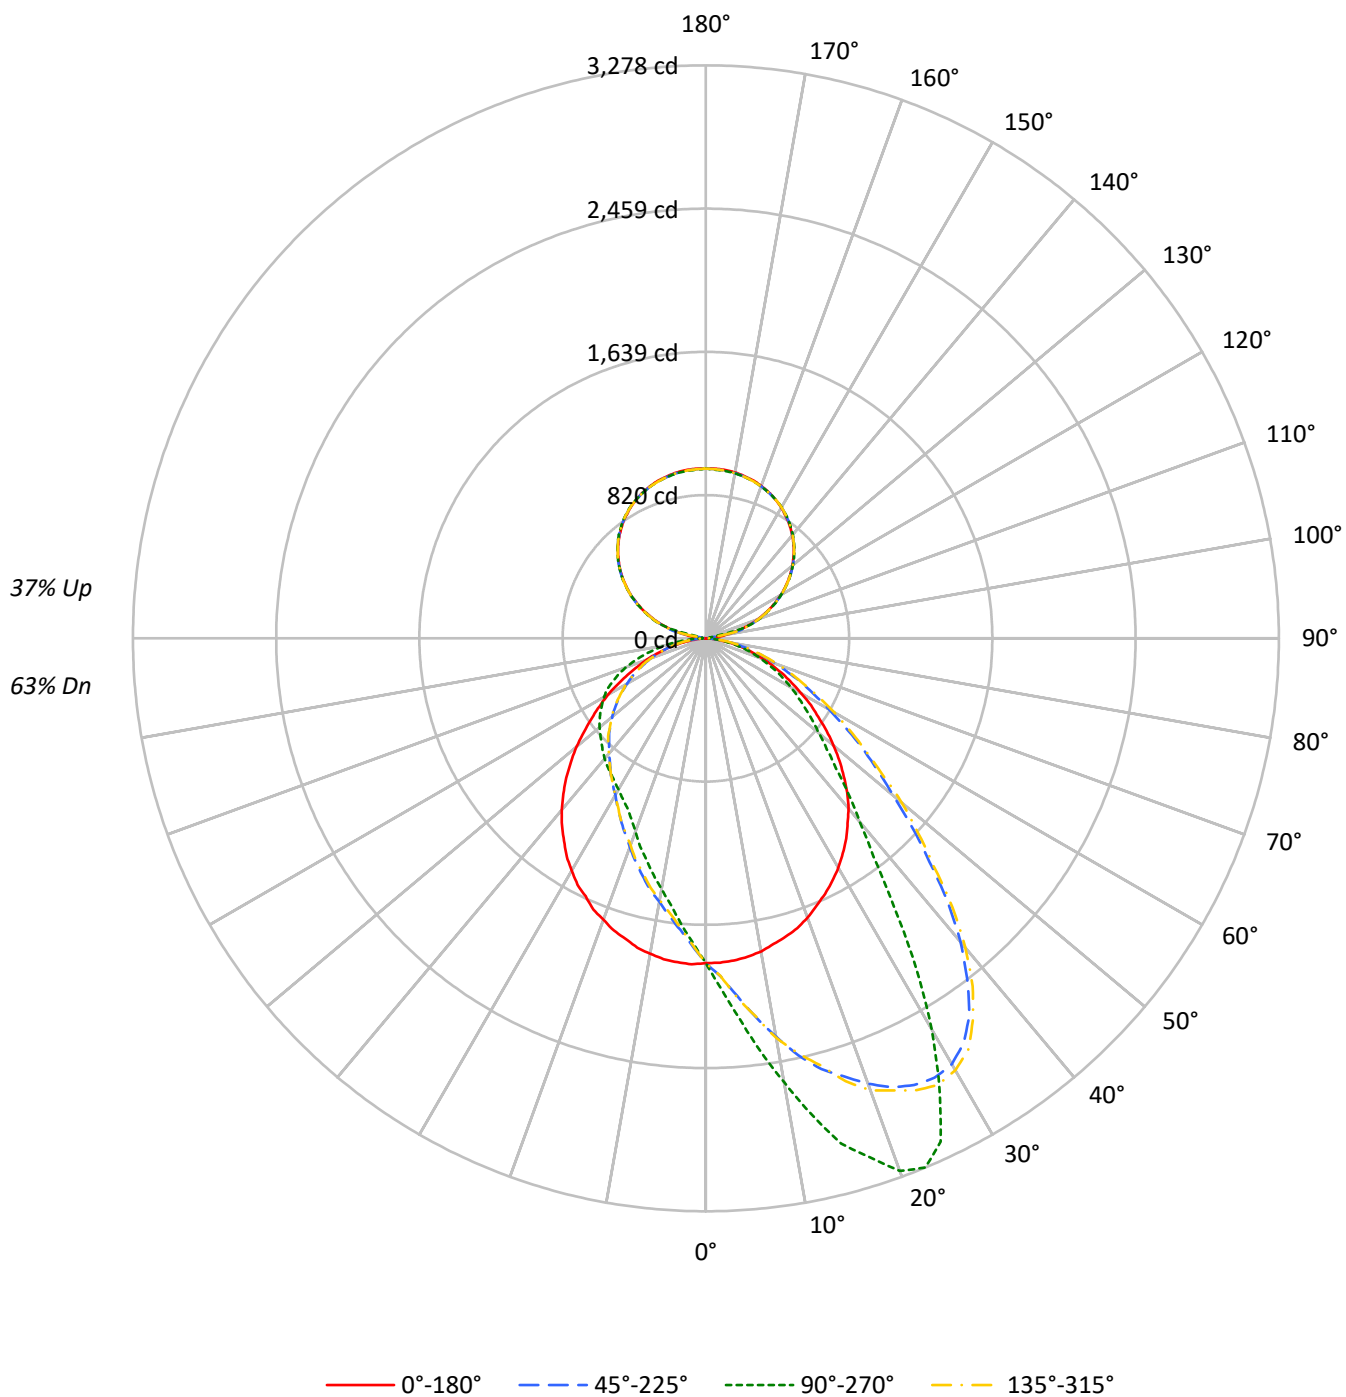

TEST NUMBER: P1032603

CATALOG NUMBER: S124DIW-B1195D770UB2750-4F0-XX-W2A-A_5000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	110	110	110	110	103	103	103	103	91	91	91	79	79	79	68	68	68	68	68	63
1	101	97	93	89	95	91	87	84	80	77	75	70	68	66	61	59	58	58	58	54
2	92	85	79	73	86	80	74	70	70	66	63	62	59	56	54	51	49	49	49	45
3	84	75	67	62	79	70	64	59	62	57	53	55	51	48	48	45	42	42	42	39
4	77	66	59	52	72	63	56	50	56	50	46	49	45	41	43	40	37	37	37	34
5	71	59	51	45	67	56	49	43	50	44	40	44	40	36	39	35	32	32	32	29
6	66	53	45	39	61	51	43	38	45	39	35	40	35	32	35	32	28	28	28	26
7	61	48	40	35	57	46	39	33	41	35	31	37	32	28	32	28	25	25	25	23
8	57	44	36	31	53	42	35	30	38	32	27	34	29	25	30	26	23	23	23	21
9	53	40	33	28	49	38	31	27	35	29	25	31	26	23	28	24	21	21	21	19
10	49	37	30	25	46	35	29	24	32	26	22	29	24	21	26	22	19	19	19	17

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	15145	15145	15145	15145
5°	15107	17375	15194	13055
10°	14994	20271	15108	11454
15°	14814	23369	14917	10249
20°	14622	25340	14728	9188
25°	14342	25050	14479	8407
30°	14069	20705	14240	8003
35°	13684	15429	13835	7759
40°	13236	11623	13364	7640
45°	12552	9328	12707	7477
50°	11734	7859	11904	7400
55°	10773	6841	10942	7314
60°	9837	6024	10126	7192
65°	8961	5183	9045	6892
70°	7931	4265	8101	6346
75°	6916	3276	6873	5392
80°	5441	2152	5380	4094
85°	3580	968	3362	2387

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 145°

Vertical Angle: 45°

Luminance: 19584 cd/sqm

TEST NUMBER: P1032603

CATALOG NUMBER: S124DIW-B1195D770UB2750-4F0-XX-W2A-A_5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	180.7	2.2
10°-20°	557.9	6.9
20°-30°	886.3	10.9
30°-40°	984.9	12.1
40°-50°	895.6	11.0
50°-60°	731.9	9.0
60°-70°	522.4	6.4
70°-80°	287.5	3.5
80°-90°	79.7	1.0
90°-100°	32.2	0.4
100°-110°	212.2	2.6
110°-120°	405.3	5.0
120°-130°	514.5	6.3
130°-140°	550.4	6.8
140°-150°	514.6	6.3
150°-160°	415.0	5.1
160°-170°	267.6	3.3
170°-180°	92.2	1.1
0°-30°	1625.0	20.0
0°-40°	2609.9	32.1
0°-60°	4237.4	52.1
0°-90°	5127.0	63.1
90°-120°	649.7	8.0
90°-150°	2229.1	27.4
90°-180°	3004.0	36.9
0°-180°	8131.0	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1857	1857	1857	1857	1857	
5°	1850	2179	1860	1637	1850	176
15°	1766	2993	1779	1313	1766	498
25°	1613	3178	1628	1066	1613	743
35°	1399	1879	1414	945	1399	874
45°	1116	1054	1129	845	1116	860
55°	785	689	797	737	785	706
65°	489	443	494	589	489	483
75°	240	222	238	365	240	252
85°	49	46	46	114	49	57
90°	2	22	2	22	2	5
95°	40	21	40	21	40	49
105°	219	207	219	207	219	229
115°	408	411	408	411	408	402
125°	574	578	574	578	574	512
135°	712	717	712	717	712	548
145°	820	825	820	825	820	513
155°	900	899	900	899	900	415
165°	949	945	949	945	949	268
175°	971	965	971	965	971	92
180°	971	971	971	971	971	

TEST NUMBER: P1032603

CATALOG NUMBER: S124DIW-B1195D770UB2750-4F0-XX-W2A-A_5000K

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
0°	1857.3	1857.3	1857.3	1857.3	1857.3	1857.3	1857.3	1857.3	1857.3	1857.3	1857.3
2.5°	1857.3	1875.7	1883.4	1889.6	1909.6	1915.7	1917.3	1926.5	1934.2	1935.7	1935.7
5°	1849.6	1878.8	1901.9	1923.4	1955.7	1969.6	1986.5	2005.0	2029.6	2045.0	2052.7
7.5°	1837.3	1880.4	1915.7	1952.7	1997.3	2025.0	2040.4	2089.6	2123.5	2151.2	2185.0
10°	1818.8	1874.2	1925.0	1978.8	2041.9	2075.8	2109.6	2169.6	2217.3	2271.2	2314.3
12.5°	1791.1	1863.4	1925.0	2000.4	2078.8	2118.9	2158.9	2263.5	2318.9	2366.6	2443.5
15°	1766.5	1838.8	1926.5	2003.5	2100.4	2160.4	2218.9	2286.6	2374.3	2477.4	2551.2
17.5°	1738.8	1829.6	1911.1	2018.8	2126.5	2183.5	2231.2	2335.8	2458.9	2560.5	2628.2
20°	1700.3	1792.6	1900.4	2014.2	2141.9	2186.6	2249.6	2389.7	2500.5	2600.5	2711.3
22.5°	1655.7	1763.4	1877.3	1986.5	2118.9	2212.7	2282.0	2405.1	2538.9	2654.3	2779.0
25°	1612.6	1729.6	1829.6	1978.8	2118.9	2181.9	2260.4	2406.6	2552.8	2692.8	2820.5
27.5°	1566.4	1675.7	1811.1	1929.6	2088.1	2157.3	2242.0	2402.0	2557.4	2697.4	2834.4
30°	1515.7	1632.6	1744.9	1885.0	2038.8	2128.1	2206.6	2380.4	2538.9	2685.1	2812.8
32.5°	1458.7	1569.5	1689.5	1821.9	1983.4	2074.2	2172.7	2351.2	2520.5	2646.6	2745.1
35°	1398.7	1511.1	1615.7	1751.1	1917.3	2008.1	2103.5	2300.4	2468.2	2571.2	2628.2
37.5°	1332.6	1438.7	1541.8	1675.7	1841.9	1938.8	2035.8	2226.6	2385.1	2471.2	2455.8
40°	1269.5	1364.9	1460.3	1586.4	1760.3	1863.4	1948.1	2140.4	2278.9	2315.8	2265.0
42.5°	1197.1	1278.7	1371.0	1500.3	1669.5	1766.5	1872.7	2048.1	2151.2	2135.8	2049.6
45°	1115.6	1187.9	1280.2	1401.8	1574.1	1674.2	1763.4	1929.6	2005.0	1966.5	1809.6
47.5°	1037.1	1107.9	1183.3	1304.9	1472.6	1557.2	1648.0	1797.3	1840.3	1758.8	1601.8
50°	952.5	1011.0	1089.4	1204.8	1361.8	1451.0	1526.4	1646.5	1661.8	1561.8	1398.7
52.5°	870.9	920.2	995.6	1109.4	1255.6	1326.4	1400.3	1506.4	1494.1	1391.0	1234.1
55°	784.8	830.9	900.2	1004.8	1134.1	1201.8	1264.9	1358.7	1332.6	1226.4	1089.4
57.5°	712.4	744.8	812.5	909.4	1015.6	1089.4	1143.3	1217.1	1177.1	1071.0	943.3
60°	629.3	669.4	726.3	804.8	909.4	958.6	1006.3	1055.6	1027.9	926.3	812.5
62.5°	553.9	584.7	634.0	709.4	790.9	835.5	886.3	917.1	889.4	795.5	700.1
65°	489.3	513.9	552.4	614.0	692.4	729.4	758.6	787.8	764.8	677.0	607.8
67.5°	418.5	440.1	472.4	521.6	587.8	614.0	641.7	661.7	635.5	577.0	509.3
70°	355.5	370.8	401.6	438.5	484.7	509.3	532.4	552.4	529.3	480.1	429.3
72.5°	290.8	303.1	330.8	357.0	398.5	415.5	432.4	447.8	440.1	393.9	352.4
75°	240.0	244.7	263.1	284.7	310.8	329.3	341.6	350.8	344.7	307.7	281.6
77.5°	181.6	187.7	201.6	218.5	241.6	252.4	260.0	269.3	261.6	232.4	213.9
80°	132.3	133.9	141.6	157.0	172.3	173.9	181.6	193.9	189.3	169.3	155.4
82.5°	84.6	89.2	92.3	101.6	112.3	115.4	120.0	123.1	121.6	109.3	104.6
85°	49.2	49.2	52.3	58.5	61.5	66.2	67.7	69.2	72.3	64.6	60.0
87.5°	21.5	23.1	23.1	24.6	27.7	27.7	29.2	30.8	32.3	30.8	26.2
90°	2.2	4.0	5.8	7.5	9.3	10.2	10.8	12.1	13.4	14.7	16.0
92.5°	10.9	10.6	10.2	9.9	9.6	9.4	10.0	11.3	12.6	13.9	15.2
95°	39.9	34.4	28.9	23.4	17.9	15.2	15.3	15.5	15.6	15.8	16.0
97.5°	76.2	79.8	83.3	86.9	90.4	92.2	83.7	66.8	49.9	32.9	16.0
100°	119.1	122.0	124.9	127.8	130.7	132.2	121.1	98.8	76.5	54.2	31.9
102.5°	167.0	168.9	170.9	172.8	174.7	175.7	176.7	178.6	180.5	182.5	184.4
105°	218.6	219.6	220.5	221.5	222.4	222.9	223.3	224.1	224.9	225.7	226.5
107.5°	265.8	266.3	266.7	267.2	267.7	267.9	268.5	269.6	270.7	271.9	273.0
110°	313.7	314.2	314.7	315.2	315.7	315.9	316.4	317.3	318.3	319.2	320.2

TEST NUMBER: P1032603

CATALOG NUMBER: S124DIW-B1195D770UB2750-4F0-XX-W2A-A_5000K

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
112.5°	360.1	361.1	362.1	363.0	364.0	364.5	364.7	365.0	365.3	365.7	366.0
115°	408.1	408.6	409.0	409.5	410.0	410.2	410.1	410.0	409.8	409.7	409.5
117.5°	450.9	451.5	452.2	452.8	453.5	453.8	454.0	454.5	455.0	455.5	456.0
120°	494.5	495.1	495.8	496.4	497.1	497.4	497.3	497.2	497.0	496.9	496.7
122.5°	535.1	535.4	535.8	536.1	536.4	536.6	536.8	537.1	537.4	537.7	538.0
125°	573.6	574.2	574.9	575.5	576.2	576.5	576.3	576.0	575.7	575.4	575.1
127.5°	610.7	610.9	611.0	611.2	611.3	611.4	611.8	612.6	613.4	614.2	615.0
130°	646.2	646.4	646.6	646.7	646.9	647.0	647.2	647.7	648.2	648.6	649.1
132.5°	678.9	679.2	679.6	679.9	680.2	680.4	680.7	681.4	682.0	682.7	683.3
135°	711.6	711.4	711.3	711.1	711.0	710.9	711.2	711.9	712.5	713.2	713.8
137.5°	740.6	740.6	740.6	740.6	740.6	740.6	741.0	741.8	742.7	743.5	744.3
140°	768.9	769.2	769.6	769.9	770.2	770.4	770.6	770.9	771.2	771.5	771.8
142.5°	794.4	795.0	795.7	796.3	797.0	797.3	797.4	797.5	797.7	797.8	798.0
145°	820.5	821.0	821.5	822.0	822.5	822.7	822.7	822.7	822.7	822.7	822.7
147.5°	840.8	841.8	842.8	843.7	844.7	845.2	845.1	845.0	844.8	844.7	844.5
150°	863.3	863.9	864.6	865.2	865.9	866.2	866.1	866.0	865.8	865.7	865.5
152.5°	882.2	882.7	883.2	883.7	884.2	884.4	884.2	883.9	883.6	883.2	882.9
155°	899.6	899.8	900.0	900.1	900.3	900.4	900.2	899.7	899.2	898.7	898.2
157.5°	914.9	914.9	914.9	914.9	914.9	914.9	914.6	913.9	913.3	912.6	912.0
160°	928.0	927.5	927.0	926.5	926.0	925.8	925.7	925.6	925.4	925.3	925.1
162.5°	939.6	939.0	938.3	937.7	937.0	936.7	936.6	936.4	936.3	936.1	935.9
165°	949.0	948.2	947.4	946.6	945.8	945.4	945.4	945.4	945.4	945.4	945.4
167.5°	957.0	956.2	955.4	954.6	953.8	953.4	953.3	953.1	953.0	952.8	952.6
170°	963.5	962.5	961.6	960.6	959.7	959.2	959.3	959.4	959.6	959.7	959.9
172.5°	967.9	966.9	965.9	965.0	964.0	963.5	963.6	963.8	963.9	964.1	964.3
175°	970.8	969.8	968.8	967.9	966.9	966.4	966.5	966.7	966.8	967.0	967.2
177.5°	973.0	971.9	970.7	969.6	968.5	967.9	968.1	968.4	968.7	969.0	969.3
180°	970.8	970.8	970.8	970.8	970.8	970.8	970.8	970.8	970.8	970.8	970.8

TEST NUMBER: P1032603

CATALOG NUMBER: S124DIW-B1195D770UB2750-4F0-XX-W2A-A_5000K

CANDELA DISTRIBUTION (continued):

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°	95°
0°	1857.3	1857.3	1857.3	1857.3	1857.3	1857.3	1857.3	1857.3	1857.3	1857.3	1857.3
2.5°	1940.4	1968.1	1980.4	1983.4	2000.4	1989.6	1994.2	1992.7	2005.0	2006.5	2006.5
5°	2081.9	2114.2	2125.0	2140.4	2163.5	2169.6	2165.0	2174.3	2191.2	2178.9	2197.3
7.5°	2231.2	2266.6	2291.2	2325.0	2332.7	2352.7	2365.1	2375.8	2378.9	2380.4	2383.5
10°	2369.7	2414.3	2448.1	2505.1	2517.4	2528.2	2582.0	2560.5	2588.2	2578.9	2582.0
12.5°	2482.0	2569.7	2597.4	2692.8	2702.0	2739.0	2735.9	2769.7	2775.9	2788.2	2775.9
15°	2629.7	2731.3	2775.9	2829.8	2860.5	2903.6	2911.3	2957.5	2975.9	2992.9	2975.9
17.5°	2765.1	2819.0	2932.9	2975.9	2995.9	3019.0	3077.5	3094.4	3122.1	3111.3	3142.1
20°	2832.8	2909.8	3029.8	3103.7	3134.4	3156.0	3205.2	3231.4	3242.1	3242.1	3245.2
22.5°	2892.8	3003.6	3092.9	3177.5	3205.2	3220.6	3249.8	3269.8	3274.5	3277.5	3280.6
25°	2946.7	3046.7	3119.0	3166.7	3177.5	3177.5	3194.4	3182.1	3162.1	3177.5	3186.7
27.5°	2946.7	3017.5	3049.8	3066.7	3066.7	3025.2	3000.6	2949.8	2906.7	2894.4	2922.1
30°	2897.5	2929.8	2885.2	2843.6	2811.3	2783.6	2686.7	2609.7	2594.3	2583.6	2625.1
32.5°	2783.6	2742.0	2654.3	2534.3	2486.6	2423.5	2348.1	2289.7	2254.3	2242.0	2232.7
35°	2582.0	2474.3	2360.4	2198.9	2165.0	2085.0	1981.9	1938.8	1880.4	1878.8	1898.8
37.5°	2362.0	2195.8	2072.7	1918.8	1871.1	1786.5	1689.5	1644.9	1604.9	1574.1	1611.1
40°	2105.0	1960.4	1772.6	1646.5	1578.8	1534.1	1452.6	1403.3	1384.9	1369.5	1392.6
42.5°	1865.0	1706.5	1560.3	1431.0	1375.6	1324.9	1271.0	1223.3	1209.5	1207.9	1224.8
45°	1626.5	1471.0	1335.6	1224.8	1189.5	1158.7	1106.4	1092.5	1069.4	1054.0	1061.7
47.5°	1435.7	1275.6	1163.3	1078.7	1047.9	1021.7	987.9	964.8	944.8	938.6	947.9
50°	1247.9	1140.2	1024.8	954.0	930.9	906.3	880.2	858.6	849.4	843.2	849.4
52.5°	1097.1	981.7	903.2	846.3	823.2	804.8	786.3	777.1	764.8	767.8	774.0
55°	961.7	860.2	794.0	752.4	738.6	730.9	707.8	697.1	692.4	689.4	692.4
57.5°	834.0	760.1	710.9	675.5	657.0	652.4	634.0	634.0	629.3	624.7	626.3
60°	732.4	669.4	621.7	594.0	590.9	583.2	570.9	569.3	558.6	563.2	564.7
62.5°	629.3	578.6	546.3	529.3	518.6	515.5	507.8	506.2	501.6	503.2	500.1
65°	547.8	506.2	473.9	460.1	455.5	453.9	447.8	443.2	440.1	443.2	440.1
67.5°	466.2	438.5	413.9	400.1	393.9	392.4	387.8	384.7	386.2	381.6	384.7
70°	389.3	361.6	346.2	338.5	335.4	330.8	330.8	330.8	330.8	327.8	326.2
72.5°	327.8	300.1	289.3	284.7	281.6	280.1	275.4	277.0	275.4	273.9	280.1
75°	260.0	243.1	232.4	227.7	230.8	226.2	221.6	224.7	220.0	221.6	227.7
77.5°	197.0	189.3	183.1	180.0	177.0	173.9	173.9	170.8	170.8	170.8	170.8
80°	143.1	141.6	130.8	129.3	129.3	126.2	126.2	126.2	126.2	124.6	126.2
82.5°	95.4	93.9	90.8	89.2	86.2	87.7	87.7	84.6	84.6	83.1	84.6
85°	55.4	55.4	52.3	50.8	49.2	50.8	47.7	46.2	47.7	46.2	47.7
87.5°	26.2	23.1	24.6	23.1	20.0	21.5	18.5	20.0	18.5	16.9	20.0
90°	17.0	17.9	18.9	19.8	20.3	20.5	20.8	21.1	21.5	21.8	21.5
92.5°	16.2	17.2	18.1	19.1	19.6	19.6	19.6	19.6	19.6	19.6	19.6
95°	17.0	17.9	18.9	19.8	20.3	20.4	20.6	20.7	20.9	21.1	20.9
97.5°	16.8	17.6	18.4	19.2	19.6	19.7	19.8	20.0	20.1	20.3	20.1
100°	29.2	26.4	23.7	21.0	19.6	19.7	19.8	20.0	20.1	20.3	20.1
102.5°	148.1	111.8	75.5	39.2	21.1	21.1	21.1	21.1	21.1	21.1	21.1
105°	228.0	229.4	230.9	232.4	233.1	230.2	224.4	218.5	212.7	206.9	212.7
107.5°	273.8	274.6	275.4	276.2	276.6	276.9	277.6	278.2	278.9	279.5	278.9
110°	320.5	320.9	321.2	321.5	321.7	321.9	322.4	322.9	323.3	323.8	323.3

TEST NUMBER: P1032603

CATALOG NUMBER: S124DIW-B1195D770UB2750-4F0-XX-W2A-A_5000K

CANDELA DISTRIBUTION (continued):

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°	95°
112.5°	365.8	365.6	365.5	365.3	365.2	365.5	366.2	366.8	367.5	368.1	367.5
115°	409.8	410.2	410.5	410.8	411.0	411.0	411.0	411.0	411.0	411.0	411.0
117.5°	455.8	455.7	455.5	455.4	455.3	455.3	455.3	455.3	455.3	455.3	455.3
120°	497.0	497.3	497.6	497.9	498.1	497.9	497.6	497.3	497.0	496.7	497.0
122.5°	538.2	538.4	538.5	538.7	538.8	538.6	538.3	538.0	537.6	537.3	537.6
125°	575.6	576.1	576.6	577.1	577.3	577.4	577.5	577.7	577.8	578.0	577.8
127.5°	614.8	614.7	614.5	614.4	614.3	614.2	614.1	613.9	613.8	613.6	613.8
130°	649.3	649.5	649.6	649.8	649.9	649.9	649.9	649.9	649.9	649.9	649.9
132.5°	683.5	683.6	683.8	683.9	684.0	683.9	683.8	683.6	683.5	683.3	683.5
135°	714.1	714.4	714.7	715.0	715.2	715.4	715.7	716.0	716.4	716.7	716.4
137.5°	744.6	744.9	745.2	745.5	745.7	745.6	745.5	745.3	745.2	745.0	745.2
140°	772.3	772.8	773.3	773.8	774.0	774.1	774.3	774.4	774.6	774.8	774.6
142.5°	798.3	798.6	798.9	799.2	799.4	799.4	799.4	799.4	799.4	799.4	799.4
145°	822.9	823.0	823.2	823.3	823.4	823.6	823.9	824.2	824.6	824.9	824.6
147.5°	844.7	844.8	845.0	845.1	845.2	845.3	845.4	845.6	845.7	845.9	845.7
150°	865.5	865.5	865.5	865.5	865.5	865.6	865.7	865.9	866.0	866.2	866.0
152.5°	883.2	883.6	883.9	884.2	884.4	884.3	884.2	884.0	883.9	883.7	883.9
155°	898.8	899.5	900.1	900.8	901.1	900.9	900.4	899.9	899.4	898.9	899.4
157.5°	912.8	913.6	914.4	915.2	915.6	915.2	914.4	913.6	912.8	912.0	912.8
160°	926.1	927.0	928.0	928.9	929.4	928.9	928.0	927.0	926.1	925.1	926.1
162.5°	936.9	937.9	938.8	939.8	940.3	939.7	938.6	937.5	936.3	935.2	936.3
165°	946.7	948.0	949.3	950.6	951.2	950.5	949.0	947.6	946.1	944.7	946.1
167.5°	954.1	955.5	957.0	958.5	959.2	958.4	956.8	955.1	953.5	951.9	953.5
170°	961.2	962.5	963.8	965.1	965.7	964.9	963.3	961.7	960.1	958.5	960.1
172.5°	965.6	966.9	968.2	969.5	970.1	969.2	967.4	965.7	963.9	962.1	963.9
175°	968.6	970.1	971.5	973.0	973.7	972.7	970.8	968.9	966.9	965.0	966.9
177.5°	970.6	971.9	973.2	974.5	975.2	974.2	972.3	970.3	968.4	966.4	968.4
180°	970.8	970.8	970.8	970.8	970.8	970.8	970.8	970.8	970.8	970.8	970.8

TEST NUMBER: P1032603

CATALOG NUMBER: S124DIW-B1195D770UB2750-4F0-XX-W2A-A_5000K

CANDELA DISTRIBUTION (continued):

	100°	105°	110°	112.5°	115°	120°	125°	130°	135°	140°	145°
0°	1857.3	1857.3	1857.3	1857.3	1857.3	1857.3	1857.3	1857.3	1857.3	1857.3	1857.3
2.5°	2003.5	1998.8	1992.7	1992.7	1985.0	1985.0	1972.7	1951.1	1932.7	1926.5	1929.6
5°	2174.3	2175.8	2166.6	2158.9	2145.0	2134.2	2114.2	2075.8	2063.5	2038.8	2021.9
7.5°	2369.7	2363.5	2346.6	2334.3	2331.2	2306.6	2263.5	2217.3	2180.4	2155.8	2120.4
10°	2589.7	2565.1	2540.5	2532.8	2514.3	2472.8	2423.5	2372.7	2322.0	2268.1	2208.1
12.5°	2774.4	2726.7	2725.1	2706.7	2671.3	2648.2	2589.7	2517.4	2429.7	2369.7	2302.0
15°	2972.9	2928.2	2891.3	2857.5	2840.5	2772.8	2723.6	2632.8	2528.2	2463.5	2417.4
17.5°	3114.4	3094.4	3031.3	3015.9	2992.9	2914.4	2835.9	2746.7	2655.9	2565.1	2440.5
20°	3228.3	3216.0	3174.4	3152.9	3116.0	3054.4	2959.0	2855.9	2751.3	2622.0	2505.1
22.5°	3277.5	3262.1	3228.3	3209.8	3186.7	3134.4	3052.9	2935.9	2799.0	2683.6	2558.9
25°	3180.6	3208.3	3199.1	3191.4	3182.1	3151.4	3089.8	2986.7	2852.8	2722.0	2566.6
27.5°	2962.1	3009.8	3056.0	3062.1	3077.5	3089.8	3065.2	2991.3	2879.0	2740.5	2569.7
30°	2668.2	2689.7	2783.6	2811.3	2832.8	2911.3	2957.5	2939.0	2852.8	2728.2	2571.2
32.5°	2291.2	2348.1	2443.5	2509.7	2568.2	2655.9	2775.9	2823.6	2792.8	2691.3	2535.9
35°	1934.2	2001.9	2112.7	2197.3	2255.8	2380.4	2522.0	2625.1	2663.6	2612.8	2474.3
37.5°	1641.8	1723.4	1821.9	1854.2	1921.9	2075.8	2271.2	2414.3	2508.2	2512.8	2405.1
40°	1421.8	1463.3	1541.8	1591.1	1657.2	1786.5	1977.3	2166.6	2308.1	2355.8	2298.9
42.5°	1235.6	1267.9	1326.4	1386.4	1446.4	1544.9	1720.3	1897.3	2088.1	2183.5	2181.9
45°	1087.9	1121.7	1161.8	1211.0	1252.5	1358.7	1497.2	1678.8	1843.4	1991.1	2028.1
47.5°	958.6	987.9	1037.1	1058.7	1086.4	1186.4	1306.4	1475.7	1646.5	1815.7	1858.8
50°	863.2	887.9	921.7	935.6	966.3	1040.2	1138.7	1275.6	1464.9	1620.3	1700.3
52.5°	777.1	795.5	821.7	832.5	854.0	909.4	998.6	1106.4	1263.3	1423.3	1535.7
55°	703.2	715.5	734.0	746.3	761.7	810.9	877.1	974.0	1109.4	1247.9	1357.2
57.5°	634.0	643.2	661.7	667.8	680.1	718.6	764.8	846.3	971.0	1094.0	1200.2
60°	569.3	575.5	586.3	600.1	609.3	635.5	678.6	746.3	846.3	958.6	1044.8
62.5°	507.8	517.0	520.1	526.3	533.9	558.6	592.4	641.7	729.4	821.7	912.5
65°	444.7	452.4	458.5	460.1	467.8	486.2	517.0	560.1	617.0	697.1	781.7
67.5°	386.2	390.8	393.9	400.1	407.8	417.0	441.6	473.9	526.3	590.9	658.6
70°	332.4	332.4	337.0	338.5	347.8	358.5	369.3	400.1	446.2	498.6	544.7
72.5°	273.9	281.6	280.1	287.7	286.2	293.9	307.7	327.8	361.6	403.2	447.8
75°	223.1	227.7	227.7	227.7	230.8	237.0	244.7	263.1	289.3	323.1	349.3
77.5°	173.9	177.0	177.0	177.0	178.5	184.6	192.3	204.7	223.1	243.1	258.5
80°	124.6	127.7	127.7	130.8	130.8	132.3	140.0	146.2	155.4	170.8	186.2
82.5°	84.6	86.2	89.2	89.2	87.7	90.8	92.3	98.5	107.7	110.8	121.6
85°	46.2	47.7	49.2	49.2	50.8	53.9	52.3	58.5	58.5	64.6	67.7
87.5°	18.5	21.5	21.5	20.0	21.5	21.5	21.5	24.6	26.2	27.7	26.2
90°	21.1	20.8	20.5	20.3	19.8	18.9	17.9	17.0	16.0	14.7	13.4
92.5°	19.6	19.6	19.6	19.6	19.1	18.1	17.2	16.2	15.2	13.9	12.6
95°	20.7	20.6	20.4	20.3	19.8	18.9	17.9	17.0	16.0	15.8	15.6
97.5°	20.0	19.8	19.7	19.6	19.2	18.4	17.6	16.8	16.0	32.9	49.9
100°	20.0	19.8	19.7	19.6	21.0	23.7	26.4	29.2	31.9	54.2	76.5
102.5°	21.1	21.1	21.1	21.1	39.2	75.5	111.8	148.1	184.4	182.5	180.5
105°	218.5	224.4	230.2	233.1	232.4	230.9	229.4	228.0	226.5	225.7	224.9
107.5°	278.2	277.6	276.9	276.6	276.2	275.4	274.6	273.8	273.0	271.9	270.7
110°	322.9	322.4	321.9	321.7	321.5	321.2	320.9	320.5	320.2	319.2	318.3

TEST NUMBER: P1032603

CATALOG NUMBER: S124DIW-B1195D770UB2750-4F0-XX-W2A-A_5000K

CANDELA DISTRIBUTION (continued):

	100°	105°	110°	112.5°	115°	120°	125°	130°	135°	140°	145°
112.5°	366.8	366.2	365.5	365.2	365.3	365.5	365.6	365.8	366.0	365.7	365.3
115°	411.0	411.0	411.0	411.0	410.8	410.5	410.2	409.8	409.5	409.7	409.8
117.5°	455.3	455.3	455.3	455.3	455.4	455.5	455.7	455.8	456.0	455.5	455.0
120°	497.3	497.6	497.9	498.1	497.9	497.6	497.3	497.0	496.7	496.9	497.0
122.5°	538.0	538.3	538.6	538.8	538.7	538.5	538.4	538.2	538.0	537.7	537.4
125°	577.7	577.5	577.4	577.3	577.1	576.6	576.1	575.6	575.1	575.4	575.7
127.5°	613.9	614.1	614.2	614.3	614.4	614.5	614.7	614.8	615.0	614.2	613.4
130°	649.9	649.9	649.9	649.9	649.8	649.6	649.5	649.3	649.1	648.6	648.2
132.5°	683.6	683.8	683.9	684.0	683.9	683.8	683.6	683.5	683.3	682.7	682.0
135°	716.0	715.7	715.4	715.2	715.0	714.7	714.4	714.1	713.8	713.2	712.5
137.5°	745.3	745.5	745.6	745.7	745.5	745.2	744.9	744.6	744.3	743.5	742.7
140°	774.4	774.3	774.1	774.0	773.8	773.3	772.8	772.3	771.8	771.5	771.2
142.5°	799.4	799.4	799.4	799.4	799.2	798.9	798.6	798.3	798.0	797.8	797.7
145°	824.2	823.9	823.6	823.4	823.3	823.2	823.0	822.9	822.7	822.7	822.7
147.5°	845.6	845.4	845.3	845.2	845.1	845.0	844.8	844.7	844.5	844.7	844.8
150°	865.9	865.7	865.6	865.5	865.5	865.5	865.5	865.5	865.5	865.7	865.8
152.5°	884.0	884.2	884.3	884.4	884.2	883.9	883.6	883.2	882.9	883.2	883.6
155°	899.9	900.4	900.9	901.1	900.8	900.1	899.5	898.8	898.2	898.7	899.2
157.5°	913.6	914.4	915.2	915.6	915.2	914.4	913.6	912.8	912.0	912.6	913.3
160°	927.0	928.0	928.9	929.4	928.9	928.0	927.0	926.1	925.1	925.3	925.4
162.5°	937.5	938.6	939.7	940.3	939.8	938.8	937.9	936.9	935.9	936.1	936.3
165°	947.6	949.0	950.5	951.2	950.6	949.3	948.0	946.7	945.4	945.4	945.4
167.5°	955.1	956.8	958.4	959.2	958.5	957.0	955.5	954.1	952.6	952.8	953.0
170°	961.7	963.3	964.9	965.7	965.1	963.8	962.5	961.2	959.9	959.7	959.6
172.5°	965.7	967.4	969.2	970.1	969.5	968.2	966.9	965.6	964.3	964.1	963.9
175°	968.9	970.8	972.7	973.7	973.0	971.5	970.1	968.6	967.2	967.0	966.8
177.5°	970.3	972.3	974.2	975.2	974.5	973.2	971.9	970.6	969.3	969.0	968.7
180°	970.8	970.8	970.8	970.8	970.8	970.8	970.8	970.8	970.8	970.8	970.8

TEST NUMBER: P1032603

CATALOG NUMBER: S124DIW-B1195D770UB2750-4F0-XX-W2A-A_5000K

CANDELA DISTRIBUTION (continued):

	150°	155°	157.5°	160°	165°	170°	175°	180°	185°	190°	195°
0°	1857.3	1857.3	1857.3	1857.3	1857.3	1857.3	1857.3	1857.3	1857.3	1857.3	1857.3
2.5°	1915.7	1909.6	1905.0	1905.0	1891.1	1877.3	1869.6	1866.5	1863.4	1851.1	1834.2
5°	1994.2	1974.2	1960.4	1946.5	1923.4	1898.8	1874.2	1860.3	1840.3	1812.6	1792.6
7.5°	2081.9	2034.2	2018.8	2001.9	1955.7	1914.2	1880.4	1851.1	1818.8	1783.4	1748.0
10°	2155.8	2105.0	2071.2	2041.9	1981.9	1926.5	1875.7	1832.6	1791.1	1744.9	1701.9
12.5°	2226.6	2154.2	2118.9	2075.8	2012.7	1932.7	1866.5	1812.6	1751.1	1703.4	1651.1
15°	2325.0	2203.5	2145.0	2117.3	2032.7	1938.8	1858.8	1778.8	1728.0	1655.7	1609.5
17.5°	2340.4	2242.0	2203.5	2132.7	2031.1	1925.0	1832.6	1752.6	1675.7	1611.1	1551.1
20°	2394.3	2265.0	2203.5	2158.9	2025.0	1917.3	1815.7	1712.6	1638.8	1569.5	1501.8
22.5°	2428.1	2282.0	2217.3	2146.6	2018.8	1889.6	1769.6	1680.3	1589.5	1518.7	1464.9
25°	2418.9	2272.7	2200.4	2134.2	1978.8	1849.6	1741.9	1628.0	1543.4	1466.4	1395.6
27.5°	2414.3	2249.6	2172.7	2098.9	1952.7	1817.3	1681.9	1589.5	1495.7	1406.4	1354.1
30°	2402.0	2220.4	2131.2	2051.2	1898.8	1757.3	1641.8	1534.1	1440.3	1358.7	1289.5
32.5°	2360.4	2171.2	2085.0	1998.8	1840.3	1698.8	1581.8	1481.8	1388.0	1303.3	1237.2
35°	2305.0	2112.7	2018.8	1928.1	1769.6	1626.5	1518.7	1414.1	1326.4	1244.8	1181.8
37.5°	2249.6	2045.0	1957.3	1852.7	1706.5	1557.2	1446.4	1352.6	1271.0	1186.4	1117.1
40°	2169.6	1965.0	1868.0	1778.8	1608.0	1468.0	1366.4	1281.8	1201.8	1121.7	1063.3
42.5°	2060.4	1877.3	1777.3	1678.8	1518.7	1380.3	1281.8	1206.4	1131.0	1064.8	1000.2
45°	1949.6	1771.1	1681.9	1594.1	1420.3	1289.5	1198.7	1129.4	1066.4	994.0	941.7
47.5°	1815.7	1664.9	1575.7	1489.5	1324.9	1194.1	1111.0	1046.3	987.9	927.9	878.6
50°	1678.8	1548.0	1466.4	1377.2	1220.2	1101.7	1020.2	966.3	918.6	861.7	821.7
52.5°	1531.1	1417.2	1347.9	1261.8	1123.3	1014.0	930.9	877.1	837.1	795.5	760.1
55°	1374.1	1291.0	1217.1	1147.9	1017.1	918.6	844.8	797.1	769.4	730.9	700.1
57.5°	1232.5	1152.5	1107.9	1029.4	915.6	818.6	760.1	720.1	687.8	664.7	640.1
60°	1084.8	1020.2	971.0	914.0	814.0	732.4	670.9	647.8	614.0	597.0	586.3
62.5°	943.3	897.1	850.9	807.8	718.6	641.7	595.5	566.3	546.3	529.3	520.1
65°	809.4	766.3	734.0	695.5	621.7	560.1	517.0	493.9	473.9	469.3	458.5
67.5°	678.6	660.1	624.7	594.0	530.9	483.2	450.9	421.6	410.8	406.2	397.0
70°	567.8	546.3	518.6	492.4	444.7	403.2	373.9	363.1	347.8	346.2	335.4
72.5°	467.8	441.6	421.6	401.6	366.2	329.3	313.9	298.5	290.8	284.7	280.1
75°	370.8	352.4	338.5	321.6	290.8	266.2	244.7	238.5	233.9	232.4	229.3
77.5°	277.0	264.7	258.5	241.6	220.0	198.5	189.3	180.0	180.0	177.0	178.5
80°	197.0	189.3	181.6	172.3	153.9	144.6	136.9	130.8	127.7	126.2	127.7
82.5°	124.6	120.0	118.5	112.3	100.0	95.4	89.2	84.6	84.6	84.6	84.6
85°	69.2	69.2	69.2	60.0	55.4	50.8	47.7	46.2	46.2	46.2	47.7
87.5°	29.2	29.2	24.6	24.6	23.1	20.0	18.5	18.5	20.0	20.0	21.5
90°	12.1	10.8	10.2	9.3	7.5	5.8	4.0	2.2	4.0	5.8	7.5
92.5°	11.3	10.0	9.4	9.6	9.9	10.2	10.6	10.9	10.6	10.2	9.9
95°	15.5	15.3	15.2	17.9	23.4	28.9	34.4	39.9	34.4	28.9	23.4
97.5°	66.8	83.7	92.2	90.4	86.9	83.3	79.8	76.2	79.8	83.3	86.9
100°	98.8	121.1	132.2	130.7	127.8	124.9	122.0	119.1	122.0	124.9	127.8
102.5°	178.6	176.7	175.7	174.7	172.8	170.9	168.9	167.0	168.9	170.9	172.8
105°	224.1	223.3	222.9	222.4	221.5	220.5	219.6	218.6	219.6	220.5	221.5
107.5°	269.6	268.5	267.9	267.7	267.2	266.7	266.3	265.8	266.3	266.7	267.2
110°	317.3	316.4	315.9	315.7	315.2	314.7	314.2	313.7	314.2	314.7	315.2

TEST NUMBER: P1032603

CATALOG NUMBER: S124DIW-B1195D770UB2750-4F0-XX-W2A-A_5000K

CANDELA DISTRIBUTION (continued):

	150°	155°	157.5°	160°	165°	170°	175°	180°	185°	190°	195°
112.5°	365.0	364.7	364.5	364.0	363.0	362.1	361.1	360.1	361.1	362.1	363.0
115°	410.0	410.1	410.2	410.0	409.5	409.0	408.6	408.1	408.6	409.0	409.5
117.5°	454.5	454.0	453.8	453.5	452.8	452.2	451.5	450.9	451.5	452.2	452.8
120°	497.2	497.3	497.4	497.1	496.4	495.8	495.1	494.5	495.1	495.8	496.4
122.5°	537.1	536.8	536.6	536.4	536.1	535.8	535.4	535.1	535.4	535.8	536.1
125°	576.0	576.3	576.5	576.2	575.5	574.9	574.2	573.6	574.2	574.9	575.5
127.5°	612.6	611.8	611.4	611.3	611.2	611.0	610.9	610.7	610.9	611.0	611.2
130°	647.7	647.2	647.0	646.9	646.7	646.6	646.4	646.2	646.4	646.6	646.7
132.5°	681.4	680.7	680.4	680.2	679.9	679.6	679.2	678.9	679.2	679.6	679.9
135°	711.9	711.2	710.9	711.0	711.1	711.3	711.4	711.6	711.4	711.3	711.1
137.5°	741.8	741.0	740.6	740.6	740.6	740.6	740.6	740.6	740.6	740.6	740.6
140°	770.9	770.6	770.4	770.2	769.9	769.6	769.2	768.9	769.2	769.6	769.9
142.5°	797.5	797.4	797.3	797.0	796.3	795.7	795.0	794.4	795.0	795.7	796.3
145°	822.7	822.7	822.7	822.5	822.0	821.5	821.0	820.5	821.0	821.5	822.0
147.5°	845.0	845.1	845.2	844.7	843.7	842.8	841.8	840.8	841.8	842.8	843.7
150°	866.0	866.1	866.2	865.9	865.2	864.6	863.9	863.3	863.9	864.6	865.2
152.5°	883.9	884.2	884.4	884.2	883.7	883.2	882.7	882.2	882.7	883.2	883.7
155°	899.7	900.2	900.4	900.3	900.1	900.0	899.8	899.6	899.8	900.0	900.1
157.5°	913.9	914.6	914.9	914.9	914.9	914.9	914.9	914.9	914.9	914.9	914.9
160°	925.6	925.7	925.8	926.0	926.5	927.0	927.5	928.0	927.5	927.0	926.5
162.5°	936.4	936.6	936.7	937.0	937.7	938.3	939.0	939.6	939.0	938.3	937.7
165°	945.4	945.4	945.4	945.8	946.6	947.4	948.2	949.0	948.2	947.4	946.6
167.5°	953.1	953.3	953.4	953.8	954.6	955.4	956.2	957.0	956.2	955.4	954.6
170°	959.4	959.3	959.2	959.7	960.6	961.6	962.5	963.5	962.5	961.6	960.6
172.5°	963.8	963.6	963.5	964.0	965.0	965.9	966.9	967.9	966.9	965.9	965.0
175°	966.7	966.5	966.4	966.9	967.9	968.8	969.8	970.8	969.8	968.8	967.9
177.5°	968.4	968.1	967.9	968.5	969.6	970.7	971.9	973.0	971.9	970.7	969.6
180°	970.8	970.8	970.8	970.8	970.8	970.8	970.8	970.8	970.8	970.8	970.8

TEST NUMBER: P1032603

CATALOG NUMBER: S124DIW-B1195D770UB2750-4F0-XX-W2A-A_5000K

CANDELA DISTRIBUTION (continued):

	200°	202.5°	205°	210°	215°	220°	225°	230°	235°	240°	245°
0°	1857.3	1857.3	1857.3	1857.3	1857.3	1857.3	1857.3	1857.3	1857.3	1857.3	1857.3
2.5°	1829.6	1823.4	1826.5	1811.1	1797.3	1777.3	1760.3	1757.3	1754.2	1763.4	1757.3
5°	1777.3	1769.6	1761.9	1743.4	1715.7	1698.8	1674.2	1672.6	1663.4	1649.5	1652.6
7.5°	1720.3	1715.7	1704.9	1675.7	1651.1	1621.8	1601.8	1584.9	1577.2	1564.9	1560.3
10°	1674.2	1657.2	1648.0	1615.7	1586.4	1555.7	1529.5	1517.2	1503.4	1492.6	1484.9
12.5°	1611.1	1606.5	1580.3	1554.1	1529.5	1494.1	1474.1	1438.7	1420.3	1429.5	1426.4
15°	1569.5	1548.0	1541.8	1504.9	1463.3	1440.3	1403.3	1380.3	1372.6	1358.7	1341.8
17.5°	1514.1	1500.3	1478.7	1444.9	1397.2	1364.9	1338.7	1317.2	1307.9	1289.5	1275.6
20°	1461.8	1438.7	1421.8	1391.0	1344.9	1303.3	1271.0	1257.2	1234.1	1218.7	1211.0
22.5°	1414.1	1397.2	1372.6	1326.4	1286.4	1246.4	1207.9	1187.9	1166.4	1157.1	1144.8
25°	1355.6	1327.9	1311.0	1260.2	1217.1	1184.8	1149.4	1123.3	1111.0	1095.6	1092.5
27.5°	1298.7	1272.5	1252.5	1207.9	1155.6	1114.1	1092.5	1074.0	1052.5	1052.5	1044.8
30°	1241.8	1223.3	1192.5	1149.4	1100.2	1060.2	1035.6	1018.7	1011.0	1004.8	1003.3
32.5°	1184.8	1160.2	1141.8	1083.3	1046.3	1009.4	991.0	977.1	967.9	966.3	967.9
35°	1126.4	1098.7	1080.2	1027.9	991.0	957.1	949.4	937.1	932.5	930.9	938.6
37.5°	1064.8	1043.3	1020.2	977.1	935.6	915.6	900.2	895.6	894.0	903.2	906.3
40°	1007.9	989.4	967.9	921.7	890.9	869.4	861.7	857.1	863.2	872.5	877.1
42.5°	954.0	927.9	910.9	869.4	841.7	829.4	820.2	820.2	826.3	837.1	844.8
45°	897.1	877.1	860.2	823.2	798.6	784.8	783.2	784.8	792.5	800.1	809.4
47.5°	841.7	821.7	803.2	772.5	750.9	743.2	741.7	743.2	755.5	766.3	777.1
50°	790.9	769.4	752.4	723.2	706.3	697.1	698.6	706.3	715.5	730.9	744.8
52.5°	730.9	715.5	700.1	674.0	658.6	652.4	657.0	663.2	680.1	690.9	707.8
55°	672.4	658.6	646.3	626.3	614.0	609.3	612.4	621.7	635.5	654.0	674.0
57.5°	618.6	603.2	590.9	577.0	563.2	564.7	566.3	578.6	595.5	612.4	635.5
60°	558.6	549.3	538.6	521.6	515.5	515.5	520.1	533.9	549.3	577.0	597.0
62.5°	504.7	492.4	484.7	473.9	464.7	466.2	477.0	489.3	507.8	530.9	557.0
65°	449.3	435.5	429.3	420.1	417.0	418.5	426.2	444.7	464.7	484.7	509.3
67.5°	387.8	383.1	377.0	367.8	370.8	372.4	380.1	395.5	417.0	437.0	464.7
70°	335.4	326.2	324.7	317.0	317.0	321.6	337.0	347.8	367.8	389.3	418.5
72.5°	280.1	272.4	272.4	266.2	270.8	275.4	283.1	298.5	317.0	338.5	363.1
75°	223.1	220.0	223.1	220.0	220.0	227.7	237.0	249.3	269.3	292.4	312.4
77.5°	172.3	172.3	170.8	175.4	175.4	180.0	192.3	204.7	220.0	238.5	260.0
80°	126.2	126.2	126.2	130.8	135.4	135.4	143.1	158.5	172.3	184.6	204.7
82.5°	86.2	86.2	86.2	89.2	95.4	95.4	104.6	113.9	129.3	140.0	149.3
85°	52.3	52.3	50.8	53.9	55.4	60.0	67.7	73.9	81.6	90.8	100.0
87.5°	23.1	23.1	24.6	26.2	27.7	30.8	33.9	36.9	44.6	47.7	52.3
90°	9.3	10.2	10.8	12.1	13.4	14.7	16.0	17.0	17.9	18.9	19.8
92.5°	9.6	9.4	10.0	11.3	12.6	13.9	15.2	16.2	17.2	18.1	19.1
95°	17.9	15.2	15.3	15.5	15.6	15.8	16.0	17.0	17.9	18.9	19.8
97.5°	90.4	92.2	83.7	66.8	49.9	32.9	16.0	16.8	17.6	18.4	19.2
100°	130.7	132.2	121.1	98.8	76.5	54.2	31.9	29.2	26.4	23.7	21.0
102.5°	174.7	175.7	176.7	178.6	180.5	182.5	184.4	148.1	111.8	75.5	39.2
105°	222.4	222.9	223.3	224.1	224.9	225.7	226.5	228.0	229.4	230.9	232.4
107.5°	267.7	267.9	268.5	269.6	270.7	271.9	273.0	273.8	274.6	275.4	276.2
110°	315.7	315.9	316.4	317.3	318.3	319.2	320.2	320.5	320.9	321.2	321.5

TEST NUMBER: P1032603

CATALOG NUMBER: S124DIW-B1195D770UB2750-4F0-XX-W2A-A_5000K

CANDELA DISTRIBUTION (continued):

	200°	202.5°	205°	210°	215°	220°	225°	230°	235°	240°	245°
112.5°	364.0	364.5	364.7	365.0	365.3	365.7	366.0	365.8	365.6	365.5	365.3
115°	410.0	410.2	410.1	410.0	409.8	409.7	409.5	409.8	410.2	410.5	410.8
117.5°	453.5	453.8	454.0	454.5	455.0	455.5	456.0	455.8	455.7	455.5	455.4
120°	497.1	497.4	497.3	497.2	497.0	496.9	496.7	497.0	497.3	497.6	497.9
122.5°	536.4	536.6	536.8	537.1	537.4	537.7	538.0	538.2	538.4	538.5	538.7
125°	576.2	576.5	576.3	576.0	575.7	575.4	575.1	575.6	576.1	576.6	577.1
127.5°	611.3	611.4	611.8	612.6	613.4	614.2	615.0	614.8	614.7	614.5	614.4
130°	646.9	647.0	647.2	647.7	648.2	648.6	649.1	649.3	649.5	649.6	649.8
132.5°	680.2	680.4	680.7	681.4	682.0	682.7	683.3	683.5	683.6	683.8	683.9
135°	711.0	710.9	711.2	711.9	712.5	713.2	713.8	714.1	714.4	714.7	715.0
137.5°	740.6	740.6	741.0	741.8	742.7	743.5	744.3	744.6	744.9	745.2	745.5
140°	770.2	770.4	770.6	770.9	771.2	771.5	771.8	772.3	772.8	773.3	773.8
142.5°	797.0	797.3	797.4	797.5	797.7	797.8	798.0	798.3	798.6	798.9	799.2
145°	822.5	822.7	822.7	822.7	822.7	822.7	822.7	822.9	823.0	823.2	823.3
147.5°	844.7	845.2	845.1	845.0	844.8	844.7	844.5	844.7	844.8	845.0	845.1
150°	865.9	866.2	866.1	866.0	865.8	865.7	865.5	865.5	865.5	865.5	865.5
152.5°	884.2	884.4	884.2	883.9	883.6	883.2	882.9	883.2	883.6	883.9	884.2
155°	900.3	900.4	900.2	899.7	899.2	898.7	898.2	898.8	899.5	900.1	900.8
157.5°	914.9	914.9	914.6	913.9	913.3	912.6	912.0	912.8	913.6	914.4	915.2
160°	926.0	925.8	925.7	925.6	925.4	925.3	925.1	926.1	927.0	928.0	928.9
162.5°	937.0	936.7	936.6	936.4	936.3	936.1	935.9	936.9	937.9	938.8	939.8
165°	945.8	945.4	945.4	945.4	945.4	945.4	945.4	946.7	948.0	949.3	950.6
167.5°	953.8	953.4	953.3	953.1	953.0	952.8	952.6	954.1	955.5	957.0	958.5
170°	959.7	959.2	959.3	959.4	959.6	959.7	959.9	961.2	962.5	963.8	965.1
172.5°	964.0	963.5	963.6	963.8	963.9	964.1	964.3	965.6	966.9	968.2	969.5
175°	966.9	966.4	966.5	966.7	966.8	967.0	967.2	968.6	970.1	971.5	973.0
177.5°	968.5	967.9	968.1	968.4	968.7	969.0	969.3	970.6	971.9	973.2	974.5
180°	970.8	970.8	970.8	970.8	970.8	970.8	970.8	970.8	970.8	970.8	970.8

TEST NUMBER: P1032603

CATALOG NUMBER: S124DIW-B1195D770UB2750-4F0-XX-W2A-A_5000K

CANDELA DISTRIBUTION (continued):

	247.5°	250°	255°	260°	265°	270°	275°	280°	285°	290°	292.5°
0°	1857.3	1857.3	1857.3	1857.3	1857.3	1857.3	1857.3	1857.3	1857.3	1857.3	1857.3
2.5°	1752.6	1751.1	1743.4	1746.5	1737.2	1740.3	1744.9	1746.5	1752.6	1748.0	1746.5
5°	1644.9	1641.8	1637.2	1632.6	1631.1	1637.2	1626.5	1629.5	1632.6	1637.2	1643.4
7.5°	1557.2	1555.7	1551.1	1543.4	1540.3	1537.2	1538.7	1549.5	1548.0	1546.4	1557.2
10°	1477.2	1478.7	1469.5	1468.0	1458.7	1457.2	1458.7	1461.8	1466.4	1472.6	1474.1
12.5°	1394.1	1414.1	1397.2	1391.0	1377.2	1384.9	1388.0	1374.1	1381.8	1386.4	1409.5
15°	1341.8	1332.6	1321.8	1321.8	1315.6	1312.6	1304.9	1315.6	1321.8	1331.0	1327.9
17.5°	1269.5	1254.1	1247.9	1241.8	1243.3	1249.5	1232.5	1257.2	1257.2	1261.8	1254.1
20°	1206.4	1194.1	1186.4	1183.3	1178.7	1175.6	1174.1	1180.2	1189.5	1192.5	1200.2
22.5°	1140.2	1140.2	1127.9	1123.3	1120.2	1115.6	1123.3	1118.7	1124.8	1131.0	1143.3
25°	1084.8	1084.8	1080.2	1074.0	1069.4	1066.4	1071.0	1069.4	1074.0	1081.7	1084.8
27.5°	1040.2	1035.6	1034.0	1032.5	1031.0	1032.5	1031.0	1035.6	1040.2	1041.7	1038.7
30°	1001.7	997.1	998.6	998.6	1000.2	998.6	997.1	1001.7	1003.3	1000.2	1001.7
32.5°	966.3	966.3	969.4	971.0	971.0	972.5	974.0	971.0	972.5	967.9	969.4
35°	937.1	940.2	943.3	944.8	946.3	944.8	947.9	946.3	943.3	940.2	938.6
37.5°	907.9	910.9	917.1	918.6	923.2	924.8	921.7	921.7	920.2	914.0	910.9
40°	877.1	880.2	887.9	892.5	895.6	900.2	897.1	897.1	890.9	884.8	880.2
42.5°	847.9	854.0	861.7	866.3	872.5	872.5	872.5	869.4	861.7	855.5	850.9
45°	818.6	820.2	830.9	838.6	844.8	844.8	844.8	840.2	835.5	823.2	817.1
47.5°	786.3	790.9	803.2	810.9	817.1	818.6	818.6	814.0	804.8	794.0	786.3
50°	750.9	758.6	772.5	783.2	790.9	794.0	789.4	786.3	775.5	763.2	754.0
52.5°	717.1	726.3	743.2	752.4	763.2	764.8	763.2	758.6	746.3	729.4	721.7
55°	683.2	690.9	709.4	724.8	734.0	737.1	734.0	726.3	710.9	694.0	686.3
57.5°	646.3	657.0	677.0	692.4	703.2	704.7	701.7	694.0	681.7	660.1	649.4
60°	607.8	621.7	641.7	657.0	670.9	672.4	669.4	658.6	643.2	621.7	612.4
62.5°	569.3	580.1	603.2	620.1	630.9	638.6	632.4	621.7	606.3	584.7	570.9
65°	524.7	540.1	560.1	575.5	587.8	589.3	586.3	577.0	560.1	537.0	526.3
67.5°	481.6	492.4	512.4	532.4	537.0	541.6	537.0	527.8	513.9	493.9	478.6
70°	429.3	438.5	463.2	477.0	483.2	487.8	484.7	475.5	463.2	444.7	432.4
72.5°	377.0	384.7	407.8	418.5	430.8	429.3	427.8	421.6	404.7	392.4	384.7
75°	321.6	330.8	346.2	360.1	364.7	364.7	364.7	360.1	349.3	329.3	321.6
77.5°	270.8	275.4	287.7	295.4	300.1	301.6	300.1	292.4	286.2	272.4	267.7
80°	207.7	220.0	229.3	230.8	237.0	237.0	237.0	233.9	227.7	213.9	212.3
82.5°	157.0	160.0	169.3	173.9	177.0	175.4	175.4	169.3	167.7	160.0	157.0
85°	106.2	110.8	109.3	115.4	116.9	113.9	113.9	116.9	109.3	110.8	106.2
87.5°	58.5	58.5	61.5	60.0	66.2	66.2	63.1	64.6	61.5	60.0	58.5
90°	20.3	20.5	20.8	21.1	21.5	21.8	21.5	21.1	20.8	20.5	20.3
92.5°	19.6	19.6	19.6	19.6	19.6	19.6	19.6	19.6	19.6	19.6	19.6
95°	20.3	20.4	20.6	20.7	20.9	21.1	20.9	20.7	20.6	20.4	20.3
97.5°	19.6	19.7	19.8	20.0	20.1	20.3	20.1	20.0	19.8	19.7	19.6
100°	19.6	19.7	19.8	20.0	20.1	20.3	20.1	20.0	19.8	19.7	19.6
102.5°	21.1	21.1	21.1	21.1	21.1	21.1	21.1	21.1	21.1	21.1	21.1
105°	233.1	230.2	224.4	218.5	212.7	206.9	212.7	218.5	224.4	230.2	233.1
107.5°	276.6	276.9	277.6	278.2	278.9	279.5	278.9	278.2	277.6	276.9	276.6
110°	321.7	321.9	322.4	322.9	323.3	323.8	323.3	322.9	322.4	321.9	321.7

TEST NUMBER: P1032603

CATALOG NUMBER: S124DIW-B1195D770UB2750-4F0-XX-W2A-A_5000K

CANDELA DISTRIBUTION (continued):

	247.5°	250°	255°	260°	265°	270°	275°	280°	285°	290°	292.5°
112.5°	365.2	365.5	366.2	366.8	367.5	368.1	367.5	366.8	366.2	365.5	365.2
115°	411.0	411.0	411.0	411.0	411.0	411.0	411.0	411.0	411.0	411.0	411.0
117.5°	455.3	455.3	455.3	455.3	455.3	455.3	455.3	455.3	455.3	455.3	455.3
120°	498.1	497.9	497.6	497.3	497.0	496.7	497.0	497.3	497.6	497.9	498.1
122.5°	538.8	538.6	538.3	538.0	537.6	537.3	537.6	538.0	538.3	538.6	538.8
125°	577.3	577.4	577.5	577.7	577.8	578.0	577.8	577.7	577.5	577.4	577.3
127.5°	614.3	614.2	614.1	613.9	613.8	613.6	613.8	613.9	614.1	614.2	614.3
130°	649.9	649.9	649.9	649.9	649.9	649.9	649.9	649.9	649.9	649.9	649.9
132.5°	684.0	683.9	683.8	683.6	683.5	683.3	683.5	683.6	683.8	683.9	684.0
135°	715.2	715.4	715.7	716.0	716.4	716.7	716.4	716.0	715.7	715.4	715.2
137.5°	745.7	745.6	745.5	745.3	745.2	745.0	745.2	745.3	745.5	745.6	745.7
140°	774.0	774.1	774.3	774.4	774.6	774.8	774.6	774.4	774.3	774.1	774.0
142.5°	799.4	799.4	799.4	799.4	799.4	799.4	799.4	799.4	799.4	799.4	799.4
145°	823.4	823.6	823.9	824.2	824.6	824.9	824.6	824.2	823.9	823.6	823.4
147.5°	845.2	845.3	845.4	845.6	845.7	845.9	845.7	845.6	845.4	845.3	845.2
150°	865.5	865.6	865.7	865.9	866.0	866.2	866.0	865.9	865.7	865.6	865.5
152.5°	884.4	884.3	884.2	884.0	883.9	883.7	883.9	884.0	884.2	884.3	884.4
155°	901.1	900.9	900.4	899.9	899.4	898.9	899.4	899.9	900.4	900.9	901.1
157.5°	915.6	915.2	914.4	913.6	912.8	912.0	912.8	913.6	914.4	915.2	915.6
160°	929.4	928.9	928.0	927.0	926.1	925.1	926.1	927.0	928.0	928.9	929.4
162.5°	940.3	939.7	938.6	937.5	936.3	935.2	936.3	937.5	938.6	939.7	940.3
165°	951.2	950.5	949.0	947.6	946.1	944.7	946.1	947.6	949.0	950.5	951.2
167.5°	959.2	958.4	956.8	955.1	953.5	951.9	953.5	955.1	956.8	958.4	959.2
170°	965.7	964.9	963.3	961.7	960.1	958.5	960.1	961.7	963.3	964.9	965.7
172.5°	970.1	969.2	967.4	965.7	963.9	962.1	963.9	965.7	967.4	969.2	970.1
175°	973.7	972.7	970.8	968.9	966.9	965.0	966.9	968.9	970.8	972.7	973.7
177.5°	975.2	974.2	972.3	970.3	968.4	966.4	968.4	970.3	972.3	974.2	975.2
180°	970.8	970.8	970.8	970.8	970.8	970.8	970.8	970.8	970.8	970.8	970.8

TEST NUMBER: P1032603

CATALOG NUMBER: S124DIW-B1195D770UB2750-4F0-XX-W2A-A_5000K

CANDELA DISTRIBUTION (continued):

	295°	300°	305°	310°	315°	320°	325°	330°	335°	337.5°	340°
0°	1857.3	1857.3	1857.3	1857.3	1857.3	1857.3	1857.3	1857.3	1857.3	1857.3	1857.3
2.5°	1746.5	1755.7	1746.5	1752.6	1755.7	1763.4	1766.5	1780.3	1784.9	1795.7	1795.7
5°	1641.8	1646.5	1648.0	1654.2	1660.3	1675.7	1686.5	1706.5	1729.6	1732.6	1746.5
7.5°	1557.2	1564.9	1577.2	1572.6	1583.4	1606.5	1620.3	1644.9	1668.0	1680.3	1697.2
10°	1481.8	1491.0	1495.7	1500.3	1520.3	1540.3	1561.8	1578.8	1609.5	1628.0	1641.8
12.5°	1420.3	1412.6	1421.8	1438.7	1461.8	1474.1	1503.4	1529.5	1552.6	1572.6	1584.9
15°	1340.2	1346.4	1355.6	1384.9	1391.0	1421.8	1432.6	1461.8	1504.9	1523.4	1538.7
17.5°	1263.3	1283.3	1301.8	1312.6	1331.0	1355.6	1386.4	1418.7	1446.4	1468.0	1486.4
20°	1201.8	1221.8	1232.5	1240.2	1258.7	1292.5	1321.8	1361.8	1397.2	1414.1	1438.7
22.5°	1152.5	1152.5	1167.9	1191.0	1201.8	1234.1	1258.7	1301.8	1340.2	1361.8	1384.9
25°	1091.0	1100.2	1112.5	1132.5	1147.9	1174.1	1209.5	1246.4	1287.9	1306.4	1335.6
27.5°	1040.2	1051.0	1067.9	1072.5	1087.9	1111.0	1147.9	1187.9	1231.0	1251.0	1275.6
30°	1001.7	1007.9	1014.0	1023.3	1037.1	1057.1	1087.9	1123.3	1175.6	1191.0	1221.8
32.5°	967.9	971.0	974.0	981.7	989.4	1009.4	1034.0	1072.5	1115.6	1138.7	1166.4
35°	937.1	934.0	935.6	940.2	947.9	955.6	981.7	1014.0	1054.0	1081.7	1103.3
37.5°	907.9	901.7	900.2	900.2	903.2	912.5	932.5	960.2	1003.3	1026.3	1047.9
40°	875.5	869.4	866.3	864.8	863.2	869.4	884.8	912.5	946.3	967.9	992.5
42.5°	844.8	838.6	830.9	829.4	826.3	829.4	840.2	866.3	895.6	917.1	937.1
45°	814.0	803.2	794.0	787.8	789.4	784.8	792.5	812.5	846.3	860.2	880.2
47.5°	780.1	767.8	755.5	749.4	743.2	746.3	749.4	766.3	795.5	809.4	829.4
50°	747.8	730.9	717.1	709.4	704.7	701.7	704.7	721.7	743.2	755.5	772.5
52.5°	710.9	694.0	680.1	667.8	661.7	657.0	658.6	674.0	694.0	706.3	723.2
55°	677.0	655.5	637.0	621.7	617.0	615.5	614.0	624.7	641.7	654.0	667.8
57.5°	638.6	617.0	597.0	578.6	569.3	567.8	567.8	570.9	592.4	601.7	609.3
60°	600.1	577.0	555.5	538.6	524.7	520.1	518.6	524.7	535.5	544.7	555.5
62.5°	557.0	533.9	507.8	492.4	478.6	466.2	470.9	472.4	487.8	492.4	501.6
65°	515.5	489.3	467.8	443.2	427.8	420.1	417.0	420.1	432.4	433.9	440.1
67.5°	467.8	443.2	417.0	400.1	386.2	372.4	369.3	369.3	375.5	380.1	387.8
70°	421.6	397.0	367.8	349.3	335.4	323.1	318.5	317.0	321.6	324.7	332.4
72.5°	367.8	343.1	321.6	301.6	284.7	275.4	270.8	267.7	272.4	275.4	277.0
75°	310.8	290.8	269.3	249.3	238.5	229.3	223.1	218.5	221.6	221.6	221.6
77.5°	257.0	237.0	220.0	206.2	192.3	181.6	177.0	172.3	173.9	173.9	177.0
80°	200.0	186.2	172.3	160.0	147.7	138.5	135.4	130.8	127.7	126.2	126.2
82.5°	147.7	136.9	124.6	113.9	107.7	98.5	95.4	89.2	89.2	87.7	87.7
85°	98.5	92.3	80.0	72.3	67.7	63.1	60.0	56.9	52.3	52.3	50.8
87.5°	52.3	49.2	46.2	36.9	36.9	32.3	30.8	29.2	24.6	26.2	26.2
90°	19.8	18.9	17.9	17.0	16.0	14.7	13.4	12.1	10.8	10.2	9.3
92.5°	19.1	18.1	17.2	16.2	15.2	13.9	12.6	11.3	10.0	9.4	9.6
95°	19.8	18.9	17.9	17.0	16.0	15.8	15.6	15.5	15.3	15.2	17.9
97.5°	19.2	18.4	17.6	16.8	16.0	32.9	49.9	66.8	83.7	92.2	90.4
100°	21.0	23.7	26.4	29.2	31.9	54.2	76.5	98.8	121.1	132.2	130.7
102.5°	39.2	75.5	111.8	148.1	184.4	182.5	180.5	178.6	176.7	175.7	174.7
105°	232.4	230.9	229.4	228.0	226.5	225.7	224.9	224.1	223.3	222.9	222.4
107.5°	276.2	275.4	274.6	273.8	273.0	271.9	270.7	269.6	268.5	267.9	267.7
110°	321.5	321.2	320.9	320.5	320.2	319.2	318.3	317.3	316.4	315.9	315.7

TEST NUMBER: P1032603

CATALOG NUMBER: S124DIW-B1195D770UB2750-4F0-XX-W2A-A_5000K

CANDELA DISTRIBUTION (continued):

	295°	300°	305°	310°	315°	320°	325°	330°	335°	337.5°	340°
112.5°	365.3	365.5	365.6	365.8	366.0	365.7	365.3	365.0	364.7	364.5	364.0
115°	410.8	410.5	410.2	409.8	409.5	409.7	409.8	410.0	410.1	410.2	410.0
117.5°	455.4	455.5	455.7	455.8	456.0	455.5	455.0	454.5	454.0	453.8	453.5
120°	497.9	497.6	497.3	497.0	496.7	496.9	497.0	497.2	497.3	497.4	497.1
122.5°	538.7	538.5	538.4	538.2	538.0	537.7	537.4	537.1	536.8	536.6	536.4
125°	577.1	576.6	576.1	575.6	575.1	575.4	575.7	576.0	576.3	576.5	576.2
127.5°	614.4	614.5	614.7	614.8	615.0	614.2	613.4	612.6	611.8	611.4	611.3
130°	649.8	649.6	649.5	649.3	649.1	648.6	648.2	647.7	647.2	647.0	646.9
132.5°	683.9	683.8	683.6	683.5	683.3	682.7	682.0	681.4	680.7	680.4	680.2
135°	715.0	714.7	714.4	714.1	713.8	713.2	712.5	711.9	711.2	710.9	711.0
137.5°	745.5	745.2	744.9	744.6	744.3	743.5	742.7	741.8	741.0	740.6	740.6
140°	773.8	773.3	772.8	772.3	771.8	771.5	771.2	770.9	770.6	770.4	770.2
142.5°	799.2	798.9	798.6	798.3	798.0	797.8	797.7	797.5	797.4	797.3	797.0
145°	823.3	823.2	823.0	822.9	822.7	822.7	822.7	822.7	822.7	822.7	822.5
147.5°	845.1	845.0	844.8	844.7	844.5	844.7	844.8	845.0	845.1	845.2	844.7
150°	865.5	865.5	865.5	865.5	865.5	865.7	865.8	866.0	866.1	866.2	865.9
152.5°	884.2	883.9	883.6	883.2	882.9	883.2	883.6	883.9	884.2	884.4	884.2
155°	900.8	900.1	899.5	898.8	898.2	898.7	899.2	899.7	900.2	900.4	900.3
157.5°	915.2	914.4	913.6	912.8	912.0	912.6	913.3	913.9	914.6	914.9	914.9
160°	928.9	928.0	927.0	926.1	925.1	925.3	925.4	925.6	925.7	925.8	926.0
162.5°	939.8	938.8	937.9	936.9	935.9	936.1	936.3	936.4	936.6	936.7	937.0
165°	950.6	949.3	948.0	946.7	945.4	945.4	945.4	945.4	945.4	945.4	945.8
167.5°	958.5	957.0	955.5	954.1	952.6	952.8	953.0	953.1	953.3	953.4	953.8
170°	965.1	963.8	962.5	961.2	959.9	959.7	959.6	959.4	959.3	959.2	959.7
172.5°	969.5	968.2	966.9	965.6	964.3	964.1	963.9	963.8	963.6	963.5	964.0
175°	973.0	971.5	970.1	968.6	967.2	967.0	966.8	966.7	966.5	966.4	966.9
177.5°	974.5	973.2	971.9	970.6	969.3	969.0	968.7	968.4	968.1	967.9	968.5
180°	970.8	970.8	970.8	970.8	970.8	970.8	970.8	970.8	970.8	970.8	970.8

TEST NUMBER: P1032603

CATALOG NUMBER: S124DIW-B1195D770UB2750-4F0-XX-W2A-A_5000K

CANDELA DISTRIBUTION (continued):

	345°	350°	355°	360°
0°	1857.3	1857.3	1857.3	1857.3
2.5°	1806.5	1821.9	1835.7	1857.3
5°	1766.5	1788.0	1817.3	1849.6
7.5°	1720.3	1754.2	1792.6	1837.3
10°	1677.2	1715.7	1764.9	1818.8
12.5°	1632.6	1678.8	1732.6	1791.1
15°	1581.8	1628.0	1688.0	1766.5
17.5°	1535.7	1591.1	1655.7	1738.8
20°	1481.8	1534.1	1604.9	1700.3
22.5°	1434.1	1494.1	1572.6	1655.7
25°	1381.8	1434.1	1512.6	1612.6
27.5°	1329.5	1394.1	1469.5	1566.4
30°	1278.7	1332.6	1414.1	1515.7
32.5°	1223.3	1287.9	1363.3	1458.7
35°	1163.3	1224.8	1295.6	1398.7
37.5°	1109.4	1169.4	1241.8	1332.6
40°	1049.4	1112.5	1178.7	1269.5
42.5°	991.0	1047.9	1114.1	1197.1
45°	934.0	983.3	1043.3	1115.6
47.5°	875.5	917.1	972.5	1037.1
50°	812.5	857.1	898.6	952.5
52.5°	754.0	792.5	826.3	870.9
55°	697.1	723.2	750.9	784.8
57.5°	637.0	657.0	677.0	712.4
60°	577.0	595.5	606.3	629.3
62.5°	518.6	526.3	540.1	553.9
65°	453.9	464.7	472.4	489.3
67.5°	395.5	400.1	407.8	418.5
70°	333.9	344.7	347.8	355.5
72.5°	281.6	286.2	289.3	290.8
75°	223.1	227.7	230.8	240.0
77.5°	175.4	173.9	180.0	181.6
80°	129.3	124.6	126.2	132.3
82.5°	84.6	86.2	84.6	84.6
85°	52.3	50.8	47.7	49.2
87.5°	23.1	23.1	21.5	21.5
90°	7.5	5.8	4.0	2.2
92.5°	9.9	10.2	10.6	10.9
95°	23.4	28.9	34.4	39.9
97.5°	86.9	83.3	79.8	76.2
100°	127.8	124.9	122.0	119.1
102.5°	172.8	170.9	168.9	167.0
105°	221.5	220.5	219.6	218.6
107.5°	267.2	266.7	266.3	265.8
110°	315.2	314.7	314.2	313.7

TEST NUMBER: P1032603

CATALOG NUMBER: S124DIW-B1195D770UB2750-4F0-XX-W2A-A_5000K

CANDELA DISTRIBUTION (continued):

	345°	350°	355°	360°
112.5°	363.0	362.1	361.1	360.1
115°	409.5	409.0	408.6	408.1
117.5°	452.8	452.2	451.5	450.9
120°	496.4	495.8	495.1	494.5
122.5°	536.1	535.8	535.4	535.1
125°	575.5	574.9	574.2	573.6
127.5°	611.2	611.0	610.9	610.7
130°	646.7	646.6	646.4	646.2
132.5°	679.9	679.6	679.2	678.9
135°	711.1	711.3	711.4	711.6
137.5°	740.6	740.6	740.6	740.6
140°	769.9	769.6	769.2	768.9
142.5°	796.3	795.7	795.0	794.4
145°	822.0	821.5	821.0	820.5
147.5°	843.7	842.8	841.8	840.8
150°	865.2	864.6	863.9	863.3
152.5°	883.7	883.2	882.7	882.2
155°	900.1	900.0	899.8	899.6
157.5°	914.9	914.9	914.9	914.9
160°	926.5	927.0	927.5	928.0
162.5°	937.7	938.3	939.0	939.6
165°	946.6	947.4	948.2	949.0
167.5°	954.6	955.4	956.2	957.0
170°	960.6	961.6	962.5	963.5
172.5°	965.0	965.9	966.9	967.9
175°	967.9	968.8	969.8	970.8
177.5°	969.6	970.7	971.9	973.0
180°	970.8	970.8	970.8	970.8

(END OF REPORT)