

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1032870

Luminaire Tested: S124RDIW-B1020D470UB2750-4F0-XX-W2A-A_2700K

Issue Date: 5/7/2025

Test Information

Test Method: LM-79-2019
Report Number: P1032870
REPORT IS A COMBINATION OF REPORTS P999959 AND P1007351
Test Lab: INNOVATION CENTER
Issue Date: 5/7/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S124RDIW-B1020D470UB2750-4F0-XX-W2A-A_2700K
Description: Define 4 Regressed Direct/Indirect Wall Mount with 2700K BioUP LEDs {m-DER=0.473}
{m-EER=0.52}
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6155.0 lumens
Efficiency: N/A
Efficacy: 102.6 lumens/watt
Spacing Criteria (0/90/45): 1.22 / 1.27 / 1.38
Luminous Opening: Rectangular w/ Sides (W: 0.33' x L: 4' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 60
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1032870

CATALOG NUMBER: S124RDIW-B1020D470UB2750-4F0-XX-W2A-A_2700K

Luminous Intensity Polar Plot

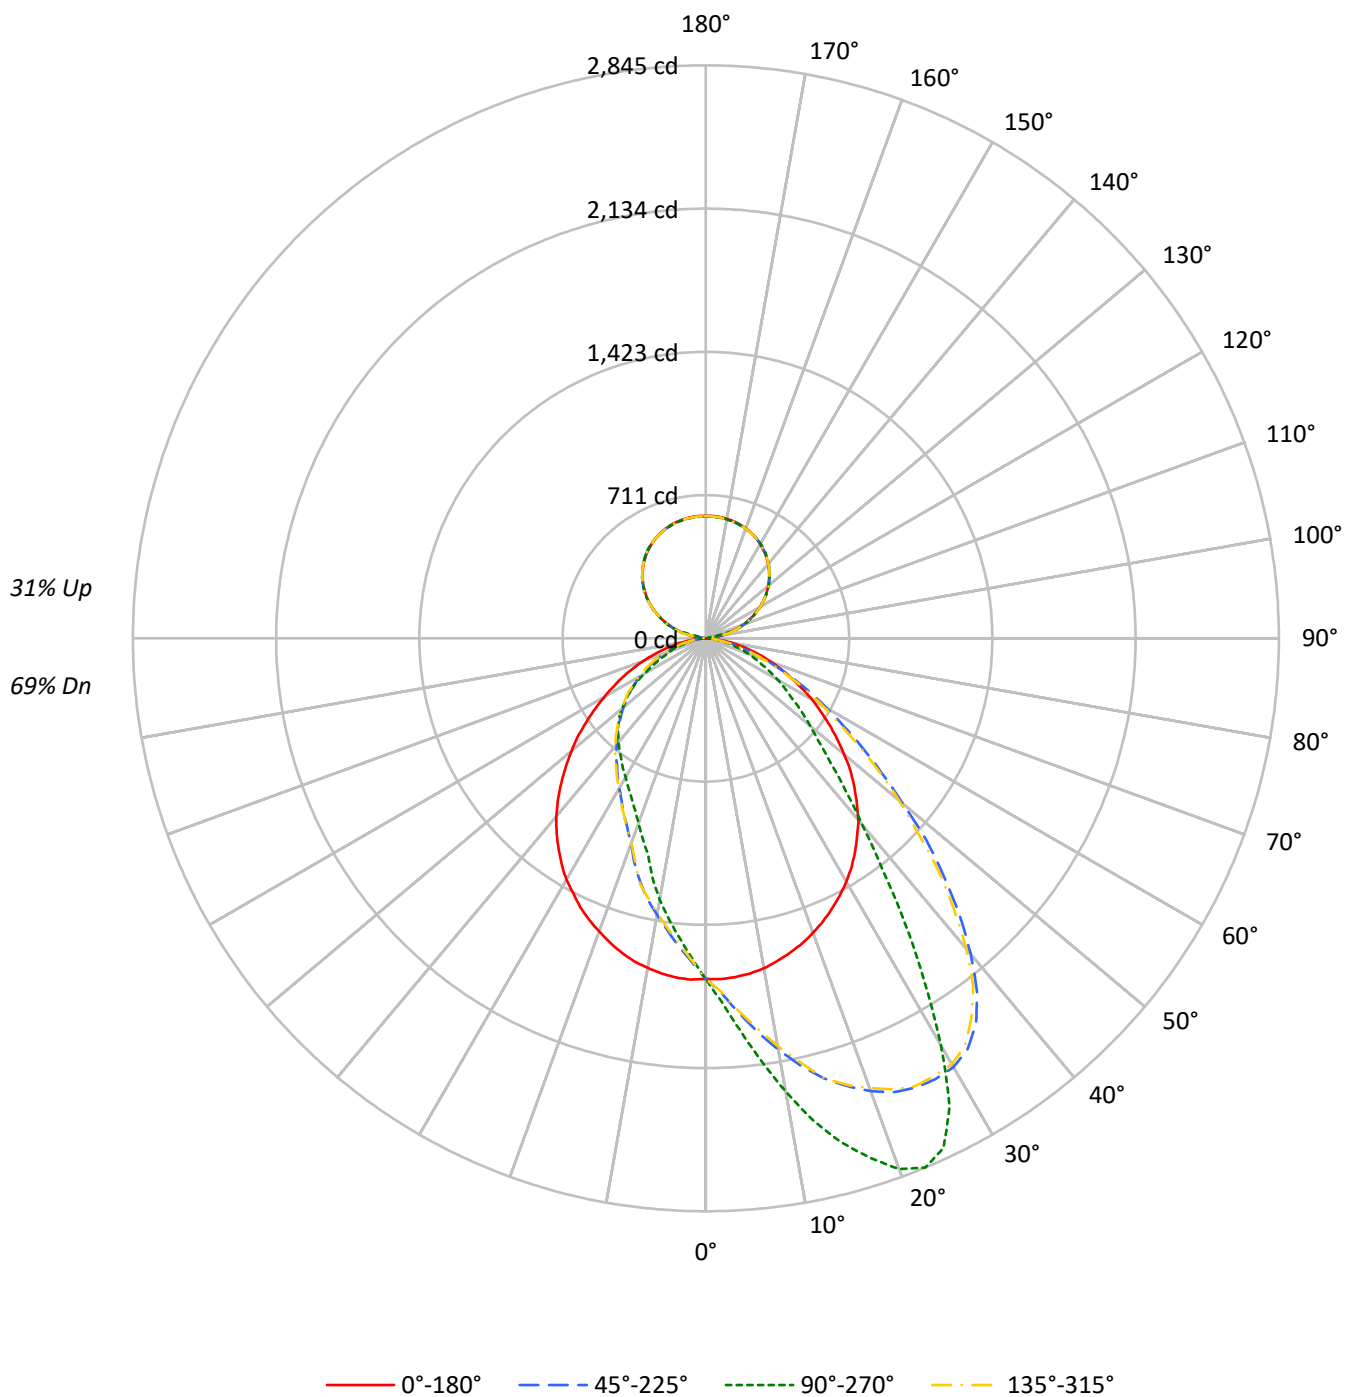

TEST NUMBER: P1032870

CATALOG NUMBER: S124RDIW-B1020D470UB2750-4F0-XX-W2A-A_2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	112	112	112	112	106	106	106	106	94	94	94	84	84	84	74	74	74
1	103	99	95	91	97	93	90	87	84	81	79	75	73	71	66	65	64
2	94	87	81	76	89	82	77	73	74	70	66	66	63	60	59	57	55
3	86	77	70	64	81	73	67	61	66	61	57	59	55	52	53	50	47
4	79	69	61	55	75	65	58	53	59	53	49	53	49	45	48	44	41
5	73	61	53	47	69	59	51	46	53	47	43	48	43	39	43	39	36
6	68	55	47	42	64	53	46	40	48	42	37	44	39	35	40	35	32
7	63	50	42	37	59	48	41	36	44	38	33	40	35	31	36	32	29
8	58	46	38	33	55	44	37	32	40	34	30	37	32	28	33	29	26
9	54	42	35	29	52	40	33	29	37	31	27	34	29	25	31	27	24
10	51	39	31	27	48	37	30	26	34	28	24	31	26	23	29	25	21

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	13787	13787	13787	13787
5°	13787	15579	13809	11907
10°	13714	17959	13702	10355
15°	13550	20212	13550	8670
20°	13380	21914	13310	7634
25°	13171	22008	13110	6896
30°	12949	18714	12848	6387
35°	12636	14120	12476	6008
40°	12287	10233	12045	5712
45°	11711	7778	11420	5450
50°	11027	6286	10725	5066
55°	10285	5204	9949	4555
60°	9542	4400	9115	3788
65°	8607	3585	8333	3011
70°	7750	2906	7387	2446
75°	6792	2095	6320	1793
80°	5602	1389	5100	1318
85°	4068	715	3369	715

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 35°

Vertical Angle: 45°

Luminance: 17260 cd/sqm

TEST NUMBER: P1032870

CATALOG NUMBER: S124RDIW-B1020D470UB2750-4F0-XX-W2A-A_2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	163.7	2.7
10°-20°	494.4	8.0
20°-30°	774.4	12.6
30°-40°	860.0	14.0
40°-50°	762.1	12.4
50°-60°	593.9	9.6
60°-70°	388.5	6.3
70°-80°	190.6	3.1
80°-90°	47.7	0.8
90°-100°	20.2	0.3
100°-110°	132.8	2.2
110°-120°	253.6	4.1
120°-130°	321.9	5.2
130°-140°	344.4	5.6
140°-150°	322.0	5.2
150°-160°	259.7	4.2
160°-170°	167.5	2.7
170°-180°	57.7	0.9
0°-30°	1432.6	23.3
0°-40°	2292.5	37.2
0°-60°	3648.5	59.3
0°-90°	4275.3	69.5
90°-120°	406.6	6.6
90°-150°	1394.9	22.7
90°-180°	1880.0	30.5
0°-180°	6155.0	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1691	1691	1691	1691	1691	
5°	1688	1954	1691	1493	1688	160
15°	1616	2589	1616	1110	1616	456
25°	1481	2792	1474	875	1481	683
35°	1292	1719	1275	732	1292	807
45°	1041	879	1015	616	1041	803
55°	749	524	725	459	749	670
65°	470	306	455	258	470	469
75°	236	142	219	121	236	250
85°	56	34	46	34	56	63
90°	1	14	1	14	1	5
95°	25	13	25	13	25	31
105°	137	130	137	130	137	143
115°	255	257	255	257	255	251
125°	359	362	359	362	359	321
135°	445	448	445	448	445	343
145°	513	516	513	516	513	321
155°	563	562	563	562	563	260
165°	594	591	594	591	594	168
175°	608	604	608	604	608	58
180°	608	608	608	608	608	

TEST NUMBER: P1032870

CATALOG NUMBER: S124RDIW-B1020D470UB2750-4F0-XX-W2A-A_2700K

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
0°	1690.7	1690.7	1690.7	1690.7	1690.7	1690.7	1690.7	1690.7	1690.7	1690.7	1690.7
2.5°	1693.5	1708.5	1716.6	1723.4	1737.1	1742.5	1753.4	1756.1	1767.0	1765.7	1761.6
5°	1688.0	1713.9	1733.0	1753.4	1777.9	1791.6	1806.5	1828.3	1839.2	1854.2	1863.8
7.5°	1678.5	1713.9	1745.2	1776.6	1816.1	1837.9	1857.0	1891.0	1919.6	1944.2	1971.4
10°	1663.5	1708.5	1754.8	1797.0	1851.5	1877.4	1906.0	1956.4	1995.9	2030.0	2073.6
12.5°	1640.3	1703.0	1754.8	1812.0	1881.5	1916.9	1955.0	2015.0	2061.3	2117.2	2171.7
15°	1615.8	1685.3	1753.4	1828.3	1907.4	1948.2	1986.4	2066.8	2137.6	2201.6	2261.6
17.5°	1588.6	1664.9	1739.8	1822.9	1918.3	1968.7	2013.6	2110.4	2188.0	2271.1	2331.1
20°	1555.9	1639.0	1724.8	1817.4	1925.1	1980.9	2031.3	2141.7	2227.5	2317.4	2392.4
22.5°	1520.4	1610.4	1704.4	1805.2	1916.9	1978.2	2036.8	2155.3	2254.8	2337.9	2438.7
25°	1480.9	1576.3	1673.0	1779.3	1904.6	1971.4	2031.3	2148.5	2254.8	2363.8	2461.9
27.5°	1440.1	1538.2	1639.0	1750.7	1878.8	1944.2	2012.3	2125.3	2249.3	2367.9	2467.3
30°	1395.1	1490.5	1596.7	1703.0	1839.2	1904.6	1974.1	2096.7	2231.6	2350.1	2457.8
32.5°	1346.1	1444.1	1545.0	1655.3	1788.8	1859.7	1923.7	2062.7	2200.3	2317.4	2418.3
35°	1291.6	1384.2	1479.6	1592.6	1724.8	1788.8	1865.1	2009.5	2148.5	2272.5	2337.9
37.5°	1233.0	1321.5	1410.1	1521.8	1648.5	1726.2	1801.1	1946.9	2094.0	2177.1	2211.2
40°	1178.5	1256.1	1333.8	1441.4	1569.5	1649.9	1726.2	1877.4	2006.8	2070.9	2045.0
42.5°	1109.0	1189.4	1258.9	1358.3	1487.7	1562.7	1640.3	1797.0	1901.9	1927.8	1863.8
45°	1040.9	1107.6	1174.4	1271.1	1407.4	1471.4	1554.5	1700.3	1787.5	1764.3	1670.3
47.5°	974.1	1028.6	1091.3	1185.3	1307.9	1384.2	1461.9	1588.6	1649.9	1617.2	1486.4
50°	895.1	949.6	1015.0	1096.7	1215.3	1288.8	1350.1	1467.3	1513.6	1433.2	1275.2
52.5°	820.2	867.9	923.7	1000.0	1113.1	1179.8	1246.6	1347.4	1362.4	1269.8	1103.5
55°	749.3	787.5	846.1	907.4	1010.9	1081.7	1128.1	1213.9	1209.8	1094.0	951.0
57.5°	675.8	711.2	750.7	814.7	912.8	965.9	1016.4	1091.3	1051.8	953.7	812.0
60°	610.4	630.8	670.3	731.6	814.7	861.0	900.5	941.4	907.4	801.1	692.1
62.5°	538.1	561.3	589.9	639.0	712.5	756.1	784.7	802.5	767.0	685.3	585.8
65°	470.0	490.5	520.4	564.0	619.9	652.6	667.6	679.8	660.8	568.1	489.1
67.5°	408.7	422.3	449.6	478.2	538.1	546.3	566.8	572.2	534.1	463.2	400.5
70°	347.4	361.0	373.3	407.4	434.6	449.6	453.7	453.7	415.5	369.2	317.4
72.5°	290.2	298.4	310.6	333.8	348.8	359.7	365.1	358.3	322.9	284.7	246.6
75°	235.7	239.8	250.7	265.7	277.9	273.8	272.5	264.3	238.4	211.2	189.4
77.5°	181.2	183.9	196.2	200.3	200.3	204.4	198.9	190.7	168.9	148.5	139.0
80°	136.2	140.3	141.7	144.4	141.7	141.7	137.6	124.0	113.1	103.5	96.7
82.5°	94.0	96.7	98.1	94.0	96.7	92.6	85.8	76.3	69.5	68.1	65.4
85°	55.9	57.2	55.9	55.9	51.8	50.4	45.0	43.6	40.9	40.9	39.5
87.5°	27.2	25.9	23.2	20.4	20.4	19.1	20.4	17.7	20.4	19.1	17.7
90°	1.4	2.5	3.6	4.7	5.8	6.4	6.8	7.6	8.4	9.2	10.0
92.5°	6.8	6.6	6.4	6.2	6.0	5.9	6.3	7.1	7.9	8.7	9.5
95°	25.0	21.6	18.1	14.7	11.2	9.5	9.6	9.7	9.8	9.9	10.0
97.5°	47.7	49.9	52.1	54.4	56.6	57.7	52.4	41.8	31.2	20.6	10.0
100°	74.5	76.3	78.1	80.0	81.8	82.7	75.7	61.8	47.9	33.9	20.0
102.5°	104.5	105.7	106.9	108.2	109.4	110.0	110.6	111.8	113.0	114.2	115.4
105°	136.8	137.4	138.0	138.6	139.2	139.5	139.8	140.3	140.8	141.3	141.8
107.5°	166.3	166.6	166.9	167.2	167.5	167.7	168.0	168.7	169.4	170.1	170.8
110°	196.3	196.6	196.9	197.2	197.5	197.6	197.9	198.5	199.2	199.8	200.4



TEST NUMBER: P1032870

CATALOG NUMBER: S124RDIW-B1020D470UB2750-4F0-XX-W2A-A_2700K

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
112.5°	225.4	226.0	226.6	227.2	227.8	228.1	228.2	228.4	228.6	228.8	229.0
115°	255.3	255.6	255.9	256.2	256.5	256.7	256.7	256.6	256.5	256.4	256.3
117.5°	282.2	282.6	283.0	283.4	283.8	284.0	284.1	284.4	284.7	285.0	285.3
120°	309.4	309.8	310.2	310.6	311.0	311.2	311.2	311.1	311.0	310.9	310.8
122.5°	334.9	335.1	335.3	335.5	335.7	335.8	335.9	336.1	336.3	336.5	336.7
125°	358.9	359.3	359.7	360.2	360.6	360.8	360.7	360.5	360.3	360.1	359.9
127.5°	382.1	382.2	382.3	382.4	382.5	382.6	382.8	383.3	383.8	384.3	384.8
130°	404.4	404.5	404.6	404.7	404.8	404.8	405.0	405.3	405.6	405.9	406.2
132.5°	424.8	425.0	425.2	425.4	425.6	425.7	425.9	426.3	426.8	427.2	427.6
135°	445.3	445.2	445.1	445.0	444.9	444.8	445.0	445.4	445.8	446.2	446.6
137.5°	463.4	463.4	463.4	463.4	463.4	463.4	463.7	464.2	464.7	465.2	465.7
140°	481.2	481.4	481.6	481.8	482.0	482.1	482.2	482.4	482.6	482.8	483.0
142.5°	497.1	497.5	497.9	498.3	498.7	498.9	498.9	499.0	499.1	499.2	499.3
145°	513.4	513.7	514.0	514.3	514.6	514.8	514.8	514.8	514.8	514.8	514.8
147.5°	526.1	526.7	527.3	528.0	528.6	528.9	528.8	528.7	528.6	528.5	528.4
150°	540.2	540.6	541.0	541.4	541.8	542.0	542.0	541.9	541.8	541.7	541.6
152.5°	552.0	552.3	552.6	552.9	553.2	553.4	553.3	553.1	552.9	552.7	552.5
155°	562.9	563.0	563.1	563.2	563.3	563.4	563.2	562.9	562.6	562.3	562.0
157.5°	572.5	572.5	572.5	572.5	572.5	572.5	572.3	571.9	571.5	571.1	570.7
160°	580.7	580.4	580.1	579.8	579.5	579.3	579.3	579.2	579.1	579.0	578.9
162.5°	587.9	587.5	587.1	586.7	586.3	586.1	586.1	586.0	585.9	585.8	585.7
165°	593.8	593.3	592.8	592.3	591.8	591.6	591.6	591.6	591.6	591.6	591.6
167.5°	598.8	598.3	597.8	597.3	596.8	596.6	596.5	596.4	596.3	596.2	596.1
170°	602.9	602.3	601.7	601.1	600.5	600.2	600.3	600.4	600.5	600.6	600.7
172.5°	605.7	605.1	604.5	603.8	603.2	602.9	603.0	603.1	603.2	603.3	603.4
175°	607.5	606.9	606.3	605.7	605.1	604.8	604.8	604.9	605.0	605.1	605.2
177.5°	608.8	608.1	607.4	606.7	606.0	605.7	605.8	606.0	606.2	606.4	606.6
180°	607.5	607.5	607.5	607.5	607.5	607.5	607.5	607.5	607.5	607.5	607.5

TEST NUMBER: P1032870

CATALOG NUMBER: S124RDIW-B1020D470UB2750-4FO-XX-W2A-A_2700K

CANDELA DISTRIBUTION (continued):

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°	95°
0°	1690.7	1690.7	1690.7	1690.7	1690.7	1690.7	1690.7	1690.7	1690.7	1690.7	1690.7
2.5°	1772.5	1787.5	1788.8	1802.5	1798.4	1791.6	1803.8	1795.6	1812.0	1806.5	1813.4
5°	1876.0	1896.5	1914.2	1925.1	1944.2	1940.1	1960.5	1953.7	1968.7	1953.7	1972.8
7.5°	1997.3	2031.3	2049.1	2077.7	2085.8	2087.2	2111.7	2117.2	2126.7	2117.2	2128.1
10°	2115.8	2156.7	2197.6	2220.7	2235.7	2256.1	2277.9	2287.5	2294.3	2284.8	2291.6
12.5°	2223.4	2287.5	2332.4	2378.8	2389.7	2407.4	2430.5	2427.8	2455.1	2449.6	2461.9
15°	2322.9	2393.7	2448.2	2485.0	2515.0	2530.0	2573.6	2576.3	2574.9	2588.6	2580.4
17.5°	2411.5	2471.4	2549.1	2596.7	2633.5	2633.5	2658.0	2708.5	2704.4	2703.0	2711.2
20°	2483.7	2551.8	2624.0	2704.4	2734.3	2739.8	2773.9	2799.7	2803.8	2803.8	2803.8
22.5°	2538.2	2618.5	2696.2	2753.4	2776.6	2795.7	2825.6	2842.0	2847.4	2844.7	2847.4
25°	2565.4	2641.7	2720.7	2772.5	2786.1	2797.0	2799.7	2809.3	2807.9	2791.6	2801.1
27.5°	2570.9	2644.4	2696.2	2709.8	2703.0	2696.2	2652.6	2656.7	2644.4	2619.9	2629.4
30°	2546.3	2585.8	2584.5	2542.2	2530.0	2501.4	2461.9	2403.3	2355.6	2335.2	2342.0
32.5°	2457.8	2457.8	2408.7	2313.4	2271.1	2219.4	2148.5	2095.4	2032.7	2019.1	2045.0
35°	2335.2	2265.7	2175.8	2050.4	1986.4	1948.2	1825.6	1787.5	1734.3	1719.4	1731.6
37.5°	2144.4	2028.6	1897.8	1780.7	1726.2	1658.0	1550.4	1495.9	1457.8	1431.9	1444.1
40°	1930.5	1790.2	1654.0	1509.5	1449.6	1393.7	1313.4	1264.3	1203.0	1205.7	1209.8
42.5°	1726.2	1561.3	1408.7	1275.2	1218.0	1171.7	1115.8	1055.9	1034.1	1027.3	1020.4
45°	1509.5	1333.8	1190.7	1091.3	1039.5	995.9	944.1	910.1	884.2	878.8	885.6
47.5°	1305.2	1156.7	1020.4	927.8	885.6	863.8	822.9	791.6	775.2	761.6	769.8
50°	1119.9	980.9	871.9	794.3	764.3	749.3	711.2	694.8	678.5	674.4	673.0
52.5°	967.3	848.8	754.8	692.1	668.9	660.8	632.2	609.0	595.4	599.5	602.2
55°	828.3	727.5	654.0	603.5	584.5	574.9	554.5	538.1	528.6	524.5	527.3
57.5°	705.7	618.5	565.4	524.5	509.5	505.5	483.7	478.2	471.4	467.3	467.3
60°	594.0	532.7	483.7	460.5	444.1	440.1	423.7	416.9	415.5	411.4	408.7
62.5°	500.0	449.6	415.5	391.0	384.2	382.8	371.9	363.8	359.7	356.9	356.9
65°	418.3	381.5	352.9	335.2	329.7	327.0	314.7	312.0	309.3	306.5	305.2
67.5°	348.8	316.1	295.6	283.4	276.6	277.9	271.1	265.7	265.7	264.3	262.9
70°	282.0	261.6	243.9	237.1	234.3	231.6	228.9	224.8	223.4	223.4	223.4
72.5°	222.1	208.4	198.9	194.8	192.1	189.4	186.6	186.6	186.6	185.3	185.3
75°	170.3	164.9	158.0	154.0	154.0	156.7	152.6	148.5	144.4	141.7	143.1
77.5°	128.1	125.3	121.3	114.4	115.8	113.1	113.1	110.4	111.7	111.7	109.0
80°	94.0	89.9	88.6	84.5	85.8	84.5	83.1	83.1	80.4	80.4	80.4
82.5°	65.4	61.3	61.3	59.9	58.6	58.6	57.2	57.2	58.6	55.9	55.9
85°	39.5	38.1	38.1	35.4	35.4	35.4	35.4	36.8	35.4	34.1	34.1
87.5°	17.7	19.1	17.7	16.3	16.3	16.3	15.0	15.0	13.6	15.0	15.0
90°	10.6	11.2	11.8	12.4	12.7	12.8	13.0	13.2	13.4	13.6	13.4
92.5°	10.1	10.7	11.4	12.0	12.3	12.3	12.3	12.3	12.3	12.3	12.3
95°	10.6	11.2	11.8	12.4	12.7	12.8	12.9	13.0	13.1	13.2	13.1
97.5°	10.5	11.0	11.5	12.0	12.3	12.3	12.4	12.5	12.6	12.7	12.6
100°	18.3	16.6	14.9	13.2	12.3	12.3	12.4	12.5	12.6	12.7	12.6
102.5°	92.7	70.0	47.3	24.6	13.2	13.2	13.2	13.2	13.2	13.2	13.2
105°	142.7	143.6	144.5	145.4	145.8	144.0	140.4	136.7	133.1	129.5	133.1
107.5°	171.3	171.8	172.3	172.8	173.1	173.3	173.7	174.1	174.5	174.9	174.5
110°	200.6	200.8	201.0	201.2	201.3	201.4	201.7	202.0	202.3	202.6	202.3

TEST NUMBER: P1032870

CATALOG NUMBER: S124RDIW-B1020D470UB2750-4F0-XX-W2A-A_2700K

CANDELA DISTRIBUTION (continued):

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°	95°
112.5°	228.9	228.8	228.7	228.6	228.5	228.7	229.1	229.6	230.0	230.4	230.0
115°	256.5	256.7	256.9	257.1	257.2	257.2	257.2	257.2	257.2	257.2	257.2
117.5°	285.2	285.1	285.0	284.9	284.9	284.9	284.9	284.9	284.9	284.9	284.9
120°	311.0	311.2	311.4	311.6	311.7	311.6	311.4	311.2	311.0	310.8	311.0
122.5°	336.8	336.9	337.0	337.1	337.1	337.0	336.8	336.6	336.4	336.2	336.4
125°	360.2	360.5	360.8	361.1	361.2	361.3	361.4	361.5	361.6	361.7	361.6
127.5°	384.7	384.6	384.5	384.4	384.4	384.3	384.2	384.1	384.0	383.9	384.0
130°	406.3	406.4	406.5	406.6	406.7	406.7	406.7	406.7	406.7	406.7	406.7
132.5°	427.7	427.8	427.9	428.0	428.0	428.0	427.9	427.8	427.7	427.6	427.7
135°	446.8	447.0	447.2	447.4	447.5	447.6	447.8	448.1	448.3	448.5	448.3
137.5°	465.9	466.1	466.3	466.5	466.6	466.6	466.5	466.4	466.3	466.2	466.3
140°	483.3	483.6	483.9	484.2	484.3	484.4	484.5	484.6	484.7	484.8	484.7
142.5°	499.5	499.7	499.9	500.1	500.2	500.2	500.2	500.2	500.2	500.2	500.2
145°	514.9	515.0	515.1	515.2	515.2	515.3	515.5	515.8	516.0	516.2	516.0
147.5°	528.5	528.6	528.7	528.8	528.9	528.9	529.0	529.1	529.2	529.3	529.2
150°	541.6	541.6	541.6	541.6	541.6	541.6	541.7	541.8	541.9	542.0	541.9
152.5°	552.7	552.9	553.1	553.3	553.4	553.4	553.3	553.2	553.1	553.0	553.1
155°	562.4	562.8	563.3	563.7	563.9	563.7	563.4	563.1	562.8	562.5	562.8
157.5°	571.2	571.7	572.2	572.7	572.9	572.7	572.2	571.7	571.2	570.7	571.2
160°	579.5	580.1	580.7	581.3	581.6	581.3	580.7	580.1	579.5	578.9	579.5
162.5°	586.3	586.9	587.5	588.1	588.4	588.0	587.3	586.6	585.9	585.2	585.9
165°	592.4	593.2	594.0	594.8	595.2	594.7	593.8	592.9	592.0	591.1	592.0
167.5°	597.0	597.9	598.8	599.7	600.2	599.7	598.7	597.7	596.7	595.7	596.7
170°	601.5	602.3	603.1	603.9	604.3	603.8	602.8	601.8	600.8	599.8	600.8
172.5°	604.2	605.0	605.8	606.6	607.0	606.4	605.3	604.2	603.1	602.0	603.1
175°	606.1	607.0	607.9	608.8	609.3	608.7	607.5	606.2	605.0	603.8	605.0
177.5°	607.4	608.2	609.0	609.8	610.2	609.6	608.4	607.2	606.0	604.8	606.0
180°	607.5	607.5	607.5	607.5	607.5	607.5	607.5	607.5	607.5	607.5	607.5

TEST NUMBER: P1032870

CATALOG NUMBER: S124RDIW-B1020D470UB2750-4F0-XX-W2A-A_2700K

CANDELA DISTRIBUTION (continued):

	100°	105°	110°	112.5°	115°	120°	125°	130°	135°	140°	145°
0°	1690.7	1690.7	1690.7	1690.7	1690.7	1690.7	1690.7	1690.7	1690.7	1690.7	1690.7
2.5°	1817.4	1807.9	1806.5	1806.5	1791.6	1799.7	1783.4	1765.7	1757.5	1757.5	1742.5
5°	1968.7	1959.1	1949.6	1934.6	1934.6	1926.4	1900.6	1874.7	1855.6	1839.2	1821.5
7.5°	2124.0	2114.5	2087.2	2072.2	2080.4	2064.0	2030.0	1986.4	1953.7	1927.8	1891.0
10°	2292.9	2267.0	2253.4	2245.2	2216.6	2198.9	2159.4	2095.4	2054.5	2020.4	1972.8
12.5°	2430.5	2438.7	2386.9	2391.0	2362.4	2337.9	2276.6	2215.3	2154.0	2106.3	2035.4
15°	2579.0	2554.5	2523.2	2498.6	2489.1	2459.1	2407.4	2325.6	2258.9	2183.9	2103.6
17.5°	2696.2	2677.1	2647.2	2624.0	2603.6	2531.3	2487.7	2415.5	2324.3	2250.7	2152.6
20°	2795.7	2777.9	2735.7	2720.7	2683.9	2632.2	2569.5	2457.8	2376.0	2295.7	2200.3
22.5°	2837.9	2820.2	2783.4	2764.3	2741.2	2690.7	2630.8	2524.5	2423.7	2322.9	2222.1
25°	2802.5	2802.5	2784.8	2777.9	2757.5	2712.5	2651.2	2561.3	2453.7	2344.7	2224.8
27.5°	2630.8	2664.9	2677.1	2683.9	2683.9	2685.3	2643.1	2555.9	2451.0	2344.7	2219.4
30°	2382.8	2440.1	2490.5	2505.5	2531.3	2560.0	2577.7	2535.4	2441.4	2329.7	2204.4
32.5°	2070.9	2144.4	2238.4	2261.6	2297.0	2382.8	2430.5	2448.2	2396.5	2298.4	2164.9
35°	1760.2	1852.9	1910.1	1980.9	2013.6	2140.3	2246.6	2310.6	2298.4	2239.8	2118.5
37.5°	1489.1	1542.2	1611.7	1686.7	1752.1	1873.3	2005.5	2129.4	2179.8	2151.2	2060.0
40°	1228.9	1291.6	1374.7	1436.0	1480.9	1602.2	1765.7	1900.6	2010.9	2028.6	1972.8
42.5°	1045.0	1107.6	1158.0	1224.8	1260.2	1377.4	1521.8	1690.7	1821.5	1891.0	1866.5
45°	903.3	941.4	982.3	1020.4	1064.0	1167.6	1301.1	1486.4	1633.5	1731.6	1741.2
47.5°	779.3	813.4	848.8	884.2	908.7	989.1	1111.7	1262.9	1423.7	1558.6	1611.7
50°	692.1	708.4	734.3	754.8	783.4	852.9	951.0	1081.7	1252.0	1397.8	1467.3
52.5°	606.3	626.7	647.1	664.9	683.9	733.0	822.9	936.0	1083.1	1233.0	1318.8
55°	534.1	550.4	569.5	581.7	592.6	636.2	704.4	791.6	918.3	1060.0	1166.2
57.5°	475.5	482.3	498.6	505.5	517.7	553.1	602.2	679.8	782.0	919.6	1006.8
60°	411.4	425.1	437.3	442.8	452.3	476.8	510.9	583.1	671.7	772.5	871.9
62.5°	359.7	365.1	374.7	381.5	388.3	414.2	442.8	497.3	564.0	648.5	739.8
65°	312.0	314.7	320.2	329.7	333.8	352.9	369.2	408.7	471.4	535.4	626.7
67.5°	262.9	265.7	272.5	277.9	282.0	294.3	312.0	340.6	374.7	445.5	495.9
70°	224.8	224.8	228.9	231.6	235.7	241.1	250.7	272.5	303.8	348.8	395.1
72.5°	188.0	188.0	188.0	192.1	192.1	196.2	201.6	216.6	238.4	273.8	303.8
75°	145.8	147.1	149.9	149.9	151.2	156.7	160.8	164.9	175.8	198.9	226.2
77.5°	110.4	113.1	114.4	111.7	114.4	114.4	119.9	125.3	130.8	137.6	158.0
80°	81.7	83.1	80.4	81.7	81.7	84.5	87.2	85.8	88.6	96.7	102.2
82.5°	54.5	55.9	55.9	55.9	55.9	59.9	59.9	58.6	59.9	61.3	62.7
85°	34.1	32.7	32.7	34.1	32.7	32.7	34.1	35.4	34.1	35.4	36.8
87.5°	15.0	15.0	15.0	15.0	13.6	13.6	15.0	13.6	15.0	13.6	12.3
90°	13.2	13.0	12.8	12.7	12.4	11.8	11.2	10.6	10.0	9.2	8.4
92.5°	12.3	12.3	12.3	12.3	12.0	11.4	10.7	10.1	9.5	8.7	7.9
95°	13.0	12.9	12.8	12.7	12.4	11.8	11.2	10.6	10.0	9.9	9.8
97.5°	12.5	12.4	12.3	12.3	12.0	11.5	11.0	10.5	10.0	20.6	31.2
100°	12.5	12.4	12.3	12.3	13.2	14.9	16.6	18.3	20.0	33.9	47.9
102.5°	13.2	13.2	13.2	13.2	24.6	47.3	70.0	92.7	115.4	114.2	113.0
105°	136.7	140.4	144.0	145.8	145.4	144.5	143.6	142.7	141.8	141.3	140.8
107.5°	174.1	173.7	173.3	173.1	172.8	172.3	171.8	171.3	170.8	170.1	169.4
110°	202.0	201.7	201.4	201.3	201.2	201.0	200.8	200.6	200.4	199.8	199.2



TEST NUMBER: P1032870

CATALOG NUMBER: S124RDIW-B1020D470UB2750-4F0-XX-W2A-A_2700K

CANDELA DISTRIBUTION (continued):

	100°	105°	110°	112.5°	115°	120°	125°	130°	135°	140°	145°
112.5°	229.6	229.1	228.7	228.5	228.6	228.7	228.8	228.9	229.0	228.8	228.6
115°	257.2	257.2	257.2	257.2	257.1	256.9	256.7	256.5	256.3	256.4	256.5
117.5°	284.9	284.9	284.9	284.9	284.9	285.0	285.1	285.2	285.3	285.0	284.7
120°	311.2	311.4	311.6	311.7	311.6	311.4	311.2	311.0	310.8	310.9	311.0
122.5°	336.6	336.8	337.0	337.1	337.1	337.0	336.9	336.8	336.7	336.5	336.3
125°	361.5	361.4	361.3	361.2	361.1	360.8	360.5	360.2	359.9	360.1	360.3
127.5°	384.1	384.2	384.3	384.4	384.4	384.5	384.6	384.7	384.8	384.3	383.8
130°	406.7	406.7	406.7	406.7	406.6	406.5	406.4	406.3	406.2	405.9	405.6
132.5°	427.8	427.9	428.0	428.0	428.0	427.9	427.8	427.7	427.6	427.2	426.8
135°	448.1	447.8	447.6	447.5	447.4	447.2	447.0	446.8	446.6	446.2	445.8
137.5°	466.4	466.5	466.6	466.6	466.5	466.3	466.1	465.9	465.7	465.2	464.7
140°	484.6	484.5	484.4	484.3	484.2	483.9	483.6	483.3	483.0	482.8	482.6
142.5°	500.2	500.2	500.2	500.2	500.1	499.9	499.7	499.5	499.3	499.2	499.1
145°	515.8	515.5	515.3	515.2	515.2	515.1	515.0	514.9	514.8	514.8	514.8
147.5°	529.1	529.0	528.9	528.9	528.8	528.7	528.6	528.5	528.4	528.5	528.6
150°	541.8	541.7	541.6	541.6	541.6	541.6	541.6	541.6	541.6	541.7	541.8
152.5°	553.2	553.3	553.4	553.4	553.3	553.1	552.9	552.7	552.5	552.7	552.9
155°	563.1	563.4	563.7	563.9	563.7	563.3	562.8	562.4	562.0	562.3	562.6
157.5°	571.7	572.2	572.7	572.9	572.7	572.2	571.7	571.2	570.7	571.1	571.5
160°	580.1	580.7	581.3	581.6	581.3	580.7	580.1	579.5	578.9	579.0	579.1
162.5°	586.6	587.3	588.0	588.4	588.1	587.5	586.9	586.3	585.7	585.8	585.9
165°	592.9	593.8	594.7	595.2	594.8	594.0	593.2	592.4	591.6	591.6	591.6
167.5°	597.7	598.7	599.7	600.2	599.7	598.8	597.9	597.0	596.1	596.2	596.3
170°	601.8	602.8	603.8	604.3	603.9	603.1	602.3	601.5	600.7	600.6	600.5
172.5°	604.2	605.3	606.4	607.0	606.6	605.8	605.0	604.2	603.4	603.3	603.2
175°	606.2	607.5	608.7	609.3	608.8	607.9	607.0	606.1	605.2	605.1	605.0
177.5°	607.2	608.4	609.6	610.2	609.8	609.0	608.2	607.4	606.6	606.4	606.2
180°	607.5	607.5	607.5	607.5	607.5	607.5	607.5	607.5	607.5	607.5	607.5

TEST NUMBER: P1032870

CATALOG NUMBER: S124RDIW-B1020D470UB2750-4F0-XX-W2A-A_2700K

CANDELA DISTRIBUTION (continued):

	150°	155°	157.5°	160°	165°	170°	175°	180°	185°	190°	195°
0°	1690.7	1690.7	1690.7	1690.7	1690.7	1690.7	1690.7	1690.7	1690.7	1690.7	1690.7
2.5°	1734.3	1727.5	1723.4	1722.1	1709.8	1703.0	1698.9	1696.2	1692.1	1681.2	1671.7
5°	1799.7	1780.7	1771.1	1760.2	1741.2	1719.4	1701.6	1690.7	1677.1	1655.3	1634.9
7.5°	1861.0	1832.4	1813.4	1798.4	1765.7	1730.3	1701.6	1678.5	1652.6	1622.6	1594.0
10°	1925.1	1878.8	1854.2	1831.1	1783.4	1737.1	1696.2	1662.1	1625.3	1585.8	1554.5
12.5°	1975.5	1914.2	1886.9	1854.2	1795.6	1741.2	1689.4	1643.1	1595.4	1553.1	1508.2
15°	2034.1	1957.8	1926.4	1884.2	1803.8	1733.0	1666.2	1615.8	1566.8	1504.1	1456.4
17.5°	2068.1	1979.6	1934.6	1897.8	1810.6	1724.8	1647.1	1584.5	1527.3	1464.6	1414.2
20°	2102.2	2001.4	1951.0	1899.2	1795.6	1704.4	1622.6	1547.7	1487.7	1419.6	1367.9
22.5°	2113.1	1995.9	1942.8	1895.1	1786.1	1683.9	1589.9	1513.6	1444.1	1376.0	1317.4
25°	2113.1	1994.6	1931.9	1870.6	1756.1	1651.2	1557.2	1474.1	1396.5	1328.3	1269.8
27.5°	2091.3	1967.3	1901.9	1846.1	1727.5	1614.4	1517.7	1426.4	1351.5	1283.4	1216.6
30°	2064.0	1927.8	1862.4	1795.6	1681.2	1573.6	1468.7	1384.2	1305.2	1227.5	1167.6
32.5°	2030.0	1885.6	1813.4	1745.2	1624.0	1512.3	1415.5	1332.4	1257.5	1177.1	1110.4
35°	1980.9	1822.9	1742.5	1682.6	1565.4	1449.6	1357.0	1275.2	1203.0	1119.9	1047.7
37.5°	1918.3	1765.7	1683.9	1610.4	1489.1	1382.8	1295.6	1216.6	1145.8	1069.5	989.1
40°	1844.7	1685.3	1614.4	1536.8	1408.7	1307.9	1226.2	1155.3	1084.5	1012.3	934.6
42.5°	1761.6	1603.5	1524.5	1449.6	1327.0	1227.5	1151.2	1087.2	1021.8	955.0	871.9
45°	1662.1	1513.6	1437.3	1366.5	1248.0	1145.8	1076.3	1015.0	959.1	891.0	817.4
47.5°	1550.4	1421.0	1343.3	1267.0	1151.2	1062.7	994.6	942.8	895.1	827.0	760.2
50°	1441.4	1313.4	1250.7	1173.0	1066.8	983.7	914.2	870.6	833.8	767.0	707.1
52.5°	1303.8	1207.1	1147.1	1080.4	978.2	893.7	839.2	801.1	757.5	705.7	652.6
55°	1182.6	1092.6	1045.0	982.3	881.5	806.5	760.2	724.8	690.7	644.4	602.2
57.5°	1045.0	989.1	941.4	886.9	787.5	723.4	682.6	652.6	621.3	583.1	549.0
60°	900.5	874.7	828.3	784.7	700.3	644.4	610.4	583.1	553.1	521.8	493.2
62.5°	772.5	757.5	730.2	696.2	617.2	569.5	535.4	515.0	493.2	464.6	437.3
65°	651.2	644.4	618.5	594.0	539.5	497.3	467.3	455.0	430.5	408.7	384.2
67.5°	543.6	535.4	520.4	509.5	463.2	423.7	408.7	392.4	371.9	355.6	335.2
70°	434.6	433.2	423.7	410.1	385.6	356.9	342.0	331.1	310.6	298.4	283.4
72.5°	337.9	344.7	336.5	331.1	314.7	294.3	280.7	273.8	257.5	248.0	237.1
75°	252.0	257.5	261.6	252.0	248.0	238.4	226.2	219.3	211.2	197.5	193.5
77.5°	171.7	183.9	183.9	186.6	188.0	182.6	173.0	167.6	158.0	155.3	149.9
80°	113.1	124.0	125.3	128.1	132.2	132.2	125.3	124.0	114.4	113.1	109.0
82.5°	65.4	74.9	80.4	84.5	83.1	88.6	83.1	81.7	76.3	76.3	73.6
85°	35.4	36.8	39.5	42.2	45.0	47.7	47.7	46.3	45.0	43.6	40.9
87.5°	13.6	13.6	15.0	13.6	15.0	17.7	19.1	19.1	17.7	16.3	13.6
90°	7.6	6.8	6.4	5.8	4.7	3.6	2.5	1.4	2.5	3.6	4.7
92.5°	7.1	6.3	5.9	6.0	6.2	6.4	6.6	6.8	6.6	6.4	6.2
95°	9.7	9.6	9.5	11.2	14.7	18.1	21.6	25.0	21.6	18.1	14.7
97.5°	41.8	52.4	57.7	56.6	54.4	52.1	49.9	47.7	49.9	52.1	54.4
100°	61.8	75.7	82.7	81.8	80.0	78.1	76.3	74.5	76.3	78.1	80.0
102.5°	111.8	110.6	110.0	109.4	108.2	106.9	105.7	104.5	105.7	106.9	108.2
105°	140.3	139.8	139.5	139.2	138.6	138.0	137.4	136.8	137.4	138.0	138.6
107.5°	168.7	168.0	167.7	167.5	167.2	166.9	166.6	166.3	166.6	166.9	167.2
110°	198.5	197.9	197.6	197.5	197.2	196.9	196.6	196.3	196.6	196.9	197.2

TEST NUMBER: P1032870

CATALOG NUMBER: S124RDIW-B1020D470UB2750-4F0-XX-W2A-A_2700K

CANDELA DISTRIBUTION (continued):

	150°	155°	157.5°	160°	165°	170°	175°	180°	185°	190°	195°
112.5°	228.4	228.2	228.1	227.8	227.2	226.6	226.0	225.4	226.0	226.6	227.2
115°	256.6	256.7	256.7	256.5	256.2	255.9	255.6	255.3	255.6	255.9	256.2
117.5°	284.4	284.1	284.0	283.8	283.4	283.0	282.6	282.2	282.6	283.0	283.4
120°	311.1	311.2	311.2	311.0	310.6	310.2	309.8	309.4	309.8	310.2	310.6
122.5°	336.1	335.9	335.8	335.7	335.5	335.3	335.1	334.9	335.1	335.3	335.5
125°	360.5	360.7	360.8	360.6	360.2	359.7	359.3	358.9	359.3	359.7	360.2
127.5°	383.3	382.8	382.6	382.5	382.4	382.3	382.2	382.1	382.2	382.3	382.4
130°	405.3	405.0	404.8	404.8	404.7	404.6	404.5	404.4	404.5	404.6	404.7
132.5°	426.3	425.9	425.7	425.6	425.4	425.2	425.0	424.8	425.0	425.2	425.4
135°	445.4	445.0	444.8	444.9	445.0	445.1	445.2	445.3	445.2	445.1	445.0
137.5°	464.2	463.7	463.4	463.4	463.4	463.4	463.4	463.4	463.4	463.4	463.4
140°	482.4	482.2	482.1	482.0	481.8	481.6	481.4	481.2	481.4	481.6	481.8
142.5°	499.0	498.9	498.9	498.7	498.3	497.9	497.5	497.1	497.5	497.9	498.3
145°	514.8	514.8	514.8	514.6	514.3	514.0	513.7	513.4	513.7	514.0	514.3
147.5°	528.7	528.8	528.9	528.6	528.0	527.3	526.7	526.1	526.7	527.3	528.0
150°	541.9	542.0	542.0	541.8	541.4	541.0	540.6	540.2	540.6	541.0	541.4
152.5°	553.1	553.3	553.4	553.2	552.9	552.6	552.3	552.0	552.3	552.6	552.9
155°	562.9	563.2	563.4	563.3	563.2	563.1	563.0	562.9	563.0	563.1	563.2
157.5°	571.9	572.3	572.5	572.5	572.5	572.5	572.5	572.5	572.5	572.5	572.5
160°	579.2	579.3	579.3	579.5	579.8	580.1	580.4	580.7	580.4	580.1	579.8
162.5°	586.0	586.1	586.1	586.3	586.7	587.1	587.5	587.9	587.5	587.1	586.7
165°	591.6	591.6	591.6	591.8	592.3	592.8	593.3	593.8	593.3	592.8	592.3
167.5°	596.4	596.5	596.6	596.8	597.3	597.8	598.3	598.8	598.3	597.8	597.3
170°	600.4	600.3	600.2	600.5	601.1	601.7	602.3	602.9	602.3	601.7	601.1
172.5°	603.1	603.0	602.9	603.2	603.8	604.5	605.1	605.7	605.1	604.5	603.8
175°	604.9	604.8	604.8	605.1	605.7	606.3	606.9	607.5	606.9	606.3	605.7
177.5°	606.0	605.8	605.7	606.0	606.7	607.4	608.1	608.8	608.1	607.4	606.7
180°	607.5	607.5	607.5	607.5	607.5	607.5	607.5	607.5	607.5	607.5	607.5

TEST NUMBER: P1032870

CATALOG NUMBER: S124RDIW-B1020D470UB2750-4F0-XX-W2A-A_2700K

CANDELA DISTRIBUTION (continued):

	200°	202.5°	205°	210°	215°	220°	225°	230°	235°	240°	245°
0°	1690.7	1690.7	1690.7	1690.7	1690.7	1690.7	1690.7	1690.7	1690.7	1690.7	1690.7
2.5°	1663.5	1660.8	1658.0	1647.1	1637.6	1621.3	1607.6	1602.2	1600.8	1602.2	1598.1
5°	1615.8	1614.4	1604.9	1585.8	1568.1	1549.1	1535.4	1521.8	1513.6	1513.6	1504.1
7.5°	1570.9	1561.3	1553.1	1528.6	1508.2	1482.3	1461.9	1449.6	1442.8	1427.8	1427.8
10°	1523.2	1509.5	1498.6	1475.5	1445.5	1419.6	1393.7	1378.8	1366.5	1355.6	1351.5
12.5°	1475.5	1464.6	1444.1	1419.6	1389.7	1357.0	1329.7	1318.8	1290.2	1267.0	1268.4
15°	1430.5	1406.0	1396.5	1361.0	1325.6	1294.3	1254.8	1223.4	1200.3	1185.3	1166.2
17.5°	1380.1	1355.6	1337.9	1307.9	1261.6	1212.5	1174.4	1132.2	1109.0	1083.1	1070.8
20°	1324.3	1303.8	1290.2	1242.5	1186.7	1128.1	1085.8	1060.0	1034.1	1015.0	1004.1
22.5°	1276.6	1250.7	1234.3	1170.3	1109.0	1050.4	1017.7	995.9	974.1	957.8	952.3
25°	1215.3	1200.3	1160.8	1104.9	1030.0	990.5	961.9	933.2	921.0	910.1	897.8
27.5°	1164.9	1128.1	1100.8	1027.3	980.9	936.0	907.4	885.6	870.6	859.7	850.1
30°	1102.2	1068.1	1030.0	968.7	926.4	884.2	858.3	840.6	824.3	817.4	809.3
32.5°	1036.8	1005.5	968.7	919.6	867.9	835.2	814.7	795.6	784.7	777.9	768.4
35°	978.2	938.7	914.2	867.9	825.6	788.8	769.8	753.4	741.1	738.4	737.1
37.5°	915.5	885.6	862.4	814.7	779.3	748.0	730.2	712.5	705.7	704.4	698.9
40°	861.0	835.2	813.4	768.4	730.2	701.6	688.0	677.1	670.3	670.3	668.9
42.5°	813.4	786.1	764.3	723.4	689.4	663.5	648.5	637.6	634.9	636.2	634.9
45°	760.2	737.1	715.3	673.0	644.4	625.3	609.0	603.5	599.5	600.8	602.2
47.5°	709.8	690.7	668.9	634.9	602.2	581.7	572.2	566.8	566.8	566.8	569.5
50°	664.9	643.1	624.0	588.6	558.6	542.2	534.1	527.3	528.6	530.0	531.3
52.5°	611.7	592.6	579.0	543.6	521.8	501.4	491.8	493.2	491.8	491.8	494.6
55°	565.4	546.3	532.7	500.0	478.2	464.6	456.4	452.3	453.7	451.0	456.4
57.5°	513.6	497.3	487.7	456.4	437.3	425.1	418.3	411.4	414.2	412.8	411.4
60°	468.7	449.6	434.6	412.8	396.5	381.5	377.4	370.6	373.3	370.6	369.2
62.5°	416.9	401.9	391.0	369.2	355.6	343.3	333.8	329.7	328.3	324.3	320.2
65°	365.1	356.9	346.1	324.3	310.6	301.1	295.6	291.6	290.2	279.3	267.0
67.5°	317.4	312.0	301.1	284.7	272.5	262.9	254.8	248.0	239.8	231.6	224.8
70°	272.5	264.3	257.5	242.5	231.6	222.1	213.9	205.7	201.6	193.5	190.7
72.5°	228.9	220.7	213.9	200.3	190.7	181.2	178.5	168.9	164.9	163.5	163.5
75°	183.9	177.1	173.0	160.8	152.6	145.8	141.7	139.0	136.2	133.5	129.4
77.5°	140.3	136.2	133.5	125.3	118.5	114.4	113.1	103.5	100.8	98.1	95.4
80°	102.2	100.8	98.1	91.3	88.6	79.0	79.0	76.3	74.9	74.9	74.9
82.5°	69.5	66.8	65.4	58.6	57.2	55.9	54.5	53.1	54.5	53.1	54.5
85°	36.8	35.4	34.1	34.1	34.1	34.1	34.1	34.1	34.1	32.7	34.1
87.5°	13.6	13.6	13.6	13.6	12.3	13.6	13.6	12.3	13.6	13.6	13.6
90°	5.8	6.4	6.8	7.6	8.4	9.2	10.0	10.6	11.2	11.8	12.4
92.5°	6.0	5.9	6.3	7.1	7.9	8.7	9.5	10.1	10.7	11.4	12.0
95°	11.2	9.5	9.6	9.7	9.8	9.9	10.0	10.6	11.2	11.8	12.4
97.5°	56.6	57.7	52.4	41.8	31.2	20.6	10.0	10.5	11.0	11.5	12.0
100°	81.8	82.7	75.7	61.8	47.9	33.9	20.0	18.3	16.6	14.9	13.2
102.5°	109.4	110.0	110.6	111.8	113.0	114.2	115.4	92.7	70.0	47.3	24.6
105°	139.2	139.5	139.8	140.3	140.8	141.3	141.8	142.7	143.6	144.5	145.4
107.5°	167.5	167.7	168.0	168.7	169.4	170.1	170.8	171.3	171.8	172.3	172.8
110°	197.5	197.6	197.9	198.5	199.2	199.8	200.4	200.6	200.8	201.0	201.2

TEST NUMBER: P1032870

CATALOG NUMBER: S124RDIW-B1020D470UB2750-4F0-XX-W2A-A_2700K

CANDELA DISTRIBUTION (continued):

	200°	202.5°	205°	210°	215°	220°	225°	230°	235°	240°	245°
112.5°	227.8	228.1	228.2	228.4	228.6	228.8	229.0	228.9	228.8	228.7	228.6
115°	256.5	256.7	256.7	256.6	256.5	256.4	256.3	256.5	256.7	256.9	257.1
117.5°	283.8	284.0	284.1	284.4	284.7	285.0	285.3	285.2	285.1	285.0	284.9
120°	311.0	311.2	311.2	311.1	311.0	310.9	310.8	311.0	311.2	311.4	311.6
122.5°	335.7	335.8	335.9	336.1	336.3	336.5	336.7	336.8	336.9	337.0	337.1
125°	360.6	360.8	360.7	360.5	360.3	360.1	359.9	360.2	360.5	360.8	361.1
127.5°	382.5	382.6	382.8	383.3	383.8	384.3	384.8	384.7	384.6	384.5	384.4
130°	404.8	404.8	405.0	405.3	405.6	405.9	406.2	406.3	406.4	406.5	406.6
132.5°	425.6	425.7	425.9	426.3	426.8	427.2	427.6	427.7	427.8	427.9	428.0
135°	444.9	444.8	445.0	445.4	445.8	446.2	446.6	446.8	447.0	447.2	447.4
137.5°	463.4	463.4	463.7	464.2	464.7	465.2	465.7	465.9	466.1	466.3	466.5
140°	482.0	482.1	482.2	482.4	482.6	482.8	483.0	483.3	483.6	483.9	484.2
142.5°	498.7	498.9	498.9	499.0	499.1	499.2	499.3	499.5	499.7	499.9	500.1
145°	514.6	514.8	514.8	514.8	514.8	514.8	514.8	514.9	515.0	515.1	515.2
147.5°	528.6	528.9	528.8	528.7	528.6	528.5	528.4	528.5	528.6	528.7	528.8
150°	541.8	542.0	542.0	541.9	541.8	541.7	541.6	541.6	541.6	541.6	541.6
152.5°	553.2	553.4	553.3	553.1	552.9	552.7	552.5	552.7	552.9	553.1	553.3
155°	563.3	563.4	563.2	562.9	562.6	562.3	562.0	562.4	562.8	563.3	563.7
157.5°	572.5	572.5	572.3	571.9	571.5	571.1	570.7	571.2	571.7	572.2	572.7
160°	579.5	579.3	579.3	579.2	579.1	579.0	578.9	579.5	580.1	580.7	581.3
162.5°	586.3	586.1	586.1	586.0	585.9	585.8	585.7	586.3	586.9	587.5	588.1
165°	591.8	591.6	591.6	591.6	591.6	591.6	591.6	592.4	593.2	594.0	594.8
167.5°	596.8	596.6	596.5	596.4	596.3	596.2	596.1	597.0	597.9	598.8	599.7
170°	600.5	600.2	600.3	600.4	600.5	600.6	600.7	601.5	602.3	603.1	603.9
172.5°	603.2	602.9	603.0	603.1	603.2	603.3	603.4	604.2	605.0	605.8	606.6
175°	605.1	604.8	604.8	604.9	605.0	605.1	605.2	606.1	607.0	607.9	608.8
177.5°	606.0	605.7	605.8	606.0	606.2	606.4	606.6	607.4	608.2	609.0	609.8
180°	607.5	607.5	607.5	607.5	607.5	607.5	607.5	607.5	607.5	607.5	607.5

TEST NUMBER: P1032870

CATALOG NUMBER: S124RDIW-B1020D470UB2750-4F0-XX-W2A-A_2700K

CANDELA DISTRIBUTION (continued):

	247.5°	250°	255°	260°	265°	270°	275°	280°	285°	290°	292.5°
0°	1690.7	1690.7	1690.7	1690.7	1690.7	1690.7	1690.7	1690.7	1690.7	1690.7	1690.7
2.5°	1598.1	1603.5	1596.7	1600.8	1591.3	1589.9	1591.3	1591.3	1592.6	1594.0	1595.4
5°	1508.2	1506.8	1498.6	1493.2	1489.1	1493.2	1495.9	1498.6	1495.9	1498.6	1500.0
7.5°	1423.7	1419.6	1415.5	1406.0	1408.7	1406.0	1414.2	1410.1	1410.1	1416.9	1422.3
10°	1348.8	1340.6	1337.9	1327.0	1318.8	1317.4	1327.0	1331.1	1335.2	1337.9	1348.8
12.5°	1252.0	1239.8	1230.3	1234.3	1211.2	1220.7	1223.4	1218.0	1234.3	1253.4	1242.5
15°	1148.5	1149.9	1130.8	1124.0	1104.9	1110.4	1111.7	1125.3	1139.0	1137.6	1154.0
17.5°	1072.2	1064.0	1047.7	1046.3	1038.2	1042.2	1040.9	1051.8	1047.7	1054.5	1068.1
20°	1001.4	995.9	982.3	976.8	979.6	976.8	978.2	979.6	983.7	998.6	995.9
22.5°	945.5	938.7	938.7	931.9	923.7	921.0	927.8	931.9	937.3	940.1	946.9
25°	896.5	891.0	884.2	880.1	873.3	874.7	878.8	884.2	888.3	893.7	899.2
27.5°	846.1	846.1	839.2	837.9	835.2	833.8	839.2	842.0	842.0	846.1	851.5
30°	806.5	806.5	799.7	798.4	797.0	797.0	801.1	802.5	803.8	807.9	810.6
32.5°	768.4	767.0	764.3	765.7	764.3	765.7	765.7	767.0	769.8	771.1	776.6
35°	733.0	734.3	731.6	731.6	730.2	731.6	734.3	735.7	737.1	739.8	739.8
37.5°	698.9	701.6	700.3	704.4	704.4	704.4	704.4	707.1	707.1	707.1	705.7
40°	668.9	668.9	667.6	670.3	673.0	673.0	674.4	674.4	675.8	675.8	674.4
42.5°	634.9	637.6	641.7	643.1	645.8	644.4	648.5	647.1	648.5	645.8	643.1
45°	603.5	603.5	609.0	614.4	615.8	615.8	615.8	618.5	615.8	611.7	610.4
47.5°	569.5	572.2	574.9	581.7	583.1	583.1	583.1	583.1	580.4	580.4	580.4
50°	535.4	536.8	538.1	540.9	545.0	543.6	543.6	543.6	549.0	543.6	545.0
52.5°	494.6	495.9	497.3	502.7	501.4	501.4	502.7	502.7	506.8	505.5	502.7
55°	453.7	453.7	456.4	456.4	456.4	459.1	460.5	463.2	461.9	463.2	464.6
57.5°	412.8	410.1	408.7	408.7	412.8	411.4	412.8	412.8	418.3	421.0	422.3
60°	365.1	365.1	363.8	355.6	355.6	354.2	358.3	361.0	363.8	376.0	374.7
62.5°	316.1	310.6	305.2	306.5	298.4	302.5	299.7	302.5	310.6	320.2	321.5
65°	267.0	262.9	257.5	256.1	253.4	257.5	256.1	257.5	261.6	267.0	273.8
67.5°	223.4	222.1	219.3	218.0	218.0	218.0	220.7	220.7	222.1	226.2	230.2
70°	190.7	189.4	190.7	188.0	189.4	188.0	189.4	190.7	192.1	193.5	197.5
72.5°	160.8	160.8	160.8	158.0	160.8	159.4	159.4	160.8	162.1	163.5	166.2
75°	128.1	125.3	122.6	119.9	118.5	121.3	122.6	121.3	125.3	130.8	130.8
77.5°	96.7	95.4	95.4	95.4	96.7	95.4	98.1	96.7	98.1	98.1	100.8
80°	74.9	73.6	74.9	74.9	73.6	76.3	74.9	74.9	76.3	77.7	76.3
82.5°	54.5	55.9	54.5	54.5	54.5	57.2	54.5	54.5	54.5	55.9	55.9
85°	34.1	34.1	34.1	34.1	35.4	34.1	35.4	34.1	36.8	35.4	35.4
87.5°	12.3	13.6	15.0	15.0	15.0	15.0	13.6	15.0	16.3	15.0	16.3
90°	12.7	12.8	13.0	13.2	13.4	13.6	13.4	13.2	13.0	12.8	12.7
92.5°	12.3	12.3	12.3	12.3	12.3	12.3	12.3	12.3	12.3	12.3	12.3
95°	12.7	12.8	12.9	13.0	13.1	13.2	13.1	13.0	12.9	12.8	12.7
97.5°	12.3	12.3	12.4	12.5	12.6	12.7	12.6	12.5	12.4	12.3	12.3
100°	12.3	12.3	12.4	12.5	12.6	12.7	12.6	12.5	12.4	12.3	12.3
102.5°	13.2	13.2	13.2	13.2	13.2	13.2	13.2	13.2	13.2	13.2	13.2
105°	145.8	144.0	140.4	136.7	133.1	129.5	133.1	136.7	140.4	144.0	145.8
107.5°	173.1	173.3	173.7	174.1	174.5	174.9	174.5	174.1	173.7	173.3	173.1
110°	201.3	201.4	201.7	202.0	202.3	202.6	202.3	202.0	201.7	201.4	201.3

TEST NUMBER: P1032870

CATALOG NUMBER: S124RDIW-B1020D470UB2750-4F0-XX-W2A-A_2700K

CANDELA DISTRIBUTION (continued):

	247.5°	250°	255°	260°	265°	270°	275°	280°	285°	290°	292.5°
112.5°	228.5	228.7	229.1	229.6	230.0	230.4	230.0	229.6	229.1	228.7	228.5
115°	257.2	257.2	257.2	257.2	257.2	257.2	257.2	257.2	257.2	257.2	257.2
117.5°	284.9	284.9	284.9	284.9	284.9	284.9	284.9	284.9	284.9	284.9	284.9
120°	311.7	311.6	311.4	311.2	311.0	310.8	311.0	311.2	311.4	311.6	311.7
122.5°	337.1	337.0	336.8	336.6	336.4	336.2	336.4	336.6	336.8	337.0	337.1
125°	361.2	361.3	361.4	361.5	361.6	361.7	361.6	361.5	361.4	361.3	361.2
127.5°	384.4	384.3	384.2	384.1	384.0	383.9	384.0	384.1	384.2	384.3	384.4
130°	406.7	406.7	406.7	406.7	406.7	406.7	406.7	406.7	406.7	406.7	406.7
132.5°	428.0	428.0	427.9	427.8	427.7	427.6	427.7	427.8	427.9	428.0	428.0
135°	447.5	447.6	447.8	448.1	448.3	448.5	448.3	448.1	447.8	447.6	447.5
137.5°	466.6	466.6	466.5	466.4	466.3	466.2	466.3	466.4	466.5	466.6	466.6
140°	484.3	484.4	484.5	484.6	484.7	484.8	484.7	484.6	484.5	484.4	484.3
142.5°	500.2	500.2	500.2	500.2	500.2	500.2	500.2	500.2	500.2	500.2	500.2
145°	515.2	515.3	515.5	515.8	516.0	516.2	516.0	515.8	515.5	515.3	515.2
147.5°	528.9	528.9	529.0	529.1	529.2	529.3	529.2	529.1	529.0	528.9	528.9
150°	541.6	541.6	541.7	541.8	541.9	542.0	541.9	541.8	541.7	541.6	541.6
152.5°	553.4	553.4	553.3	553.2	553.1	553.0	553.1	553.2	553.3	553.4	553.4
155°	563.9	563.7	563.4	563.1	562.8	562.5	562.8	563.1	563.4	563.7	563.9
157.5°	572.9	572.7	572.2	571.7	571.2	570.7	571.2	571.7	572.2	572.7	572.9
160°	581.6	581.3	580.7	580.1	579.5	578.9	579.5	580.1	580.7	581.3	581.6
162.5°	588.4	588.0	587.3	586.6	585.9	585.2	585.9	586.6	587.3	588.0	588.4
165°	595.2	594.7	593.8	592.9	592.0	591.1	592.0	592.9	593.8	594.7	595.2
167.5°	600.2	599.7	598.7	597.7	596.7	595.7	596.7	597.7	598.7	599.7	600.2
170°	604.3	603.8	602.8	601.8	600.8	599.8	600.8	601.8	602.8	603.8	604.3
172.5°	607.0	606.4	605.3	604.2	603.1	602.0	603.1	604.2	605.3	606.4	607.0
175°	609.3	608.7	607.5	606.2	605.0	603.8	605.0	606.2	607.5	608.7	609.3
177.5°	610.2	609.6	608.4	607.2	606.0	604.8	606.0	607.2	608.4	609.6	610.2
180°	607.5	607.5	607.5	607.5	607.5	607.5	607.5	607.5	607.5	607.5	607.5

TEST NUMBER: P1032870

CATALOG NUMBER: S124RDIW-B1020D470UB2750-4F0-XX-W2A-A_2700K

CANDELA DISTRIBUTION (continued):

	295°	300°	305°	310°	315°	320°	325°	330°	335°	337.5°	340°
0°	1690.7	1690.7	1690.7	1690.7	1690.7	1690.7	1690.7	1690.7	1690.7	1690.7	1690.7
2.5°	1600.8	1607.6	1604.9	1595.4	1599.5	1607.6	1615.8	1626.7	1633.5	1639.0	1641.7
5°	1506.8	1519.1	1516.4	1516.4	1521.8	1535.4	1549.1	1572.2	1580.4	1589.9	1603.5
7.5°	1423.7	1433.2	1441.4	1444.1	1452.3	1470.0	1487.7	1513.6	1534.1	1545.0	1553.1
10°	1350.1	1357.0	1369.2	1376.0	1384.2	1406.0	1431.9	1459.1	1479.6	1498.6	1509.5
12.5°	1256.1	1283.4	1299.7	1310.6	1321.5	1354.2	1374.7	1404.6	1429.2	1446.9	1463.2
15°	1151.2	1183.9	1193.5	1235.7	1262.9	1288.8	1320.2	1355.6	1378.8	1399.2	1421.0
17.5°	1062.7	1085.8	1096.7	1141.7	1164.9	1205.7	1250.7	1295.6	1331.1	1346.1	1367.9
20°	1006.8	1019.1	1040.9	1055.9	1080.4	1128.1	1177.1	1231.6	1284.7	1299.7	1321.5
22.5°	949.6	965.9	980.9	1001.4	1020.4	1053.1	1102.2	1162.1	1219.4	1246.6	1272.5
25°	897.8	914.2	923.7	945.5	963.2	995.9	1030.0	1091.3	1159.4	1182.6	1223.4
27.5°	857.0	866.5	882.8	892.4	912.8	942.8	974.1	1020.4	1087.2	1126.7	1166.2
30°	816.1	822.9	836.5	850.1	865.1	885.6	921.0	965.9	1027.3	1061.3	1100.8
32.5°	775.2	786.1	794.3	803.8	820.2	844.7	869.2	912.8	961.9	1000.0	1039.5
35°	741.1	745.2	756.1	767.0	777.9	799.7	825.6	867.9	911.4	941.4	976.8
37.5°	704.4	711.2	719.3	723.4	741.1	754.8	782.0	814.7	866.5	885.6	921.0
40°	675.8	674.4	682.6	689.4	697.6	719.3	735.7	771.1	812.0	842.0	863.8
42.5°	640.3	640.3	643.1	651.2	662.1	675.8	694.8	724.8	767.0	788.8	814.7
45°	611.7	607.6	609.0	614.4	621.3	634.9	654.0	679.8	722.1	739.8	767.0
47.5°	577.7	573.6	573.6	579.0	584.5	594.0	609.0	639.0	673.0	696.2	716.6
50°	539.5	540.9	539.5	543.6	546.3	555.9	572.2	596.7	628.1	647.1	670.3
52.5°	504.1	501.4	500.0	502.7	508.2	515.0	532.7	554.5	584.5	603.5	624.0
55°	460.5	463.2	463.2	463.2	471.4	474.1	487.7	509.5	539.5	554.5	573.6
57.5°	421.0	419.6	422.3	421.0	427.8	437.3	448.2	464.6	494.6	509.5	527.3
60°	377.4	378.7	380.1	380.1	385.6	395.1	407.4	422.3	446.9	461.9	478.2
62.5°	324.3	331.1	337.9	340.6	348.8	355.6	363.8	380.1	401.9	412.8	427.8
65°	273.8	283.4	292.9	299.7	305.2	312.0	322.9	337.9	355.6	366.5	381.5
67.5°	230.2	237.1	249.3	256.1	267.0	275.2	282.0	294.3	316.1	320.2	332.4
70°	198.9	201.6	207.1	212.5	224.8	231.6	239.8	252.0	268.4	277.9	284.7
72.5°	167.6	168.9	171.7	177.1	182.6	190.7	200.3	211.2	226.2	230.2	239.8
75°	133.5	141.7	141.7	145.8	149.9	154.0	162.1	173.0	182.6	189.4	194.8
77.5°	99.5	103.5	106.3	113.1	118.5	122.6	128.1	136.2	141.7	147.1	151.2
80°	77.7	79.0	80.4	80.4	83.1	88.6	94.0	99.5	106.3	109.0	113.1
82.5°	57.2	57.2	57.2	59.9	61.3	62.7	62.7	65.4	72.2	74.9	79.0
85°	36.8	36.8	36.8	36.8	38.1	39.5	40.9	42.2	42.2	42.2	45.0
87.5°	15.0	17.7	16.3	17.7	17.7	17.7	17.7	19.1	19.1	20.4	20.4
90°	12.4	11.8	11.2	10.6	10.0	9.2	8.4	7.6	6.8	6.4	5.8
92.5°	12.0	11.4	10.7	10.1	9.5	8.7	7.9	7.1	6.3	5.9	6.0
95°	12.4	11.8	11.2	10.6	10.0	9.9	9.8	9.7	9.6	9.5	11.2
97.5°	12.0	11.5	11.0	10.5	10.0	20.6	31.2	41.8	52.4	57.7	56.6
100°	13.2	14.9	16.6	18.3	20.0	33.9	47.9	61.8	75.7	82.7	81.8
102.5°	24.6	47.3	70.0	92.7	115.4	114.2	113.0	111.8	110.6	110.0	109.4
105°	145.4	144.5	143.6	142.7	141.8	141.3	140.8	140.3	139.8	139.5	139.2
107.5°	172.8	172.3	171.8	171.3	170.8	170.1	169.4	168.7	168.0	167.7	167.5
110°	201.2	201.0	200.8	200.6	200.4	199.8	199.2	198.5	197.9	197.6	197.5

TEST NUMBER: P1032870

CATALOG NUMBER: S124RDIW-B1020D470UB2750-4F0-XX-W2A-A_2700K

CANDELA DISTRIBUTION (continued):

	295°	300°	305°	310°	315°	320°	325°	330°	335°	337.5°	340°
112.5°	228.6	228.7	228.8	228.9	229.0	228.8	228.6	228.4	228.2	228.1	227.8
115°	257.1	256.9	256.7	256.5	256.3	256.4	256.5	256.6	256.7	256.7	256.5
117.5°	284.9	285.0	285.1	285.2	285.3	285.0	284.7	284.4	284.1	284.0	283.8
120°	311.6	311.4	311.2	311.0	310.8	310.9	311.0	311.1	311.2	311.2	311.0
122.5°	337.1	337.0	336.9	336.8	336.7	336.5	336.3	336.1	335.9	335.8	335.7
125°	361.1	360.8	360.5	360.2	359.9	360.1	360.3	360.5	360.7	360.8	360.6
127.5°	384.4	384.5	384.6	384.7	384.8	384.3	383.8	383.3	382.8	382.6	382.5
130°	406.6	406.5	406.4	406.3	406.2	405.9	405.6	405.3	405.0	404.8	404.8
132.5°	428.0	427.9	427.8	427.7	427.6	427.2	426.8	426.3	425.9	425.7	425.6
135°	447.4	447.2	447.0	446.8	446.6	446.2	445.8	445.4	445.0	444.8	444.9
137.5°	466.5	466.3	466.1	465.9	465.7	465.2	464.7	464.2	463.7	463.4	463.4
140°	484.2	483.9	483.6	483.3	483.0	482.8	482.6	482.4	482.2	482.1	482.0
142.5°	500.1	499.9	499.7	499.5	499.3	499.2	499.1	499.0	498.9	498.9	498.7
145°	515.2	515.1	515.0	514.9	514.8	514.8	514.8	514.8	514.8	514.8	514.6
147.5°	528.8	528.7	528.6	528.5	528.4	528.5	528.6	528.7	528.8	528.9	528.6
150°	541.6	541.6	541.6	541.6	541.6	541.7	541.8	541.9	542.0	542.0	541.8
152.5°	553.3	553.1	552.9	552.7	552.5	552.7	552.9	553.1	553.3	553.4	553.2
155°	563.7	563.3	562.8	562.4	562.0	562.3	562.6	562.9	563.2	563.4	563.3
157.5°	572.7	572.2	571.7	571.2	570.7	571.1	571.5	571.9	572.3	572.5	572.5
160°	581.3	580.7	580.1	579.5	578.9	579.0	579.1	579.2	579.3	579.3	579.5
162.5°	588.1	587.5	586.9	586.3	585.7	585.8	585.9	586.0	586.1	586.1	586.3
165°	594.8	594.0	593.2	592.4	591.6	591.6	591.6	591.6	591.6	591.6	591.8
167.5°	599.7	598.8	597.9	597.0	596.1	596.2	596.3	596.4	596.5	596.6	596.8
170°	603.9	603.1	602.3	601.5	600.7	600.6	600.5	600.4	600.3	600.2	600.5
172.5°	606.6	605.8	605.0	604.2	603.4	603.3	603.2	603.1	603.0	602.9	603.2
175°	608.8	607.9	607.0	606.1	605.2	605.1	605.0	604.9	604.8	604.8	605.1
177.5°	609.8	609.0	608.2	607.4	606.6	606.4	606.2	606.0	605.8	605.7	606.0
180°	607.5	607.5	607.5	607.5	607.5	607.5	607.5	607.5	607.5	607.5	607.5

TEST NUMBER: P1032870

CATALOG NUMBER: S124RDIW-B1020D470UB2750-4F0-XX-W2A-A_2700K

CANDELA DISTRIBUTION (continued):

	345°	350°	355°	360°
0°	1690.7	1690.7	1690.7	1690.7
2.5°	1652.6	1660.8	1674.4	1693.5
5°	1614.4	1637.6	1659.4	1688.0
7.5°	1580.4	1607.6	1637.6	1678.5
10°	1540.9	1574.9	1613.1	1663.5
12.5°	1494.6	1542.2	1585.8	1640.3
15°	1460.5	1495.9	1551.8	1615.8
17.5°	1412.8	1460.5	1516.4	1588.6
20°	1367.9	1418.3	1480.9	1555.9
22.5°	1320.2	1377.4	1440.1	1520.4
25°	1271.1	1332.4	1395.1	1480.9
27.5°	1226.2	1282.0	1352.9	1440.1
30°	1171.7	1235.7	1303.8	1395.1
32.5°	1118.5	1185.3	1254.8	1346.1
35°	1061.3	1128.1	1204.4	1291.6
37.5°	1005.5	1079.0	1148.5	1233.0
40°	944.1	1020.4	1092.6	1178.5
42.5°	884.2	963.2	1035.4	1109.0
45°	828.3	906.0	971.4	1040.9
47.5°	775.2	844.7	911.4	974.1
50°	723.4	782.0	843.3	895.1
52.5°	668.9	724.8	773.8	820.2
55°	619.9	663.5	707.1	749.3
57.5°	561.3	604.9	643.1	675.8
60°	512.3	539.5	576.3	610.4
62.5°	456.4	487.7	516.4	538.1
65°	401.9	429.2	451.0	470.0
67.5°	355.6	371.9	388.3	408.7
70°	299.7	313.4	332.4	347.4
72.5°	252.0	262.9	272.5	290.2
75°	204.4	213.9	219.3	235.7
77.5°	158.0	167.6	171.7	181.2
80°	121.3	122.6	128.1	136.2
82.5°	83.1	85.8	87.2	94.0
85°	47.7	54.5	53.1	55.9
87.5°	20.4	21.8	24.5	27.2
90°	4.7	3.6	2.5	1.4
92.5°	6.2	6.4	6.6	6.8
95°	14.7	18.1	21.6	25.0
97.5°	54.4	52.1	49.9	47.7
100°	80.0	78.1	76.3	74.5
102.5°	108.2	106.9	105.7	104.5
105°	138.6	138.0	137.4	136.8
107.5°	167.2	166.9	166.6	166.3
110°	197.2	196.9	196.6	196.3



TEST NUMBER: P1032870

CATALOG NUMBER: S124RDIW-B1020D470UB2750-4F0-XX-W2A-A_2700K

CANDELA DISTRIBUTION (continued):

	345°	350°	355°	360°
112.5°	227.2	226.6	226.0	225.4
115°	256.2	255.9	255.6	255.3
117.5°	283.4	283.0	282.6	282.2
120°	310.6	310.2	309.8	309.4
122.5°	335.5	335.3	335.1	334.9
125°	360.2	359.7	359.3	358.9
127.5°	382.4	382.3	382.2	382.1
130°	404.7	404.6	404.5	404.4
132.5°	425.4	425.2	425.0	424.8
135°	445.0	445.1	445.2	445.3
137.5°	463.4	463.4	463.4	463.4
140°	481.8	481.6	481.4	481.2
142.5°	498.3	497.9	497.5	497.1
145°	514.3	514.0	513.7	513.4
147.5°	528.0	527.3	526.7	526.1
150°	541.4	541.0	540.6	540.2
152.5°	552.9	552.6	552.3	552.0
155°	563.2	563.1	563.0	562.9
157.5°	572.5	572.5	572.5	572.5
160°	579.8	580.1	580.4	580.7
162.5°	586.7	587.1	587.5	587.9
165°	592.3	592.8	593.3	593.8
167.5°	597.3	597.8	598.3	598.8
170°	601.1	601.7	602.3	602.9
172.5°	603.8	604.5	605.1	605.7
175°	605.7	606.3	606.9	607.5
177.5°	606.7	607.4	608.1	608.8
180°	607.5	607.5	607.5	607.5

(END OF REPORT)