

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1032986

Luminaire Tested: S124RDIW-B350D770UB2750-4F0-XX-W2A-F_3000K

Issue Date: 5/7/2025

Test Information

Test Method: LM-79-2019
Report Number: P1032986
REPORT IS A COMBINATION OF REPORTS P1000451 AND P1007351
Test Lab: INNOVATION CENTER
Issue Date: 5/7/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S124RDIW-B350D770UB2750-4F0-XX-W2A-F_3000K
Description: Define 4 Regressed Direct/Indirect Wall Mount with 3000K BioUP LEDs {m-DER=0.589}
{m-EER=0.647}
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 4516.0 lumens
Efficiency: N/A
Efficacy: 124.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.09 / 1.24
Luminous Opening: Rectangular w/ Sides (W: 0.33' x L: 4' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 36.2
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1032986

CATALOG NUMBER: S124RDIW-B350D770UB2750-4F0-XX-W2A-F_3000K

Luminous Intensity Polar Plot

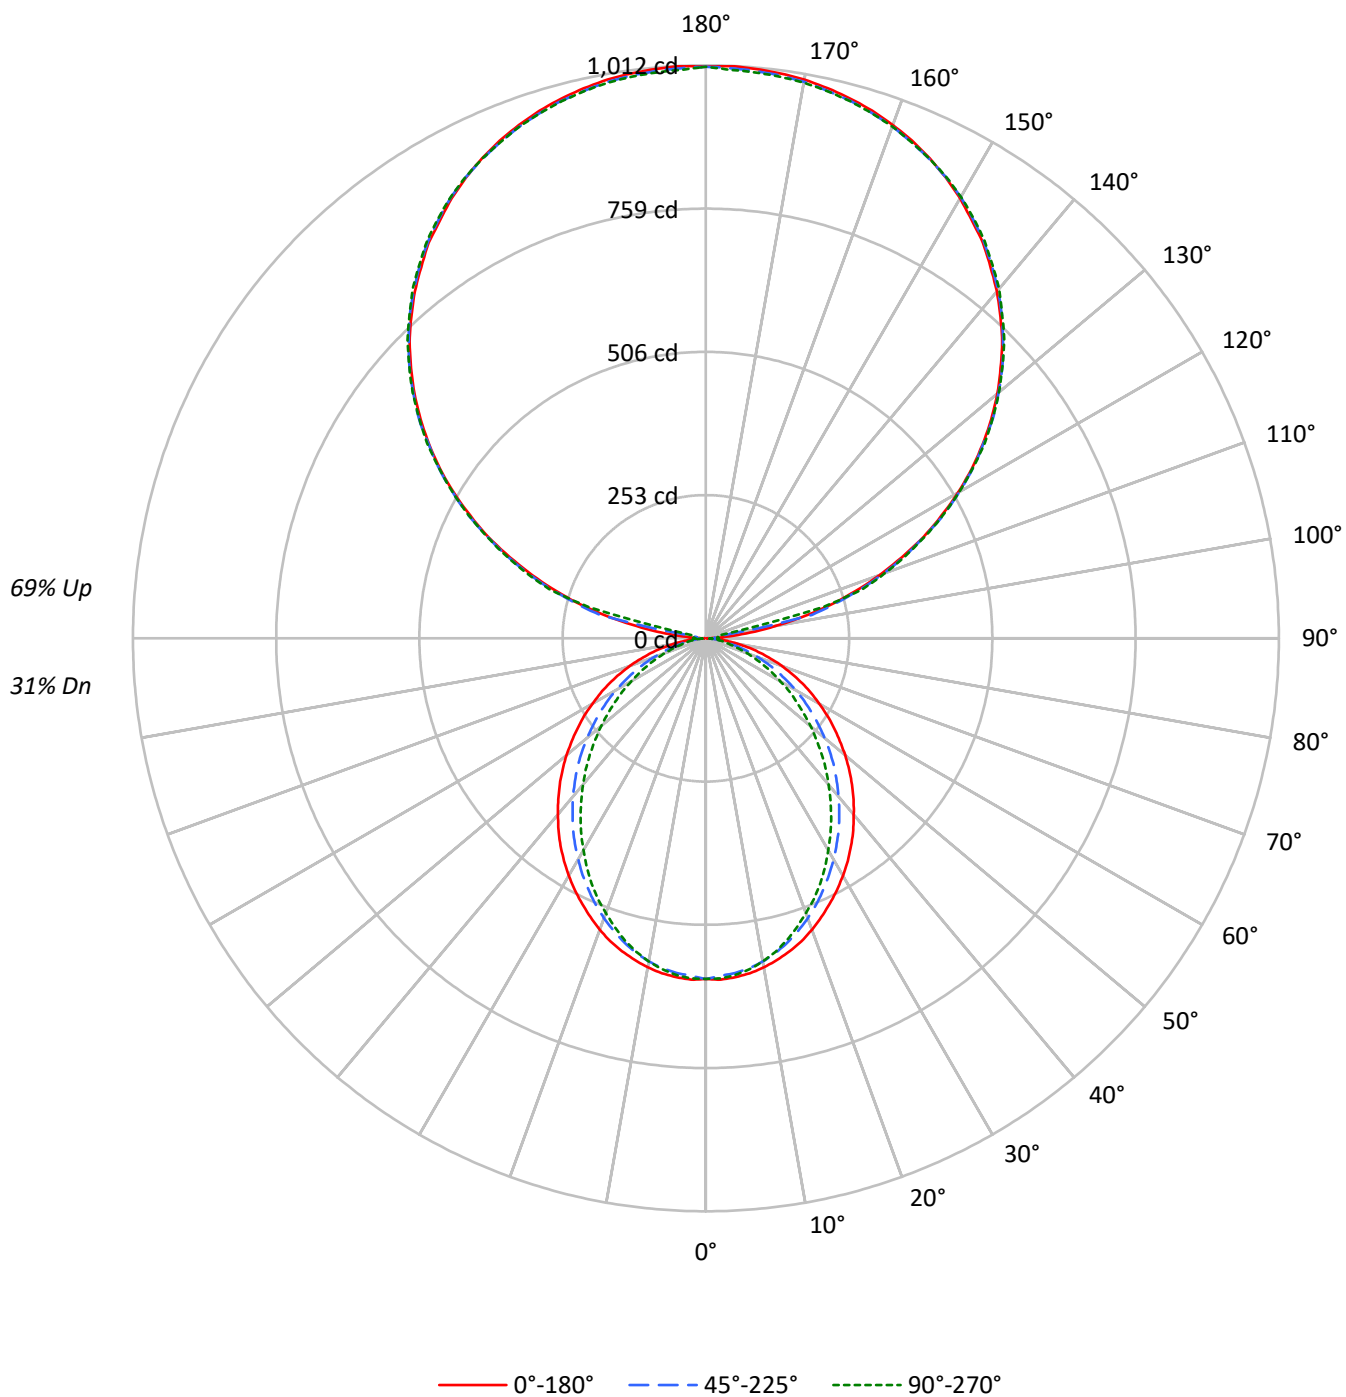

TEST NUMBER: P1032986

CATALOG NUMBER: S124RDIW-B350D770UB2750-4F0-XX-W2A-F_3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	103	103	103	103	92	92	92	92	73	73	73	55	55	55	39	39	39
1	94	90	86	82	84	81	77	75	64	62	60	48	47	46	34	33	33
2	85	78	72	68	76	71	66	61	56	53	50	43	40	39	30	29	28
3	78	69	62	56	70	62	56	51	50	45	42	38	35	33	27	25	24
4	71	61	53	48	64	55	49	44	44	39	36	34	31	28	24	22	21
5	65	54	46	41	59	49	42	37	39	35	31	30	27	24	22	20	18
6	60	49	41	35	54	44	37	32	35	30	27	27	24	21	20	18	16
7	56	44	36	31	50	40	33	28	32	27	24	25	21	19	18	16	14
8	51	40	32	27	46	36	30	25	29	24	21	23	19	17	17	14	13
9	48	36	29	24	43	33	27	22	27	22	19	21	17	15	15	13	11
10	45	33	26	21	40	30	24	20	25	20	17	19	16	14	14	12	10

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	4906	4906	4906
5°	4906	4760	4761
10°	4865	4610	4555
15°	4798	4422	4312
20°	4710	4209	4036
25°	4601	3979	3766
30°	4493	3744	3463
35°	4376	3507	3166
40°	4236	3251	2862
45°	4104	2996	2560
50°	3956	2719	2254
55°	3794	2435	1938
60°	3614	2133	1626
65°	3441	1786	1325
70°	3197	1423	1012
75°	2882	1035	708
80°	2406	635	510
85°	1812	366	281

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 4104 cd/sqm

TEST NUMBER: P1032986

CATALOG NUMBER: S124RDIW-B350D770UB2750-4F0-XX-W2A-F_3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	56.6	1.3
10°-20°	157.7	3.5
20°-30°	227.7	5.0
30°-40°	258.1	5.7
40°-50°	249.2	5.5
50°-60°	207.2	4.6
60°-70°	143.0	3.2
70°-80°	72.3	1.6
80°-90°	20.4	0.5
90°-100°	33.5	0.7
100°-110°	220.7	4.9
110°-120°	421.4	9.3
120°-130°	535.0	11.8
130°-140°	572.3	12.7
140°-150°	535.2	11.9
150°-160°	431.6	9.6
160°-170°	278.3	6.2
170°-180°	95.9	2.1
0°-30°	442.0	9.8
0°-40°	700.1	15.5
0°-60°	1156.4	25.6
0°-90°	1392.1	30.8
90°-120°	675.6	15.0
90°-150°	2318.1	51.3
90°-180°	3124.0	69.2
0°-180°	4516.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	602	602	602	602	602	
5°	601	599	593	598	597	57
15°	572	568	556	556	552	161
25°	517	509	490	482	478	238
35°	447	432	410	394	386	280
45°	365	348	320	298	289	281
55°	276	258	228	204	195	247
65°	188	168	139	119	113	186
75°	100	83	61	51	48	105
85°	25	16	14	13	13	27
90°	2	11	17	21	23	4
95°	42	16	17	21	22	51
105°	227	232	236	242	215	238
115°	424	427	426	427	427	418
125°	596	600	598	600	601	533
135°	740	739	742	744	745	570
145°	853	856	856	856	858	533
155°	936	936	934	937	935	431
165°	987	983	983	989	982	279
175°	1010	1005	1006	1013	1004	96
180°	1010	1010	1010	1010	1010	

TEST NUMBER: P1032986

CATALOG NUMBER: S124RDIW-B350D770UB2750-4F0-XX-W2A-F_3000K

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	601.6	601.6	601.6	601.6	601.6
2.5°	603.4	601.6	596.5	601.6	601.1
5°	600.7	598.8	593.3	597.9	597.0
7.5°	596.5	594.7	587.8	591.0	589.6
10°	590.1	587.8	579.5	581.3	579.5
12.5°	581.8	579.0	568.9	569.8	567.0
15°	572.1	567.9	556.4	555.5	552.3
17.5°	561.0	555.1	541.7	539.4	534.8
20°	547.7	541.7	526.0	522.3	516.4
22.5°	532.9	526.0	509.0	503.0	498.4
25°	517.3	509.0	490.1	482.3	477.7
27.5°	501.2	491.0	471.2	462.0	455.6
30°	484.1	472.6	450.9	439.4	432.1
32.5°	466.2	452.8	430.2	416.4	409.5
35°	447.3	432.5	409.5	393.8	385.5
37.5°	427.5	412.3	386.9	369.9	361.6
40°	406.3	391.1	364.8	345.5	337.2
42.5°	386.0	369.9	342.2	322.4	313.7
45°	364.8	347.8	320.1	297.6	289.3
47.5°	343.2	325.7	297.1	273.6	264.4
50°	321.1	303.1	273.6	250.6	241.8
52.5°	298.5	281.0	250.6	227.1	217.9
55°	276.4	257.9	228.0	204.1	195.3
57.5°	254.7	235.4	205.9	181.5	175.0
60°	231.2	212.8	183.3	159.4	152.0
62.5°	210.0	190.7	160.3	138.6	133.1
65°	187.9	168.1	138.6	118.8	113.3
67.5°	164.9	146.0	118.4	100.9	94.4
70°	143.3	123.9	97.7	82.5	77.8
72.5°	120.2	103.2	78.8	66.3	62.2
75°	100.0	82.9	61.3	50.7	47.9
77.5°	78.8	64.0	45.6	38.2	37.3
80°	58.5	45.1	31.3	29.9	29.5
82.5°	41.0	29.0	22.6	21.6	21.2
85°	24.9	15.7	14.3	13.4	13.4
87.5°	10.6	6.9	6.4	6.0	6.4
90°	2.3	10.6	16.6	21.1	22.7
92.5°	11.3	9.8	15.9	20.4	20.4
95°	41.5	15.9	16.6	21.1	21.9
97.5°	79.3	95.9	16.6	20.4	21.1
100°	123.8	137.4	33.2	20.4	21.1
102.5°	173.7	182.7	191.8	21.9	21.9
105°	227.3	231.8	235.6	242.4	215.2
107.5°	276.4	278.6	283.9	287.7	290.7
110°	326.2	328.5	333.0	334.5	336.8

TEST NUMBER: P1032986

CATALOG NUMBER: S124RDIW-B350D770UB2750-4F0-XX-W2A-F_3000K

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	374.5	379.1	380.6	379.8	382.8
115°	424.4	426.6	425.9	427.4	427.4
117.5°	468.9	471.9	474.2	473.4	473.4
120°	514.2	517.2	516.5	518.0	516.5
122.5°	556.5	558.0	559.5	560.3	558.8
125°	596.5	599.5	598.0	600.3	601.1
127.5°	635.0	635.8	639.6	638.8	638.1
130°	672.0	672.8	675.0	675.8	675.8
132.5°	706.0	707.5	710.5	711.3	710.5
135°	740.0	739.2	742.3	743.8	745.3
137.5°	770.2	770.2	774.0	775.5	774.7
140°	799.6	801.1	802.7	804.9	805.7
142.5°	826.1	829.1	829.8	831.4	831.4
145°	853.3	855.5	855.5	856.3	857.8
147.5°	874.4	878.9	878.2	878.9	879.7
150°	897.8	900.8	900.1	900.1	900.8
152.5°	917.4	919.7	918.2	919.7	918.9
155°	935.6	936.3	934.0	937.1	934.8
157.5°	951.4	951.4	948.4	952.2	948.4
160°	965.0	962.7	962.0	966.5	962.0
162.5°	977.1	974.1	973.3	977.8	972.6
165°	986.9	983.1	983.1	989.2	982.4
167.5°	995.2	991.4	990.7	997.5	989.9
170°	1002.0	997.5	998.2	1004.3	996.7
172.5°	1006.5	1002.0	1002.8	1008.8	1000.5
175°	1009.6	1005.0	1005.8	1012.6	1003.5
177.5°	1011.8	1006.5	1008.0	1014.1	1005.0
180°	1009.6	1009.6	1009.6	1009.6	1009.6

(END OF REPORT)