

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1033483

Luminaire Tested: S124DIW-B350D470UB35-4F0-XX-W2A-A1

Issue Date: 5/6/2025

Test Information

Test Method: LM-79-2019
Report Number: P1033483
REPORT IS A COMBINATION OF REPORTS P997517 AND P1007351
Test Lab: INNOVATION CENTER
Issue Date: 5/6/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S124DIW-B350D470UB35-4F0-XX-W2A-A1
Description: Define 4 Direct/Indirect Wall Mount with 3500K BioUP LEDs {m-DER=0.721} {m-EER=0.792}
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 3193.0 lumens
Efficiency: N/A
Efficacy: 121.9 lumens/watt
Spacing Criteria (0/90/45): 1.22 / 1.3 / 1.41
Luminous Opening: Rectangular w/ Sides (W: 0.33' x L: 4' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 26.2
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1033483

CATALOG NUMBER: S124DIW-B350D470UB35-4F0-XX-W2A-A1

Luminous Intensity Polar Plot

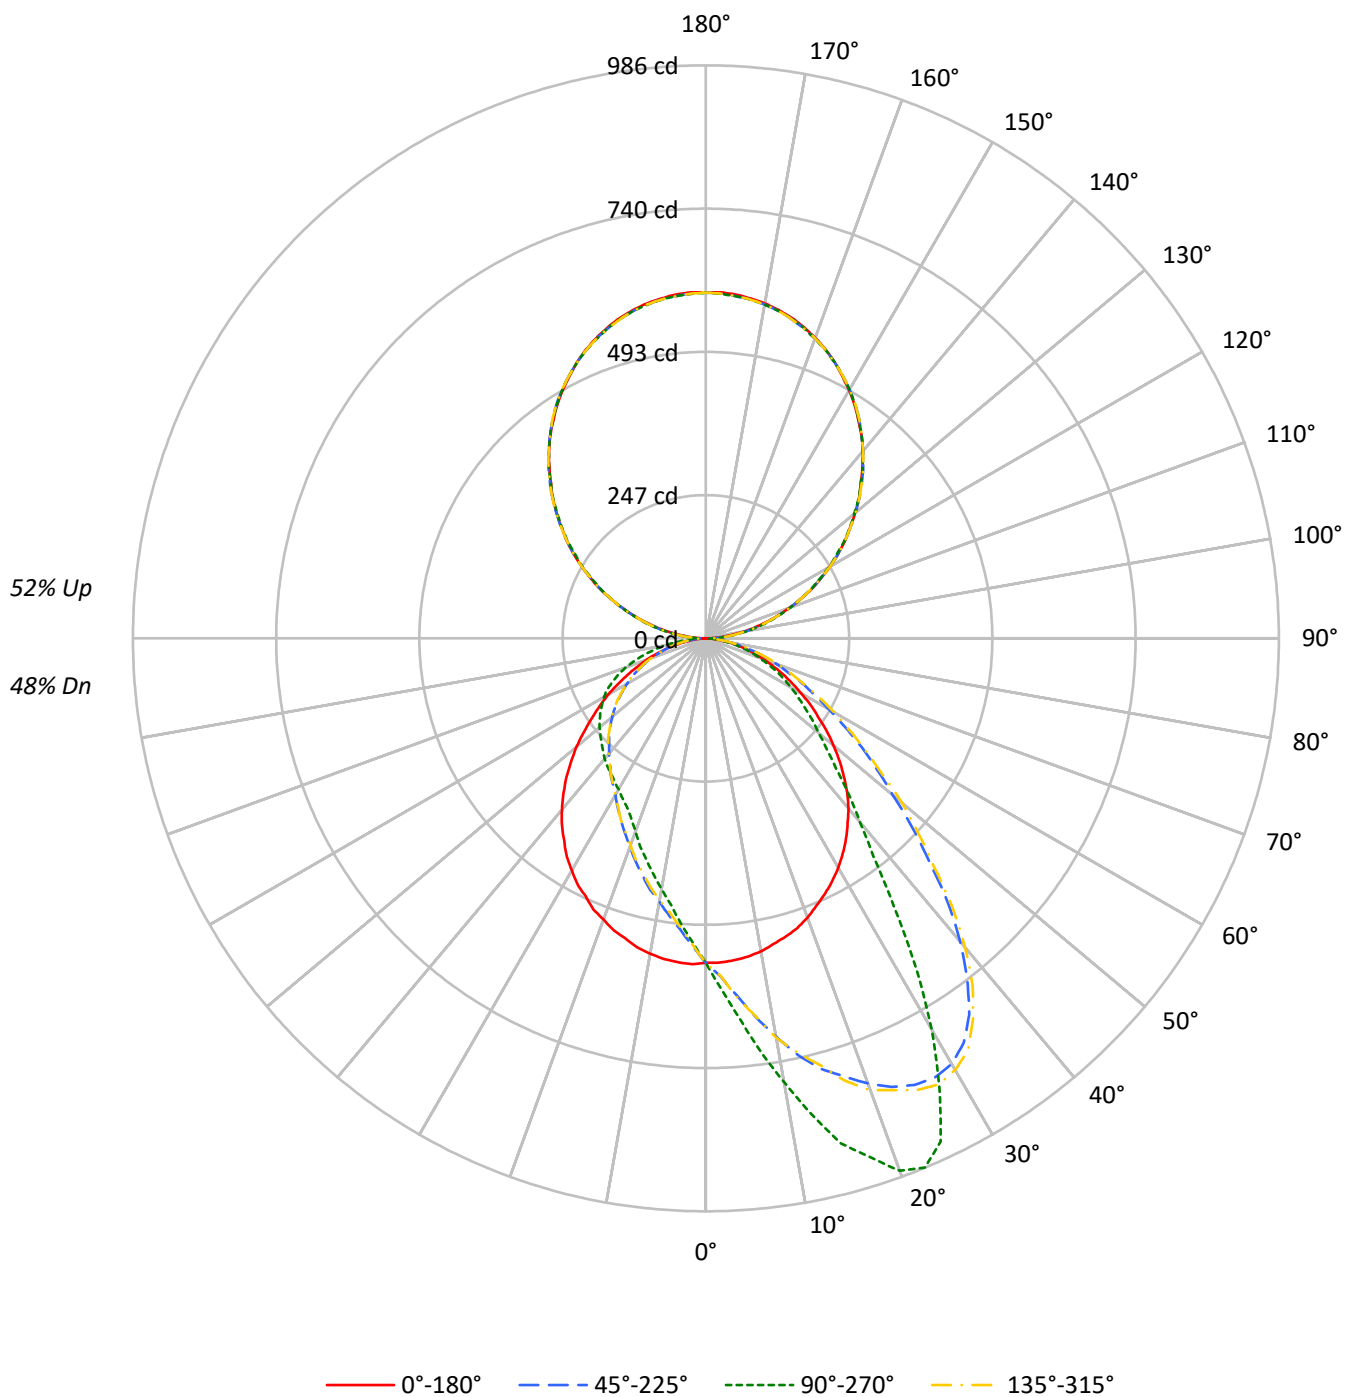

TEST NUMBER: P1033483

CATALOG NUMBER: S124DIW-B350D470UB35-4F0-XX-W2A-A1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	107	107	107	107	98	98	98	98	82	82	82	68	68	68	55	55	55
1	98	93	90	86	90	86	83	80	73	70	68	60	58	57	49	47	46
2	89	82	76	71	82	76	70	66	64	60	57	53	50	48	43	41	39
3	81	72	65	59	75	67	60	55	56	52	48	47	44	41	38	36	34
4	75	64	56	50	68	59	52	47	50	45	41	42	38	35	34	32	29
5	68	57	49	43	63	53	46	41	45	40	35	38	34	31	31	28	26
6	63	51	43	37	58	48	40	35	41	35	31	34	30	27	28	25	23
7	58	46	38	33	54	43	36	31	37	31	27	31	27	24	26	23	20
8	54	42	34	29	50	39	32	28	34	28	24	29	24	21	24	21	18
9	50	38	31	26	46	36	29	25	31	26	22	26	22	19	22	19	16
10	47	35	28	23	43	33	26	22	28	23	20	24	20	17	20	17	15

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	4553	4553	4553	4553
5°	4542	5224	4569	3926
10°	4509	6095	4542	3444
15°	4455	7027	4486	3082
20°	4397	7620	4429	2763
25°	4313	7532	4354	2527
30°	4230	6225	4282	2407
35°	4115	4639	4160	2333
40°	3980	3495	4018	2297
45°	3774	2805	3821	2248
50°	3528	2363	3580	2225
55°	3240	2057	3290	2199
60°	2958	1811	3045	2163
65°	2694	1559	2720	2072
70°	2385	1282	2436	1909
75°	2081	985	2066	1622
80°	1637	648	1616	1232
85°	1077	291	1011	717

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 145°

Vertical Angle: 45°

Luminance: 5888 cd/sqm

TEST NUMBER: P1033483

CATALOG NUMBER: S124DIW-B350D470UB35-4F0-XX-W2A-A1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	54.3	1.7
10°-20°	167.8	5.3
20°-30°	266.5	8.3
30°-40°	296.1	9.3
40°-50°	269.3	8.4
50°-60°	220.1	6.9
60°-70°	157.1	4.9
70°-80°	86.4	2.7
80°-90°	24.6	0.8
90°-100°	38.8	1.2
100°-110°	116.2	3.6
110°-120°	197.3	6.2
120°-130°	260.2	8.2
130°-140°	292.3	9.2
140°-150°	287.3	9.0
150°-160°	241.6	7.6
160°-170°	160.8	5.0
170°-180°	56.3	1.8
0°-30°	488.6	15.3
0°-40°	784.7	24.6
0°-60°	1274.1	39.9
0°-90°	1542.3	48.3
90°-120°	352.3	11.0
90°-150°	1192.1	37.3
90°-180°	1651.0	51.7
0°-180°	3193.0	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	558	558	558	558	558	
5°	556	655	559	492	556	53
15°	531	900	535	395	531	150
25°	485	955	490	321	485	223
35°	421	565	425	284	421	263
45°	335	317	340	254	335	259
55°	236	207	240	222	236	212
65°	147	133	148	177	147	145
75°	72	67	72	110	72	76
85°	15	14	14	34	15	17
90°	1	14	1	14	1	3
95°	28	36	28	36	28	30
105°	107	112	107	112	107	114
115°	201	199	201	199	201	198
125°	292	290	292	290	292	260
135°	377	377	377	377	377	292
145°	458	458	458	458	458	287
155°	524	524	524	524	524	241
165°	571	570	571	570	571	161
175°	594	591	594	591	594	56
180°	595	595	595	595	595	

TEST NUMBER: P1033483

CATALOG NUMBER: S124DIW-B350D470UB35-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
0°	558.4	558.4	558.4	558.4	558.4	558.4	558.4	558.4	558.4	558.4	558.4
2.5°	558.4	564.0	566.3	568.2	574.2	576.0	576.5	579.3	581.6	582.0	582.0
5°	556.1	564.9	571.9	578.3	588.1	592.2	597.3	602.9	610.3	614.9	617.2
7.5°	552.4	565.4	576.0	587.1	600.6	608.9	613.5	628.3	638.5	646.8	657.0
10°	546.9	563.5	578.8	595.0	614.0	624.1	634.3	652.4	666.7	682.9	695.9
12.5°	538.6	560.3	578.8	601.5	625.1	637.1	649.1	680.6	697.3	711.6	734.7
15°	531.2	552.9	579.3	602.4	631.6	649.6	667.2	687.5	713.9	744.9	767.1
17.5°	522.8	550.1	574.6	607.0	639.4	656.5	670.9	702.3	739.4	769.9	790.2
20°	511.3	539.0	571.4	605.6	644.0	657.5	676.4	718.5	751.8	781.9	815.2
22.5°	497.8	530.2	564.5	597.3	637.1	665.3	686.1	723.2	763.4	798.1	835.6
25°	484.9	520.0	550.1	595.0	637.1	656.1	679.7	723.6	767.6	809.7	848.1
27.5°	471.0	503.9	544.6	580.2	627.9	648.7	674.1	722.2	769.0	811.1	852.2
30°	455.7	490.9	524.7	566.8	613.0	639.9	663.5	715.8	763.4	807.4	845.8
32.5°	438.6	471.9	508.0	547.8	596.4	623.7	653.3	707.0	757.9	795.8	825.4
35°	420.6	454.3	485.8	526.5	576.5	603.8	632.5	691.7	742.1	773.1	790.2
37.5°	400.7	432.6	463.6	503.9	553.8	583.0	612.1	669.5	717.1	743.1	738.4
40°	381.7	410.4	439.1	477.0	529.3	560.3	585.7	643.6	685.2	696.3	681.1
42.5°	360.0	384.5	412.2	451.1	502.0	531.2	563.1	615.8	646.8	642.2	616.3
45°	335.4	357.2	384.9	421.5	473.3	503.4	530.2	580.2	602.9	591.3	544.1
47.5°	311.8	333.1	355.8	392.3	442.8	468.2	495.5	540.4	553.4	528.8	481.6
50°	286.4	304.0	327.6	362.3	409.5	436.3	459.0	495.1	499.7	469.6	420.6
52.5°	261.9	276.7	299.4	333.6	377.5	398.8	421.0	453.0	449.3	418.3	371.1
55°	236.0	249.8	270.7	302.1	341.0	361.3	380.3	408.5	400.7	368.8	327.6
57.5°	214.2	223.9	244.3	273.4	305.4	327.6	343.8	366.0	353.9	322.0	283.6
60°	189.2	201.3	218.4	242.0	273.4	288.2	302.6	317.4	309.1	278.5	244.3
62.5°	166.6	175.8	190.6	213.3	237.8	251.2	266.5	275.8	267.4	239.2	210.5
65°	147.1	154.5	166.1	184.6	208.2	219.3	228.1	236.9	229.9	203.6	182.8
67.5°	125.8	132.3	142.0	156.8	176.7	184.6	192.9	199.0	191.1	173.5	153.1
70°	106.9	111.5	120.8	131.9	145.7	153.1	160.1	166.1	159.2	144.4	129.1
72.5°	87.4	91.1	99.5	107.3	119.8	124.9	130.0	134.6	132.3	118.4	106.0
75°	72.2	73.6	79.1	85.6	93.5	99.0	102.7	105.5	103.6	92.5	84.7
77.5°	54.6	56.4	60.6	65.7	72.6	75.9	78.2	81.0	78.7	69.9	64.3
80°	39.8	40.3	42.6	47.2	51.8	52.3	54.6	58.3	56.9	50.9	46.7
82.5°	25.4	26.8	27.8	30.5	33.8	34.7	36.1	37.0	36.6	32.8	31.5
85°	14.8	14.8	15.7	17.6	18.5	19.9	20.4	20.8	21.7	19.4	18.0
87.5°	6.5	6.9	6.9	7.4	8.3	8.3	8.8	9.3	9.7	9.3	7.9
90°	1.4	2.5	3.6	4.7	5.8	6.4	6.8	7.6	8.5	9.3	10.1
92.5°	12.0	13.3	14.6	15.9	17.2	17.9	18.2	18.7	19.2	19.7	20.2
95°	27.6	28.5	29.4	30.3	31.2	31.7	32.1	32.8	33.5	34.3	35.0
97.5°	44.2	45.0	45.8	46.7	47.5	47.9	48.3	49.1	49.9	50.7	51.5
100°	64.4	64.8	65.2	65.7	66.1	66.3	66.8	67.7	68.6	69.5	70.4
102.5°	85.6	85.7	85.8	85.9	86.0	86.0	86.4	87.2	88.1	88.9	89.7
105°	107.2	107.3	107.4	107.5	107.6	107.7	107.9	108.3	108.7	109.1	109.5
107.5°	129.8	129.9	130.0	130.1	130.2	130.2	130.3	130.4	130.5	130.6	130.7
110°	152.8	153.0	153.2	153.4	153.6	153.7	153.6	153.5	153.4	153.3	153.2

TEST NUMBER: P1033483

CATALOG NUMBER: S124DIW-B350D470UB35-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
112.5°	176.7	176.7	176.7	176.7	176.7	176.7	176.6	176.4	176.2	176.0	175.8
115°	200.6	200.6	200.6	200.6	200.6	200.6	200.5	200.3	200.1	199.9	199.7
117.5°	223.2	223.2	223.2	223.2	223.2	223.2	223.1	223.0	222.9	222.8	222.7
120°	245.7	246.1	246.5	246.9	247.3	247.5	247.4	247.1	246.8	246.5	246.2
122.5°	269.2	269.3	269.4	269.5	269.6	269.6	269.6	269.5	269.4	269.3	269.2
125°	292.2	292.2	292.2	292.2	292.2	292.2	292.1	292.0	291.9	291.8	291.7
127.5°	312.9	313.2	313.5	313.8	314.1	314.3	314.2	314.0	313.7	313.5	313.3
130°	335.0	335.3	335.6	335.9	336.2	336.3	336.3	336.3	336.3	336.3	336.3
132.5°	357.5	357.7	357.9	358.1	358.3	358.4	358.4	358.3	358.2	358.1	358.0
135°	376.8	377.4	378.0	378.7	379.3	379.6	379.6	379.6	379.6	379.6	379.6
137.5°	398.5	398.8	399.1	399.4	399.7	399.8	399.9	400.1	400.4	400.6	400.8
140°	420.1	420.3	420.5	420.7	420.9	421.0	421.0	421.0	421.0	421.0	421.0
142.5°	439.9	440.1	440.3	440.5	440.7	440.8	440.7	440.6	440.5	440.4	440.3
145°	457.8	458.2	458.6	459.1	459.5	459.7	459.7	459.8	459.9	460.0	460.1
147.5°	476.2	476.7	477.2	477.7	478.2	478.5	478.5	478.4	478.3	478.2	478.1
150°	492.8	493.2	493.6	494.0	494.4	494.6	494.6	494.6	494.6	494.6	494.6
152.5°	508.4	508.6	508.8	509.1	509.3	509.4	509.4	509.5	509.6	509.7	509.8
155°	524.5	524.5	524.5	524.5	524.5	524.5	524.5	524.4	524.3	524.2	524.1
157.5°	538.3	538.1	537.9	537.7	537.5	537.4	537.4	537.4	537.4	537.4	537.4
160°	550.3	550.2	550.1	550.0	549.9	549.8	549.8	549.7	549.6	549.5	549.4
162.5°	561.3	561.0	560.7	560.4	560.1	560.0	559.9	559.8	559.7	559.6	559.5
165°	571.0	570.7	570.4	570.1	569.8	569.6	569.5	569.3	569.1	568.9	568.7
167.5°	578.8	578.4	578.0	577.6	577.2	577.0	577.0	577.0	577.0	577.0	577.0
170°	585.3	584.8	584.3	583.8	583.3	583.0	583.0	583.1	583.2	583.3	583.4
172.5°	589.9	589.5	589.1	588.6	588.2	588.0	588.0	588.0	588.0	588.0	588.0
175°	594.0	593.5	593.0	592.5	592.0	591.7	591.7	591.6	591.5	591.4	591.3
177.5°	595.9	595.4	594.9	594.4	593.9	593.6	593.6	593.6	593.6	593.6	593.6
180°	594.9	594.9	594.9	594.9	594.9	594.9	594.9	594.9	594.9	594.9	594.9

TEST NUMBER: P1033483

CATALOG NUMBER: S124DIW-B350D470UB35-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°	95°
0°	558.4	558.4	558.4	558.4	558.4	558.4	558.4	558.4	558.4	558.4	558.4
2.5°	583.4	591.8	595.5	596.4	601.5	598.2	599.6	599.2	602.9	603.3	603.3
5°	626.0	635.7	639.0	643.6	650.5	652.4	651.0	653.8	658.8	655.1	660.7
7.5°	670.9	681.5	688.9	699.1	701.4	707.4	711.1	714.4	715.3	715.8	716.7
10°	712.5	725.9	736.1	753.2	756.9	760.2	776.4	769.9	778.2	775.4	776.4
12.5°	746.3	772.7	781.0	809.7	812.5	823.6	822.6	832.8	834.7	838.4	834.7
15°	790.7	821.2	834.7	850.9	860.1	873.1	875.4	889.3	894.8	899.9	894.8
17.5°	831.4	847.6	881.9	894.8	900.8	907.8	925.4	930.4	938.8	935.5	944.8
20°	851.8	874.9	911.0	933.2	942.5	948.9	963.8	971.6	974.9	974.9	975.8
22.5°	869.8	903.1	930.0	955.4	963.8	968.4	977.2	983.2	984.6	985.5	986.4
25°	886.0	916.1	937.8	952.2	955.4	955.4	960.5	956.8	950.8	955.4	958.2
27.5°	886.0	907.3	917.0	922.1	922.1	909.6	902.2	886.9	874.0	870.3	878.6
30°	871.2	880.9	867.5	855.0	845.3	837.0	807.8	784.7	780.1	776.8	789.3
32.5°	837.0	824.5	798.1	762.0	747.7	728.7	706.0	688.5	677.8	674.1	671.3
35°	776.4	744.0	709.7	661.2	651.0	626.9	595.9	583.0	565.4	564.9	570.9
37.5°	710.2	660.2	623.2	577.0	562.6	537.2	508.0	494.6	482.6	473.3	484.4
40°	632.9	589.4	533.0	495.1	474.7	461.3	436.8	422.0	416.4	411.8	418.7
42.5°	560.8	513.1	469.2	430.3	413.6	398.4	382.2	367.8	363.7	363.2	368.3
45°	489.0	442.3	401.6	368.3	357.6	348.4	332.7	328.5	321.6	316.9	319.2
47.5°	431.7	383.6	349.8	324.3	315.1	307.2	297.0	290.1	284.1	282.2	285.0
50°	375.2	342.8	308.1	286.9	279.9	272.5	264.7	258.2	255.4	253.5	255.4
52.5°	329.9	295.2	271.6	254.5	247.5	242.0	236.4	233.7	229.9	230.9	232.7
55°	289.2	258.6	238.7	226.2	222.1	219.8	212.8	209.6	208.2	207.3	208.2
57.5°	250.8	228.6	213.8	203.1	197.6	196.2	190.6	190.6	189.2	187.8	188.3
60°	220.2	201.3	186.9	178.6	177.7	175.4	171.7	171.2	168.0	169.3	169.8
62.5°	189.2	174.0	164.2	159.2	155.9	155.0	152.7	152.2	150.8	151.3	150.4
65°	164.7	152.2	142.5	138.3	137.0	136.5	134.6	133.3	132.3	133.3	132.3
67.5°	140.2	131.9	124.5	120.3	118.4	118.0	116.6	115.7	116.1	114.7	115.7
70°	117.1	108.7	104.1	101.8	100.9	99.5	99.5	99.5	99.5	98.5	98.1
72.5°	98.5	90.2	87.0	85.6	84.7	84.2	82.8	83.3	82.8	82.4	84.2
75°	78.2	73.1	69.9	68.5	69.4	68.0	66.6	67.6	66.2	66.6	68.5
77.5°	59.2	56.9	55.1	54.1	53.2	52.3	52.3	51.4	51.4	51.4	51.4
80°	43.0	42.6	39.3	38.9	38.9	37.9	37.9	37.9	37.9	37.5	37.9
82.5°	28.7	28.2	27.3	26.8	25.9	26.4	26.4	25.4	25.4	25.0	25.4
85°	16.7	16.7	15.7	15.3	14.8	15.3	14.3	13.9	14.3	13.9	14.3
87.5°	7.9	6.9	7.4	6.9	6.0	6.5	5.6	6.0	5.6	5.1	6.0
90°	10.7	11.3	12.0	12.6	12.9	13.0	13.2	13.4	13.6	13.8	13.6
92.5°	20.5	20.8	21.1	21.4	21.6	21.7	21.8	21.9	22.0	22.1	22.0
95°	35.3	35.6	35.9	36.2	36.3	36.3	36.3	36.3	36.3	36.3	36.3
97.5°	51.9	52.3	52.8	53.2	53.4	53.4	53.4	53.4	53.4	53.4	53.4
100°	70.6	70.8	71.0	71.2	71.3	71.3	71.3	71.3	71.3	71.3	71.3
102.5°	90.0	90.3	90.6	90.9	91.1	91.2	91.3	91.4	91.5	91.6	91.5
105°	109.8	110.1	110.4	110.7	110.9	111.1	111.4	111.7	112.0	112.3	112.0
107.5°	131.1	131.5	131.9	132.3	132.5	132.5	132.4	132.3	132.2	132.1	132.2
110°	153.0	152.8	152.6	152.4	152.3	152.5	152.8	153.1	153.4	153.7	153.4

TEST NUMBER: P1033483

CATALOG NUMBER: S124DIW-B350D470UB35-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°	95°
112.5°	175.8	175.8	175.8	175.8	175.8	175.8	175.8	175.8	175.8	175.8	175.8
115°	199.6	199.5	199.4	199.3	199.2	199.2	199.1	199.0	198.9	198.8	198.9
117.5°	222.4	222.1	221.8	221.5	221.3	221.1	220.8	220.5	220.2	219.9	220.2
120°	245.7	245.2	244.7	244.2	243.9	244.0	244.2	244.4	244.6	244.8	244.6
122.5°	268.9	268.6	268.3	268.0	267.8	267.5	267.0	266.5	266.0	265.5	266.0
125°	291.5	291.3	291.1	290.9	290.8	290.7	290.5	290.3	290.1	289.9	290.1
127.5°	313.1	312.9	312.7	312.5	312.4	312.4	312.3	312.2	312.1	312.0	312.1
130°	336.1	335.9	335.7	335.5	335.4	335.2	334.8	334.4	334.0	333.6	334.0
132.5°	357.8	357.6	357.4	357.2	357.1	357.0	356.9	356.8	356.7	356.6	356.7
135°	379.4	379.2	379.0	378.8	378.7	378.5	378.2	377.9	377.6	377.3	377.6
137.5°	400.5	400.2	399.9	399.6	399.4	399.4	399.5	399.6	399.7	399.8	399.7
140°	420.9	420.8	420.7	420.6	420.6	420.5	420.4	420.3	420.2	420.1	420.2
142.5°	440.3	440.3	440.3	440.3	440.3	440.3	440.3	440.3	440.3	440.3	440.3
145°	460.0	459.9	459.8	459.7	459.7	459.5	459.2	458.9	458.6	458.3	458.6
147.5°	478.0	477.9	477.8	477.7	477.6	477.5	477.4	477.3	477.2	477.1	477.2
150°	494.6	494.6	494.6	494.6	494.6	494.6	494.5	494.4	494.3	494.2	494.3
152.5°	510.1	510.4	510.7	511.0	511.2	511.0	510.7	510.4	510.1	509.8	510.1
155°	524.5	524.9	525.3	525.7	525.9	525.7	525.3	524.9	524.5	524.1	524.5
157.5°	537.7	538.0	538.3	538.6	538.8	538.6	538.3	538.0	537.7	537.4	537.7
160°	549.7	550.0	550.3	550.6	550.8	550.5	550.0	549.5	549.0	548.5	549.0
162.5°	560.1	560.7	561.4	562.0	562.3	562.0	561.5	561.0	560.5	560.0	560.5
165°	569.3	569.9	570.6	571.2	571.5	571.3	570.9	570.4	570.0	569.6	570.0
167.5°	577.6	578.2	578.9	579.5	579.8	579.5	578.9	578.2	577.6	577.0	577.6
170°	584.0	584.6	585.3	585.9	586.2	585.8	585.1	584.4	583.7	583.0	583.7
172.5°	588.7	589.5	590.2	590.9	591.3	590.9	590.2	589.5	588.7	588.0	588.7
175°	592.0	592.7	593.4	594.1	594.5	594.1	593.4	592.7	592.0	591.3	592.0
177.5°	594.3	595.0	595.7	596.4	596.8	596.4	595.6	594.7	593.9	593.1	593.9
180°	594.9	594.9	594.9	594.9	594.9	594.9	594.9	594.9	594.9	594.9	594.9

TEST NUMBER: P1033483

CATALOG NUMBER: S124DIW-B350D470UB35-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	100°	105°	110°	112.5°	115°	120°	125°	130°	135°	140°	145°
0°	558.4	558.4	558.4	558.4	558.4	558.4	558.4	558.4	558.4	558.4	558.4
2.5°	602.4	601.0	599.2	599.2	596.9	596.9	593.1	586.7	581.1	579.3	580.2
5°	653.8	654.2	651.4	649.1	645.0	641.7	635.7	624.1	620.4	613.0	608.0
7.5°	712.5	710.7	705.6	701.9	701.0	693.6	680.6	666.7	655.6	648.2	637.6
10°	778.7	771.3	763.9	761.6	756.0	743.5	728.7	713.4	698.2	682.0	663.9
12.5°	834.2	819.9	819.4	813.8	803.2	796.3	778.7	756.9	730.6	712.5	692.2
15°	893.9	880.5	869.4	859.2	854.1	833.7	818.9	791.6	760.2	740.7	726.9
17.5°	936.5	930.4	911.5	906.8	899.9	876.3	852.7	825.9	798.6	771.3	733.8
20°	970.7	967.0	954.5	948.0	936.9	918.4	889.7	858.7	827.3	788.4	753.2
22.5°	985.5	980.9	970.7	965.1	958.2	942.5	917.9	882.8	841.6	806.9	769.4
25°	956.3	964.7	961.9	959.6	956.8	947.6	929.1	898.1	857.8	818.5	771.7
27.5°	890.6	905.0	918.9	920.7	925.4	929.1	921.6	899.4	865.7	824.0	772.7
30°	802.3	808.8	837.0	845.3	851.8	875.4	889.3	883.7	857.8	820.3	773.1
32.5°	688.9	706.0	734.7	754.6	772.2	798.6	834.7	849.0	839.8	809.2	762.5
35°	581.6	601.9	635.3	660.7	678.3	715.8	758.3	789.3	800.9	785.6	744.0
37.5°	493.7	518.2	547.8	557.5	577.9	624.1	682.9	725.9	754.2	755.5	723.2
40°	427.5	440.0	463.6	478.4	498.3	537.2	594.5	651.4	694.0	708.4	691.2
42.5°	371.5	381.2	398.8	416.9	434.9	464.5	517.3	570.5	627.9	656.5	656.1
45°	327.1	337.3	349.3	364.1	376.6	408.5	450.2	504.8	554.3	598.7	609.8
47.5°	288.2	297.0	311.8	318.3	326.6	356.7	392.8	443.7	495.1	546.0	558.9
50°	259.6	267.0	277.1	281.3	290.6	312.8	342.4	383.6	440.5	487.2	511.3
52.5°	233.7	239.2	247.1	250.3	256.8	273.4	300.3	332.7	379.9	428.0	461.7
55°	211.4	215.1	220.7	224.4	229.0	243.8	263.7	292.9	333.6	375.2	408.1
57.5°	190.6	193.4	199.0	200.8	204.5	216.1	229.9	254.5	291.9	329.0	360.9
60°	171.2	173.0	176.3	180.4	183.2	191.1	204.0	224.4	254.5	288.2	314.2
62.5°	152.7	155.5	156.4	158.2	160.5	168.0	178.1	192.9	219.3	247.1	274.4
65°	133.7	136.0	137.9	138.3	140.7	146.2	155.5	168.4	185.5	209.6	235.0
67.5°	116.1	117.5	118.4	120.3	122.6	125.4	132.8	142.5	158.2	177.7	198.0
70°	99.9	99.9	101.3	101.8	104.6	107.8	111.0	120.3	134.2	149.9	163.8
72.5°	82.4	84.7	84.2	86.5	86.1	88.4	92.5	98.5	108.7	121.2	134.6
75°	67.1	68.5	68.5	68.5	69.4	71.3	73.6	79.1	87.0	97.2	105.0
77.5°	52.3	53.2	53.2	53.2	53.7	55.5	57.8	61.5	67.1	73.1	77.7
80°	37.5	38.4	38.4	39.3	39.3	39.8	42.1	44.0	46.7	51.4	56.0
82.5°	25.4	25.9	26.8	26.8	26.4	27.3	27.8	29.6	32.4	33.3	36.6
85°	13.9	14.3	14.8	14.8	15.3	16.2	15.7	17.6	17.6	19.4	20.4
87.5°	5.6	6.5	6.5	6.0	6.5	6.5	6.5	7.4	7.9	8.3	7.9
90°	13.4	13.2	13.0	12.9	12.6	12.0	11.3	10.7	10.1	9.3	8.5
92.5°	21.9	21.8	21.7	21.6	21.4	21.1	20.8	20.5	20.2	19.7	19.2
95°	36.3	36.3	36.3	36.3	36.2	35.9	35.6	35.3	35.0	34.3	33.5
97.5°	53.4	53.4	53.4	53.4	53.2	52.8	52.3	51.9	51.5	50.7	49.9
100°	71.3	71.3	71.3	71.3	71.2	71.0	70.8	70.6	70.4	69.5	68.6
102.5°	91.4	91.3	91.2	91.1	90.9	90.6	90.3	90.0	89.7	88.9	88.1
105°	111.7	111.4	111.1	110.9	110.7	110.4	110.1	109.8	109.5	109.1	108.7
107.5°	132.3	132.4	132.5	132.5	132.3	131.9	131.5	131.1	130.7	130.6	130.5
110°	153.1	152.8	152.5	152.3	152.4	152.6	152.8	153.0	153.2	153.3	153.4

TEST NUMBER: P1033483

CATALOG NUMBER: S124DIW-B350D470UB35-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	100°	105°	110°	112.5°	115°	120°	125°	130°	135°	140°	145°
112.5°	175.8	175.8	175.8	175.8	175.8	175.8	175.8	175.8	175.8	176.0	176.2
115°	199.0	199.1	199.2	199.2	199.3	199.4	199.5	199.6	199.7	199.9	200.1
117.5°	220.5	220.8	221.1	221.3	221.5	221.8	222.1	222.4	222.7	222.8	222.9
120°	244.4	244.2	244.0	243.9	244.2	244.7	245.2	245.7	246.2	246.5	246.8
122.5°	266.5	267.0	267.5	267.8	268.0	268.3	268.6	268.9	269.2	269.3	269.4
125°	290.3	290.5	290.7	290.8	290.9	291.1	291.3	291.5	291.7	291.8	291.9
127.5°	312.2	312.3	312.4	312.4	312.5	312.7	312.9	313.1	313.3	313.5	313.7
130°	334.4	334.8	335.2	335.4	335.5	335.7	335.9	336.1	336.3	336.3	336.3
132.5°	356.8	356.9	357.0	357.1	357.2	357.4	357.6	357.8	358.0	358.1	358.2
135°	377.9	378.2	378.5	378.7	378.8	379.0	379.2	379.4	379.6	379.6	379.6
137.5°	399.6	399.5	399.4	399.4	399.6	399.9	400.2	400.5	400.8	400.6	400.4
140°	420.3	420.4	420.5	420.6	420.6	420.7	420.8	420.9	421.0	421.0	421.0
142.5°	440.3	440.3	440.3	440.3	440.3	440.3	440.3	440.3	440.3	440.4	440.5
145°	458.9	459.2	459.5	459.7	459.7	459.8	459.9	460.0	460.1	460.0	459.9
147.5°	477.3	477.4	477.5	477.6	477.7	477.8	477.9	478.0	478.1	478.2	478.3
150°	494.4	494.5	494.6	494.6	494.6	494.6	494.6	494.6	494.6	494.6	494.6
152.5°	510.4	510.7	511.0	511.2	511.0	510.7	510.4	510.1	509.8	509.7	509.6
155°	524.9	525.3	525.7	525.9	525.7	525.3	524.9	524.5	524.1	524.2	524.3
157.5°	538.0	538.3	538.6	538.8	538.6	538.3	538.0	537.7	537.4	537.4	537.4
160°	549.5	550.0	550.5	550.8	550.6	550.3	550.0	549.7	549.4	549.5	549.6
162.5°	561.0	561.5	562.0	562.3	562.0	561.4	560.7	560.1	559.5	559.6	559.7
165°	570.4	570.9	571.3	571.5	571.2	570.6	569.9	569.3	568.7	568.9	569.1
167.5°	578.2	578.9	579.5	579.8	579.5	578.9	578.2	577.6	577.0	577.0	577.0
170°	584.4	585.1	585.8	586.2	585.9	585.3	584.6	584.0	583.4	583.3	583.2
172.5°	589.5	590.2	590.9	591.3	590.9	590.2	589.5	588.7	588.0	588.0	588.0
175°	592.7	593.4	594.1	594.5	594.1	593.4	592.7	592.0	591.3	591.4	591.5
177.5°	594.7	595.6	596.4	596.8	596.4	595.7	595.0	594.3	593.6	593.6	593.6
180°	594.9	594.9	594.9	594.9	594.9	594.9	594.9	594.9	594.9	594.9	594.9

TEST NUMBER: P1033483

CATALOG NUMBER: S124DIW-B350D470UB35-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	150°	155°	157.5°	160°	165°	170°	175°	180°	185°	190°	195°
0°	558.4	558.4	558.4	558.4	558.4	558.4	558.4	558.4	558.4	558.4	558.4
2.5°	576.0	574.2	572.8	572.8	568.6	564.5	562.2	561.2	560.3	556.6	551.5
5°	599.6	593.6	589.4	585.3	578.3	570.9	563.5	559.4	553.4	545.0	539.0
7.5°	626.0	611.7	607.0	601.9	588.1	575.6	565.4	556.6	546.9	536.2	525.6
10°	648.2	632.9	622.8	614.0	595.9	579.3	564.0	551.0	538.6	524.7	511.7
12.5°	669.5	647.7	637.1	624.1	605.2	581.1	561.2	545.0	526.5	512.2	496.5
15°	699.1	662.6	645.0	636.6	611.2	583.0	558.9	534.9	519.6	497.8	484.0
17.5°	703.7	674.1	662.6	641.3	610.7	578.8	551.0	527.0	503.9	484.4	466.4
20°	719.9	681.1	662.6	649.1	608.9	576.5	546.0	515.0	492.7	471.9	451.6
22.5°	730.1	686.1	666.7	645.4	607.0	568.2	532.1	505.2	477.9	456.7	440.5
25°	727.3	683.4	661.6	641.7	595.0	556.1	523.7	489.5	464.1	440.9	419.6
27.5°	725.9	676.4	653.3	631.1	587.1	546.4	505.7	477.9	449.7	422.9	407.2
30°	722.2	667.6	640.8	616.7	570.9	528.4	493.7	461.3	433.1	408.5	387.7
32.5°	709.7	652.8	626.9	601.0	553.4	510.8	475.6	445.6	417.3	391.9	372.0
35°	693.1	635.3	607.0	579.7	532.1	489.0	456.7	425.2	398.8	374.3	355.3
37.5°	676.4	614.9	588.5	557.1	513.1	468.2	434.9	406.7	382.2	356.7	335.9
40°	652.4	590.8	561.7	534.9	483.5	441.4	410.9	385.4	361.3	337.3	319.7
42.5°	619.5	564.5	534.4	504.8	456.7	415.0	385.4	362.7	340.1	320.2	300.7
45°	586.2	532.5	505.7	479.3	427.0	387.7	360.4	339.6	320.6	298.9	283.2
47.5°	546.0	500.6	473.8	447.9	398.4	359.0	334.1	314.6	297.0	279.0	264.2
50°	504.8	465.5	440.9	414.1	366.9	331.3	306.8	290.6	276.2	259.1	247.1
52.5°	460.4	426.1	405.3	379.4	337.8	304.9	279.9	263.7	251.7	239.2	228.6
55°	413.2	388.2	366.0	345.2	305.8	276.2	254.0	239.7	231.3	219.8	210.5
57.5°	370.6	346.5	333.1	309.5	275.3	246.1	228.6	216.5	206.8	199.9	192.5
60°	326.2	306.8	291.9	274.8	244.8	220.2	201.7	194.8	184.6	179.5	176.3
62.5°	283.6	269.7	255.9	242.9	216.1	192.9	179.1	170.3	164.2	159.2	156.4
65°	243.4	230.4	220.7	209.1	186.9	168.4	155.5	148.5	142.5	141.1	137.9
67.5°	204.0	198.5	187.8	178.6	159.6	145.3	135.6	126.8	123.5	122.1	119.4
70°	170.7	164.2	155.9	148.1	133.7	121.2	112.4	109.2	104.6	104.1	100.9
72.5°	140.7	132.8	126.8	120.8	110.1	99.0	94.4	89.8	87.4	85.6	84.2
75°	111.5	106.0	101.8	96.7	87.4	80.0	73.6	71.7	70.3	69.9	68.9
77.5°	83.3	79.6	77.7	72.6	66.2	59.7	56.9	54.1	54.1	53.2	53.7
80°	59.2	56.9	54.6	51.8	46.3	43.5	41.2	39.3	38.4	37.9	38.4
82.5°	37.5	36.1	35.6	33.8	30.1	28.7	26.8	25.4	25.4	25.4	25.4
85°	20.8	20.8	20.8	18.0	16.7	15.3	14.3	13.9	13.9	13.9	14.3
87.5°	8.8	8.8	7.4	7.4	6.9	6.0	5.6	5.6	6.0	6.0	6.5
90°	7.6	6.8	6.4	5.8	4.7	3.6	2.5	1.4	2.5	3.6	4.7
92.5°	18.7	18.2	17.9	17.2	15.9	14.6	13.3	12.0	13.3	14.6	15.9
95°	32.8	32.1	31.7	31.2	30.3	29.4	28.5	27.6	28.5	29.4	30.3
97.5°	49.1	48.3	47.9	47.5	46.7	45.8	45.0	44.2	45.0	45.8	46.7
100°	67.7	66.8	66.3	66.1	65.7	65.2	64.8	64.4	64.8	65.2	65.7
102.5°	87.2	86.4	86.0	86.0	85.9	85.8	85.7	85.6	85.7	85.8	85.9
105°	108.3	107.9	107.7	107.6	107.5	107.4	107.3	107.2	107.3	107.4	107.5
107.5°	130.4	130.3	130.2	130.2	130.1	130.0	129.9	129.8	129.9	130.0	130.1
110°	153.5	153.6	153.7	153.6	153.4	153.2	153.0	152.8	153.0	153.2	153.4

TEST NUMBER: P1033483

CATALOG NUMBER: S124DIW-B350D470UB35-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	150°	155°	157.5°	160°	165°	170°	175°	180°	185°	190°	195°
112.5°	176.4	176.6	176.7	176.7	176.7	176.7	176.7	176.7	176.7	176.7	176.7
115°	200.3	200.5	200.6	200.6	200.6	200.6	200.6	200.6	200.6	200.6	200.6
117.5°	223.0	223.1	223.2	223.2	223.2	223.2	223.2	223.2	223.2	223.2	223.2
120°	247.1	247.4	247.5	247.3	246.9	246.5	246.1	245.7	246.1	246.5	246.9
122.5°	269.5	269.6	269.6	269.6	269.5	269.4	269.3	269.2	269.3	269.4	269.5
125°	292.0	292.1	292.2	292.2	292.2	292.2	292.2	292.2	292.2	292.2	292.2
127.5°	314.0	314.2	314.3	314.1	313.8	313.5	313.2	312.9	313.2	313.5	313.8
130°	336.3	336.3	336.3	336.2	335.9	335.6	335.3	335.0	335.3	335.6	335.9
132.5°	358.3	358.4	358.4	358.3	358.1	357.9	357.7	357.5	357.7	357.9	358.1
135°	379.6	379.6	379.6	379.3	378.7	378.0	377.4	376.8	377.4	378.0	378.7
137.5°	400.1	399.9	399.8	399.7	399.4	399.1	398.8	398.5	398.8	399.1	399.4
140°	421.0	421.0	421.0	420.9	420.7	420.5	420.3	420.1	420.3	420.5	420.7
142.5°	440.6	440.7	440.8	440.7	440.5	440.3	440.1	439.9	440.1	440.3	440.5
145°	459.8	459.7	459.7	459.5	459.1	458.6	458.2	457.8	458.2	458.6	459.1
147.5°	478.4	478.5	478.5	478.2	477.7	477.2	476.7	476.2	476.7	477.2	477.7
150°	494.6	494.6	494.6	494.4	494.0	493.6	493.2	492.8	493.2	493.6	494.0
152.5°	509.5	509.4	509.4	509.3	509.1	508.8	508.6	508.4	508.6	508.8	509.1
155°	524.4	524.5	524.5	524.5	524.5	524.5	524.5	524.5	524.5	524.5	524.5
157.5°	537.4	537.4	537.4	537.5	537.7	537.9	538.1	538.3	538.1	537.9	537.7
160°	549.7	549.8	549.8	549.9	550.0	550.1	550.2	550.3	550.2	550.1	550.0
162.5°	559.8	559.9	560.0	560.1	560.4	560.7	561.0	561.3	561.0	560.7	560.4
165°	569.3	569.5	569.6	569.8	570.1	570.4	570.7	571.0	570.7	570.4	570.1
167.5°	577.0	577.0	577.0	577.2	577.6	578.0	578.4	578.8	578.4	578.0	577.6
170°	583.1	583.0	583.0	583.3	583.8	584.3	584.8	585.3	584.8	584.3	583.8
172.5°	588.0	588.0	588.0	588.2	588.6	589.1	589.5	589.9	589.5	589.1	588.6
175°	591.6	591.7	591.7	592.0	592.5	593.0	593.5	594.0	593.5	593.0	592.5
177.5°	593.6	593.6	593.6	593.9	594.4	594.9	595.4	595.9	595.4	594.9	594.4
180°	594.9	594.9	594.9	594.9	594.9	594.9	594.9	594.9	594.9	594.9	594.9

TEST NUMBER: P1033483

CATALOG NUMBER: S124DIW-B350D470UB35-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	200°	202.5°	205°	210°	215°	220°	225°	230°	235°	240°	245°
0°	558.4	558.4	558.4	558.4	558.4	558.4	558.4	558.4	558.4	558.4	558.4
2.5°	550.1	548.3	549.2	544.6	540.4	534.4	529.3	528.4	527.4	530.2	528.4
5°	534.4	532.1	529.8	524.2	515.9	510.8	503.4	502.9	500.2	496.0	496.9
7.5°	517.3	515.9	512.6	503.9	496.5	487.7	481.6	476.6	474.2	470.5	469.2
10°	503.4	498.3	495.5	485.8	477.0	467.8	459.9	456.2	452.0	448.8	446.5
12.5°	484.4	483.0	475.2	467.3	459.9	449.3	443.2	432.6	427.0	429.8	428.9
15°	471.9	465.5	463.6	452.5	440.0	433.1	422.0	415.0	412.7	408.5	403.5
17.5°	455.3	451.1	444.6	434.5	420.1	410.4	402.5	396.1	393.3	387.7	383.6
20°	439.5	432.6	427.5	418.3	404.4	391.9	382.2	378.0	371.1	366.4	364.1
22.5°	425.2	420.1	412.7	398.8	386.8	374.8	363.2	357.2	350.7	347.9	344.2
25°	407.6	399.3	394.2	378.9	366.0	356.3	345.6	337.8	334.1	329.4	328.5
27.5°	390.5	382.6	376.6	363.2	347.5	335.0	328.5	322.9	316.5	316.5	314.2
30°	373.4	367.8	358.6	345.6	330.8	318.8	311.4	306.3	304.0	302.1	301.7
32.5°	356.3	348.9	343.3	325.7	314.6	303.5	298.0	293.8	291.0	290.6	291.0
35°	338.7	330.4	324.8	309.1	298.0	287.8	285.5	281.8	280.4	279.9	282.2
37.5°	320.2	313.7	306.8	293.8	281.3	275.3	270.7	269.3	268.8	271.6	272.5
40°	303.1	297.5	291.0	277.1	267.9	261.4	259.1	257.7	259.6	262.3	263.7
42.5°	286.9	279.0	273.9	261.4	253.1	249.4	246.6	246.6	248.5	251.7	254.0
45°	269.7	263.7	258.6	247.5	240.1	236.0	235.5	236.0	238.3	240.6	243.4
47.5°	253.1	247.1	241.5	232.3	225.8	223.5	223.0	223.5	227.2	230.4	233.7
50°	237.8	231.3	226.2	217.5	212.4	209.6	210.1	212.4	215.1	219.8	223.9
52.5°	219.8	215.1	210.5	202.7	198.0	196.2	197.6	199.4	204.5	207.7	212.8
55°	202.2	198.0	194.3	188.3	184.6	183.2	184.1	186.9	191.1	196.6	202.7
57.5°	186.0	181.4	177.7	173.5	169.3	169.8	170.3	174.0	179.1	184.1	191.1
60°	168.0	165.2	161.9	156.8	155.0	155.0	156.4	160.5	165.2	173.5	179.5
62.5°	151.8	148.1	145.7	142.5	139.7	140.2	143.4	147.1	152.7	159.6	167.5
65°	135.1	130.9	129.1	126.3	125.4	125.8	128.2	133.7	139.7	145.7	153.1
67.5°	116.6	115.2	113.4	110.6	111.5	112.0	114.3	118.9	125.4	131.4	139.7
70°	100.9	98.1	97.6	95.3	95.3	96.7	101.3	104.6	110.6	117.1	125.8
72.5°	84.2	81.9	81.9	80.0	81.4	82.8	85.1	89.8	95.3	101.8	109.2
75°	67.1	66.2	67.1	66.2	66.2	68.5	71.3	75.0	81.0	87.9	93.9
77.5°	51.8	51.8	51.4	52.7	52.7	54.1	57.8	61.5	66.2	71.7	78.2
80°	37.9	37.9	37.9	39.3	40.7	40.7	43.0	47.7	51.8	55.5	61.5
82.5°	25.9	25.9	25.9	26.8	28.7	28.7	31.5	34.2	38.9	42.1	44.9
85°	15.7	15.7	15.3	16.2	16.7	18.0	20.4	22.2	24.5	27.3	30.1
87.5°	6.9	6.9	7.4	7.9	8.3	9.3	10.2	11.1	13.4	14.3	15.7
90°	5.8	6.4	6.8	7.6	8.5	9.3	10.1	10.7	11.3	12.0	12.6
92.5°	17.2	17.9	18.2	18.7	19.2	19.7	20.2	20.5	20.8	21.1	21.4
95°	31.2	31.7	32.1	32.8	33.5	34.3	35.0	35.3	35.6	35.9	36.2
97.5°	47.5	47.9	48.3	49.1	49.9	50.7	51.5	51.9	52.3	52.8	53.2
100°	66.1	66.3	66.8	67.7	68.6	69.5	70.4	70.6	70.8	71.0	71.2
102.5°	86.0	86.0	86.4	87.2	88.1	88.9	89.7	90.0	90.3	90.6	90.9
105°	107.6	107.7	107.9	108.3	108.7	109.1	109.5	109.8	110.1	110.4	110.7
107.5°	130.2	130.2	130.3	130.4	130.5	130.6	130.7	131.1	131.5	131.9	132.3
110°	153.6	153.7	153.6	153.5	153.4	153.3	153.2	153.0	152.8	152.6	152.4

TEST NUMBER: P1033483

CATALOG NUMBER: S124DIW-B350D470UB35-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	200°	202.5°	205°	210°	215°	220°	225°	230°	235°	240°	245°
112.5°	176.7	176.7	176.6	176.4	176.2	176.0	175.8	175.8	175.8	175.8	175.8
115°	200.6	200.6	200.5	200.3	200.1	199.9	199.7	199.6	199.5	199.4	199.3
117.5°	223.2	223.2	223.1	223.0	222.9	222.8	222.7	222.4	222.1	221.8	221.5
120°	247.3	247.5	247.4	247.1	246.8	246.5	246.2	245.7	245.2	244.7	244.2
122.5°	269.6	269.6	269.6	269.5	269.4	269.3	269.2	268.9	268.6	268.3	268.0
125°	292.2	292.2	292.1	292.0	291.9	291.8	291.7	291.5	291.3	291.1	290.9
127.5°	314.1	314.3	314.2	314.0	313.7	313.5	313.3	313.1	312.9	312.7	312.5
130°	336.2	336.3	336.3	336.3	336.3	336.3	336.3	336.1	335.9	335.7	335.5
132.5°	358.3	358.4	358.4	358.3	358.2	358.1	358.0	357.8	357.6	357.4	357.2
135°	379.3	379.6	379.6	379.6	379.6	379.6	379.6	379.4	379.2	379.0	378.8
137.5°	399.7	399.8	399.9	400.1	400.4	400.6	400.8	400.5	400.2	399.9	399.6
140°	420.9	421.0	421.0	421.0	421.0	421.0	421.0	420.9	420.8	420.7	420.6
142.5°	440.7	440.8	440.7	440.6	440.5	440.4	440.3	440.3	440.3	440.3	440.3
145°	459.5	459.7	459.7	459.8	459.9	460.0	460.1	460.0	459.9	459.8	459.7
147.5°	478.2	478.5	478.5	478.4	478.3	478.2	478.1	478.0	477.9	477.8	477.7
150°	494.4	494.6	494.6	494.6	494.6	494.6	494.6	494.6	494.6	494.6	494.6
152.5°	509.3	509.4	509.4	509.5	509.6	509.7	509.8	510.1	510.4	510.7	511.0
155°	524.5	524.5	524.5	524.4	524.3	524.2	524.1	524.5	524.9	525.3	525.7
157.5°	537.5	537.4	537.4	537.4	537.4	537.4	537.4	537.7	538.0	538.3	538.6
160°	549.9	549.8	549.8	549.7	549.6	549.5	549.4	549.7	550.0	550.3	550.6
162.5°	560.1	560.0	559.9	559.8	559.7	559.6	559.5	560.1	560.7	561.4	562.0
165°	569.8	569.6	569.5	569.3	569.1	568.9	568.7	569.3	569.9	570.6	571.2
167.5°	577.2	577.0	577.0	577.0	577.0	577.0	577.0	577.6	578.2	578.9	579.5
170°	583.3	583.0	583.0	583.1	583.2	583.3	583.4	584.0	584.6	585.3	585.9
172.5°	588.2	588.0	588.0	588.0	588.0	588.0	588.0	588.7	589.5	590.2	590.9
175°	592.0	591.7	591.7	591.6	591.5	591.4	591.3	592.0	592.7	593.4	594.1
177.5°	593.9	593.6	593.6	593.6	593.6	593.6	593.6	594.3	595.0	595.7	596.4
180°	594.9	594.9	594.9	594.9	594.9	594.9	594.9	594.9	594.9	594.9	594.9

TEST NUMBER: P1033483

CATALOG NUMBER: S124DIW-B350D470UB35-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	247.5°	250°	255°	260°	265°	270°	275°	280°	285°	290°	292.5°
0°	558.4	558.4	558.4	558.4	558.4	558.4	558.4	558.4	558.4	558.4	558.4
2.5°	527.0	526.5	524.2	525.1	522.4	523.3	524.7	525.1	527.0	525.6	525.1
5°	494.6	493.7	492.3	490.9	490.4	492.3	489.0	490.0	490.9	492.3	494.1
7.5°	468.2	467.8	466.4	464.1	463.1	462.2	462.7	465.9	465.5	465.0	468.2
10°	444.2	444.6	441.9	441.4	438.6	438.2	438.6	439.5	440.9	442.8	443.2
12.5°	419.2	425.2	420.1	418.3	414.1	416.4	417.3	413.2	415.5	416.9	423.8
15°	403.5	400.7	397.4	397.4	395.6	394.7	392.3	395.6	397.4	400.2	399.3
17.5°	381.7	377.1	375.2	373.4	373.8	375.7	370.6	378.0	378.0	379.4	377.1
20°	362.7	359.0	356.7	355.8	354.4	353.5	353.0	354.9	357.6	358.6	360.9
22.5°	342.8	342.8	339.1	337.8	336.8	335.4	337.8	336.4	338.2	340.1	343.8
25°	326.2	326.2	324.8	322.9	321.6	320.6	322.0	321.6	322.9	325.3	326.2
27.5°	312.8	311.4	310.9	310.5	310.0	310.5	310.0	311.4	312.8	313.2	312.3
30°	301.2	299.8	300.3	300.3	300.7	300.3	299.8	301.2	301.7	300.7	301.2
32.5°	290.6	290.6	291.5	291.9	291.9	292.4	292.9	291.9	292.4	291.0	291.5
35°	281.8	282.7	283.6	284.1	284.5	284.1	285.0	284.5	283.6	282.7	282.2
37.5°	273.0	273.9	275.8	276.2	277.6	278.1	277.1	277.1	276.7	274.8	273.9
40°	263.7	264.7	267.0	268.4	269.3	270.7	269.7	269.7	267.9	266.0	264.7
42.5°	254.9	256.8	259.1	260.5	262.3	262.3	262.3	261.4	259.1	257.2	255.9
45°	246.1	246.6	249.8	252.2	254.0	254.0	254.0	252.6	251.2	247.5	245.7
47.5°	236.4	237.8	241.5	243.8	245.7	246.1	246.1	244.8	242.0	238.7	236.4
50°	225.8	228.1	232.3	235.5	237.8	238.7	237.4	236.4	233.2	229.5	226.7
52.5°	215.6	218.4	223.5	226.2	229.5	229.9	229.5	228.1	224.4	219.3	217.0
55°	205.4	207.7	213.3	217.9	220.7	221.6	220.7	218.4	213.8	208.7	206.4
57.5°	194.3	197.6	203.6	208.2	211.4	211.9	211.0	208.7	205.0	198.5	195.2
60°	182.8	186.9	192.9	197.6	201.7	202.2	201.3	198.0	193.4	186.9	184.1
62.5°	171.2	174.4	181.4	186.5	189.7	192.0	190.2	186.9	182.3	175.8	171.7
65°	157.8	162.4	168.4	173.0	176.7	177.2	176.3	173.5	168.4	161.5	158.2
67.5°	144.8	148.1	154.1	160.1	161.5	162.9	161.5	158.7	154.5	148.5	143.9
70°	129.1	131.9	139.3	143.4	145.3	146.7	145.7	143.0	139.3	133.7	130.0
72.5°	113.4	115.7	122.6	125.8	129.5	129.1	128.6	126.8	121.7	118.0	115.7
75°	96.7	99.5	104.1	108.3	109.7	109.7	109.7	108.3	105.0	99.0	96.7
77.5°	81.4	82.8	86.5	88.8	90.2	90.7	90.2	87.9	86.1	81.9	80.5
80°	62.5	66.2	68.9	69.4	71.3	71.3	71.3	70.3	68.5	64.3	63.8
82.5°	47.2	48.1	50.9	52.3	53.2	52.7	52.7	50.9	50.4	48.1	47.2
85°	31.9	33.3	32.8	34.7	35.2	34.2	34.2	35.2	32.8	33.3	31.9
87.5°	17.6	17.6	18.5	18.0	19.9	19.9	19.0	19.4	18.5	18.0	17.6
90°	12.9	13.0	13.2	13.4	13.6	13.8	13.6	13.4	13.2	13.0	12.9
92.5°	21.6	21.7	21.8	21.9	22.0	22.1	22.0	21.9	21.8	21.7	21.6
95°	36.3	36.3	36.3	36.3	36.3	36.3	36.3	36.3	36.3	36.3	36.3
97.5°	53.4	53.4	53.4	53.4	53.4	53.4	53.4	53.4	53.4	53.4	53.4
100°	71.3	71.3	71.3	71.3	71.3	71.3	71.3	71.3	71.3	71.3	71.3
102.5°	91.1	91.2	91.3	91.4	91.5	91.6	91.5	91.4	91.3	91.2	91.1
105°	110.9	111.1	111.4	111.7	112.0	112.3	112.0	111.7	111.4	111.1	110.9
107.5°	132.5	132.5	132.4	132.3	132.2	132.1	132.2	132.3	132.4	132.5	132.5
110°	152.3	152.5	152.8	153.1	153.4	153.7	153.4	153.1	152.8	152.5	152.3

TEST NUMBER: P1033483

CATALOG NUMBER: S124DIW-B350D470UB35-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	247.5°	250°	255°	260°	265°	270°	275°	280°	285°	290°	292.5°
112.5°	175.8	175.8	175.8	175.8	175.8	175.8	175.8	175.8	175.8	175.8	175.8
115°	199.2	199.2	199.1	199.0	198.9	198.8	198.9	199.0	199.1	199.2	199.2
117.5°	221.3	221.1	220.8	220.5	220.2	219.9	220.2	220.5	220.8	221.1	221.3
120°	243.9	244.0	244.2	244.4	244.6	244.8	244.6	244.4	244.2	244.0	243.9
122.5°	267.8	267.5	267.0	266.5	266.0	265.5	266.0	266.5	267.0	267.5	267.8
125°	290.8	290.7	290.5	290.3	290.1	289.9	290.1	290.3	290.5	290.7	290.8
127.5°	312.4	312.4	312.3	312.2	312.1	312.0	312.1	312.2	312.3	312.4	312.4
130°	335.4	335.2	334.8	334.4	334.0	333.6	334.0	334.4	334.8	335.2	335.4
132.5°	357.1	357.0	356.9	356.8	356.7	356.6	356.7	356.8	356.9	357.0	357.1
135°	378.7	378.5	378.2	377.9	377.6	377.3	377.6	377.9	378.2	378.5	378.7
137.5°	399.4	399.4	399.5	399.6	399.7	399.8	399.7	399.6	399.5	399.4	399.4
140°	420.6	420.5	420.4	420.3	420.2	420.1	420.2	420.3	420.4	420.5	420.6
142.5°	440.3	440.3	440.3	440.3	440.3	440.3	440.3	440.3	440.3	440.3	440.3
145°	459.7	459.5	459.2	458.9	458.6	458.3	458.6	458.9	459.2	459.5	459.7
147.5°	477.6	477.5	477.4	477.3	477.2	477.1	477.2	477.3	477.4	477.5	477.6
150°	494.6	494.6	494.5	494.4	494.3	494.2	494.3	494.4	494.5	494.6	494.6
152.5°	511.2	511.0	510.7	510.4	510.1	509.8	510.1	510.4	510.7	511.0	511.2
155°	525.9	525.7	525.3	524.9	524.5	524.1	524.5	524.9	525.3	525.7	525.9
157.5°	538.8	538.6	538.3	538.0	537.7	537.4	537.7	538.0	538.3	538.6	538.8
160°	550.8	550.5	550.0	549.5	549.0	548.5	549.0	549.5	550.0	550.5	550.8
162.5°	562.3	562.0	561.5	561.0	560.5	560.0	560.5	561.0	561.5	562.0	562.3
165°	571.5	571.3	570.9	570.4	570.0	569.6	570.0	570.4	570.9	571.3	571.5
167.5°	579.8	579.5	578.9	578.2	577.6	577.0	577.6	578.2	578.9	579.5	579.8
170°	586.2	585.8	585.1	584.4	583.7	583.0	583.7	584.4	585.1	585.8	586.2
172.5°	591.3	590.9	590.2	589.5	588.7	588.0	588.7	589.5	590.2	590.9	591.3
175°	594.5	594.1	593.4	592.7	592.0	591.3	592.0	592.7	593.4	594.1	594.5
177.5°	596.8	596.4	595.6	594.7	593.9	593.1	593.9	594.7	595.6	596.4	596.8
180°	594.9	594.9	594.9	594.9	594.9	594.9	594.9	594.9	594.9	594.9	594.9

TEST NUMBER: P1033483

CATALOG NUMBER: S124DIW-B350D470UB35-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	295°	300°	305°	310°	315°	320°	325°	330°	335°	337.5°	340°
0°	558.4	558.4	558.4	558.4	558.4	558.4	558.4	558.4	558.4	558.4	558.4
2.5°	525.1	527.9	525.1	527.0	527.9	530.2	531.2	535.3	536.7	539.9	539.9
5°	493.7	495.1	495.5	497.4	499.2	503.9	507.1	513.1	520.0	521.0	525.1
7.5°	468.2	470.5	474.2	472.9	476.1	483.0	487.2	494.6	501.5	505.2	510.3
10°	445.6	448.3	449.7	451.1	457.1	463.1	469.6	474.7	484.0	489.5	493.7
12.5°	427.0	424.7	427.5	432.6	439.5	443.2	452.0	459.9	466.8	472.9	476.6
15°	403.0	404.8	407.6	416.4	418.3	427.5	430.8	439.5	452.5	458.0	462.7
17.5°	379.9	385.9	391.4	394.7	400.2	407.6	416.9	426.6	434.9	441.4	446.9
20°	361.3	367.4	370.6	372.9	378.5	388.6	397.4	409.5	420.1	425.2	432.6
22.5°	346.5	346.5	351.2	358.1	361.3	371.1	378.5	391.4	403.0	409.5	416.4
25°	328.0	330.8	334.5	340.5	345.2	353.0	363.7	374.8	387.3	392.8	401.6
27.5°	312.8	316.0	321.1	322.5	327.1	334.1	345.2	357.2	370.1	376.2	383.6
30°	301.2	303.1	304.9	307.7	311.8	317.9	327.1	337.8	353.5	358.1	367.4
32.5°	291.0	291.9	292.9	295.2	297.5	303.5	310.9	322.5	335.4	342.4	350.7
35°	281.8	280.8	281.3	282.7	285.0	287.3	295.2	304.9	316.9	325.3	331.7
37.5°	273.0	271.1	270.7	270.7	271.6	274.4	280.4	288.7	301.7	308.6	315.1
40°	263.3	261.4	260.5	260.0	259.6	261.4	266.0	274.4	284.5	291.0	298.4
42.5°	254.0	252.2	249.8	249.4	248.5	249.4	252.6	260.5	269.3	275.8	281.8
45°	244.8	241.5	238.7	236.9	237.4	236.0	238.3	244.3	254.5	258.6	264.7
47.5°	234.6	230.9	227.2	225.3	223.5	224.4	225.3	230.4	239.2	243.4	249.4
50°	224.9	219.8	215.6	213.3	211.9	211.0	211.9	217.0	223.5	227.2	232.3
52.5°	213.8	208.7	204.5	200.8	199.0	197.6	198.0	202.7	208.7	212.4	217.5
55°	203.6	197.1	191.5	186.9	185.5	185.1	184.6	187.8	192.9	196.6	200.8
57.5°	192.0	185.5	179.5	174.0	171.2	170.7	170.7	171.7	178.1	180.9	183.2
60°	180.4	173.5	167.0	161.9	157.8	156.4	155.9	157.8	161.0	163.8	167.0
62.5°	167.5	160.5	152.7	148.1	143.9	140.2	141.6	142.0	146.7	148.1	150.8
65°	155.0	147.1	140.7	133.3	128.6	126.3	125.4	126.3	130.0	130.5	132.3
67.5°	140.7	133.3	125.4	120.3	116.1	112.0	111.0	111.0	112.9	114.3	116.6
70°	126.8	119.4	110.6	105.0	100.9	97.2	95.8	95.3	96.7	97.6	99.9
72.5°	110.6	103.2	96.7	90.7	85.6	82.8	81.4	80.5	81.9	82.8	83.3
75°	93.5	87.4	81.0	75.0	71.7	68.9	67.1	65.7	66.6	66.6	66.6
77.5°	77.3	71.3	66.2	62.0	57.8	54.6	53.2	51.8	52.3	52.3	53.2
80°	60.1	56.0	51.8	48.1	44.4	41.6	40.7	39.3	38.4	37.9	37.9
82.5°	44.4	41.2	37.5	34.2	32.4	29.6	28.7	26.8	26.8	26.4	26.4
85°	29.6	27.8	24.1	21.7	20.4	19.0	18.0	17.1	15.7	15.7	15.3
87.5°	15.7	14.8	13.9	11.1	11.1	9.7	9.3	8.8	7.4	7.9	7.9
90°	12.6	12.0	11.3	10.7	10.1	9.3	8.5	7.6	6.8	6.4	5.8
92.5°	21.4	21.1	20.8	20.5	20.2	19.7	19.2	18.7	18.2	17.9	17.2
95°	36.2	35.9	35.6	35.3	35.0	34.3	33.5	32.8	32.1	31.7	31.2
97.5°	53.2	52.8	52.3	51.9	51.5	50.7	49.9	49.1	48.3	47.9	47.5
100°	71.2	71.0	70.8	70.6	70.4	69.5	68.6	67.7	66.8	66.3	66.1
102.5°	90.9	90.6	90.3	90.0	89.7	88.9	88.1	87.2	86.4	86.0	86.0
105°	110.7	110.4	110.1	109.8	109.5	109.1	108.7	108.3	107.9	107.7	107.6
107.5°	132.3	131.9	131.5	131.1	130.7	130.6	130.5	130.4	130.3	130.2	130.2
110°	152.4	152.6	152.8	153.0	153.2	153.3	153.4	153.5	153.6	153.7	153.6

TEST NUMBER: P1033483

CATALOG NUMBER: S124DIW-B350D470UB35-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	295°	300°	305°	310°	315°	320°	325°	330°	335°	337.5°	340°
112.5°	175.8	175.8	175.8	175.8	175.8	176.0	176.2	176.4	176.6	176.7	176.7
115°	199.3	199.4	199.5	199.6	199.7	199.9	200.1	200.3	200.5	200.6	200.6
117.5°	221.5	221.8	222.1	222.4	222.7	222.8	222.9	223.0	223.1	223.2	223.2
120°	244.2	244.7	245.2	245.7	246.2	246.5	246.8	247.1	247.4	247.5	247.3
122.5°	268.0	268.3	268.6	268.9	269.2	269.3	269.4	269.5	269.6	269.6	269.6
125°	290.9	291.1	291.3	291.5	291.7	291.8	291.9	292.0	292.1	292.2	292.2
127.5°	312.5	312.7	312.9	313.1	313.3	313.5	313.7	314.0	314.2	314.3	314.1
130°	335.5	335.7	335.9	336.1	336.3	336.3	336.3	336.3	336.3	336.3	336.2
132.5°	357.2	357.4	357.6	357.8	358.0	358.1	358.2	358.3	358.4	358.4	358.3
135°	378.8	379.0	379.2	379.4	379.6	379.6	379.6	379.6	379.6	379.6	379.3
137.5°	399.6	399.9	400.2	400.5	400.8	400.6	400.4	400.1	399.9	399.8	399.7
140°	420.6	420.7	420.8	420.9	421.0	421.0	421.0	421.0	421.0	421.0	420.9
142.5°	440.3	440.3	440.3	440.3	440.3	440.4	440.5	440.6	440.7	440.8	440.7
145°	459.7	459.8	459.9	460.0	460.1	460.0	459.9	459.8	459.7	459.7	459.5
147.5°	477.7	477.8	477.9	478.0	478.1	478.2	478.3	478.4	478.5	478.5	478.2
150°	494.6	494.6	494.6	494.6	494.6	494.6	494.6	494.6	494.6	494.6	494.4
152.5°	511.0	510.7	510.4	510.1	509.8	509.7	509.6	509.5	509.4	509.4	509.3
155°	525.7	525.3	524.9	524.5	524.1	524.2	524.3	524.4	524.5	524.5	524.5
157.5°	538.6	538.3	538.0	537.7	537.4	537.4	537.4	537.4	537.4	537.4	537.5
160°	550.6	550.3	550.0	549.7	549.4	549.5	549.6	549.7	549.8	549.8	549.9
162.5°	562.0	561.4	560.7	560.1	559.5	559.6	559.7	559.8	559.9	560.0	560.1
165°	571.2	570.6	569.9	569.3	568.7	568.9	569.1	569.3	569.5	569.6	569.8
167.5°	579.5	578.9	578.2	577.6	577.0	577.0	577.0	577.0	577.0	577.0	577.2
170°	585.9	585.3	584.6	584.0	583.4	583.3	583.2	583.1	583.0	583.0	583.3
172.5°	590.9	590.2	589.5	588.7	588.0	588.0	588.0	588.0	588.0	588.0	588.2
175°	594.1	593.4	592.7	592.0	591.3	591.4	591.5	591.6	591.7	591.7	592.0
177.5°	596.4	595.7	595.0	594.3	593.6	593.6	593.6	593.6	593.6	593.6	593.9
180°	594.9	594.9	594.9	594.9	594.9	594.9	594.9	594.9	594.9	594.9	594.9

TEST NUMBER: P1033483

CATALOG NUMBER: S124DIW-B350D470UB35-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	345°	350°	355°	360°
0°	558.4	558.4	558.4	558.4
2.5°	543.2	547.8	552.0	558.4
5°	531.2	537.6	546.4	556.1
7.5°	517.3	527.4	539.0	552.4
10°	504.3	515.9	530.7	546.9
12.5°	490.9	504.8	521.0	538.6
15°	475.6	489.5	507.6	531.2
17.5°	461.7	478.4	497.8	522.8
20°	445.6	461.3	482.6	511.3
22.5°	431.2	449.3	472.9	497.8
25°	415.5	431.2	454.8	484.9
27.5°	399.8	419.2	441.9	471.0
30°	384.5	400.7	425.2	455.7
32.5°	367.8	387.3	409.9	438.6
35°	349.8	368.3	389.6	420.6
37.5°	333.6	351.6	373.4	400.7
40°	315.5	334.5	354.4	381.7
42.5°	298.0	315.1	335.0	360.0
45°	280.8	295.6	313.7	335.4
47.5°	263.3	275.8	292.4	311.8
50°	244.3	257.7	270.2	286.4
52.5°	226.7	238.3	248.5	261.9
55°	209.6	217.5	225.8	236.0
57.5°	191.5	197.6	203.6	214.2
60°	173.5	179.1	182.3	189.2
62.5°	155.9	158.2	162.4	166.6
65°	136.5	139.7	142.0	147.1
67.5°	118.9	120.3	122.6	125.8
70°	100.4	103.6	104.6	106.9
72.5°	84.7	86.1	87.0	87.4
75°	67.1	68.5	69.4	72.2
77.5°	52.7	52.3	54.1	54.6
80°	38.9	37.5	37.9	39.8
82.5°	25.4	25.9	25.4	25.4
85°	15.7	15.3	14.3	14.8
87.5°	6.9	6.9	6.5	6.5
90°	4.7	3.6	2.5	1.4
92.5°	15.9	14.6	13.3	12.0
95°	30.3	29.4	28.5	27.6
97.5°	46.7	45.8	45.0	44.2
100°	65.7	65.2	64.8	64.4
102.5°	85.9	85.8	85.7	85.6
105°	107.5	107.4	107.3	107.2
107.5°	130.1	130.0	129.9	129.8
110°	153.4	153.2	153.0	152.8



TEST NUMBER: P1033483

CATALOG NUMBER: S124DIW-B350D470UB35-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	345°	350°	355°	360°
112.5°	176.7	176.7	176.7	176.7
115°	200.6	200.6	200.6	200.6
117.5°	223.2	223.2	223.2	223.2
120°	246.9	246.5	246.1	245.7
122.5°	269.5	269.4	269.3	269.2
125°	292.2	292.2	292.2	292.2
127.5°	313.8	313.5	313.2	312.9
130°	335.9	335.6	335.3	335.0
132.5°	358.1	357.9	357.7	357.5
135°	378.7	378.0	377.4	376.8
137.5°	399.4	399.1	398.8	398.5
140°	420.7	420.5	420.3	420.1
142.5°	440.5	440.3	440.1	439.9
145°	459.1	458.6	458.2	457.8
147.5°	477.7	477.2	476.7	476.2
150°	494.0	493.6	493.2	492.8
152.5°	509.1	508.8	508.6	508.4
155°	524.5	524.5	524.5	524.5
157.5°	537.7	537.9	538.1	538.3
160°	550.0	550.1	550.2	550.3
162.5°	560.4	560.7	561.0	561.3
165°	570.1	570.4	570.7	571.0
167.5°	577.6	578.0	578.4	578.8
170°	583.8	584.3	584.8	585.3
172.5°	588.6	589.1	589.5	589.9
175°	592.5	593.0	593.5	594.0
177.5°	594.4	594.9	595.4	595.9
180°	594.9	594.9	594.9	594.9

(END OF REPORT)