

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1035759

Luminaire Tested: S125RDIW-B1090D770UB30-4F0-XX-W2A-F1

Issue Date: 5/7/2025

Test Information

Test Method: LM-79-2019
Report Number: P1035759
REPORT IS A COMBINATION OF REPORTS P1006119 AND P1007351
Test Lab: INNOVATION CENTER
Issue Date: 5/7/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S125RDIW-B1090D770UB30-4F0-XX-W2A-F1
Description: Define 5 Regressed Direct/Indirect Wall Mount with 3000K BioUP LEDs {m-DER=0.589}
{m-EER=0.647}
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6908.0 lumens
Efficiency: N/A
Efficacy: 98.7 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.11 / 1.25
Luminous Opening: Rectangular w/ Sides (W: 0.42' x L: 4' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 70
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1035759

CATALOG NUMBER: S125RDIW-B1090D770UB30-4F0-XX-W2A-F1

Luminous Intensity Polar Plot

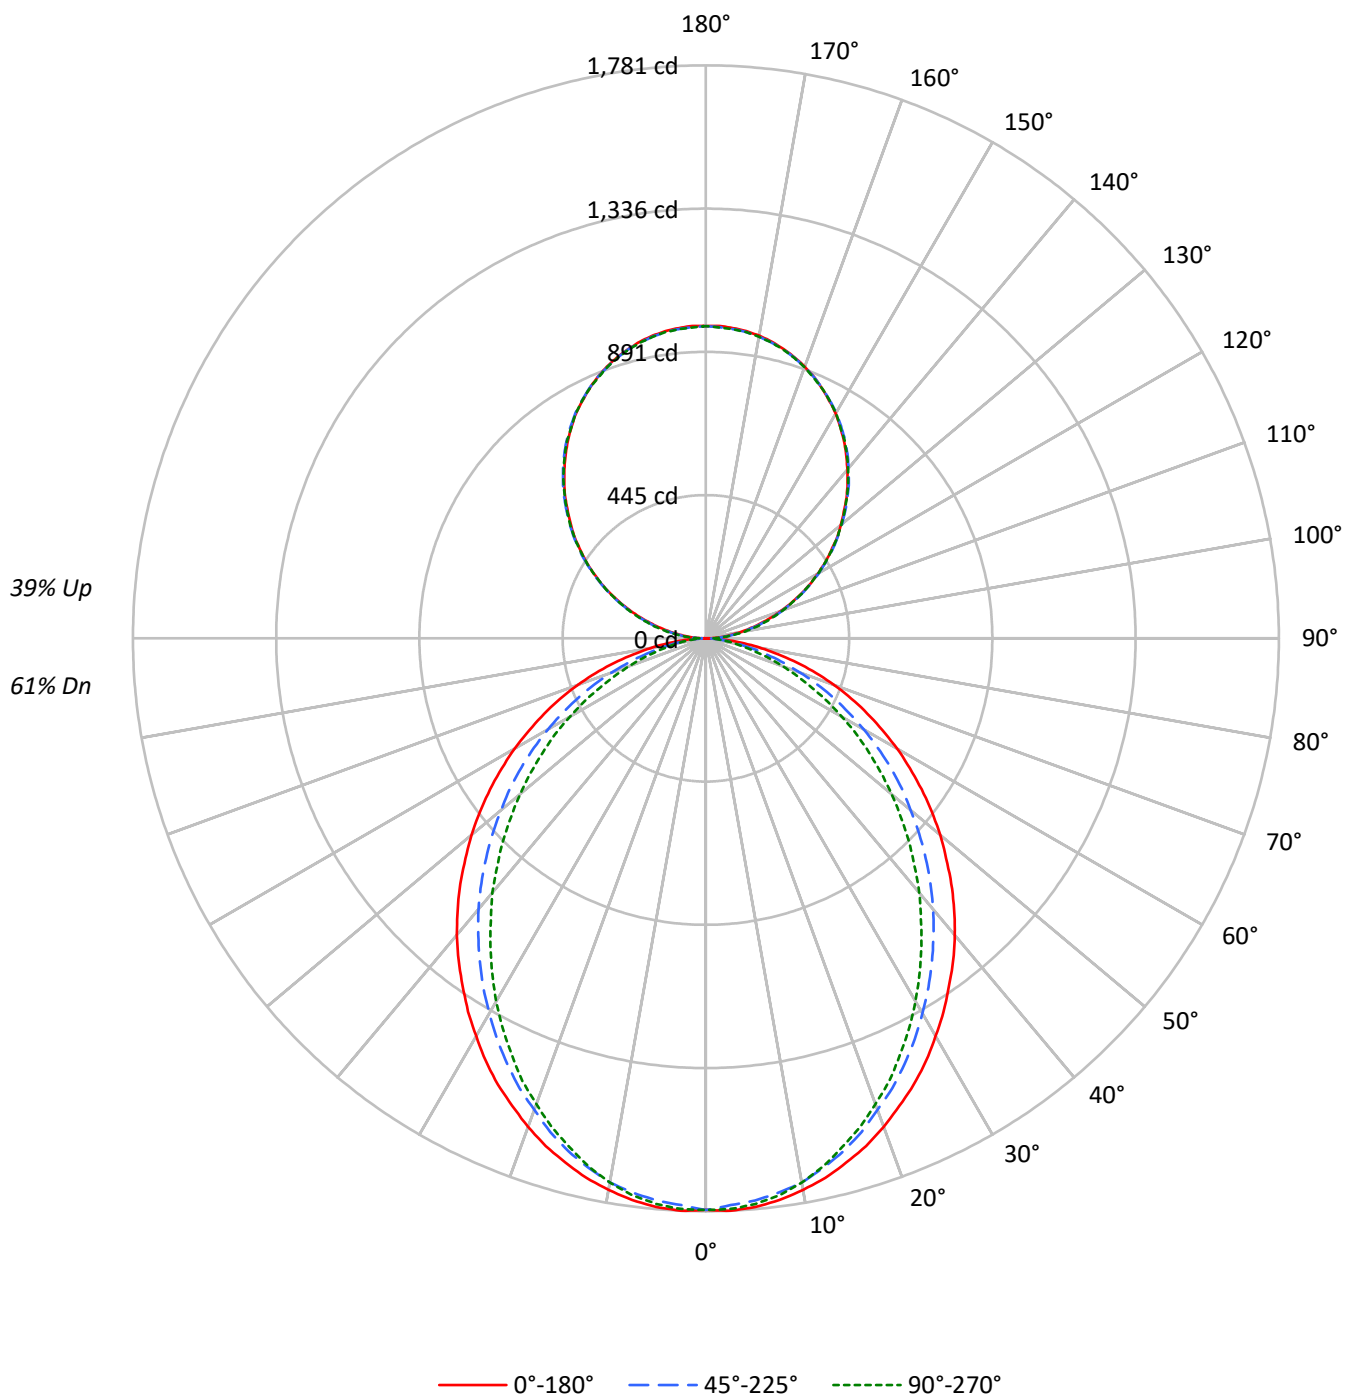

TEST NUMBER: P1035759

CATALOG NUMBER: S125RDIW-B1090D770UB30-4F0-XX-W2A-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	110	110	110	110	103	103	103	103	89	89	89	77	77	77	66	66	66
1	100	96	92	89	94	90	87	84	79	76	74	68	67	65	59	58	56
2	92	84	78	73	86	79	74	69	69	65	62	60	57	55	52	50	48
3	84	74	67	61	78	70	63	58	61	56	52	54	50	47	46	43	41
4	77	66	58	52	72	62	55	50	55	49	45	48	44	40	42	38	36
5	71	59	51	45	66	56	48	43	49	43	39	43	39	35	38	34	31
6	65	53	45	39	61	50	43	37	44	38	34	39	34	31	34	30	28
7	60	48	40	34	56	45	38	33	40	34	30	36	31	27	31	27	25
8	56	44	36	31	52	41	34	29	37	31	27	33	28	24	29	25	22
9	52	40	32	27	49	38	31	26	34	28	24	30	25	22	27	23	20
10	49	37	30	25	46	35	28	24	31	26	22	28	23	20	25	21	18

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	11384	11384	11384
5°	11385	11100	11118
10°	11275	10821	10726
15°	11115	10429	10209
20°	10918	9958	9667
25°	10691	9498	9086
30°	10414	8992	8476
35°	10131	8479	7827
40°	9862	7951	7194
45°	9538	7382	6531
50°	9210	6778	5856
55°	8829	6182	5157
60°	8439	5502	4432
65°	7976	4741	3650
70°	7434	3859	2872
75°	6684	2902	2093
80°	5639	1880	1411
85°	4220	1009	796

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 9538 cd/sqm

TEST NUMBER: P1035759

CATALOG NUMBER: S125RDIW-B1090D770UB30-4F0-XX-W2A-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	167.2	2.4
10°-20°	467.3	6.8
20°-30°	677.6	9.8
30°-40°	772.0	11.2
40°-50°	752.5	10.9
50°-60°	633.3	9.2
60°-70°	443.8	6.4
70°-80°	227.5	3.3
80°-90°	58.3	0.8
90°-100°	64.5	0.9
100°-110°	191.7	2.8
110°-120°	325.1	4.7
120°-130°	428.0	6.2
130°-140°	479.7	6.9
140°-150°	470.1	6.8
150°-160°	394.9	5.7
160°-170°	262.5	3.8
170°-180°	91.9	1.3
0°-30°	1312.2	19.0
0°-40°	2084.2	30.2
0°-60°	3470.0	50.2
0°-90°	4199.5	60.8
90°-120°	581.4	8.4
90°-150°	1959.2	28.4
90°-180°	2708.0	39.2
0°-180°	6908.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1777	1777	1777	1777	1777	
5°	1774	1769	1754	1767	1765	168
15°	1687	1679	1651	1649	1637	476
25°	1530	1510	1460	1443	1428	704
35°	1318	1286	1225	1186	1168	825
45°	1079	1040	966	913	892	832
55°	819	776	700	640	619	732
65°	554	509	438	384	364	549
75°	295	255	199	169	160	312
85°	74	50	43	42	40	81
90°	1	7	12	16	18	8
95°	49	51	58	63	65	51
105°	172	176	180	185	187	184
115°	326	328	330	329	328	322
125°	475	480	480	479	478	426
135°	618	622	623	623	620	476
145°	748	751	754	754	751	468
155°	856	856	857	860	856	394
165°	931	930	930	934	929	263
175°	968	965	965	970	964	92
180°	970	970	970	970	970	

TEST NUMBER: P1035759

CATALOG NUMBER: S125RDIW-B1090D770UB30-4F0-XX-W2A-F1

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1776.8	1776.8	1776.8	1776.8	1776.8
2.5°	1780.8	1776.8	1763.4	1776.8	1775.5
5°	1774.1	1768.8	1754.0	1767.4	1764.7
7.5°	1760.7	1755.4	1737.9	1748.6	1746.0
10°	1740.6	1736.6	1717.8	1721.8	1717.8
12.5°	1717.8	1712.4	1685.6	1688.3	1681.5
15°	1686.9	1678.9	1650.7	1649.3	1637.3
17.5°	1654.7	1642.6	1609.1	1602.4	1593.0
20°	1615.8	1602.4	1559.4	1552.7	1540.6
22.5°	1572.8	1559.4	1513.8	1499.0	1489.6
25°	1529.9	1509.8	1460.1	1442.7	1427.9
27.5°	1481.6	1457.4	1405.1	1382.3	1367.5
30°	1427.9	1402.4	1346.0	1315.2	1303.1
32.5°	1375.6	1344.7	1287.0	1252.1	1236.0
35°	1317.9	1285.6	1225.3	1186.3	1167.5
37.5°	1262.8	1223.9	1162.2	1116.6	1097.8
40°	1203.8	1163.5	1099.1	1048.1	1032.0
42.5°	1142.1	1100.4	1033.3	985.0	959.5
45°	1079.0	1040.1	966.2	912.6	892.4
47.5°	1013.2	973.0	899.1	844.1	821.3
50°	951.5	907.2	830.7	774.3	754.2
52.5°	884.4	838.8	767.6	705.9	685.8
55°	818.6	775.7	700.5	640.1	618.7
57.5°	751.5	705.9	633.4	574.4	555.6
60°	687.1	640.1	567.7	508.6	488.5
62.5°	618.7	574.4	500.6	446.9	426.8
65°	554.3	508.6	437.5	383.8	363.7
67.5°	489.8	444.2	375.8	324.8	308.7
70°	424.1	378.4	311.3	269.7	253.6
72.5°	359.7	315.4	253.6	216.1	206.7
75°	295.2	255.0	198.6	169.1	159.7
77.5°	229.5	197.3	150.3	127.5	119.4
80°	174.5	142.3	104.7	92.6	89.9
82.5°	120.8	92.6	69.8	65.8	64.4
85°	73.8	49.7	42.9	41.6	40.3
87.5°	30.9	21.5	20.1	20.1	18.8
90°	0.8	6.8	12.1	15.9	18.1
92.5°	22.7	26.4	33.2	38.5	40.0
95°	49.1	50.6	58.2	63.4	64.9
97.5°	75.5	76.3	86.9	91.4	92.1
100°	105.7	105.7	115.5	122.3	123.9
102.5°	138.2	142.0	145.8	153.3	155.6
105°	172.2	176.0	180.5	185.0	187.3
107.5°	209.2	213.0	216.7	219.0	219.0
110°	247.7	251.5	253.8	256.0	255.3



TEST NUMBER: P1035759

CATALOG NUMBER: S125RDIW-B1090D770UB30-4F0-XX-W2A-F1

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	287.0	288.5	291.5	292.3	290.8
115°	325.5	328.5	330.0	329.3	328.5
117.5°	364.8	365.5	367.0	367.8	364.8
120°	401.0	404.8	405.6	405.6	402.5
122.5°	440.3	441.1	443.3	442.6	440.3
125°	475.0	479.6	480.3	478.8	478.1
127.5°	513.6	515.8	516.6	515.8	514.3
130°	547.5	551.3	552.8	552.1	550.6
132.5°	581.5	588.3	587.6	586.8	584.5
135°	617.8	622.3	623.1	623.1	620.0
137.5°	651.8	656.3	657.8	658.6	654.8
140°	684.2	688.0	690.3	691.8	688.0
142.5°	716.7	719.7	722.8	723.5	719.7
145°	748.4	751.4	753.7	753.7	751.4
147.5°	777.9	780.1	781.7	783.9	777.9
150°	807.3	806.6	809.6	809.6	808.1
152.5°	831.5	833.0	833.8	836.0	833.0
155°	856.4	856.4	857.2	860.2	856.4
157.5°	879.1	877.6	878.3	881.3	876.1
160°	898.7	896.5	897.2	900.2	896.5
162.5°	916.1	914.6	914.6	918.4	913.8
165°	931.2	929.7	930.4	933.5	928.9
167.5°	944.8	941.8	941.8	946.3	941.8
170°	955.4	952.3	952.3	956.9	951.6
172.5°	962.9	959.9	959.9	964.4	959.9
175°	968.2	965.2	965.2	969.7	964.4
177.5°	972.0	969.0	968.2	972.7	967.4
180°	970.5	970.5	970.5	970.5	970.5

(END OF REPORT)