

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1035933

Luminaire Tested: S125RDIW-B375D470UB30-4F0-XX-W2A-A1

Issue Date: 5/7/2025

Test Information

Test Method: LM-79-2019
Report Number: P1035933
REPORT IS A COMBINATION OF REPORTS P1006512 AND P1007351
Test Lab: INNOVATION CENTER
Issue Date: 5/7/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S125RDIW-B375D470UB30-4F0-XX-W2A-A1
Description: Define 5 Regressed Direct/Indirect Wall Mount with 3000K BioUP LEDs {m-DER=0.589}
{m-EER=0.647}
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 3063.8 lumens
Efficiency: N/A
Efficacy: 116.9 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.4 / 1.47
Luminous Opening: Rectangular w/ Sides (W: 0.42' x L: 4' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 26.2
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1035933

CATALOG NUMBER: S125RDIW-B375D470UB30-4F0-XX-W2A-A1

Luminous Intensity Polar Plot

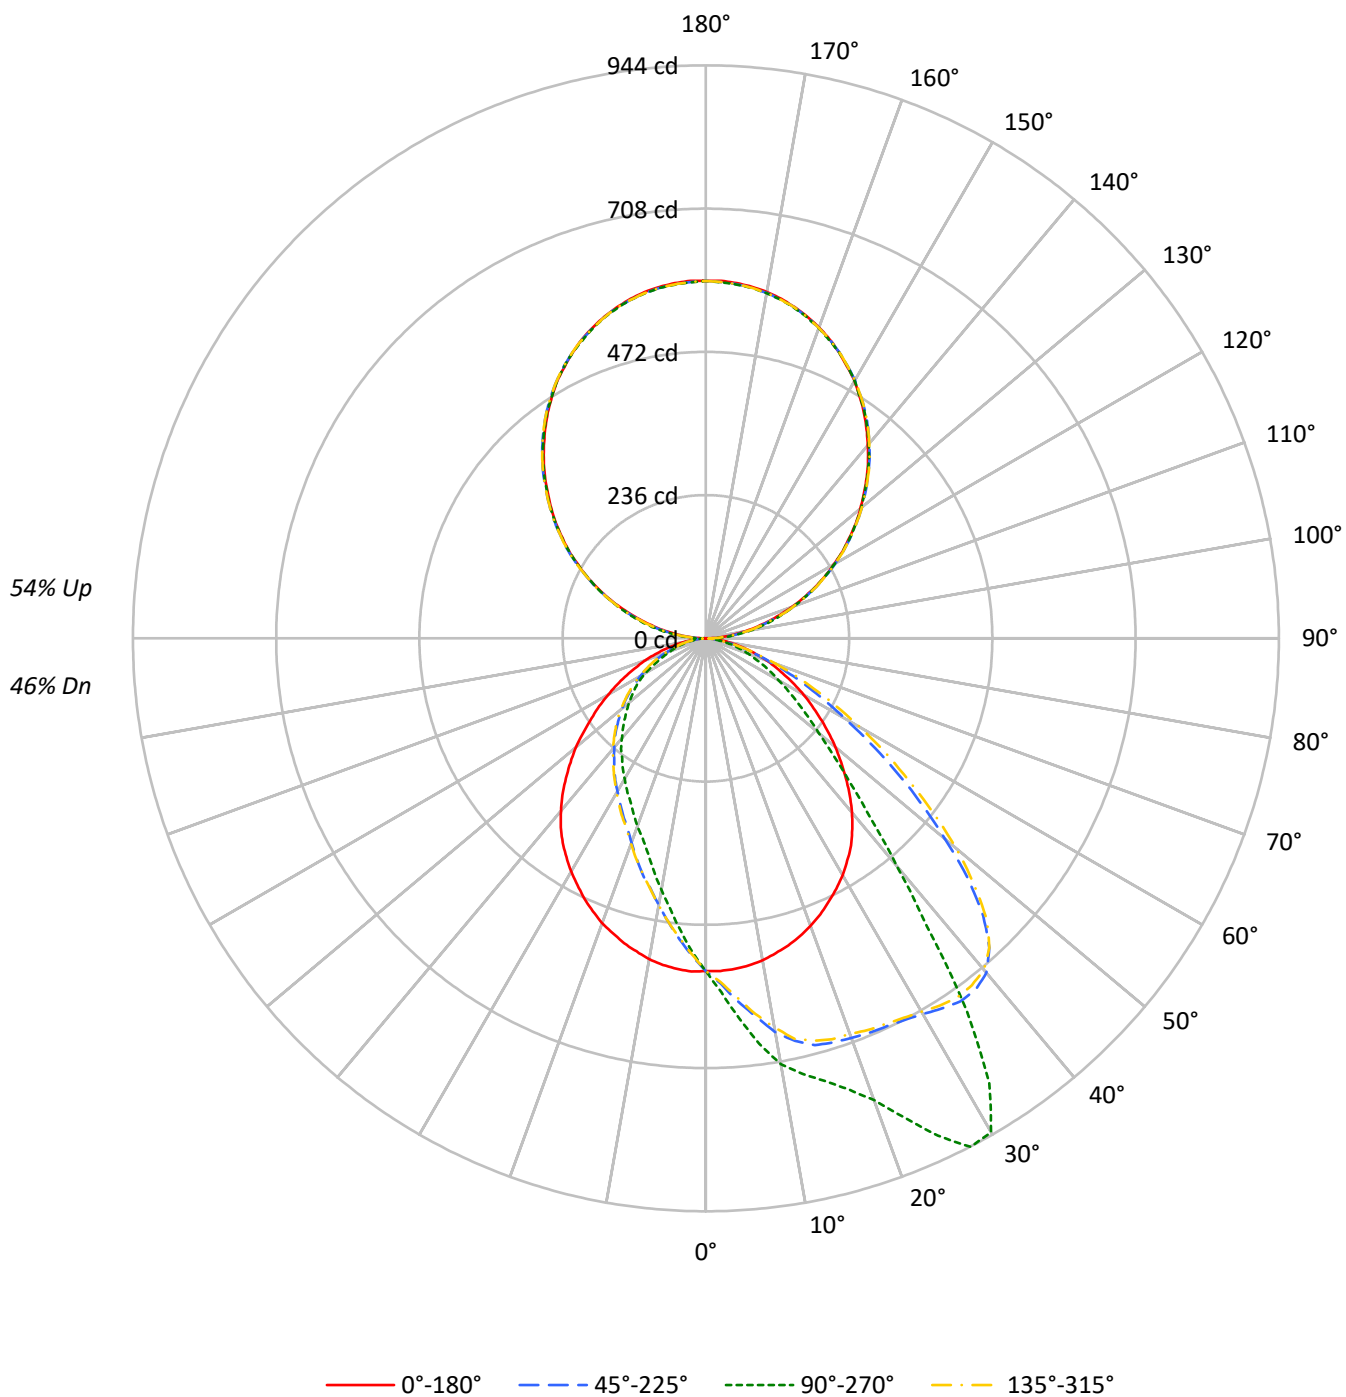

TEST NUMBER: P1035933

CATALOG NUMBER: S125RDIW-B375D470UB30-4F0-XX-W2A-A1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	106	106	106	106	98	98	98	98	81	81	81	66	66	66	53	53	53
1	97	93	90	86	89	86	83	80	72	70	68	59	58	56	47	46	45
2	89	82	76	71	82	75	70	66	63	60	57	52	50	47	42	40	39
3	81	72	65	59	74	67	61	56	56	52	48	47	43	41	38	35	33
4	75	64	56	51	68	59	53	47	50	45	41	42	38	35	34	31	29
5	68	57	49	43	63	53	46	41	45	40	36	37	34	30	30	28	25
6	63	51	43	38	58	48	41	35	41	35	31	34	30	27	28	25	22
7	58	46	39	33	54	43	36	31	37	31	27	31	27	24	25	22	20
8	54	42	35	29	50	39	32	28	34	28	24	28	24	21	23	20	18
9	50	38	31	26	46	36	29	25	31	25	22	26	22	19	21	18	16
10	47	35	28	23	43	33	26	22	28	23	20	24	20	17	20	17	15

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	3512	3512	3512	3512
5°	3508	3958	3508	3042
10°	3489	4447	3477	2630
15°	3451	4705	3428	2290
20°	3405	5079	3375	2069
25°	3346	5750	3308	1878
30°	3285	6111	3236	1741
35°	3206	5026	3162	1614
40°	3067	3413	3041	1499
45°	2884	2453	2880	1386
50°	2696	1887	2709	1282
55°	2485	1534	2480	1181
60°	2288	1257	2277	1049
65°	2059	1048	2072	844
70°	1869	840	1862	703
75°	1578	637	1578	578
80°	1280	388	1264	388
85°	898	203	875	231

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 135°

Vertical Angle: 45°

Luminance: 4999 cd/sqm

TEST NUMBER: P1035933

CATALOG NUMBER: S125RDIW-B375D470UB30-4F0-XX-W2A-A1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	52.6	1.7
10°-20°	154.1	5.0
20°-30°	244.3	8.0
30°-40°	295.2	9.6
40°-50°	262.8	8.6
50°-60°	201.5	6.6
60°-70°	130.9	4.3
70°-80°	63.5	2.1
80°-90°	15.8	0.5
90°-100°	39.1	1.3
100°-110°	116.3	3.8
110°-120°	197.2	6.4
120°-130°	259.7	8.5
130°-140°	291.0	9.5
140°-150°	285.2	9.3
150°-160°	239.6	7.8
160°-170°	159.2	5.2
170°-180°	55.7	1.8
0°-30°	451.0	14.7
0°-40°	746.2	24.4
0°-60°	1210.6	39.5
0°-90°	1420.8	46.4
90°-120°	352.7	11.5
90°-150°	1188.5	38.8
90°-180°	1643.0	53.6
0°-180°	3063.8	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	548	548	548	548	548	
5°	547	628	547	483	547	52
15°	524	755	520	367	524	148
25°	479	904	473	295	479	221
35°	417	750	411	241	417	260
45°	326	335	326	189	326	252
55°	230	184	230	142	230	206
65°	143	104	144	84	143	143
75°	70	49	70	44	70	75
85°	16	10	15	12	16	18
90°	0	11	0	11	0	3
95°	30	39	30	39	30	31
105°	104	114	104	114	104	111
115°	198	199	198	199	198	195
125°	288	290	288	290	288	258
135°	375	376	375	376	375	289
145°	454	456	454	456	454	284
155°	520	520	520	520	520	239
165°	565	564	565	564	565	159
175°	587	585	587	585	587	56
180°	589	589	589	589	589	

TEST NUMBER: P1035933

CATALOG NUMBER: S125RDIW-B375D470UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
0°	548.1	548.1	548.1	548.1	548.1	548.1	548.1	548.1	548.1	548.1	548.1
2.5°	548.5	553.0	554.4	558.0	562.0	562.9	565.2	568.3	570.1	569.7	569.7
5°	546.7	554.4	559.8	566.1	573.7	576.9	579.6	586.3	591.7	594.9	600.3
7.5°	543.6	554.8	563.8	573.3	585.0	590.4	596.2	605.7	615.6	621.9	627.7
10°	538.6	553.0	565.6	579.6	595.3	603.4	610.6	625.0	637.2	645.3	658.8
12.5°	531.4	549.4	567.0	585.4	605.2	613.8	623.7	639.4	656.5	668.2	679.5
15°	523.8	545.4	564.3	586.3	610.2	623.2	635.8	652.5	667.8	680.8	693.9
17.5°	514.8	537.7	561.1	586.3	613.3	626.4	637.2	657.0	673.2	686.2	697.9
20°	504.0	529.6	556.2	584.1	611.5	623.7	634.0	655.6	670.0	684.0	700.6
22.5°	492.3	520.2	548.5	576.0	603.0	616.0	628.2	647.1	662.8	681.7	703.3
25°	478.8	509.4	538.2	565.6	591.3	603.4	614.2	634.9	657.0	680.8	705.1
27.5°	465.3	495.0	522.9	548.1	576.0	587.2	598.0	624.1	650.2	675.4	708.7
30°	450.4	480.6	504.9	528.3	555.3	567.0	580.5	610.2	639.9	674.1	714.6
32.5°	433.8	461.2	483.7	508.0	532.3	546.7	563.8	596.2	630.4	671.4	723.1
35°	417.1	439.2	459.9	482.8	512.1	527.4	544.0	578.2	621.0	670.0	730.3
37.5°	396.0	417.1	433.3	456.7	486.9	504.9	521.5	561.1	609.7	666.9	729.9
40°	374.4	392.4	407.7	432.0	464.8	481.5	499.5	542.7	598.0	657.9	719.1
42.5°	351.0	366.3	382.9	406.3	438.3	454.5	475.2	525.6	581.8	645.3	691.2
45°	326.2	341.1	355.0	379.3	411.3	428.8	451.3	503.1	562.0	618.7	646.2
47.5°	301.9	315.0	329.8	351.0	383.4	402.7	425.7	481.0	535.5	583.2	585.4
50°	278.5	288.9	301.5	323.1	356.8	375.3	399.1	450.9	504.0	536.8	514.8
52.5°	254.2	263.7	276.7	295.6	327.1	348.7	369.4	421.2	465.7	487.8	447.3
55°	230.4	238.5	252.0	273.1	300.6	317.2	338.4	386.5	425.7	426.1	382.0
57.5°	207.0	214.2	225.4	244.3	270.0	289.3	308.7	350.5	377.1	369.4	320.4
60°	186.3	190.8	201.1	219.6	243.4	257.4	278.1	313.2	330.7	316.8	264.1
62.5°	164.7	169.2	177.3	192.1	214.6	229.5	242.5	271.3	283.5	262.3	219.1
65°	143.1	148.5	154.3	166.0	187.2	197.1	208.8	229.9	241.6	216.9	179.5
67.5°	124.2	126.9	132.7	144.9	159.7	168.7	176.8	191.2	193.5	173.7	143.1
70°	106.6	107.5	112.9	120.1	131.4	136.8	143.5	152.1	152.1	135.9	111.6
72.5°	86.8	88.2	92.2	99.9	106.6	109.3	111.6	117.0	116.1	101.2	84.6
75°	69.7	70.6	73.8	77.4	80.1	85.0	86.8	85.9	85.5	72.9	63.4
77.5°	54.0	54.4	56.7	59.8	60.3	62.1	60.7	60.7	56.7	49.5	44.5
80°	39.6	40.0	40.9	41.8	41.8	41.8	41.8	39.6	36.9	32.4	31.0
82.5°	26.5	26.5	27.0	27.9	27.4	26.5	25.6	23.4	21.6	20.2	19.3
85°	15.7	15.7	16.2	15.7	13.9	13.5	12.6	12.1	11.7	11.2	11.2
87.5°	7.6	7.2	6.3	5.4	5.4	5.4	5.4	5.4	5.4	4.9	4.9
90°	0.5	1.3	2.1	2.9	3.7	4.1	4.5	5.2	5.9	6.6	7.3
92.5°	13.7	14.2	14.7	15.2	15.7	16.0	16.5	17.4	18.3	19.3	20.2
95°	29.8	30.0	30.2	30.4	30.6	30.7	31.2	32.2	33.3	34.3	35.3
97.5°	45.8	45.9	46.0	46.1	46.2	46.3	47.0	48.4	49.9	51.3	52.7
100°	64.1	64.1	64.1	64.1	64.1	64.1	64.8	66.1	67.4	68.8	70.1
102.5°	83.8	84.3	84.8	85.3	85.8	86.1	86.4	86.9	87.4	87.9	88.4
105°	104.5	105.0	105.5	106.0	106.5	106.7	107.0	107.6	108.3	108.9	109.5
107.5°	126.9	127.4	127.9	128.4	128.9	129.2	129.5	130.0	130.5	131.0	131.5
110°	150.3	150.8	151.3	151.8	152.3	152.6	152.7	153.0	153.3	153.6	153.9

TEST NUMBER: P1035933

CATALOG NUMBER: S125RDIW-B375D470UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
112.5°	174.1	174.3	174.5	174.7	174.9	175.0	175.2	175.6	176.0	176.4	176.8
115°	197.5	197.9	198.3	198.7	199.1	199.3	199.4	199.6	199.8	200.0	200.2
117.5°	221.3	221.4	221.5	221.6	221.7	221.7	221.8	222.0	222.3	222.5	222.7
120°	243.3	243.8	244.3	244.8	245.3	245.6	245.6	245.7	245.8	245.9	246.0
122.5°	267.1	267.2	267.3	267.4	267.5	267.6	267.7	268.0	268.3	268.6	268.9
125°	288.2	288.8	289.4	290.0	290.6	290.9	291.0	291.1	291.2	291.3	291.4
127.5°	311.5	311.8	312.1	312.4	312.7	312.9	313.0	313.1	313.2	313.3	313.4
130°	332.2	332.7	333.2	333.7	334.2	334.5	334.6	334.8	335.0	335.2	335.4
132.5°	352.8	353.7	354.6	355.5	356.4	356.9	356.8	356.7	356.6	356.5	356.4
135°	374.8	375.4	376.0	376.6	377.2	377.5	377.6	377.7	377.8	377.9	378.0
137.5°	395.4	396.0	396.6	397.2	397.8	398.1	398.2	398.4	398.7	398.9	399.1
140°	415.1	415.6	416.1	416.6	417.1	417.4	417.6	417.9	418.2	418.5	418.8
142.5°	434.8	435.2	435.6	436.0	436.4	436.6	436.8	437.2	437.7	438.1	438.5
145°	454.0	454.4	454.8	455.3	455.7	455.9	456.0	456.3	456.6	456.9	457.2
147.5°	471.9	472.2	472.5	472.8	473.1	473.3	473.4	473.6	473.8	474.0	474.2
150°	489.8	489.7	489.6	489.5	489.4	489.3	489.5	489.9	490.3	490.7	491.1
152.5°	504.4	504.6	504.8	505.0	505.2	505.3	505.4	505.5	505.6	505.7	505.8
155°	519.5	519.5	519.5	519.5	519.5	519.5	519.6	519.7	519.8	519.9	520.0
157.5°	533.3	533.1	532.9	532.7	532.5	532.4	532.4	532.5	532.6	532.7	532.8
160°	545.2	544.9	544.6	544.3	544.0	543.8	543.9	544.0	544.1	544.2	544.3
162.5°	555.7	555.5	555.3	555.1	554.9	554.8	554.8	554.8	554.8	554.8	554.8
165°	564.9	564.7	564.5	564.3	564.1	564.0	564.0	564.1	564.2	564.3	564.4
167.5°	573.1	572.7	572.3	571.9	571.5	571.3	571.3	571.3	571.3	571.3	571.3
170°	579.6	579.2	578.8	578.3	577.9	577.7	577.7	577.7	577.7	577.7	577.7
172.5°	584.1	583.7	583.3	582.9	582.5	582.3	582.3	582.3	582.3	582.3	582.3
175°	587.4	587.0	586.6	586.1	585.7	585.5	585.5	585.5	585.5	585.5	585.5
177.5°	589.6	589.2	588.8	588.4	588.0	587.8	587.8	587.7	587.6	587.5	587.4
180°	588.7	588.7	588.7	588.7	588.7	588.7	588.7	588.7	588.7	588.7	588.7

TEST NUMBER: P1035933

CATALOG NUMBER: S125RDIW-B375D470UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°	95°
0°	548.1	548.1	548.1	548.1	548.1	548.1	548.1	548.1	548.1	548.1	548.1
2.5°	571.9	575.1	577.8	576.4	581.8	581.4	582.3	584.1	584.5	583.6	581.8
5°	603.0	607.5	615.1	619.2	618.3	621.9	623.7	626.4	629.1	628.2	628.2
7.5°	637.6	643.9	651.6	661.9	663.3	666.4	671.8	671.8	675.0	673.6	673.2
10°	667.8	675.4	687.6	695.7	699.3	701.1	706.5	708.3	711.9	712.3	712.3
12.5°	692.5	706.0	714.1	722.2	724.0	726.7	730.8	733.5	734.8	734.8	733.5
15°	705.6	716.4	725.8	734.4	739.3	741.6	745.6	748.8	750.6	754.6	755.5
17.5°	711.0	724.0	739.3	751.5	760.0	762.3	770.4	773.1	776.7	778.5	780.7
20°	718.6	737.5	756.0	770.8	778.9	784.8	793.3	805.9	809.5	809.5	808.2
22.5°	725.4	749.7	774.9	798.7	805.5	817.2	832.9	846.4	851.8	854.1	852.3
25°	733.5	766.8	799.6	829.3	847.8	856.3	877.5	893.7	900.0	903.6	904.5
27.5°	747.4	789.3	831.1	868.9	887.8	897.7	919.8	933.7	941.4	944.5	942.3
30°	763.2	814.5	863.1	896.8	909.4	921.6	936.0	941.4	939.6	939.6	946.3
32.5°	779.4	832.5	875.7	897.7	902.2	900.4	894.6	878.4	868.9	868.9	874.8
35°	788.4	834.3	856.3	849.1	831.6	821.2	789.3	771.3	751.0	749.7	756.4
37.5°	783.4	803.2	794.2	747.0	723.1	703.3	653.4	633.6	618.7	598.0	630.0
40°	748.8	742.0	695.2	627.3	600.7	572.8	533.2	513.4	492.7	489.6	497.2
42.5°	690.3	650.2	581.8	516.1	489.1	469.3	439.2	419.8	406.8	401.4	410.4
45°	617.4	554.4	486.0	433.8	404.1	393.7	366.3	349.2	339.3	335.2	341.5
47.5°	528.3	464.8	400.0	355.9	338.4	328.0	309.6	294.7	286.2	283.5	286.2
50°	448.6	383.4	328.9	300.6	284.8	276.3	261.0	251.5	244.8	243.0	247.5
52.5°	379.8	320.4	279.0	253.8	243.4	236.2	225.4	217.3	213.3	211.5	214.6
55°	318.1	270.0	236.7	215.1	207.4	202.9	193.5	189.0	184.5	184.0	187.2
57.5°	263.7	230.4	199.8	184.5	182.2	175.5	167.4	163.3	161.1	160.6	162.0
60°	219.6	189.9	171.4	157.9	154.8	149.4	144.9	142.2	139.5	138.6	139.5
62.5°	182.7	159.3	144.4	135.4	130.9	129.6	124.6	121.5	121.0	121.0	121.9
65°	150.7	130.9	121.5	114.3	111.1	109.8	106.2	103.9	104.4	104.4	104.8
67.5°	122.8	108.4	99.9	96.3	93.6	93.1	89.5	88.6	87.7	87.7	88.6
70°	97.6	88.6	82.3	80.5	80.1	76.9	75.6	75.1	73.8	74.2	74.2
72.5°	76.5	70.6	67.0	64.3	64.8	63.0	61.2	61.2	60.3	61.6	61.6
75°	56.7	54.0	51.3	50.4	51.3	50.4	49.0	48.6	49.0	48.6	48.6
77.5°	41.8	40.5	39.6	39.1	39.1	37.3	36.4	37.3	35.5	36.4	36.4
80°	29.2	27.4	27.0	26.1	26.5	25.2	25.6	24.7	24.7	24.7	24.7
82.5°	18.4	18.0	18.0	18.0	17.5	17.5	17.5	17.5	17.5	17.5	17.1
85°	11.2	10.8	10.8	10.8	10.3	10.3	10.3	10.3	10.3	10.3	10.3
87.5°	4.5	4.9	4.9	5.4	4.9	4.5	4.5	4.5	4.9	4.9	4.5
90°	7.8	8.3	8.8	9.3	9.6	9.8	10.1	10.4	10.7	11.0	10.7
92.5°	20.9	21.6	22.3	23.0	23.4	23.5	23.7	23.9	24.1	24.3	24.1
95°	36.0	36.7	37.4	38.1	38.5	38.6	38.8	39.0	39.2	39.4	39.2
97.5°	53.3	53.9	54.5	55.1	55.4	55.5	55.6	55.7	55.8	55.9	55.8
100°	71.0	71.9	72.8	73.7	74.2	74.3	74.5	74.7	74.9	75.1	74.9
102.5°	89.4	90.4	91.5	92.5	93.0	93.2	93.5	93.8	94.1	94.4	94.1
105°	110.1	110.7	111.3	111.9	112.2	112.4	112.7	113.0	113.3	113.6	113.3
107.5°	131.8	132.1	132.4	132.7	132.9	132.9	132.9	132.9	132.9	132.9	132.9
110°	154.2	154.5	154.8	155.1	155.3	155.3	155.2	155.1	155.0	154.9	155.0

TEST NUMBER: P1035933

CATALOG NUMBER: S125RDIW-B375D470UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°	95°
112.5°	176.9	177.0	177.1	177.2	177.3	177.2	177.0	176.8	176.6	176.4	176.6
115°	200.1	200.0	199.9	199.8	199.8	199.7	199.6	199.5	199.4	199.3	199.4
117.5°	222.8	222.9	223.0	223.1	223.1	222.9	222.5	222.1	221.7	221.3	221.7
120°	246.0	246.0	246.0	246.0	246.0	245.8	245.4	245.0	244.6	244.2	244.6
122.5°	268.8	268.7	268.6	268.5	268.5	268.3	268.0	267.7	267.4	267.1	267.4
125°	291.2	291.0	290.8	290.6	290.5	290.4	290.3	290.2	290.1	290.0	290.1
127.5°	313.3	313.2	313.1	313.0	312.9	312.8	312.6	312.4	312.2	312.0	312.2
130°	335.3	335.2	335.1	335.0	334.9	334.8	334.6	334.4	334.2	334.0	334.2
132.5°	356.3	356.2	356.1	356.0	356.0	355.8	355.5	355.2	354.9	354.6	354.9
135°	378.0	378.0	378.0	378.0	378.0	377.8	377.4	376.9	376.5	376.1	376.5
137.5°	399.2	399.3	399.4	399.5	399.5	399.2	398.7	398.2	397.7	397.2	397.7
140°	419.0	419.2	419.4	419.6	419.7	419.4	418.9	418.4	417.9	417.4	417.9
142.5°	438.6	438.7	438.8	438.9	438.9	438.6	438.1	437.6	437.1	436.6	437.1
145°	457.2	457.2	457.2	457.2	457.2	457.1	456.8	456.5	456.2	455.9	456.2
147.5°	474.5	474.8	475.1	475.4	475.6	475.2	474.4	473.5	472.7	471.9	472.7
150°	491.1	491.1	491.1	491.1	491.1	491.0	490.8	490.6	490.4	490.2	490.4
152.5°	506.1	506.4	506.7	507.0	507.2	507.0	506.6	506.1	505.7	505.3	505.7
155°	520.4	520.8	521.2	521.6	521.8	521.5	521.0	520.5	520.0	519.5	520.0
157.5°	533.2	533.6	534.1	534.5	534.7	534.3	533.6	532.9	532.2	531.5	532.2
160°	544.7	545.1	545.5	545.9	546.1	545.8	545.3	544.8	544.3	543.8	544.3
162.5°	555.3	555.8	556.3	556.8	557.1	556.8	556.2	555.6	555.0	554.4	555.0
165°	564.8	565.2	565.7	566.1	566.3	566.0	565.4	564.7	564.1	563.5	564.1
167.5°	571.9	572.5	573.2	573.8	574.1	573.8	573.2	572.5	571.9	571.3	571.9
170°	578.3	578.9	579.6	580.2	580.5	580.1	579.4	578.7	578.0	577.3	578.0
172.5°	582.9	583.5	584.2	584.8	585.1	584.8	584.2	583.5	582.9	582.3	582.9
175°	586.1	586.7	587.4	588.0	588.3	587.9	587.2	586.5	585.8	585.1	585.8
177.5°	588.0	588.6	589.2	589.8	590.1	589.7	589.0	588.3	587.6	586.9	587.6
180°	588.7	588.7	588.7	588.7	588.7	588.7	588.7	588.7	588.7	588.7	588.7

TEST NUMBER: P1035933

CATALOG NUMBER: S125RDIW-B375D470UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	100°	105°	110°	112.5°	115°	120°	125°	130°	135°	140°	145°
0°	548.1	548.1	548.1	548.1	548.1	548.1	548.1	548.1	548.1	548.1	548.1
2.5°	584.1	580.9	582.3	580.9	579.6	578.2	575.1	570.6	567.0	564.3	563.8
5°	629.1	625.0	622.3	621.0	618.3	614.7	608.8	602.1	594.0	590.8	584.5
7.5°	670.5	669.1	662.8	661.9	660.1	653.4	643.5	634.5	624.1	615.6	607.5
10°	709.6	706.5	702.0	695.7	694.8	686.2	676.8	664.2	650.7	642.6	628.2
12.5°	733.9	730.3	725.4	721.3	719.1	713.7	700.6	688.0	675.9	661.0	648.4
15°	751.5	747.0	738.0	734.8	732.1	724.9	715.5	702.4	686.2	675.9	657.9
17.5°	775.3	769.9	760.9	755.1	750.1	738.9	725.4	707.8	692.5	680.8	664.6
20°	802.8	794.7	783.0	775.3	768.1	755.1	736.2	715.5	693.4	679.0	662.4
22.5°	848.2	832.9	814.5	803.7	793.8	771.3	748.8	723.1	698.4	676.8	656.5
25°	892.3	877.0	854.1	839.2	823.9	797.8	768.1	732.6	701.1	675.9	649.3
27.5°	933.3	917.5	896.4	878.4	863.5	824.4	785.2	745.2	705.1	670.5	643.5
30°	942.7	936.0	919.8	904.0	890.5	854.5	809.1	758.2	710.1	665.5	635.4
32.5°	885.6	902.2	906.3	904.0	895.5	869.8	828.0	774.4	717.3	663.3	621.9
35°	766.8	796.9	828.0	844.6	852.7	856.3	831.6	782.5	722.2	659.7	612.9
37.5°	635.8	665.1	714.1	738.9	766.3	802.3	812.2	780.7	720.0	657.0	598.5
40°	522.4	559.8	600.3	622.8	646.6	711.4	760.5	756.9	712.8	647.1	587.2
42.5°	425.2	448.6	484.2	508.9	538.2	610.6	676.3	708.7	691.2	634.9	572.8
45°	354.6	372.6	397.8	423.0	441.0	506.7	584.5	637.6	654.3	613.3	550.8
47.5°	298.8	312.3	334.3	350.1	369.4	421.2	488.7	563.4	598.5	582.7	527.4
50°	256.0	266.8	284.4	294.3	311.4	355.9	407.2	485.5	538.6	540.4	496.3
52.5°	218.7	229.5	244.3	252.9	263.2	293.4	345.1	411.3	472.5	495.0	460.8
55°	190.3	196.6	208.8	215.5	225.0	254.2	287.1	343.3	407.2	444.1	422.5
57.5°	164.2	171.0	178.6	184.0	190.8	214.2	243.9	286.2	349.6	389.7	382.5
60°	143.1	147.1	154.3	158.4	164.7	180.0	200.7	243.0	293.4	331.2	335.2
62.5°	123.3	126.9	131.8	135.4	139.5	151.6	166.9	197.1	241.2	282.1	287.5
65°	106.2	109.3	112.0	115.2	118.3	126.0	139.0	162.4	196.6	234.9	246.6
67.5°	90.9	91.8	95.8	96.3	98.1	103.9	113.4	132.3	157.0	187.6	202.9
70°	76.0	77.8	78.7	80.1	81.9	85.9	93.6	103.5	121.9	146.7	161.1
72.5°	61.6	62.1	63.4	64.3	66.1	69.3	72.9	80.5	92.2	110.2	123.3
75°	49.0	49.5	50.4	50.8	52.2	53.1	54.9	60.3	68.4	79.2	88.6
77.5°	36.9	37.8	38.7	38.7	39.1	40.0	40.9	42.7	46.8	54.0	62.1
80°	25.2	25.6	25.6	26.1	25.6	27.0	28.3	30.6	32.4	34.6	38.7
82.5°	17.5	17.5	17.5	18.0	18.0	18.4	18.4	18.9	19.3	20.7	22.5
85°	10.8	10.8	11.2	10.3	10.8	11.2	11.2	10.8	11.2	11.7	12.1
87.5°	4.5	4.5	4.9	4.9	4.9	4.9	4.5	4.9	4.5	4.9	4.9
90°	10.4	10.1	9.8	9.6	9.3	8.8	8.3	7.8	7.3	6.6	5.9
92.5°	23.9	23.7	23.5	23.4	23.0	22.3	21.6	20.9	20.2	19.3	18.3
95°	39.0	38.8	38.6	38.5	38.1	37.4	36.7	36.0	35.3	34.3	33.3
97.5°	55.7	55.6	55.5	55.4	55.1	54.5	53.9	53.3	52.7	51.3	49.9
100°	74.7	74.5	74.3	74.2	73.7	72.8	71.9	71.0	70.1	68.8	67.4
102.5°	93.8	93.5	93.2	93.0	92.5	91.5	90.4	89.4	88.4	87.9	87.4
105°	113.0	112.7	112.4	112.2	111.9	111.3	110.7	110.1	109.5	108.9	108.3
107.5°	132.9	132.9	132.9	132.9	132.7	132.4	132.1	131.8	131.5	131.0	130.5
110°	155.1	155.2	155.3	155.3	155.1	154.8	154.5	154.2	153.9	153.6	153.3

TEST NUMBER: P1035933

CATALOG NUMBER: S125RDIW-B375D470UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	100°	105°	110°	112.5°	115°	120°	125°	130°	135°	140°	145°
112.5°	176.8	177.0	177.2	177.3	177.2	177.1	177.0	176.9	176.8	176.4	176.0
115°	199.5	199.6	199.7	199.8	199.8	199.9	200.0	200.1	200.2	200.0	199.8
117.5°	222.1	222.5	222.9	223.1	223.1	223.0	222.9	222.8	222.7	222.5	222.3
120°	245.0	245.4	245.8	246.0	246.0	246.0	246.0	246.0	246.0	245.9	245.8
122.5°	267.7	268.0	268.3	268.5	268.5	268.6	268.7	268.8	268.9	268.6	268.3
125°	290.2	290.3	290.4	290.5	290.6	290.8	291.0	291.2	291.4	291.3	291.2
127.5°	312.4	312.6	312.8	312.9	313.0	313.1	313.2	313.3	313.4	313.3	313.2
130°	334.4	334.6	334.8	334.9	335.0	335.1	335.2	335.3	335.4	335.2	335.0
132.5°	355.2	355.5	355.8	356.0	356.0	356.1	356.2	356.3	356.4	356.5	356.6
135°	376.9	377.4	377.8	378.0	378.0	378.0	378.0	378.0	378.0	377.9	377.8
137.5°	398.2	398.7	399.2	399.5	399.5	399.4	399.3	399.2	399.1	398.9	398.7
140°	418.4	418.9	419.4	419.7	419.6	419.4	419.2	419.0	418.8	418.5	418.2
142.5°	437.6	438.1	438.6	438.9	438.9	438.8	438.7	438.6	438.5	438.1	437.7
145°	456.5	456.8	457.1	457.2	457.2	457.2	457.2	457.2	457.2	456.9	456.6
147.5°	473.5	474.4	475.2	475.6	475.4	475.1	474.8	474.5	474.2	474.0	473.8
150°	490.6	490.8	491.0	491.1	491.1	491.1	491.1	491.1	491.1	490.7	490.3
152.5°	506.1	506.6	507.0	507.2	507.0	506.7	506.4	506.1	505.8	505.7	505.6
155°	520.5	521.0	521.5	521.8	521.6	521.2	520.8	520.4	520.0	519.9	519.8
157.5°	532.9	533.6	534.3	534.7	534.5	534.1	533.6	533.2	532.8	532.7	532.6
160°	544.8	545.3	545.8	546.1	545.9	545.5	545.1	544.7	544.3	544.2	544.1
162.5°	555.6	556.2	556.8	557.1	556.8	556.3	555.8	555.3	554.8	554.8	554.8
165°	564.7	565.4	566.0	566.3	566.1	565.7	565.2	564.8	564.4	564.3	564.2
167.5°	572.5	573.2	573.8	574.1	573.8	573.2	572.5	571.9	571.3	571.3	571.3
170°	578.7	579.4	580.1	580.5	580.2	579.6	578.9	578.3	577.7	577.7	577.7
172.5°	583.5	584.2	584.8	585.1	584.8	584.2	583.5	582.9	582.3	582.3	582.3
175°	586.5	587.2	587.9	588.3	588.0	587.4	586.7	586.1	585.5	585.5	585.5
177.5°	588.3	589.0	589.7	590.1	589.8	589.2	588.6	588.0	587.4	587.5	587.6
180°	588.7	588.7	588.7	588.7	588.7	588.7	588.7	588.7	588.7	588.7	588.7

TEST NUMBER: P1035933

CATALOG NUMBER: S125RDIW-B375D470UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	150°	155°	157.5°	160°	165°	170°	175°	180°	185°	190°	195°
0°	548.1	548.1	548.1	548.1	548.1	548.1	548.1	548.1	548.1	548.1	548.1
2.5°	562.5	559.8	558.0	557.5	554.8	552.6	549.9	549.4	548.1	544.5	542.2
5°	580.0	573.7	572.4	568.3	561.6	556.6	550.3	546.7	542.7	535.9	530.5
7.5°	598.0	589.5	583.2	577.3	567.9	558.9	549.9	542.7	535.5	525.6	517.5
10°	615.6	602.5	594.9	586.3	573.3	559.8	547.2	536.8	525.1	513.4	501.7
12.5°	631.8	615.1	603.9	591.7	575.5	558.9	542.7	528.3	516.1	500.4	487.3
15°	641.7	623.2	612.0	600.3	576.0	557.5	538.6	520.2	504.0	487.3	475.2
17.5°	647.5	626.8	614.2	603.4	578.7	553.5	529.2	509.4	491.8	472.0	455.8
20°	644.8	624.6	612.9	602.5	573.7	548.5	522.4	499.5	477.4	457.2	440.1
22.5°	639.0	617.8	604.8	595.3	569.7	540.0	511.2	486.4	463.5	443.2	423.9
25°	626.4	605.7	594.4	582.7	557.5	529.2	499.9	473.4	449.1	427.5	405.9
27.5°	615.1	589.9	578.2	567.9	541.3	516.1	487.3	458.1	433.3	410.8	389.2
30°	602.1	573.7	561.1	547.2	523.3	499.5	470.7	443.7	418.0	394.2	373.5
32.5°	588.1	555.3	540.9	525.1	500.8	478.3	454.0	427.5	401.8	378.4	356.8
35°	570.1	535.0	518.4	503.5	478.3	455.8	433.3	411.3	385.6	360.9	340.2
37.5°	553.0	514.3	496.8	479.7	453.1	431.5	413.1	392.4	367.6	343.8	324.0
40°	533.7	489.1	471.1	455.4	427.9	404.1	387.4	371.2	349.6	326.7	305.1
42.5°	516.1	465.7	446.8	430.6	401.8	379.3	363.6	350.1	331.2	310.0	288.0
45°	491.8	440.5	421.2	404.1	374.8	353.7	337.5	325.8	310.9	291.1	271.3
47.5°	469.3	416.2	395.1	374.4	347.8	326.2	311.4	302.4	292.5	274.9	254.7
50°	441.9	388.3	366.7	349.6	319.5	301.0	286.2	279.9	270.9	254.2	238.0
52.5°	412.2	361.3	341.1	320.4	292.5	274.5	261.4	254.2	247.0	234.9	219.6
55°	377.5	331.2	312.3	293.8	265.9	249.3	237.6	229.9	225.9	214.6	203.4
57.5°	344.2	300.6	283.0	265.9	241.6	222.7	215.1	208.3	202.5	194.4	184.9
60°	310.5	270.9	252.0	236.7	215.5	198.4	192.1	185.4	180.9	174.6	167.8
62.5°	271.8	238.0	223.6	209.2	191.2	177.7	170.5	165.1	159.3	155.2	149.4
65°	230.8	207.0	193.0	182.2	165.1	153.0	147.6	144.0	139.0	135.0	130.5
67.5°	192.6	173.7	167.8	156.1	143.1	132.3	128.2	123.7	119.7	117.4	113.4
70°	155.7	142.2	136.3	133.2	118.8	111.6	108.0	106.2	101.2	99.0	96.3
72.5°	120.6	115.6	111.6	107.5	98.1	93.6	89.5	87.7	84.1	82.3	81.4
75°	89.1	85.9	83.7	83.2	79.2	74.7	70.6	69.7	67.0	65.2	64.3
77.5°	62.5	61.6	61.2	61.6	58.9	56.2	55.3	54.4	51.3	50.8	50.8
80°	40.9	43.2	43.2	42.7	41.8	41.4	40.0	39.1	37.3	36.9	37.3
82.5°	25.2	26.5	27.0	27.9	27.4	27.0	26.1	25.6	26.1	25.2	25.6
85°	12.6	13.5	15.3	15.3	15.7	15.7	15.7	15.3	14.4	14.8	14.4
87.5°	4.9	5.4	5.4	5.4	4.9	6.3	6.7	6.7	6.7	5.8	5.8
90°	5.2	4.5	4.1	3.7	2.9	2.1	1.3	0.5	1.3	2.1	2.9
92.5°	17.4	16.5	16.0	15.7	15.2	14.7	14.2	13.7	14.2	14.7	15.2
95°	32.2	31.2	30.7	30.6	30.4	30.2	30.0	29.8	30.0	30.2	30.4
97.5°	48.4	47.0	46.3	46.2	46.1	46.0	45.9	45.8	45.9	46.0	46.1
100°	66.1	64.8	64.1	64.1	64.1	64.1	64.1	64.1	64.1	64.1	64.1
102.5°	86.9	86.4	86.1	85.8	85.3	84.8	84.3	83.8	84.3	84.8	85.3
105°	107.6	107.0	106.7	106.5	106.0	105.5	105.0	104.5	105.0	105.5	106.0
107.5°	130.0	129.5	129.2	128.9	128.4	127.9	127.4	126.9	127.4	127.9	128.4
110°	153.0	152.7	152.6	152.3	151.8	151.3	150.8	150.3	150.8	151.3	151.8

TEST NUMBER: P1035933

CATALOG NUMBER: S125RDIW-B375D470UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	150°	155°	157.5°	160°	165°	170°	175°	180°	185°	190°	195°
112.5°	175.6	175.2	175.0	174.9	174.7	174.5	174.3	174.1	174.3	174.5	174.7
115°	199.6	199.4	199.3	199.1	198.7	198.3	197.9	197.5	197.9	198.3	198.7
117.5°	222.0	221.8	221.7	221.7	221.6	221.5	221.4	221.3	221.4	221.5	221.6
120°	245.7	245.6	245.6	245.3	244.8	244.3	243.8	243.3	243.8	244.3	244.8
122.5°	268.0	267.7	267.6	267.5	267.4	267.3	267.2	267.1	267.2	267.3	267.4
125°	291.1	291.0	290.9	290.6	290.0	289.4	288.8	288.2	288.8	289.4	290.0
127.5°	313.1	313.0	312.9	312.7	312.4	312.1	311.8	311.5	311.8	312.1	312.4
130°	334.8	334.6	334.5	334.2	333.7	333.2	332.7	332.2	332.7	333.2	333.7
132.5°	356.7	356.8	356.9	356.4	355.5	354.6	353.7	352.8	353.7	354.6	355.5
135°	377.7	377.6	377.5	377.2	376.6	376.0	375.4	374.8	375.4	376.0	376.6
137.5°	398.4	398.2	398.1	397.8	397.2	396.6	396.0	395.4	396.0	396.6	397.2
140°	417.9	417.6	417.4	417.1	416.6	416.1	415.6	415.1	415.6	416.1	416.6
142.5°	437.2	436.8	436.6	436.4	436.0	435.6	435.2	434.8	435.2	435.6	436.0
145°	456.3	456.0	455.9	455.7	455.3	454.8	454.4	454.0	454.4	454.8	455.3
147.5°	473.6	473.4	473.3	473.1	472.8	472.5	472.2	471.9	472.2	472.5	472.8
150°	489.9	489.5	489.3	489.4	489.5	489.6	489.7	489.8	489.7	489.6	489.5
152.5°	505.5	505.4	505.3	505.2	505.0	504.8	504.6	504.4	504.6	504.8	505.0
155°	519.7	519.6	519.5	519.5	519.5	519.5	519.5	519.5	519.5	519.5	519.5
157.5°	532.5	532.4	532.4	532.5	532.7	532.9	533.1	533.3	533.1	532.9	532.7
160°	544.0	543.9	543.8	544.0	544.3	544.6	544.9	545.2	544.9	544.6	544.3
162.5°	554.8	554.8	554.8	554.9	555.1	555.3	555.5	555.7	555.5	555.3	555.1
165°	564.1	564.0	564.0	564.1	564.3	564.5	564.7	564.9	564.7	564.5	564.3
167.5°	571.3	571.3	571.3	571.5	571.9	572.3	572.7	573.1	572.7	572.3	571.9
170°	577.7	577.7	577.7	577.9	578.3	578.8	579.2	579.6	579.2	578.8	578.3
172.5°	582.3	582.3	582.3	582.5	582.9	583.3	583.7	584.1	583.7	583.3	582.9
175°	585.5	585.5	585.5	585.7	586.1	586.6	587.0	587.4	587.0	586.6	586.1
177.5°	587.7	587.8	587.8	588.0	588.4	588.8	589.2	589.6	589.2	588.8	588.4
180°	588.7	588.7	588.7	588.7	588.7	588.7	588.7	588.7	588.7	588.7	588.7

TEST NUMBER: P1035933

CATALOG NUMBER: S125RDIW-B375D470UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	200°	202.5°	205°	210°	215°	220°	225°	230°	235°	240°	245°
0°	548.1	548.1	548.1	548.1	548.1	548.1	548.1	548.1	548.1	548.1	548.1
2.5°	540.9	539.1	537.7	536.4	530.5	524.2	523.3	522.0	519.3	522.4	521.1
5°	526.9	522.9	520.6	514.8	507.6	502.2	497.7	492.3	490.0	488.2	487.8
7.5°	509.8	506.2	502.2	496.3	487.3	478.3	471.6	466.2	461.7	459.4	459.4
10°	493.2	488.7	483.3	473.4	464.8	453.6	446.4	441.0	434.7	431.1	427.9
12.5°	476.1	471.1	466.2	453.6	443.7	432.0	421.6	414.9	411.7	407.7	402.3
15°	459.0	451.3	446.4	433.8	421.2	409.5	402.7	395.5	388.3	384.3	382.5
17.5°	441.0	435.6	427.5	414.0	400.0	389.7	379.8	373.0	364.5	360.4	356.4
20°	424.8	416.7	408.6	395.1	381.6	367.6	357.7	349.6	344.2	341.1	337.5
22.5°	405.4	397.8	391.0	376.6	361.8	348.7	337.9	333.0	327.6	322.6	319.0
25°	388.8	381.1	374.4	358.6	342.4	330.3	322.2	315.9	310.0	307.8	304.2
27.5°	371.2	364.0	355.0	339.3	324.9	314.5	306.0	300.1	295.6	291.1	288.4
30°	354.6	346.5	338.4	321.3	309.6	299.2	291.1	283.9	280.3	278.1	273.6
32.5°	338.4	328.0	321.3	305.5	294.3	284.4	277.6	271.3	266.8	262.8	259.2
35°	320.8	309.6	302.8	289.8	278.1	268.2	262.3	257.8	252.4	248.8	247.0
37.5°	304.2	294.7	288.0	274.5	262.8	254.7	248.4	242.5	240.3	235.3	234.4
40°	286.2	278.1	271.8	258.7	247.9	241.6	234.9	229.5	225.4	223.2	220.0
42.5°	270.0	263.2	256.5	244.3	234.0	226.3	221.4	216.4	212.8	209.2	207.0
45°	255.1	247.9	241.6	229.9	219.6	212.8	207.9	202.0	201.1	196.2	193.9
47.5°	239.4	233.1	227.7	215.5	206.1	199.3	193.5	189.4	185.4	183.6	180.4
50°	224.1	217.8	211.5	200.7	192.1	185.4	179.5	175.0	172.8	170.1	167.4
52.5°	207.4	202.5	197.5	186.3	177.7	171.9	166.9	161.1	158.8	156.6	154.8
55°	193.5	186.3	180.9	171.4	163.8	157.5	152.1	147.6	145.3	143.5	141.3
57.5°	174.6	170.1	165.6	157.0	149.8	143.5	138.1	134.5	131.8	130.5	130.9
60°	158.4	153.4	150.7	141.7	134.5	129.6	124.6	121.0	118.3	117.0	116.5
62.5°	141.3	137.7	132.7	126.4	119.2	114.7	111.1	108.4	103.9	103.5	102.1
65°	124.6	121.9	117.4	111.6	105.7	101.7	97.6	94.0	92.2	90.0	88.6
67.5°	108.4	105.7	101.7	96.7	92.7	88.6	85.0	81.4	78.3	76.5	75.6
70°	92.7	90.4	87.7	81.9	76.9	73.8	71.1	68.8	65.7	64.8	64.3
72.5°	77.4	75.1	73.8	68.8	64.3	61.6	58.9	56.7	55.3	54.9	53.5
75°	63.4	61.2	59.4	54.9	52.2	50.4	47.7	46.8	45.4	45.0	44.5
77.5°	49.5	47.2	46.8	43.6	40.5	39.6	38.7	36.9	36.9	36.9	36.0
80°	35.5	35.1	34.6	31.5	30.1	29.2	28.8	27.4	26.5	25.6	25.2
82.5°	23.8	23.4	22.9	21.6	20.2	19.8	19.3	18.4	18.4	18.9	18.0
85°	14.4	13.5	13.0	12.6	11.7	11.7	12.1	11.7	11.7	11.7	11.2
87.5°	5.4	5.4	5.4	5.4	5.8	4.9	5.4	5.4	4.9	4.9	4.5
90°	3.7	4.1	4.5	5.2	5.9	6.6	7.3	7.8	8.3	8.8	9.3
92.5°	15.7	16.0	16.5	17.4	18.3	19.3	20.2	20.9	21.6	22.3	23.0
95°	30.6	30.7	31.2	32.2	33.3	34.3	35.3	36.0	36.7	37.4	38.1
97.5°	46.2	46.3	47.0	48.4	49.9	51.3	52.7	53.3	53.9	54.5	55.1
100°	64.1	64.1	64.8	66.1	67.4	68.8	70.1	71.0	71.9	72.8	73.7
102.5°	85.8	86.1	86.4	86.9	87.4	87.9	88.4	89.4	90.4	91.5	92.5
105°	106.5	106.7	107.0	107.6	108.3	108.9	109.5	110.1	110.7	111.3	111.9
107.5°	128.9	129.2	129.5	130.0	130.5	131.0	131.5	131.8	132.1	132.4	132.7
110°	152.3	152.6	152.7	153.0	153.3	153.6	153.9	154.2	154.5	154.8	155.1

TEST NUMBER: P1035933

CATALOG NUMBER: S125RDIW-B375D470UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	200°	202.5°	205°	210°	215°	220°	225°	230°	235°	240°	245°
112.5°	174.9	175.0	175.2	175.6	176.0	176.4	176.8	176.9	177.0	177.1	177.2
115°	199.1	199.3	199.4	199.6	199.8	200.0	200.2	200.1	200.0	199.9	199.8
117.5°	221.7	221.7	221.8	222.0	222.3	222.5	222.7	222.8	222.9	223.0	223.1
120°	245.3	245.6	245.6	245.7	245.8	245.9	246.0	246.0	246.0	246.0	246.0
122.5°	267.5	267.6	267.7	268.0	268.3	268.6	268.9	268.8	268.7	268.6	268.5
125°	290.6	290.9	291.0	291.1	291.2	291.3	291.4	291.2	291.0	290.8	290.6
127.5°	312.7	312.9	313.0	313.1	313.2	313.3	313.4	313.3	313.2	313.1	313.0
130°	334.2	334.5	334.6	334.8	335.0	335.2	335.4	335.3	335.2	335.1	335.0
132.5°	356.4	356.9	356.8	356.7	356.6	356.5	356.4	356.3	356.2	356.1	356.0
135°	377.2	377.5	377.6	377.7	377.8	377.9	378.0	378.0	378.0	378.0	378.0
137.5°	397.8	398.1	398.2	398.4	398.7	398.9	399.1	399.2	399.3	399.4	399.5
140°	417.1	417.4	417.6	417.9	418.2	418.5	418.8	419.0	419.2	419.4	419.6
142.5°	436.4	436.6	436.8	437.2	437.7	438.1	438.5	438.6	438.7	438.8	438.9
145°	455.7	455.9	456.0	456.3	456.6	456.9	457.2	457.2	457.2	457.2	457.2
147.5°	473.1	473.3	473.4	473.6	473.8	474.0	474.2	474.5	474.8	475.1	475.4
150°	489.4	489.3	489.5	489.9	490.3	490.7	491.1	491.1	491.1	491.1	491.1
152.5°	505.2	505.3	505.4	505.5	505.6	505.7	505.8	506.1	506.4	506.7	507.0
155°	519.5	519.5	519.6	519.7	519.8	519.9	520.0	520.4	520.8	521.2	521.6
157.5°	532.5	532.4	532.4	532.5	532.6	532.7	532.8	533.2	533.6	534.1	534.5
160°	544.0	543.8	543.9	544.0	544.1	544.2	544.3	544.7	545.1	545.5	545.9
162.5°	554.9	554.8	554.8	554.8	554.8	554.8	554.8	555.3	555.8	556.3	556.8
165°	564.1	564.0	564.0	564.1	564.2	564.3	564.4	564.8	565.2	565.7	566.1
167.5°	571.5	571.3	571.3	571.3	571.3	571.3	571.3	571.9	572.5	573.2	573.8
170°	577.9	577.7	577.7	577.7	577.7	577.7	577.7	578.3	578.9	579.6	580.2
172.5°	582.5	582.3	582.3	582.3	582.3	582.3	582.3	582.9	583.5	584.2	584.8
175°	585.7	585.5	585.5	585.5	585.5	585.5	585.5	586.1	586.7	587.4	588.0
177.5°	588.0	587.8	587.8	587.7	587.6	587.5	587.4	588.0	588.6	589.2	589.8
180°	588.7	588.7	588.7	588.7	588.7	588.7	588.7	588.7	588.7	588.7	588.7

TEST NUMBER: P1035933

CATALOG NUMBER: S125RDIW-B375D470UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	247.5°	250°	255°	260°	265°	270°	275°	280°	285°	290°	292.5°
0°	548.1	548.1	548.1	548.1	548.1	548.1	548.1	548.1	548.1	548.1	548.1
2.5°	518.8	519.7	517.5	516.6	514.8	517.0	517.5	517.0	521.1	519.3	520.2
5°	488.7	486.9	485.5	482.4	482.4	482.8	484.2	481.9	483.3	486.4	486.0
7.5°	455.4	454.5	454.9	451.3	448.6	449.5	448.6	452.7	454.9	454.0	455.8
10°	425.2	427.0	423.0	421.2	419.4	421.2	420.7	421.6	424.3	426.1	429.3
12.5°	400.9	400.5	398.2	396.4	393.3	394.2	396.9	396.0	396.4	400.5	400.0
15°	378.0	375.3	373.5	369.4	370.3	367.2	369.9	373.0	374.4	378.0	380.2
17.5°	355.0	354.6	352.3	351.9	346.9	345.6	348.3	349.2	350.5	352.3	355.5
20°	335.7	335.2	332.1	331.2	327.1	329.8	328.9	330.7	331.6	335.2	336.6
22.5°	318.1	315.9	315.0	313.6	312.3	311.8	313.6	313.2	316.3	317.7	318.1
25°	301.9	300.1	299.7	297.4	296.5	295.2	296.5	297.9	301.5	302.8	304.6
27.5°	287.1	285.7	284.8	283.0	281.7	281.7	282.6	284.4	285.7	286.6	287.5
30°	273.6	272.7	270.0	269.1	267.7	267.7	267.7	268.6	270.9	273.6	274.9
32.5°	259.6	257.8	256.0	256.0	254.7	254.7	255.1	256.0	258.3	258.7	261.0
35°	246.1	244.3	243.0	242.1	242.5	240.7	241.6	243.0	245.7	246.6	247.9
37.5°	233.1	232.6	229.9	228.6	229.5	229.5	229.0	229.9	231.7	233.5	234.4
40°	218.7	217.8	217.8	216.4	216.9	215.1	216.4	217.3	218.2	220.0	221.4
42.5°	206.1	205.2	203.4	203.8	202.5	202.5	203.4	203.8	205.2	207.4	208.3
45°	192.6	192.6	191.7	190.3	190.8	189.4	190.3	190.8	192.6	194.8	193.9
47.5°	179.5	179.1	179.1	177.3	178.2	176.8	178.2	178.6	179.5	180.9	180.4
50°	166.9	165.6	166.0	165.6	165.1	165.1	166.0	166.0	166.9	166.9	168.3
52.5°	153.9	153.9	153.0	153.4	154.3	153.4	154.8	153.4	154.3	154.8	155.7
55°	142.2	141.3	141.7	141.3	143.1	141.7	143.1	142.2	143.1	142.6	143.5
57.5°	129.6	128.2	128.7	128.2	129.6	129.1	130.5	129.1	129.6	130.0	131.4
60°	115.2	115.2	115.2	114.3	115.6	115.6	115.2	115.2	117.0	117.9	117.4
62.5°	101.7	101.2	99.9	99.4	99.9	99.0	100.8	100.3	101.2	102.1	103.0
65°	86.8	85.9	85.5	84.6	84.6	84.1	84.6	86.4	86.8	87.3	89.5
67.5°	74.7	74.2	73.8	72.4	72.4	73.3	73.3	73.3	76.0	74.7	76.5
70°	63.9	63.0	62.1	61.6	61.6	62.1	62.5	63.0	62.5	64.3	64.8
72.5°	53.5	54.0	53.1	53.1	53.1	52.6	52.6	53.5	54.0	53.5	54.0
75°	44.5	44.5	44.1	44.5	44.5	44.1	44.1	45.0	45.0	44.5	45.9
77.5°	36.0	35.5	34.6	33.7	34.2	33.7	34.2	33.7	35.1	36.4	35.5
80°	25.2	24.7	24.7	24.7	25.2	24.7	25.6	24.7	25.2	25.2	25.6
82.5°	18.0	18.4	18.4	18.0	18.4	18.0	18.4	18.4	18.4	18.0	18.4
85°	11.7	11.7	11.7	11.7	11.2	11.7	11.7	11.7	12.1	11.7	12.1
87.5°	4.9	4.9	4.9	4.9	4.9	4.9	4.9	4.9	5.4	4.9	5.4
90°	9.6	9.8	10.1	10.4	10.7	11.0	10.7	10.4	10.1	9.8	9.6
92.5°	23.4	23.5	23.7	23.9	24.1	24.3	24.1	23.9	23.7	23.5	23.4
95°	38.5	38.6	38.8	39.0	39.2	39.4	39.2	39.0	38.8	38.6	38.5
97.5°	55.4	55.5	55.6	55.7	55.8	55.9	55.8	55.7	55.6	55.5	55.4
100°	74.2	74.3	74.5	74.7	74.9	75.1	74.9	74.7	74.5	74.3	74.2
102.5°	93.0	93.2	93.5	93.8	94.1	94.4	94.1	93.8	93.5	93.2	93.0
105°	112.2	112.4	112.7	113.0	113.3	113.6	113.3	113.0	112.7	112.4	112.2
107.5°	132.9	132.9	132.9	132.9	132.9	132.9	132.9	132.9	132.9	132.9	132.9
110°	155.3	155.3	155.2	155.1	155.0	154.9	155.0	155.1	155.2	155.3	155.3

TEST NUMBER: P1035933

CATALOG NUMBER: S125RDIW-B375D470UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	247.5°	250°	255°	260°	265°	270°	275°	280°	285°	290°	292.5°
112.5°	177.3	177.2	177.0	176.8	176.6	176.4	176.6	176.8	177.0	177.2	177.3
115°	199.8	199.7	199.6	199.5	199.4	199.3	199.4	199.5	199.6	199.7	199.8
117.5°	223.1	222.9	222.5	222.1	221.7	221.3	221.7	222.1	222.5	222.9	223.1
120°	246.0	245.8	245.4	245.0	244.6	244.2	244.6	245.0	245.4	245.8	246.0
122.5°	268.5	268.3	268.0	267.7	267.4	267.1	267.4	267.7	268.0	268.3	268.5
125°	290.5	290.4	290.3	290.2	290.1	290.0	290.1	290.2	290.3	290.4	290.5
127.5°	312.9	312.8	312.6	312.4	312.2	312.0	312.2	312.4	312.6	312.8	312.9
130°	334.9	334.8	334.6	334.4	334.2	334.0	334.2	334.4	334.6	334.8	334.9
132.5°	356.0	355.8	355.5	355.2	354.9	354.6	354.9	355.2	355.5	355.8	356.0
135°	378.0	377.8	377.4	376.9	376.5	376.1	376.5	376.9	377.4	377.8	378.0
137.5°	399.5	399.2	398.7	398.2	397.7	397.2	397.7	398.2	398.7	399.2	399.5
140°	419.7	419.4	418.9	418.4	417.9	417.4	417.9	418.4	418.9	419.4	419.7
142.5°	438.9	438.6	438.1	437.6	437.1	436.6	437.1	437.6	438.1	438.6	438.9
145°	457.2	457.1	456.8	456.5	456.2	455.9	456.2	456.5	456.8	457.1	457.2
147.5°	475.6	475.2	474.4	473.5	472.7	471.9	472.7	473.5	474.4	475.2	475.6
150°	491.1	491.0	490.8	490.6	490.4	490.2	490.4	490.6	490.8	491.0	491.1
152.5°	507.2	507.0	506.6	506.1	505.7	505.3	505.7	506.1	506.6	507.0	507.2
155°	521.8	521.5	521.0	520.5	520.0	519.5	520.0	520.5	521.0	521.5	521.8
157.5°	534.7	534.3	533.6	532.9	532.2	531.5	532.2	532.9	533.6	534.3	534.7
160°	546.1	545.8	545.3	544.8	544.3	543.8	544.3	544.8	545.3	545.8	546.1
162.5°	557.1	556.8	556.2	555.6	555.0	554.4	555.0	555.6	556.2	556.8	557.1
165°	566.3	566.0	565.4	564.7	564.1	563.5	564.1	564.7	565.4	566.0	566.3
167.5°	574.1	573.8	573.2	572.5	571.9	571.3	571.9	572.5	573.2	573.8	574.1
170°	580.5	580.1	579.4	578.7	578.0	577.3	578.0	578.7	579.4	580.1	580.5
172.5°	585.1	584.8	584.2	583.5	582.9	582.3	582.9	583.5	584.2	584.8	585.1
175°	588.3	587.9	587.2	586.5	585.8	585.1	585.8	586.5	587.2	587.9	588.3
177.5°	590.1	589.7	589.0	588.3	587.6	586.9	587.6	588.3	589.0	589.7	590.1
180°	588.7	588.7	588.7	588.7	588.7	588.7	588.7	588.7	588.7	588.7	588.7

TEST NUMBER: P1035933

CATALOG NUMBER: S125RDIW-B375D470UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	295°	300°	305°	310°	315°	320°	325°	330°	335°	337.5°	340°
0°	548.1	548.1	548.1	548.1	548.1	548.1	548.1	548.1	548.1	548.1	548.1
2.5°	518.4	520.6	518.8	517.5	521.1	522.9	522.9	526.0	529.2	531.9	532.3
5°	486.4	490.0	490.9	490.5	495.9	498.6	504.4	507.6	512.1	515.2	518.8
7.5°	457.2	462.1	462.6	463.5	471.6	476.1	481.0	489.1	495.4	499.9	504.0
10°	427.9	431.1	434.2	438.3	446.4	454.0	461.2	469.8	477.9	482.4	488.2
12.5°	405.9	408.1	411.7	414.4	423.0	429.7	439.2	450.9	462.6	466.2	473.4
15°	382.9	384.3	391.5	394.2	401.4	412.6	418.5	429.7	442.3	449.1	457.2
17.5°	356.4	364.5	369.0	372.1	381.1	390.1	399.6	411.3	427.5	433.8	439.6
20°	337.5	343.3	348.3	352.3	360.4	373.9	382.5	391.9	407.2	414.4	423.0
22.5°	320.8	325.8	330.3	334.8	340.2	352.3	362.2	375.3	390.6	397.3	407.2
25°	305.1	310.0	312.7	318.1	325.3	333.9	345.6	357.3	372.6	380.2	389.7
27.5°	289.8	294.7	299.7	304.2	309.1	317.2	325.3	340.2	355.9	364.9	373.0
30°	276.7	279.0	283.5	288.4	293.4	301.0	310.5	320.8	338.8	346.9	356.8
32.5°	262.3	266.4	269.5	273.1	279.4	285.7	294.3	307.3	321.7	329.4	340.2
35°	248.8	252.4	254.7	261.0	265.0	271.8	280.3	292.0	304.2	312.7	322.2
37.5°	235.8	239.4	242.1	245.7	251.1	256.9	265.9	274.5	288.9	296.1	306.9
40°	222.3	225.4	228.6	232.6	237.6	244.8	250.2	261.0	272.7	280.8	288.9
42.5°	209.2	211.0	214.6	219.1	224.1	230.4	238.0	246.6	258.3	265.5	272.7
45°	195.3	198.4	202.5	205.6	210.1	216.4	223.2	230.8	242.5	249.7	257.4
47.5°	182.2	184.5	187.2	192.1	198.0	202.5	209.7	216.9	227.7	234.4	241.6
50°	168.7	171.0	175.0	178.2	182.7	188.5	195.3	202.9	213.3	217.8	225.0
52.5°	156.1	157.0	161.1	164.2	168.7	175.5	180.9	187.6	197.5	202.5	209.7
55°	143.5	144.4	146.7	149.8	154.8	160.2	166.0	173.7	182.2	186.7	193.5
57.5°	130.5	131.4	133.6	135.9	140.8	145.8	152.5	158.8	167.4	171.4	177.7
60°	117.4	117.4	119.7	122.8	126.4	130.9	136.8	144.4	150.7	155.7	160.2
62.5°	103.5	104.8	106.2	108.4	112.5	117.9	122.8	128.2	135.9	139.5	143.5
65°	89.5	90.9	93.6	95.8	99.0	102.6	108.9	113.4	119.2	123.3	126.9
67.5°	77.4	78.7	80.5	83.2	85.5	89.5	94.0	98.5	104.8	107.5	110.2
70°	64.8	66.1	67.5	71.1	73.3	76.5	79.6	84.1	89.5	91.3	93.6
72.5°	54.9	55.3	57.1	58.0	61.2	63.9	67.5	70.2	74.2	76.5	78.3
75°	46.3	46.3	46.8	47.7	49.5	51.3	54.0	56.7	60.3	61.6	63.9
77.5°	36.4	37.8	37.3	38.2	39.1	40.0	42.3	44.1	47.7	48.6	49.5
80°	26.1	26.5	27.9	29.2	29.2	30.6	31.9	32.4	34.6	36.0	36.0
82.5°	18.9	19.3	18.9	19.3	19.8	20.2	21.6	23.4	23.4	23.8	24.7
85°	11.7	11.7	12.1	12.6	12.6	12.1	13.0	12.6	13.0	13.9	13.9
87.5°	5.8	5.4	5.4	5.4	5.4	5.4	5.8	5.4	5.8	5.8	5.8
90°	9.3	8.8	8.3	7.8	7.3	6.6	5.9	5.2	4.5	4.1	3.7
92.5°	23.0	22.3	21.6	20.9	20.2	19.3	18.3	17.4	16.5	16.0	15.7
95°	38.1	37.4	36.7	36.0	35.3	34.3	33.3	32.2	31.2	30.7	30.6
97.5°	55.1	54.5	53.9	53.3	52.7	51.3	49.9	48.4	47.0	46.3	46.2
100°	73.7	72.8	71.9	71.0	70.1	68.8	67.4	66.1	64.8	64.1	64.1
102.5°	92.5	91.5	90.4	89.4	88.4	87.9	87.4	86.9	86.4	86.1	85.8
105°	111.9	111.3	110.7	110.1	109.5	108.9	108.3	107.6	107.0	106.7	106.5
107.5°	132.7	132.4	132.1	131.8	131.5	131.0	130.5	130.0	129.5	129.2	128.9
110°	155.1	154.8	154.5	154.2	153.9	153.6	153.3	153.0	152.7	152.6	152.3

TEST NUMBER: P1035933

CATALOG NUMBER: S125RDIW-B375D470UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	295°	300°	305°	310°	315°	320°	325°	330°	335°	337.5°	340°
112.5°	177.2	177.1	177.0	176.9	176.8	176.4	176.0	175.6	175.2	175.0	174.9
115°	199.8	199.9	200.0	200.1	200.2	200.0	199.8	199.6	199.4	199.3	199.1
117.5°	223.1	223.0	222.9	222.8	222.7	222.5	222.3	222.0	221.8	221.7	221.7
120°	246.0	246.0	246.0	246.0	246.0	245.9	245.8	245.7	245.6	245.6	245.3
122.5°	268.5	268.6	268.7	268.8	268.9	268.6	268.3	268.0	267.7	267.6	267.5
125°	290.6	290.8	291.0	291.2	291.4	291.3	291.2	291.1	291.0	290.9	290.6
127.5°	313.0	313.1	313.2	313.3	313.4	313.3	313.2	313.1	313.0	312.9	312.7
130°	335.0	335.1	335.2	335.3	335.4	335.2	335.0	334.8	334.6	334.5	334.2
132.5°	356.0	356.1	356.2	356.3	356.4	356.5	356.6	356.7	356.8	356.9	356.4
135°	378.0	378.0	378.0	378.0	378.0	377.9	377.8	377.7	377.6	377.5	377.2
137.5°	399.5	399.4	399.3	399.2	399.1	398.9	398.7	398.4	398.2	398.1	397.8
140°	419.6	419.4	419.2	419.0	418.8	418.5	418.2	417.9	417.6	417.4	417.1
142.5°	438.9	438.8	438.7	438.6	438.5	438.1	437.7	437.2	436.8	436.6	436.4
145°	457.2	457.2	457.2	457.2	457.2	456.9	456.6	456.3	456.0	455.9	455.7
147.5°	475.4	475.1	474.8	474.5	474.2	474.0	473.8	473.6	473.4	473.3	473.1
150°	491.1	491.1	491.1	491.1	491.1	490.7	490.3	489.9	489.5	489.3	489.4
152.5°	507.0	506.7	506.4	506.1	505.8	505.7	505.6	505.5	505.4	505.3	505.2
155°	521.6	521.2	520.8	520.4	520.0	519.9	519.8	519.7	519.6	519.5	519.5
157.5°	534.5	534.1	533.6	533.2	532.8	532.7	532.6	532.5	532.4	532.4	532.5
160°	545.9	545.5	545.1	544.7	544.3	544.2	544.1	544.0	543.9	543.8	544.0
162.5°	556.8	556.3	555.8	555.3	554.8	554.8	554.8	554.8	554.8	554.8	554.9
165°	566.1	565.7	565.2	564.8	564.4	564.3	564.2	564.1	564.0	564.0	564.1
167.5°	573.8	573.2	572.5	571.9	571.3	571.3	571.3	571.3	571.3	571.3	571.5
170°	580.2	579.6	578.9	578.3	577.7	577.7	577.7	577.7	577.7	577.7	577.9
172.5°	584.8	584.2	583.5	582.9	582.3	582.3	582.3	582.3	582.3	582.3	582.5
175°	588.0	587.4	586.7	586.1	585.5	585.5	585.5	585.5	585.5	585.5	585.7
177.5°	589.8	589.2	588.6	588.0	587.4	587.5	587.6	587.7	587.8	587.8	588.0
180°	588.7	588.7	588.7	588.7	588.7	588.7	588.7	588.7	588.7	588.7	588.7

TEST NUMBER: P1035933

CATALOG NUMBER: S125RDIW-B375D470UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	345°	350°	355°	360°
0°	548.1	548.1	548.1	548.1
2.5°	535.5	539.5	543.6	548.5
5°	524.7	531.9	539.5	546.7
7.5°	513.0	523.3	533.2	543.6
10°	499.9	513.0	524.2	538.6
12.5°	485.5	499.5	515.2	531.4
15°	471.1	488.7	505.3	523.8
17.5°	457.6	474.3	492.7	514.8
20°	441.4	459.9	480.6	504.0
22.5°	424.3	444.6	467.1	492.3
25°	409.9	430.6	452.2	478.8
27.5°	394.2	415.8	436.9	465.3
30°	376.2	399.6	421.2	450.4
32.5°	359.1	382.5	406.3	433.8
35°	342.4	365.4	389.2	417.1
37.5°	326.7	347.4	370.8	396.0
40°	311.8	330.7	351.4	374.4
42.5°	292.9	315.0	334.3	351.0
45°	276.7	294.7	312.7	326.2
47.5°	257.8	275.8	291.1	301.9
50°	242.1	256.5	269.1	278.5
52.5°	223.2	236.7	247.0	254.2
55°	204.7	216.4	225.4	230.4
57.5°	188.1	195.7	202.5	207.0
60°	169.6	175.5	181.3	186.3
62.5°	149.8	156.1	159.3	164.7
65°	132.3	136.3	141.3	143.1
67.5°	115.2	117.4	120.6	124.2
70°	97.2	98.5	101.7	106.6
72.5°	81.4	82.8	85.0	86.8
75°	64.8	66.1	67.9	69.7
77.5°	50.8	51.3	52.2	54.0
80°	36.9	38.2	39.1	39.6
82.5°	25.6	26.1	26.1	26.5
85°	16.2	15.3	15.3	15.7
87.5°	5.8	6.7	6.7	7.6
90°	2.9	2.1	1.3	0.5
92.5°	15.2	14.7	14.2	13.7
95°	30.4	30.2	30.0	29.8
97.5°	46.1	46.0	45.9	45.8
100°	64.1	64.1	64.1	64.1
102.5°	85.3	84.8	84.3	83.8
105°	106.0	105.5	105.0	104.5
107.5°	128.4	127.9	127.4	126.9
110°	151.8	151.3	150.8	150.3

TEST NUMBER: P1035933

CATALOG NUMBER: S125RDIW-B375D470UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	345°	350°	355°	360°
112.5°	174.7	174.5	174.3	174.1
115°	198.7	198.3	197.9	197.5
117.5°	221.6	221.5	221.4	221.3
120°	244.8	244.3	243.8	243.3
122.5°	267.4	267.3	267.2	267.1
125°	290.0	289.4	288.8	288.2
127.5°	312.4	312.1	311.8	311.5
130°	333.7	333.2	332.7	332.2
132.5°	355.5	354.6	353.7	352.8
135°	376.6	376.0	375.4	374.8
137.5°	397.2	396.6	396.0	395.4
140°	416.6	416.1	415.6	415.1
142.5°	436.0	435.6	435.2	434.8
145°	455.3	454.8	454.4	454.0
147.5°	472.8	472.5	472.2	471.9
150°	489.5	489.6	489.7	489.8
152.5°	505.0	504.8	504.6	504.4
155°	519.5	519.5	519.5	519.5
157.5°	532.7	532.9	533.1	533.3
160°	544.3	544.6	544.9	545.2
162.5°	555.1	555.3	555.5	555.7
165°	564.3	564.5	564.7	564.9
167.5°	571.9	572.3	572.7	573.1
170°	578.3	578.8	579.2	579.6
172.5°	582.9	583.3	583.7	584.1
175°	586.1	586.6	587.0	587.4
177.5°	588.4	588.8	589.2	589.6
180°	588.7	588.7	588.7	588.7

(END OF REPORT)