

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1036086

Luminaire Tested: S125RDIW-B850D1340UB27-4F0-XX-W2A-A

Issue Date: 5/7/2025

Test Information

Test Method: LM-79-2019
Report Number: P1036086
REPORT IS A COMBINATION OF REPORTS P1006843 AND P1007351
Test Lab: INNOVATION CENTER
Issue Date: 5/7/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S125RDIW-B850D1340UB27-4F0-XX-W2A-A
Description: Define 5 Regressed Direct/Indirect Wall Mount with 2700K BioUP LEDs {m-DER=0.473}
{m-EER=0.52}
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 8590.0 lumens
Efficiency: N/A
Efficacy: 110.1 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.4 / 1.47
Luminous Opening: Rectangular w/ Sides (W: 0.42' x L: 4' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 78
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1036086

CATALOG NUMBER: S125RDIW-B850D1340UB27-4F0-XX-W2A-A

Luminous Intensity Polar Plot

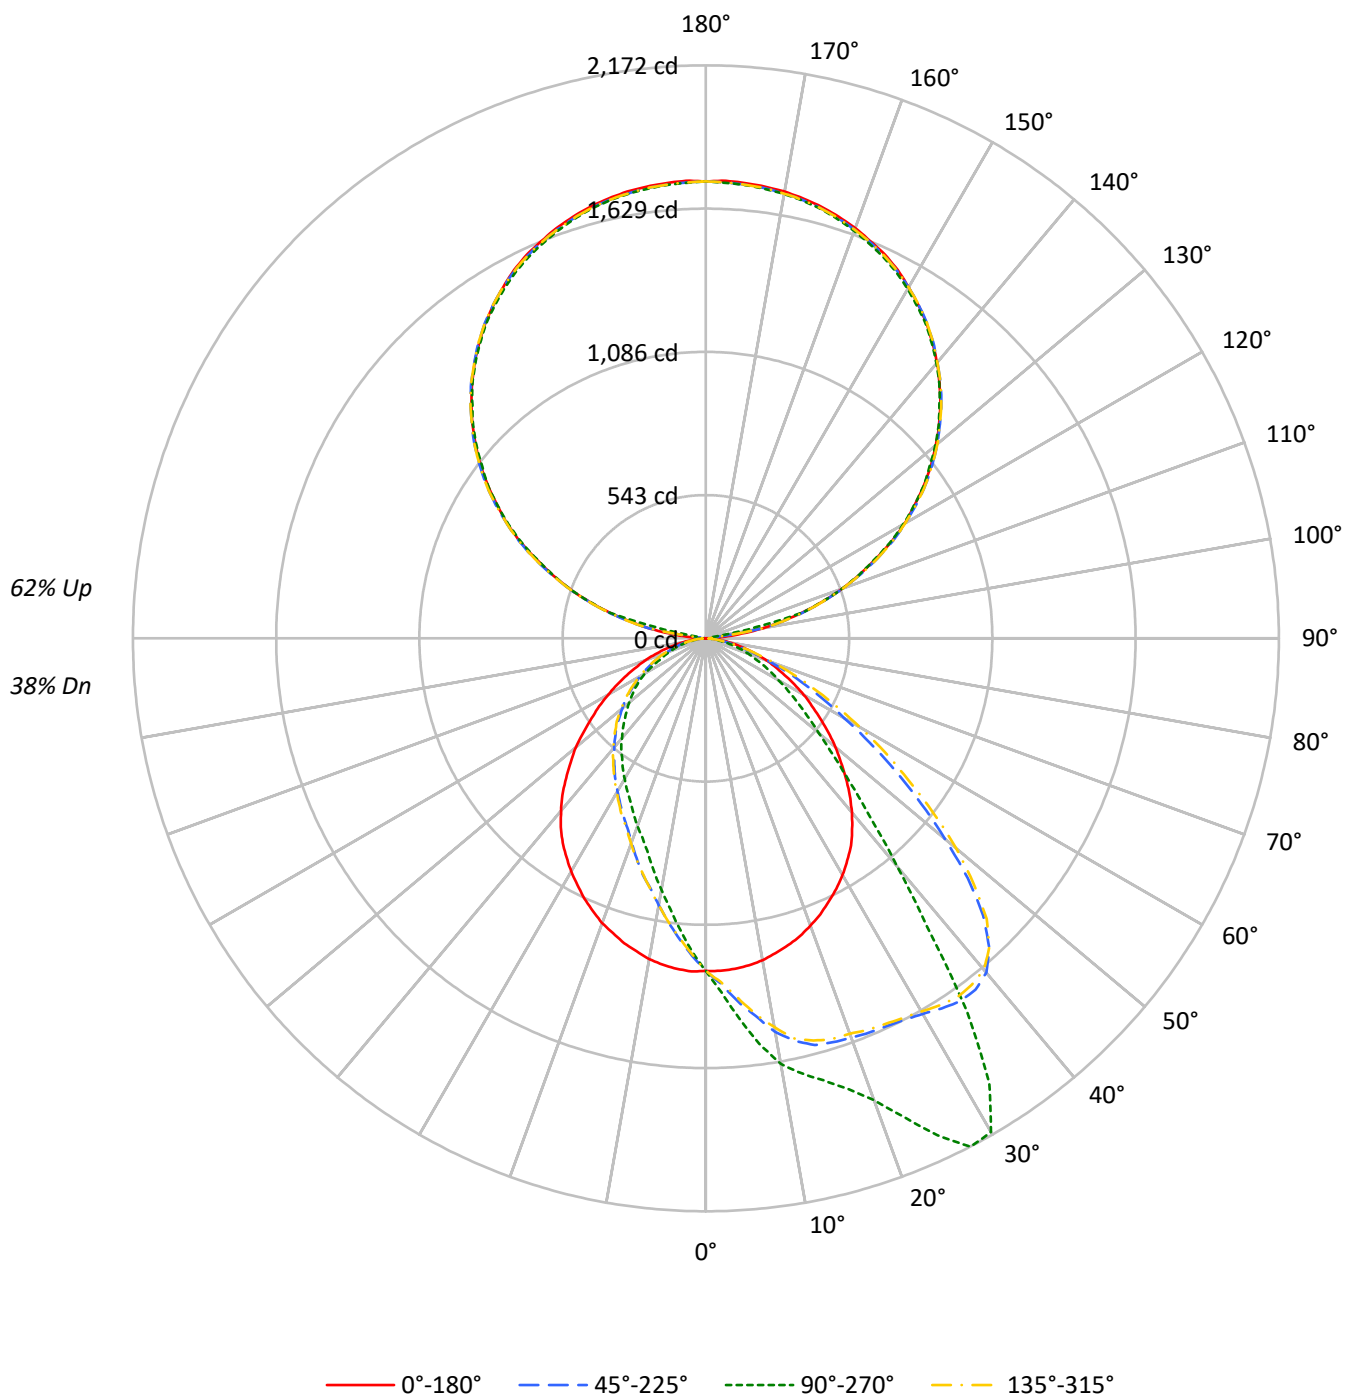

TEST NUMBER: P1036086

CATALOG NUMBER: S125RDIW-B850D1340UB27-4F0-XX-W2A-A

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	104	104	104	104	95	95	95	95	77	77	77	60	60	60	45	45	45	38		
1	95	91	88	84	87	83	80	77	68	66	64	53	52	51	40	40	39	33		
2	87	80	74	69	79	73	68	64	60	56	53	47	45	43	36	34	33	28		
3	80	71	64	58	72	64	58	54	53	48	45	42	39	37	32	30	28	24		
4	73	63	55	49	66	57	51	46	47	42	38	38	34	31	29	27	25	21		
5	67	56	48	42	61	51	44	39	42	37	33	34	30	27	26	24	22	18		
6	62	50	42	37	56	46	39	34	38	33	29	31	27	24	24	21	19	16		
7	57	45	37	32	52	41	35	30	34	29	25	28	24	21	22	19	17	14		
8	53	41	33	28	48	38	31	26	31	26	23	25	22	19	20	17	15	13		
9	49	37	30	25	45	34	28	23	29	24	20	23	20	17	18	16	14	12		
10	46	34	27	22	42	31	25	21	26	21	18	21	18	15	17	14	12	10		

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	8077	8077	8077	8077
5°	8070	9103	8070	6997
10°	8025	10230	7998	6049
15°	7938	10823	7883	5266
20°	7832	11683	7762	4760
25°	7695	13224	7609	4320
30°	7556	14056	7443	4005
35°	7375	11560	7272	3712
40°	7054	7850	6995	3449
45°	6634	5643	6624	3189
50°	6202	4340	6232	2949
55°	5715	3529	5704	2718
60°	5263	2892	5237	2413
65°	4735	2410	4766	1942
70°	4300	1934	4282	1617
75°	3632	1465	3632	1329
80°	2944	893	2908	893
85°	2070	470	2013	531

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 135°

Vertical Angle: 45°

Luminance: 11497 cd/sqm

TEST NUMBER: P1036086

CATALOG NUMBER: S125RDIW-B850D1340UB27-4F0-XX-W2A-A

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	120.9	1.4
10°-20°	354.4	4.1
20°-30°	561.9	6.5
30°-40°	679.0	7.9
40°-50°	604.6	7.0
50°-60°	463.6	5.4
60°-70°	301.1	3.5
70°-80°	146.1	1.7
80°-90°	36.9	0.4
90°-100°	58.8	0.7
100°-110°	391.0	4.6
110°-120°	704.1	8.2
120°-130°	903.7	10.5
130°-140°	972.0	11.3
140°-150°	912.2	10.6
150°-160°	737.9	8.6
160°-170°	477.2	5.6
170°-180°	164.6	1.9
0°-30°	1037.2	12.1
0°-40°	1716.3	20.0
0°-60°	2784.4	32.4
0°-90°	3268.6	38.1
90°-120°	1153.8	13.4
90°-150°	3941.7	45.9
90°-180°	5321.0	61.9
0°-180°	8590.0	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1261	1261	1261	1261	1261	
5°	1258	1445	1258	1110	1258	119
15°	1205	1736	1196	845	1205	340
25°	1101	2078	1089	679	1101	508
35°	959	1724	946	554	959	597
45°	750	771	749	436	750	579
55°	530	423	529	326	530	475
65°	329	240	331	194	329	329
75°	160	112	160	101	160	172
85°	36	24	35	27	36	41
90°	1	31	1	31	1	6
95°	73	27	73	27	73	90
105°	378	381	378	381	378	400
115°	709	704	709	704	709	703
125°	1008	1008	1008	1008	1008	900
135°	1257	1252	1257	1252	1257	969
145°	1458	1454	1458	1454	1458	912
155°	1605	1594	1605	1594	1605	740
165°	1694	1685	1694	1685	1694	478
175°	1732	1725	1732	1725	1732	165
180°	1732	1732	1732	1732	1732	

TEST NUMBER: P1036086

CATALOG NUMBER: S125RDIW-B850D1340UB27-4F0-XX-W2A-A

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
0°	1260.6	1260.6	1260.6	1260.6	1260.6	1260.6	1260.6	1260.6	1260.6	1260.6	1260.6
2.5°	1261.7	1272.0	1275.1	1283.4	1292.7	1294.8	1299.9	1307.2	1311.3	1310.3	1310.3
5°	1257.5	1275.1	1287.5	1302.0	1319.6	1326.9	1333.1	1348.6	1361.0	1368.3	1380.7
7.5°	1250.3	1276.1	1296.8	1318.6	1345.5	1357.9	1371.4	1393.1	1415.9	1430.4	1443.8
10°	1238.9	1272.0	1301.0	1333.1	1369.3	1387.9	1404.5	1437.6	1465.5	1484.2	1515.2
12.5°	1222.3	1263.7	1304.1	1346.5	1392.1	1411.7	1434.5	1470.7	1510.0	1537.0	1562.8
15°	1204.7	1254.4	1297.9	1348.6	1403.4	1433.5	1462.4	1500.7	1535.9	1565.9	1596.0
17.5°	1184.0	1236.8	1290.6	1348.6	1410.7	1440.7	1465.5	1511.1	1548.3	1578.4	1605.3
20°	1159.2	1218.2	1279.2	1343.4	1406.6	1434.5	1458.3	1508.0	1541.1	1573.2	1611.5
22.5°	1132.3	1196.4	1261.7	1324.8	1386.9	1416.9	1444.8	1488.3	1524.5	1568.0	1617.7
25°	1101.2	1171.6	1237.8	1301.0	1360.0	1387.9	1412.8	1460.4	1511.1	1565.9	1621.8
27.5°	1070.2	1138.5	1202.7	1260.6	1324.8	1350.7	1375.5	1435.5	1495.6	1553.5	1630.1
30°	1036.0	1105.4	1161.3	1215.1	1277.2	1304.1	1335.1	1403.4	1471.8	1550.4	1643.6
32.5°	997.7	1060.9	1112.6	1168.5	1224.4	1257.5	1296.8	1371.4	1450.0	1544.2	1663.2
35°	959.4	1010.1	1057.8	1110.5	1177.8	1213.0	1251.3	1330.0	1428.3	1541.1	1679.8
37.5°	910.8	959.4	996.7	1050.5	1119.9	1161.3	1199.6	1290.6	1402.4	1533.9	1678.8
40°	861.1	902.5	937.7	993.6	1069.1	1107.4	1148.8	1248.2	1375.5	1513.2	1653.9
42.5°	807.3	842.5	880.8	934.6	1008.1	1045.3	1092.9	1208.9	1338.2	1484.2	1589.7
45°	750.4	784.5	816.6	872.5	946.0	986.3	1038.1	1157.1	1292.7	1423.1	1486.2
47.5°	694.5	724.5	758.6	807.3	881.8	926.3	979.1	1106.4	1231.6	1341.3	1346.5
50°	640.7	664.5	693.4	743.1	820.7	863.2	918.0	1037.1	1159.2	1234.7	1184.0
52.5°	584.8	606.5	636.5	680.0	752.4	802.1	849.7	968.8	1071.2	1121.9	1028.8
55°	529.9	548.5	579.6	628.2	691.4	729.7	778.3	889.1	979.1	980.1	878.7
57.5°	476.1	492.7	518.5	562.0	621.0	665.5	710.0	806.3	867.3	849.7	736.9
60°	428.5	438.8	462.6	505.1	559.9	592.0	639.6	720.4	760.7	728.6	607.5
62.5°	378.8	389.2	407.8	441.9	493.7	527.8	557.9	624.1	652.0	603.4	504.0
65°	329.1	341.5	355.0	381.9	430.6	453.3	480.2	528.9	555.8	498.9	413.0
67.5°	285.7	291.9	305.3	333.3	367.4	388.1	406.8	439.9	445.0	399.5	329.1
70°	245.3	247.4	259.8	276.3	302.2	314.6	330.2	349.8	349.8	312.6	256.7
72.5°	199.8	202.9	212.2	229.8	245.3	251.5	256.7	269.1	267.0	232.9	194.6
75°	160.4	162.5	169.7	178.0	184.2	195.6	199.8	197.7	196.6	167.7	145.9
77.5°	124.2	125.2	130.4	137.7	138.7	142.8	139.7	139.7	130.4	113.8	102.5
80°	91.1	92.1	94.2	96.3	96.3	96.3	96.3	91.1	84.9	74.5	71.4
82.5°	61.1	61.1	62.1	64.2	63.1	61.1	59.0	53.8	49.7	46.6	44.5
85°	36.2	36.2	37.3	36.2	32.1	31.0	29.0	27.9	26.9	25.9	25.9
87.5°	17.6	16.6	14.5	12.4	12.4	12.4	12.4	12.4	12.4	11.4	11.4
90°	1.3	3.6	5.9	8.2	10.5	11.6	12.6	14.6	16.5	18.5	20.5
92.5°	24.4	21.8	19.2	16.7	14.1	12.8	13.7	15.4	17.1	18.8	20.5
95°	73.2	72.3	71.5	70.6	69.7	69.3	63.9	53.0	42.2	31.3	20.5
97.5°	137.4	139.1	140.8	142.5	144.2	145.1	131.5	104.4	77.3	50.2	23.1
100°	214.5	215.3	216.2	217.0	217.9	218.3	218.9	220.0	221.1	222.3	223.4
102.5°	292.8	293.9	295.1	296.2	297.3	297.9	298.2	298.8	299.3	299.9	300.5
105°	377.5	378.7	379.8	381.0	382.1	382.7	382.7	382.7	382.7	382.7	382.7
107.5°	464.9	464.9	464.9	464.9	464.9	464.9	465.2	465.7	466.3	466.8	467.4
110°	549.6	549.6	549.6	549.6	549.6	549.6	549.9	550.5	551.0	551.6	552.2

TEST NUMBER: P1036086

CATALOG NUMBER: S125RDIW-B850D1340UB27-4F0-XX-W2A-A

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
112.5°	629.2	630.1	630.9	631.8	632.7	633.1	633.2	633.5	633.8	634.1	634.4
115°	708.9	710.3	711.7	713.2	714.6	715.3	715.4	715.7	716.0	716.3	716.6
117.5°	792.3	792.3	792.3	792.3	792.3	792.3	792.9	794.0	795.2	796.3	797.5
120°	869.4	869.1	868.8	868.5	868.2	868.1	868.5	869.4	870.3	871.1	872.0
122.5°	937.4	938.8	940.3	941.7	943.2	943.9	944.0	944.3	944.6	944.9	945.2
125°	1008.1	1010.1	1012.1	1014.1	1016.1	1017.1	1017.1	1017.1	1017.1	1017.1	1017.1
127.5°	1076.1	1077.5	1079.0	1080.4	1081.9	1082.6	1082.5	1082.2	1081.9	1081.6	1081.3
130°	1137.8	1139.2	1140.6	1142.1	1143.5	1144.2	1144.3	1144.6	1144.9	1145.2	1145.5
132.5°	1199.4	1201.1	1202.8	1204.5	1206.2	1207.1	1206.7	1205.8	1205.0	1204.1	1203.3
135°	1257.2	1258.9	1260.6	1262.3	1264.0	1264.9	1264.6	1264.0	1263.5	1262.9	1262.3
137.5°	1311.1	1312.8	1314.6	1316.3	1318.0	1318.9	1318.6	1318.0	1317.5	1316.9	1316.3
140°	1363.8	1364.4	1365.0	1365.5	1366.1	1366.4	1366.3	1366.0	1365.7	1365.4	1365.1
142.5°	1411.3	1411.6	1411.9	1412.2	1412.5	1412.6	1412.9	1413.5	1414.0	1414.6	1415.2
145°	1457.5	1458.1	1458.7	1459.2	1459.8	1460.1	1460.1	1460.1	1460.1	1460.1	1460.1
147.5°	1498.6	1498.6	1498.6	1498.6	1498.6	1498.6	1498.7	1499.0	1499.3	1499.6	1499.9
150°	1537.2	1536.6	1536.0	1535.5	1534.9	1534.6	1534.9	1535.5	1536.0	1536.6	1537.2
152.5°	1574.4	1573.0	1571.6	1570.1	1568.7	1568.0	1568.3	1568.8	1569.4	1569.9	1570.5
155°	1605.2	1603.5	1601.8	1600.1	1598.4	1597.5	1597.8	1598.4	1598.9	1599.5	1600.1
157.5°	1629.6	1628.8	1627.9	1627.1	1626.2	1625.8	1625.8	1625.8	1625.8	1625.8	1625.8
160°	1655.3	1653.6	1651.9	1650.2	1648.5	1647.6	1647.7	1648.0	1648.3	1648.6	1648.9
162.5°	1675.9	1674.2	1672.4	1670.7	1669.0	1668.1	1668.2	1668.5	1668.8	1669.1	1669.4
165°	1693.8	1692.1	1690.4	1688.7	1687.0	1686.1	1686.2	1686.5	1686.8	1687.1	1687.4
167.5°	1708.0	1706.3	1704.6	1702.9	1701.2	1700.3	1700.4	1700.7	1701.0	1701.2	1701.5
170°	1719.5	1717.5	1715.5	1713.5	1711.5	1710.5	1710.6	1710.9	1711.2	1711.5	1711.8
172.5°	1727.2	1725.2	1723.2	1721.2	1719.2	1718.2	1718.5	1719.1	1719.6	1720.2	1720.8
175°	1732.4	1730.7	1729.0	1727.3	1725.6	1724.7	1724.8	1725.1	1725.4	1725.6	1725.9
177.5°	1736.2	1734.5	1732.8	1731.1	1729.4	1728.5	1728.6	1728.9	1729.2	1729.5	1729.8
180°	1732.4	1732.4	1732.4	1732.4	1732.4	1732.4	1732.4	1732.4	1732.4	1732.4	1732.4

TEST NUMBER: P1036086

CATALOG NUMBER: S125RDIW-B850D1340UB27-4F0-XX-W2A-A

CANDELA DISTRIBUTION (continued):

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°	95°
0°	1260.6	1260.6	1260.6	1260.6	1260.6	1260.6	1260.6	1260.6	1260.6	1260.6	1260.6
2.5°	1315.5	1322.7	1328.9	1325.8	1338.2	1337.2	1339.3	1343.4	1344.5	1342.4	1338.2
5°	1386.9	1397.2	1414.8	1424.1	1422.1	1430.4	1434.5	1440.7	1446.9	1444.8	1444.8
7.5°	1466.6	1481.1	1498.7	1522.5	1525.6	1532.8	1545.2	1545.2	1552.5	1549.4	1548.3
10°	1535.9	1553.5	1581.5	1600.1	1608.4	1612.5	1624.9	1629.1	1637.4	1638.4	1638.4
12.5°	1592.8	1623.9	1642.5	1661.2	1665.3	1671.5	1680.8	1687.0	1690.1	1690.1	1687.0
15°	1622.9	1647.7	1669.4	1689.1	1700.5	1705.7	1715.0	1722.2	1726.4	1735.7	1737.7
17.5°	1635.3	1665.3	1700.5	1728.4	1748.1	1753.3	1771.9	1778.1	1786.4	1790.5	1795.7
20°	1652.9	1696.3	1738.8	1772.9	1791.6	1805.0	1824.7	1853.7	1861.9	1861.9	1858.8
22.5°	1668.4	1724.3	1782.3	1837.1	1852.6	1879.5	1915.8	1946.8	1959.2	1964.4	1960.3
25°	1687.0	1763.6	1839.2	1907.5	1949.9	1969.6	2018.2	2055.5	2070.0	2078.3	2080.3
27.5°	1719.1	1815.4	1911.6	1998.6	2042.0	2064.8	2115.5	2147.6	2165.2	2172.4	2167.3
30°	1755.3	1873.3	1985.1	2062.7	2091.7	2119.7	2152.8	2165.2	2161.1	2161.1	2176.6
32.5°	1792.6	1914.7	2014.1	2064.8	2075.2	2071.0	2057.6	2020.3	1998.6	1998.6	2012.0
35°	1813.3	1918.9	1969.6	1953.0	1912.7	1888.9	1815.4	1774.0	1727.4	1724.3	1739.8
37.5°	1801.9	1847.5	1826.8	1718.1	1663.2	1617.7	1502.8	1457.3	1423.1	1375.5	1449.0
40°	1722.2	1706.7	1599.1	1442.8	1381.7	1317.5	1226.5	1180.9	1133.3	1126.1	1143.7
42.5°	1587.7	1495.6	1338.2	1187.1	1125.0	1079.5	1010.1	965.6	935.6	923.2	943.9
45°	1420.0	1275.1	1117.8	997.7	929.4	905.6	842.5	803.2	780.4	771.1	785.6
47.5°	1215.1	1069.1	920.1	818.7	778.3	754.5	712.1	677.9	658.3	652.0	658.3
50°	1031.9	881.8	756.6	691.4	655.1	635.5	600.3	578.6	563.0	558.9	569.2
52.5°	873.5	736.9	641.7	583.7	559.9	543.4	518.5	499.9	490.6	486.4	493.7
55°	731.7	621.0	544.4	494.7	477.1	466.8	445.0	434.7	424.3	423.3	430.6
57.5°	606.5	529.9	459.5	424.3	419.2	403.6	385.0	375.7	370.5	369.5	372.6
60°	505.1	436.8	394.3	363.3	356.0	343.6	333.3	327.1	320.8	318.8	320.8
62.5°	420.2	366.4	332.2	311.5	301.2	298.1	286.7	279.4	278.4	278.4	280.5
65°	346.7	301.2	279.4	262.9	255.6	252.5	244.3	239.1	240.1	240.1	241.2
67.5°	282.6	249.4	229.8	221.5	215.3	214.2	206.0	203.9	201.8	201.8	203.9
70°	224.6	203.9	189.4	185.3	184.2	177.0	173.9	172.8	169.7	170.8	170.8
72.5°	175.9	162.5	154.2	148.0	149.0	144.9	140.8	140.8	138.7	141.8	141.8
75°	130.4	124.2	118.0	115.9	118.0	115.9	112.8	111.8	112.8	111.8	111.8
77.5°	96.3	93.1	91.1	90.0	90.0	85.9	83.8	85.9	81.8	83.8	83.8
80°	67.3	63.1	62.1	60.0	61.1	58.0	59.0	56.9	56.9	56.9	56.9
82.5°	42.4	41.4	41.4	41.4	40.4	40.4	40.4	40.4	40.4	40.4	39.3
85°	25.9	24.8	24.8	24.8	23.8	23.8	23.8	23.8	23.8	23.8	23.8
87.5°	10.3	11.4	11.4	12.4	11.4	10.3	10.3	10.3	11.4	11.4	10.3
90°	21.9	23.4	24.8	26.3	27.0	27.4	28.3	29.1	30.0	30.8	30.0
92.5°	21.9	23.4	24.8	26.3	27.0	27.1	27.4	27.7	28.0	28.3	28.0
95°	21.9	23.4	24.8	26.3	27.0	27.0	27.0	27.0	27.0	27.0	27.0
97.5°	23.7	24.3	24.8	25.4	25.7	25.8	26.1	26.4	26.7	27.0	26.7
100°	180.9	138.4	95.9	53.4	32.1	31.5	30.4	29.3	28.1	27.0	28.1
102.5°	301.1	301.7	302.2	302.8	303.1	291.1	267.1	243.2	219.2	195.2	219.2
105°	382.7	382.7	382.7	382.7	382.7	382.6	382.3	382.0	381.7	381.4	381.7
107.5°	467.7	468.0	468.3	468.6	468.7	468.1	467.0	465.9	464.7	463.6	464.7
110°	551.3	550.5	549.6	548.7	548.3	548.4	548.7	549.0	549.3	549.6	549.3

TEST NUMBER: P1036086

CATALOG NUMBER: S125RDIW-B850D1340UB27-4F0-XX-W2A-A

CANDELA DISTRIBUTION (continued):

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°	95°
112.5°	633.2	632.1	630.9	629.8	629.2	628.9	628.4	627.8	627.3	626.7	627.3
115°	715.4	714.3	713.1	712.0	711.4	710.5	708.8	707.1	705.4	703.7	705.4
117.5°	795.8	794.1	792.4	790.7	789.8	789.5	788.9	788.4	787.8	787.2	787.8
120°	871.4	870.8	870.3	869.7	869.4	868.7	867.3	865.8	864.4	863.0	864.4
122.5°	944.6	944.0	943.5	942.9	942.6	941.7	940.0	938.3	936.6	934.9	936.6
125°	1015.9	1014.8	1013.6	1012.5	1011.9	1011.5	1010.6	1009.8	1008.9	1008.1	1008.9
127.5°	1080.7	1080.1	1079.6	1079.0	1078.7	1077.6	1075.3	1073.0	1070.7	1068.4	1070.7
130°	1144.6	1143.8	1142.9	1142.0	1141.6	1140.9	1139.5	1138.0	1136.6	1135.2	1136.6
132.5°	1203.3	1203.3	1203.3	1203.3	1203.3	1202.6	1201.2	1199.7	1198.3	1196.9	1198.3
135°	1261.7	1261.2	1260.6	1260.1	1259.8	1258.9	1257.2	1255.5	1253.8	1252.1	1253.8
137.5°	1316.3	1316.3	1316.3	1316.3	1316.3	1315.6	1314.2	1312.7	1311.3	1309.9	1311.3
140°	1365.7	1366.2	1366.8	1367.3	1367.6	1366.7	1365.0	1363.3	1361.6	1359.9	1361.6
142.5°	1415.2	1415.2	1415.2	1415.2	1415.2	1414.3	1412.6	1410.9	1409.2	1407.5	1409.2
145°	1460.4	1460.7	1461.0	1461.3	1461.4	1460.5	1458.8	1457.1	1455.4	1453.7	1455.4
147.5°	1500.2	1500.5	1500.8	1501.1	1501.2	1500.2	1498.2	1496.2	1494.2	1492.2	1494.2
150°	1537.8	1538.3	1538.9	1539.4	1539.7	1538.6	1536.3	1534.0	1531.8	1529.5	1531.8
152.5°	1571.1	1571.7	1572.2	1572.8	1573.1	1572.1	1570.1	1568.1	1566.1	1564.1	1566.1
155°	1600.9	1601.8	1602.6	1603.5	1603.9	1602.8	1600.5	1598.2	1596.0	1593.7	1596.0
157.5°	1626.6	1627.5	1628.3	1629.2	1629.6	1628.5	1626.2	1623.9	1621.6	1619.3	1621.6
160°	1650.0	1651.2	1652.3	1653.4	1654.0	1652.9	1650.6	1648.3	1646.0	1643.7	1646.0
162.5°	1671.1	1672.8	1674.5	1676.2	1677.1	1675.8	1673.3	1670.7	1668.2	1665.6	1668.2
165°	1689.1	1690.8	1692.5	1694.2	1695.1	1694.0	1691.7	1689.4	1687.1	1684.8	1687.1
167.5°	1703.5	1705.5	1707.5	1709.5	1710.5	1709.2	1706.7	1704.1	1701.6	1699.0	1701.6
170°	1714.1	1716.4	1718.7	1721.0	1722.1	1720.8	1718.2	1715.7	1713.1	1710.5	1713.1
172.5°	1722.8	1724.8	1726.8	1728.8	1729.8	1728.5	1725.9	1723.4	1720.8	1718.2	1720.8
175°	1728.2	1730.5	1732.8	1735.1	1736.2	1734.9	1732.4	1729.8	1727.3	1724.7	1727.3
177.5°	1731.8	1733.8	1735.8	1737.8	1738.8	1737.7	1735.4	1733.1	1730.8	1728.5	1730.8
180°	1732.4	1732.4	1732.4	1732.4	1732.4	1732.4	1732.4	1732.4	1732.4	1732.4	1732.4

TEST NUMBER: P1036086

CATALOG NUMBER: S125RDIW-B850D1340UB27-4F0-XX-W2A-A

CANDELA DISTRIBUTION (continued):

	100°	105°	110°	112.5°	115°	120°	125°	130°	135°	140°	145°
0°	1260.6	1260.6	1260.6	1260.6	1260.6	1260.6	1260.6	1260.6	1260.6	1260.6	1260.6
2.5°	1343.4	1336.2	1339.3	1336.2	1333.1	1330.0	1322.7	1312.4	1304.1	1297.9	1296.8
5°	1446.9	1437.6	1431.4	1428.3	1422.1	1413.8	1400.3	1384.8	1366.2	1358.9	1344.5
7.5°	1542.1	1539.0	1524.5	1522.5	1518.3	1502.8	1480.0	1459.3	1435.5	1415.9	1397.2
10°	1632.2	1624.9	1614.6	1600.1	1598.0	1578.4	1556.6	1527.6	1496.6	1478.0	1444.8
12.5°	1688.1	1679.8	1668.4	1659.1	1653.9	1641.5	1611.5	1582.5	1554.6	1520.4	1491.4
15°	1728.4	1718.1	1697.4	1690.1	1683.9	1667.4	1645.6	1615.6	1578.4	1554.6	1513.2
17.5°	1783.3	1770.9	1750.2	1736.7	1725.3	1699.5	1668.4	1628.0	1592.8	1565.9	1528.7
20°	1846.4	1827.8	1800.9	1783.3	1766.7	1736.7	1693.2	1645.6	1594.9	1561.8	1523.5
22.5°	1951.0	1915.8	1873.3	1848.5	1825.7	1774.0	1722.2	1663.2	1606.3	1556.6	1510.0
25°	2052.4	2017.2	1964.4	1930.3	1895.1	1835.0	1766.7	1685.0	1612.5	1554.6	1493.5
27.5°	2146.6	2110.3	2061.7	2020.3	1986.1	1896.1	1806.1	1713.9	1621.8	1542.1	1480.0
30°	2168.3	2152.8	2115.5	2079.3	2048.2	1965.4	1860.9	1744.0	1633.2	1530.7	1461.4
32.5°	2036.9	2075.2	2084.5	2079.3	2059.6	2000.6	1904.4	1781.2	1649.8	1525.6	1430.4
35°	1763.6	1833.0	1904.4	1942.7	1961.3	1969.6	1912.7	1799.8	1661.2	1517.3	1409.7
37.5°	1462.4	1529.7	1642.5	1699.5	1762.6	1845.4	1868.2	1795.7	1656.0	1511.1	1376.5
40°	1201.6	1287.5	1380.7	1432.4	1487.3	1636.3	1749.1	1740.9	1639.4	1488.3	1350.7
42.5°	978.1	1031.9	1113.6	1170.6	1237.8	1404.5	1555.6	1630.1	1589.7	1460.4	1317.5
45°	815.6	857.0	914.9	972.9	1014.3	1165.4	1344.5	1466.6	1504.9	1410.7	1266.8
47.5°	687.2	718.3	769.0	805.2	849.7	968.8	1124.0	1295.8	1376.5	1340.3	1213.0
50°	588.9	613.7	654.1	676.9	716.2	818.7	936.7	1116.8	1238.9	1243.0	1141.6
52.5°	503.0	527.8	562.0	581.7	605.5	674.8	793.8	946.0	1086.7	1138.5	1059.8
55°	437.8	452.3	480.2	495.8	517.5	584.8	660.3	789.7	936.7	1021.5	971.9
57.5°	377.8	393.3	410.9	423.3	438.8	492.7	561.0	658.3	804.2	896.3	879.7
60°	329.1	338.4	355.0	364.3	378.8	414.0	461.6	558.9	674.8	761.8	771.1
62.5°	283.6	291.9	303.3	311.5	320.8	348.8	384.0	453.3	554.8	648.9	661.4
65°	244.3	251.5	257.7	265.0	272.2	289.8	319.8	373.6	452.3	540.3	567.2
67.5°	209.1	211.1	220.5	221.5	225.6	239.1	260.8	304.3	361.2	431.6	466.8
70°	174.9	179.1	181.1	184.2	188.4	197.7	215.3	238.0	280.5	337.4	370.5
72.5°	141.8	142.8	145.9	148.0	152.1	159.4	167.7	185.3	212.2	253.6	283.6
75°	112.8	113.8	115.9	117.0	120.1	122.1	126.3	138.7	157.3	182.2	203.9
77.5°	84.9	86.9	89.0	89.0	90.0	92.1	94.2	98.3	107.6	124.2	142.8
80°	58.0	59.0	59.0	60.0	59.0	62.1	65.2	70.4	74.5	79.7	89.0
82.5°	40.4	40.4	40.4	41.4	41.4	42.4	42.4	43.5	44.5	47.6	51.7
85°	24.8	24.8	25.9	23.8	24.8	25.9	25.9	24.8	25.9	26.9	27.9
87.5°	10.3	10.3	11.4	11.4	11.4	11.4	10.3	11.4	10.3	11.4	11.4
90°	29.1	28.3	27.4	27.0	26.3	24.8	23.4	21.9	20.5	18.5	16.5
92.5°	27.7	27.4	27.1	27.0	26.3	24.8	23.4	21.9	20.5	18.8	17.1
95°	27.0	27.0	27.0	27.0	26.3	24.8	23.4	21.9	20.5	31.3	42.2
97.5°	26.4	26.1	25.8	25.7	25.4	24.8	24.3	23.7	23.1	50.2	77.3
100°	29.3	30.4	31.5	32.1	53.4	95.9	138.4	180.9	223.4	222.3	221.1
102.5°	243.2	267.1	291.1	303.1	302.8	302.2	301.7	301.1	300.5	299.9	299.3
105°	382.0	382.3	382.6	382.7	382.7	382.7	382.7	382.7	382.7	382.7	382.7
107.5°	465.9	467.0	468.1	468.7	468.6	468.3	468.0	467.7	467.4	466.8	466.3
110°	549.0	548.7	548.4	548.3	548.7	549.6	550.5	551.3	552.2	551.6	551.0

TEST NUMBER: P1036086

CATALOG NUMBER: S125RDIW-B850D1340UB27-4F0-XX-W2A-A

CANDELA DISTRIBUTION (continued):

	100°	105°	110°	112.5°	115°	120°	125°	130°	135°	140°	145°
112.5°	627.8	628.4	628.9	629.2	629.8	630.9	632.1	633.2	634.4	634.1	633.8
115°	707.1	708.8	710.5	711.4	712.0	713.1	714.3	715.4	716.6	716.3	716.0
117.5°	788.4	788.9	789.5	789.8	790.7	792.4	794.1	795.8	797.5	796.3	795.2
120°	865.8	867.3	868.7	869.4	869.7	870.3	870.8	871.4	872.0	871.1	870.3
122.5°	938.3	940.0	941.7	942.6	942.9	943.5	944.0	944.6	945.2	944.9	944.6
125°	1009.8	1010.6	1011.5	1011.9	1012.5	1013.6	1014.8	1015.9	1017.1	1017.1	1017.1
127.5°	1073.0	1075.3	1077.6	1078.7	1079.0	1079.6	1080.1	1080.7	1081.3	1081.6	1081.9
130°	1138.0	1139.5	1140.9	1141.6	1142.0	1142.9	1143.8	1144.6	1145.5	1145.2	1144.9
132.5°	1199.7	1201.2	1202.6	1203.3	1203.3	1203.3	1203.3	1203.3	1203.3	1204.1	1205.0
135°	1255.5	1257.2	1258.9	1259.8	1260.1	1260.6	1261.2	1261.7	1262.3	1262.9	1263.5
137.5°	1312.7	1314.2	1315.6	1316.3	1316.3	1316.3	1316.3	1316.3	1316.3	1316.9	1317.5
140°	1363.3	1365.0	1366.7	1367.6	1367.3	1366.8	1366.2	1365.7	1365.1	1365.4	1365.7
142.5°	1410.9	1412.6	1414.3	1415.2	1415.2	1415.2	1415.2	1415.2	1415.2	1414.6	1414.0
145°	1457.1	1458.8	1460.5	1461.4	1461.3	1461.0	1460.7	1460.4	1460.1	1460.1	1460.1
147.5°	1496.2	1498.2	1500.2	1501.2	1501.1	1500.8	1500.5	1500.2	1499.9	1499.6	1499.3
150°	1534.0	1536.3	1538.6	1539.7	1539.4	1538.9	1538.3	1537.8	1537.2	1536.6	1536.0
152.5°	1568.1	1570.1	1572.1	1573.1	1572.8	1572.2	1571.7	1571.1	1570.5	1569.9	1569.4
155°	1598.2	1600.5	1602.8	1603.9	1603.5	1602.6	1601.8	1600.9	1600.1	1599.5	1598.9
157.5°	1623.9	1626.2	1628.5	1629.6	1629.2	1628.3	1627.5	1626.6	1625.8	1625.8	1625.8
160°	1648.3	1650.6	1652.9	1654.0	1653.4	1652.3	1651.2	1650.0	1648.9	1648.6	1648.3
162.5°	1670.7	1673.3	1675.8	1677.1	1676.2	1674.5	1672.8	1671.1	1669.4	1669.1	1668.8
165°	1689.4	1691.7	1694.0	1695.1	1694.2	1692.5	1690.8	1689.1	1687.4	1687.1	1686.8
167.5°	1704.1	1706.7	1709.2	1710.5	1709.5	1707.5	1705.5	1703.5	1701.5	1701.2	1701.0
170°	1715.7	1718.2	1720.8	1722.1	1721.0	1718.7	1716.4	1714.1	1711.8	1711.5	1711.2
172.5°	1723.4	1725.9	1728.5	1729.8	1728.8	1726.8	1724.8	1722.8	1720.8	1720.2	1719.6
175°	1729.8	1732.4	1734.9	1736.2	1735.1	1732.8	1730.5	1728.2	1725.9	1725.6	1725.4
177.5°	1733.1	1735.4	1737.7	1738.8	1737.8	1735.8	1733.8	1731.8	1729.8	1729.5	1729.2
180°	1732.4	1732.4	1732.4	1732.4	1732.4	1732.4	1732.4	1732.4	1732.4	1732.4	1732.4

TEST NUMBER: P1036086

CATALOG NUMBER: S125RDIW-B850D1340UB27-4F0-XX-W2A-A

CANDELA DISTRIBUTION (continued):

	150°	155°	157.5°	160°	165°	170°	175°	180°	185°	190°	195°
0°	1260.6	1260.6	1260.6	1260.6	1260.6	1260.6	1260.6	1260.6	1260.6	1260.6	1260.6
2.5°	1293.7	1287.5	1283.4	1282.4	1276.1	1271.0	1264.8	1263.7	1260.6	1252.3	1247.2
5°	1334.1	1319.6	1316.5	1307.2	1291.7	1280.3	1265.8	1257.5	1248.2	1232.7	1220.3
7.5°	1375.5	1355.8	1341.3	1327.9	1306.2	1285.5	1264.8	1248.2	1231.6	1208.9	1190.2
10°	1415.9	1385.9	1368.3	1348.6	1318.6	1287.5	1258.5	1234.7	1207.8	1180.9	1154.0
12.5°	1453.1	1414.8	1389.0	1361.0	1323.8	1285.5	1248.2	1215.1	1187.1	1150.9	1120.9
15°	1475.9	1433.5	1407.6	1380.7	1324.8	1282.4	1238.9	1196.4	1159.2	1120.9	1092.9
17.5°	1489.4	1441.7	1412.8	1387.9	1331.0	1273.0	1217.1	1171.6	1131.2	1085.7	1048.4
20°	1483.1	1436.6	1409.7	1385.9	1319.6	1261.7	1201.6	1148.8	1098.1	1051.5	1012.2
22.5°	1469.7	1421.0	1391.0	1369.3	1310.3	1242.0	1175.7	1118.8	1066.0	1019.5	975.0
25°	1440.7	1393.1	1367.2	1340.3	1282.4	1217.1	1149.9	1088.8	1032.9	983.2	933.6
27.5°	1414.8	1356.9	1330.0	1306.2	1245.1	1187.1	1120.9	1053.6	996.7	944.9	895.3
30°	1384.8	1319.6	1290.6	1258.5	1203.7	1148.8	1082.6	1020.5	961.5	906.7	859.0
32.5°	1352.7	1277.2	1244.1	1207.8	1151.9	1100.2	1044.3	983.2	924.2	870.4	820.7
35°	1311.3	1230.6	1192.3	1158.2	1100.2	1048.4	996.7	946.0	887.0	830.1	782.5
37.5°	1272.0	1183.0	1142.6	1103.3	1042.2	992.6	950.1	902.5	845.6	790.7	745.2
40°	1227.5	1125.0	1083.6	1047.4	984.3	929.4	891.1	853.9	804.2	751.4	701.7
42.5°	1187.1	1071.2	1027.7	990.5	924.2	872.5	836.3	805.2	761.8	713.1	662.4
45°	1131.2	1013.3	968.8	929.4	862.1	813.5	776.2	749.3	715.2	669.6	624.1
47.5°	1079.5	957.4	908.7	861.1	800.0	750.4	716.2	695.5	672.7	632.4	585.8
50°	1016.4	893.2	843.5	804.2	734.8	692.4	658.3	643.8	623.1	584.8	547.5
52.5°	948.1	831.1	784.5	736.9	672.7	631.3	601.3	584.8	568.2	540.3	505.1
55°	868.4	761.8	718.3	675.8	611.7	573.4	546.5	528.9	519.6	493.7	467.8
57.5°	791.8	691.4	651.0	611.7	555.8	512.3	494.7	479.2	465.7	447.1	425.4
60°	714.1	623.1	579.6	544.4	495.8	456.4	441.9	426.4	416.1	401.6	386.1
62.5°	625.1	547.5	514.4	481.3	439.9	408.8	392.3	379.8	366.4	357.1	343.6
65°	530.9	476.1	444.0	419.2	379.8	351.9	339.5	331.2	319.8	310.5	300.1
67.5°	443.0	399.5	386.1	359.1	329.1	304.3	295.0	284.6	275.3	270.1	260.8
70°	358.1	327.1	313.6	306.4	273.2	256.7	248.4	244.3	232.9	227.7	221.5
72.5°	277.4	266.0	256.7	247.4	225.6	215.3	206.0	201.8	193.5	189.4	187.3
75°	204.9	197.7	192.5	191.5	182.2	171.8	162.5	160.4	154.2	150.1	148.0
77.5°	143.9	141.8	140.8	141.8	135.6	129.4	127.3	125.2	118.0	117.0	117.0
80°	94.2	99.4	99.4	98.3	96.3	95.2	92.1	90.0	85.9	84.9	85.9
82.5°	58.0	61.1	62.1	64.2	63.1	62.1	60.0	59.0	60.0	58.0	59.0
85°	29.0	31.0	35.2	35.2	36.2	36.2	36.2	35.2	33.1	34.2	33.1
87.5°	11.4	12.4	12.4	12.4	11.4	14.5	15.5	15.5	15.5	13.5	13.5
90°	14.6	12.6	11.6	10.5	8.2	5.9	3.6	1.3	3.6	5.9	8.2
92.5°	15.4	13.7	12.8	14.1	16.7	19.2	21.8	24.4	21.8	19.2	16.7
95°	53.0	63.9	69.3	69.7	70.6	71.5	72.3	73.2	72.3	71.5	70.6
97.5°	104.4	131.5	145.1	144.2	142.5	140.8	139.1	137.4	139.1	140.8	142.5
100°	220.0	218.9	218.3	217.9	217.0	216.2	215.3	214.5	215.3	216.2	217.0
102.5°	298.8	298.2	297.9	297.3	296.2	295.1	293.9	292.8	293.9	295.1	296.2
105°	382.7	382.7	382.7	382.1	381.0	379.8	378.7	377.5	378.7	379.8	381.0
107.5°	465.7	465.2	464.9	464.9	464.9	464.9	464.9	464.9	464.9	464.9	464.9
110°	550.5	549.9	549.6	549.6	549.6	549.6	549.6	549.6	549.6	549.6	549.6

TEST NUMBER: P1036086

CATALOG NUMBER: S125RDIW-B850D1340UB27-4F0-XX-W2A-A

CANDELA DISTRIBUTION (continued):

	150°	155°	157.5°	160°	165°	170°	175°	180°	185°	190°	195°
112.5°	633.5	633.2	633.1	632.7	631.8	630.9	630.1	629.2	630.1	630.9	631.8
115°	715.7	715.4	715.3	714.6	713.2	711.7	710.3	708.9	710.3	711.7	713.2
117.5°	794.0	792.9	792.3	792.3	792.3	792.3	792.3	792.3	792.3	792.3	792.3
120°	869.4	868.5	868.1	868.2	868.5	868.8	869.1	869.4	869.1	868.8	868.5
122.5°	944.3	944.0	943.9	943.2	941.7	940.3	938.8	937.4	938.8	940.3	941.7
125°	1017.1	1017.1	1017.1	1016.1	1014.1	1012.1	1010.1	1008.1	1010.1	1012.1	1014.1
127.5°	1082.2	1082.5	1082.6	1081.9	1080.4	1079.0	1077.5	1076.1	1077.5	1079.0	1080.4
130°	1144.6	1144.3	1144.2	1143.5	1142.1	1140.6	1139.2	1137.8	1139.2	1140.6	1142.1
132.5°	1205.8	1206.7	1207.1	1206.2	1204.5	1202.8	1201.1	1199.4	1201.1	1202.8	1204.5
135°	1264.0	1264.6	1264.9	1264.0	1262.3	1260.6	1258.9	1257.2	1258.9	1260.6	1262.3
137.5°	1318.0	1318.6	1318.9	1318.0	1316.3	1314.6	1312.8	1311.1	1312.8	1314.6	1316.3
140°	1366.0	1366.3	1366.4	1366.1	1365.5	1365.0	1364.4	1363.8	1364.4	1365.0	1365.5
142.5°	1413.5	1412.9	1412.6	1412.5	1412.2	1411.9	1411.6	1411.3	1411.6	1411.9	1412.2
145°	1460.1	1460.1	1460.1	1459.8	1459.2	1458.7	1458.1	1457.5	1458.1	1458.7	1459.2
147.5°	1499.0	1498.7	1498.6	1498.6	1498.6	1498.6	1498.6	1498.6	1498.6	1498.6	1498.6
150°	1535.5	1534.9	1534.6	1534.9	1535.5	1536.0	1536.6	1537.2	1536.6	1536.0	1535.5
152.5°	1568.8	1568.3	1568.0	1568.7	1570.1	1571.6	1573.0	1574.4	1573.0	1571.6	1570.1
155°	1598.4	1597.8	1597.5	1598.4	1600.1	1601.8	1603.5	1605.2	1603.5	1601.8	1600.1
157.5°	1625.8	1625.8	1625.8	1626.2	1627.1	1627.9	1628.8	1629.6	1628.8	1627.9	1627.1
160°	1648.0	1647.7	1647.6	1648.5	1650.2	1651.9	1653.6	1655.3	1653.6	1651.9	1650.2
162.5°	1668.5	1668.2	1668.1	1669.0	1670.7	1672.4	1674.2	1675.9	1674.2	1672.4	1670.7
165°	1686.5	1686.2	1686.1	1687.0	1688.7	1690.4	1692.1	1693.8	1692.1	1690.4	1688.7
167.5°	1700.7	1700.4	1700.3	1701.2	1702.9	1704.6	1706.3	1708.0	1706.3	1704.6	1702.9
170°	1710.9	1710.6	1710.5	1711.5	1713.5	1715.5	1717.5	1719.5	1717.5	1715.5	1713.5
172.5°	1719.1	1718.5	1718.2	1719.2	1721.2	1723.2	1725.2	1727.2	1725.2	1723.2	1721.2
175°	1725.1	1724.8	1724.7	1725.6	1727.3	1729.0	1730.7	1732.4	1730.7	1729.0	1727.3
177.5°	1728.9	1728.6	1728.5	1729.4	1731.1	1732.8	1734.5	1736.2	1734.5	1732.8	1731.1
180°	1732.4	1732.4	1732.4	1732.4	1732.4	1732.4	1732.4	1732.4	1732.4	1732.4	1732.4

TEST NUMBER: P1036086

CATALOG NUMBER: S125RDIW-B850D1340UB27-4F0-XX-W2A-A

CANDELA DISTRIBUTION (continued):

	200°	202.5°	205°	210°	215°	220°	225°	230°	235°	240°	245°
0°	1260.6	1260.6	1260.6	1260.6	1260.6	1260.6	1260.6	1260.6	1260.6	1260.6	1260.6
2.5°	1244.1	1239.9	1236.8	1233.7	1220.3	1205.8	1203.7	1200.6	1194.4	1201.6	1198.5
5°	1212.0	1202.7	1197.5	1184.0	1167.5	1155.0	1144.7	1132.3	1127.1	1123.0	1121.9
7.5°	1172.6	1164.4	1155.0	1141.6	1120.9	1100.2	1084.7	1072.2	1061.9	1056.7	1056.7
10°	1134.3	1124.0	1111.6	1088.8	1069.1	1043.3	1026.7	1014.3	999.8	991.5	984.3
12.5°	1095.0	1083.6	1072.2	1043.3	1020.5	993.6	969.8	954.3	947.0	937.7	925.3
15°	1055.7	1038.1	1026.7	997.7	968.8	941.8	926.3	909.8	893.2	883.9	879.7
17.5°	1014.3	1001.9	983.2	952.2	920.1	896.3	873.5	858.0	838.3	829.0	819.7
20°	977.0	958.4	939.8	908.7	877.7	845.6	822.8	804.2	791.8	784.5	776.2
22.5°	932.5	914.9	899.4	866.3	832.1	802.1	777.3	765.9	753.5	742.1	733.8
25°	894.2	876.6	861.1	824.9	787.6	759.7	741.1	726.6	713.1	707.9	699.7
27.5°	853.9	837.3	816.6	780.4	747.3	723.5	703.8	690.3	680.0	669.6	663.4
30°	815.6	796.9	778.3	739.0	712.1	688.3	669.6	653.1	644.8	639.6	629.3
32.5°	778.3	754.5	739.0	702.8	676.9	654.1	638.6	624.1	613.7	604.4	596.2
35°	737.9	712.1	696.5	666.5	639.6	616.9	603.4	593.0	580.6	572.3	568.2
37.5°	699.7	677.9	662.4	631.3	604.4	585.8	571.3	557.9	552.7	541.3	539.2
40°	658.3	639.6	625.1	595.1	570.3	555.8	540.3	527.8	518.5	513.4	506.1
42.5°	621.0	605.5	589.9	562.0	538.2	520.6	509.2	497.8	489.6	481.3	476.1
45°	586.8	570.3	555.8	528.9	505.1	489.6	478.2	464.7	462.6	451.3	446.1
47.5°	550.6	536.1	523.7	495.8	474.0	458.5	445.0	435.7	426.4	422.3	415.0
50°	515.4	500.9	486.4	461.6	441.9	426.4	413.0	402.6	397.4	391.2	385.0
52.5°	477.1	465.7	454.4	428.5	408.8	395.4	384.0	370.5	365.4	360.2	356.0
55°	445.0	428.5	416.1	394.3	376.7	362.2	349.8	339.5	334.3	330.2	325.0
57.5°	401.6	391.2	380.9	361.2	344.7	330.2	317.7	309.5	303.3	300.1	301.2
60°	364.3	352.9	346.7	326.0	309.5	298.1	286.7	278.4	272.2	269.1	268.1
62.5°	325.0	316.7	305.3	290.8	274.3	263.9	255.6	249.4	239.1	238.0	234.9
65°	286.7	280.5	270.1	256.7	243.2	233.9	224.6	216.3	212.2	207.0	203.9
67.5°	249.4	243.2	233.9	222.5	213.2	203.9	195.6	187.3	180.1	175.9	173.9
70°	213.2	208.0	201.8	188.4	177.0	169.7	163.5	158.4	151.1	149.0	148.0
72.5°	178.0	172.8	169.7	158.4	148.0	141.8	135.6	130.4	127.3	126.3	123.2
75°	145.9	140.8	136.6	126.3	120.1	115.9	109.7	107.6	104.5	103.5	102.5
77.5°	113.8	108.7	107.6	100.4	93.1	91.1	89.0	84.9	84.9	84.9	82.8
80°	81.8	80.7	79.7	72.4	69.3	67.3	66.2	63.1	61.1	59.0	58.0
82.5°	54.9	53.8	52.8	49.7	46.6	45.5	44.5	42.4	42.4	43.5	41.4
85°	33.1	31.0	30.0	29.0	26.9	26.9	27.9	26.9	26.9	26.9	25.9
87.5°	12.4	12.4	12.4	12.4	13.5	11.4	12.4	12.4	11.4	11.4	10.3
90°	10.5	11.6	12.6	14.6	16.5	18.5	20.5	21.9	23.4	24.8	26.3
92.5°	14.1	12.8	13.7	15.4	17.1	18.8	20.5	21.9	23.4	24.8	26.3
95°	69.7	69.3	63.9	53.0	42.2	31.3	20.5	21.9	23.4	24.8	26.3
97.5°	144.2	145.1	131.5	104.4	77.3	50.2	23.1	23.7	24.3	24.8	25.4
100°	217.9	218.3	218.9	220.0	221.1	222.3	223.4	180.9	138.4	95.9	53.4
102.5°	297.3	297.9	298.2	298.8	299.3	299.9	300.5	301.1	301.7	302.2	302.8
105°	382.1	382.7	382.7	382.7	382.7	382.7	382.7	382.7	382.7	382.7	382.7
107.5°	464.9	464.9	465.2	465.7	466.3	466.8	467.4	467.7	468.0	468.3	468.6
110°	549.6	549.6	549.9	550.5	551.0	551.6	552.2	551.3	550.5	549.6	548.7

TEST NUMBER: P1036086

CATALOG NUMBER: S125RDIW-B850D1340UB27-4F0-XX-W2A-A

CANDELA DISTRIBUTION (continued):

	200°	202.5°	205°	210°	215°	220°	225°	230°	235°	240°	245°
112.5°	632.7	633.1	633.2	633.5	633.8	634.1	634.4	633.2	632.1	630.9	629.8
115°	714.6	715.3	715.4	715.7	716.0	716.3	716.6	715.4	714.3	713.1	712.0
117.5°	792.3	792.3	792.9	794.0	795.2	796.3	797.5	795.8	794.1	792.4	790.7
120°	868.2	868.1	868.5	869.4	870.3	871.1	872.0	871.4	870.8	870.3	869.7
122.5°	943.2	943.9	944.0	944.3	944.6	944.9	945.2	944.6	944.0	943.5	942.9
125°	1016.1	1017.1	1017.1	1017.1	1017.1	1017.1	1017.1	1015.9	1014.8	1013.6	1012.5
127.5°	1081.9	1082.6	1082.5	1082.2	1081.9	1081.6	1081.3	1080.7	1080.1	1079.6	1079.0
130°	1143.5	1144.2	1144.3	1144.6	1144.9	1145.2	1145.5	1144.6	1143.8	1142.9	1142.0
132.5°	1206.2	1207.1	1206.7	1205.8	1205.0	1204.1	1203.3	1203.3	1203.3	1203.3	1203.3
135°	1264.0	1264.9	1264.6	1264.0	1263.5	1262.9	1262.3	1261.7	1261.2	1260.6	1260.1
137.5°	1318.0	1318.9	1318.6	1318.0	1317.5	1316.9	1316.3	1316.3	1316.3	1316.3	1316.3
140°	1366.1	1366.4	1366.3	1366.0	1365.7	1365.4	1365.1	1365.7	1366.2	1366.8	1367.3
142.5°	1412.5	1412.6	1412.9	1413.5	1414.0	1414.6	1415.2	1415.2	1415.2	1415.2	1415.2
145°	1459.8	1460.1	1460.1	1460.1	1460.1	1460.1	1460.1	1460.4	1460.7	1461.0	1461.3
147.5°	1498.6	1498.6	1498.7	1499.0	1499.3	1499.6	1499.9	1500.2	1500.5	1500.8	1501.1
150°	1534.9	1534.6	1534.9	1535.5	1536.0	1536.6	1537.2	1537.8	1538.3	1538.9	1539.4
152.5°	1568.7	1568.0	1568.3	1568.8	1569.4	1569.9	1570.5	1571.1	1571.7	1572.2	1572.8
155°	1598.4	1597.5	1597.8	1598.4	1598.9	1599.5	1600.1	1600.9	1601.8	1602.6	1603.5
157.5°	1626.2	1625.8	1625.8	1625.8	1625.8	1625.8	1625.8	1626.6	1627.5	1628.3	1629.2
160°	1648.5	1647.6	1647.7	1648.0	1648.3	1648.6	1648.9	1650.0	1651.2	1652.3	1653.4
162.5°	1669.0	1668.1	1668.2	1668.5	1668.8	1669.1	1669.4	1671.1	1672.8	1674.5	1676.2
165°	1687.0	1686.1	1686.2	1686.5	1686.8	1687.1	1687.4	1689.1	1690.8	1692.5	1694.2
167.5°	1701.2	1700.3	1700.4	1700.7	1701.0	1701.2	1701.5	1703.5	1705.5	1707.5	1709.5
170°	1711.5	1710.5	1710.6	1710.9	1711.2	1711.5	1711.8	1714.1	1716.4	1718.7	1721.0
172.5°	1719.2	1718.2	1718.5	1719.1	1719.6	1720.2	1720.8	1722.8	1724.8	1726.8	1728.8
175°	1725.6	1724.7	1724.8	1725.1	1725.4	1725.6	1725.9	1728.2	1730.5	1732.8	1735.1
177.5°	1729.4	1728.5	1728.6	1728.9	1729.2	1729.5	1729.8	1731.8	1733.8	1735.8	1737.8
180°	1732.4	1732.4	1732.4	1732.4	1732.4	1732.4	1732.4	1732.4	1732.4	1732.4	1732.4

TEST NUMBER: P1036086

CATALOG NUMBER: S125RDIW-B850D1340UB27-4F0-XX-W2A-A

CANDELA DISTRIBUTION (continued):

	247.5°	250°	255°	260°	265°	270°	275°	280°	285°	290°	292.5°
0°	1260.6	1260.6	1260.6	1260.6	1260.6	1260.6	1260.6	1260.6	1260.6	1260.6	1260.6
2.5°	1193.3	1195.4	1190.2	1188.2	1184.0	1189.2	1190.2	1189.2	1198.5	1194.4	1196.4
5°	1124.0	1119.9	1116.8	1109.5	1109.5	1110.5	1113.6	1108.5	1111.6	1118.8	1117.8
7.5°	1047.4	1045.3	1046.4	1038.1	1031.9	1034.0	1031.9	1041.2	1046.4	1044.3	1048.4
10°	978.1	982.2	972.9	968.8	964.6	968.8	967.7	969.8	976.0	980.1	987.4
12.5°	922.2	921.1	916.0	911.8	904.6	906.7	912.9	910.8	911.8	921.1	920.1
15°	869.4	863.2	859.0	849.7	851.8	844.6	850.8	858.0	861.1	869.4	874.6
17.5°	816.6	815.6	810.4	809.4	798.0	794.9	801.1	803.2	806.3	810.4	817.6
20°	772.1	771.1	763.8	761.8	752.4	758.6	756.6	760.7	762.8	771.1	774.2
22.5°	731.7	726.6	724.5	721.4	718.3	717.2	721.4	720.4	727.6	730.7	731.7
25°	694.5	690.3	689.3	684.1	682.1	679.0	682.1	685.2	693.4	696.5	700.7
27.5°	660.3	657.2	655.1	651.0	647.9	647.9	650.0	654.1	657.2	659.3	661.4
30°	629.3	627.2	621.0	618.9	615.8	615.8	615.8	617.9	623.1	629.3	632.4
32.5°	597.2	593.0	588.9	588.9	585.8	585.8	586.8	588.9	594.1	595.1	600.3
35°	566.1	562.0	558.9	556.8	557.9	553.7	555.8	558.9	565.1	567.2	570.3
37.5°	536.1	535.1	528.9	525.8	527.8	527.8	526.8	528.9	533.0	537.2	539.2
40°	503.0	500.9	500.9	497.8	498.9	494.7	497.8	499.9	502.0	506.1	509.2
42.5°	474.0	472.0	467.8	468.9	465.7	465.7	467.8	468.9	472.0	477.1	479.2
45°	443.0	443.0	440.9	437.8	438.8	435.7	437.8	438.8	443.0	448.2	446.1
47.5°	413.0	411.9	411.9	407.8	409.9	406.8	409.9	410.9	413.0	416.1	415.0
50°	384.0	380.9	381.9	380.9	379.8	379.8	381.9	381.9	384.0	384.0	387.1
52.5°	354.0	354.0	351.9	352.9	355.0	352.9	356.0	352.9	355.0	356.0	358.1
55°	327.1	325.0	326.0	325.0	329.1	326.0	329.1	327.1	329.1	328.1	330.2
57.5°	298.1	295.0	296.0	295.0	298.1	297.0	300.1	297.0	298.1	299.1	302.2
60°	265.0	265.0	265.0	262.9	266.0	266.0	265.0	265.0	269.1	271.2	270.1
62.5°	233.9	232.9	229.8	228.7	229.8	227.7	231.8	230.8	232.9	234.9	237.0
65°	199.8	197.7	196.6	194.6	194.6	193.5	194.6	198.7	199.8	200.8	206.0
67.5°	171.8	170.8	169.7	166.6	166.6	168.7	168.7	168.7	174.9	171.8	175.9
70°	147.0	144.9	142.8	141.8	141.8	142.8	143.9	144.9	143.9	148.0	149.0
72.5°	123.2	124.2	122.1	122.1	122.1	121.1	121.1	123.2	124.2	123.2	124.2
75°	102.5	102.5	101.4	102.5	102.5	101.4	101.4	103.5	103.5	102.5	105.6
77.5°	82.8	81.8	79.7	77.6	78.7	77.6	78.7	77.6	80.7	83.8	81.8
80°	58.0	56.9	56.9	56.9	58.0	56.9	59.0	56.9	58.0	58.0	59.0
82.5°	41.4	42.4	42.4	41.4	42.4	41.4	42.4	42.4	42.4	41.4	42.4
85°	26.9	26.9	26.9	26.9	25.9	26.9	26.9	26.9	27.9	26.9	27.9
87.5°	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	12.4	11.4	12.4
90°	27.0	27.4	28.3	29.1	30.0	30.8	30.0	29.1	28.3	27.4	27.0
92.5°	27.0	27.1	27.4	27.7	28.0	28.3	28.0	27.7	27.4	27.1	27.0
95°	27.0	27.0	27.0	27.0	27.0	27.0	27.0	27.0	27.0	27.0	27.0
97.5°	25.7	25.8	26.1	26.4	26.7	27.0	26.7	26.4	26.1	25.8	25.7
100°	32.1	31.5	30.4	29.3	28.1	27.0	28.1	29.3	30.4	31.5	32.1
102.5°	303.1	291.1	267.1	243.2	219.2	195.2	219.2	243.2	267.1	291.1	303.1
105°	382.7	382.6	382.3	382.0	381.7	381.4	381.7	382.0	382.3	382.6	382.7
107.5°	468.7	468.1	467.0	465.9	464.7	463.6	464.7	465.9	467.0	468.1	468.7
110°	548.3	548.4	548.7	549.0	549.3	549.6	549.3	549.0	548.7	548.4	548.3

TEST NUMBER: P1036086

CATALOG NUMBER: S125RDIW-B850D1340UB27-4F0-XX-W2A-A

CANDELA DISTRIBUTION (continued):

	247.5°	250°	255°	260°	265°	270°	275°	280°	285°	290°	292.5°
112.5°	629.2	628.9	628.4	627.8	627.3	626.7	627.3	627.8	628.4	628.9	629.2
115°	711.4	710.5	708.8	707.1	705.4	703.7	705.4	707.1	708.8	710.5	711.4
117.5°	789.8	789.5	788.9	788.4	787.8	787.2	787.8	788.4	788.9	789.5	789.8
120°	869.4	868.7	867.3	865.8	864.4	863.0	864.4	865.8	867.3	868.7	869.4
122.5°	942.6	941.7	940.0	938.3	936.6	934.9	936.6	938.3	940.0	941.7	942.6
125°	1011.9	1011.5	1010.6	1009.8	1008.9	1008.1	1008.9	1009.8	1010.6	1011.5	1011.9
127.5°	1078.7	1077.6	1075.3	1073.0	1070.7	1068.4	1070.7	1073.0	1075.3	1077.6	1078.7
130°	1141.6	1140.9	1139.5	1138.0	1136.6	1135.2	1136.6	1138.0	1139.5	1140.9	1141.6
132.5°	1203.3	1202.6	1201.2	1199.7	1198.3	1196.9	1198.3	1199.7	1201.2	1202.6	1203.3
135°	1259.8	1258.9	1257.2	1255.5	1253.8	1252.1	1253.8	1255.5	1257.2	1258.9	1259.8
137.5°	1316.3	1315.6	1314.2	1312.7	1311.3	1309.9	1311.3	1312.7	1314.2	1315.6	1316.3
140°	1367.6	1366.7	1365.0	1363.3	1361.6	1359.9	1361.6	1363.3	1365.0	1366.7	1367.6
142.5°	1415.2	1414.3	1412.6	1410.9	1409.2	1407.5	1409.2	1410.9	1412.6	1414.3	1415.2
145°	1461.4	1460.5	1458.8	1457.1	1455.4	1453.7	1455.4	1457.1	1458.8	1460.5	1461.4
147.5°	1501.2	1500.2	1498.2	1496.2	1494.2	1492.2	1494.2	1496.2	1498.2	1500.2	1501.2
150°	1539.7	1538.6	1536.3	1534.0	1531.8	1529.5	1531.8	1534.0	1536.3	1538.6	1539.7
152.5°	1573.1	1572.1	1570.1	1568.1	1566.1	1564.1	1566.1	1568.1	1570.1	1572.1	1573.1
155°	1603.9	1602.8	1600.5	1598.2	1596.0	1593.7	1596.0	1598.2	1600.5	1602.8	1603.9
157.5°	1629.6	1628.5	1626.2	1623.9	1621.6	1619.3	1621.6	1623.9	1626.2	1628.5	1629.6
160°	1654.0	1652.9	1650.6	1648.3	1646.0	1643.7	1646.0	1648.3	1650.6	1652.9	1654.0
162.5°	1677.1	1675.8	1673.3	1670.7	1668.2	1665.6	1668.2	1670.7	1673.3	1675.8	1677.1
165°	1695.1	1694.0	1691.7	1689.4	1687.1	1684.8	1687.1	1689.4	1691.7	1694.0	1695.1
167.5°	1710.5	1709.2	1706.7	1704.1	1701.6	1699.0	1701.6	1704.1	1706.7	1709.2	1710.5
170°	1722.1	1720.8	1718.2	1715.7	1713.1	1710.5	1713.1	1715.7	1718.2	1720.8	1722.1
172.5°	1729.8	1728.5	1725.9	1723.4	1720.8	1718.2	1720.8	1723.4	1725.9	1728.5	1729.8
175°	1736.2	1734.9	1732.4	1729.8	1727.3	1724.7	1727.3	1729.8	1732.4	1734.9	1736.2
177.5°	1738.8	1737.7	1735.4	1733.1	1730.8	1728.5	1730.8	1733.1	1735.4	1737.7	1738.8
180°	1732.4	1732.4	1732.4	1732.4	1732.4	1732.4	1732.4	1732.4	1732.4	1732.4	1732.4

TEST NUMBER: P1036086

CATALOG NUMBER: S125RDIW-B850D1340UB27-4F0-XX-W2A-A

CANDELA DISTRIBUTION (continued):

	295°	300°	305°	310°	315°	320°	325°	330°	335°	337.5°	340°
0°	1260.6	1260.6	1260.6	1260.6	1260.6	1260.6	1260.6	1260.6	1260.6	1260.6	1260.6
2.5°	1192.3	1197.5	1193.3	1190.2	1198.5	1202.7	1202.7	1209.9	1217.1	1223.4	1224.4
5°	1118.8	1127.1	1129.2	1128.1	1140.6	1146.8	1160.2	1167.5	1177.8	1185.1	1193.3
7.5°	1051.5	1062.9	1064.0	1066.0	1084.7	1095.0	1106.4	1125.0	1139.5	1149.9	1159.2
10°	984.3	991.5	998.8	1008.1	1026.7	1044.3	1060.9	1080.5	1099.2	1109.5	1123.0
12.5°	933.6	938.7	947.0	953.2	972.9	988.4	1010.1	1037.1	1064.0	1072.2	1088.8
15°	880.8	883.9	900.4	906.7	923.2	949.1	962.5	988.4	1017.4	1032.9	1051.5
17.5°	819.7	838.3	848.7	855.9	876.6	897.3	919.1	946.0	983.2	997.7	1011.2
20°	776.2	789.7	801.1	810.4	829.0	860.1	879.7	901.5	936.7	953.2	972.9
22.5°	737.9	749.3	759.7	770.0	782.5	810.4	833.2	863.2	898.4	913.9	936.7
25°	701.7	713.1	719.3	731.7	748.3	768.0	794.9	821.8	857.0	874.6	896.3
27.5°	666.5	677.9	689.3	699.7	711.0	729.7	748.3	782.5	818.7	839.4	858.0
30°	636.5	641.7	652.0	663.4	674.8	692.4	714.1	737.9	779.3	798.0	820.7
32.5°	603.4	612.7	620.0	628.2	642.7	657.2	676.9	706.9	740.0	757.6	782.5
35°	572.3	580.6	585.8	600.3	609.6	625.1	644.8	671.7	699.7	719.3	741.1
37.5°	542.3	550.6	556.8	565.1	577.5	591.0	611.7	631.3	664.5	681.0	705.9
40°	511.3	518.5	525.8	535.1	546.5	563.0	575.5	600.3	627.2	645.8	664.5
42.5°	481.3	485.4	493.7	504.0	515.4	529.9	547.5	567.2	594.1	610.6	627.2
45°	449.2	456.4	465.7	473.0	483.3	497.8	513.4	530.9	557.9	574.4	592.0
47.5°	419.2	424.3	430.6	441.9	455.4	465.7	482.3	498.9	523.7	539.2	555.8
50°	388.1	393.3	402.6	409.9	420.2	433.7	449.2	466.8	490.6	500.9	517.5
52.5°	359.1	361.2	370.5	377.8	388.1	403.6	416.1	431.6	454.4	465.7	482.3
55°	330.2	332.2	337.4	344.7	356.0	368.5	381.9	399.5	419.2	429.5	445.0
57.5°	300.1	302.2	307.4	312.6	324.0	335.3	350.9	365.4	385.0	394.3	408.8
60°	270.1	270.1	275.3	282.6	290.8	301.2	314.6	332.2	346.7	358.1	368.5
62.5°	238.0	241.2	244.3	249.4	258.7	271.2	282.6	295.0	312.6	320.8	330.2
65°	206.0	209.1	215.3	220.5	227.7	236.0	250.5	260.8	274.3	283.6	291.9
67.5°	178.0	181.1	185.3	191.5	196.6	206.0	216.3	226.7	241.2	247.4	253.6
70°	149.0	152.1	155.2	163.5	168.7	175.9	183.2	193.5	206.0	210.1	215.3
72.5°	126.3	127.3	131.4	133.5	140.8	147.0	155.2	161.5	170.8	175.9	180.1
75°	106.6	106.6	107.6	109.7	113.8	118.0	124.2	130.4	138.7	141.8	147.0
77.5°	83.8	86.9	85.9	88.0	90.0	92.1	97.3	101.4	109.7	111.8	113.8
80°	60.0	61.1	64.2	67.3	67.3	70.4	73.5	74.5	79.7	82.8	82.8
82.5°	43.5	44.5	43.5	44.5	45.5	46.6	49.7	53.8	53.8	54.9	56.9
85°	26.9	26.9	27.9	29.0	29.0	27.9	30.0	29.0	30.0	32.1	32.1
87.5°	13.5	12.4	12.4	12.4	12.4	12.4	13.5	12.4	13.5	13.5	13.5
90°	26.3	24.8	23.4	21.9	20.5	18.5	16.5	14.6	12.6	11.6	10.5
92.5°	26.3	24.8	23.4	21.9	20.5	18.8	17.1	15.4	13.7	12.8	14.1
95°	26.3	24.8	23.4	21.9	20.5	31.3	42.2	53.0	63.9	69.3	69.7
97.5°	25.4	24.8	24.3	23.7	23.1	50.2	77.3	104.4	131.5	145.1	144.2
100°	53.4	95.9	138.4	180.9	223.4	222.3	221.1	220.0	218.9	218.3	217.9
102.5°	302.8	302.2	301.7	301.1	300.5	299.9	299.3	298.8	298.2	297.9	297.3
105°	382.7	382.7	382.7	382.7	382.7	382.7	382.7	382.7	382.7	382.7	382.1
107.5°	468.6	468.3	468.0	467.7	467.4	466.8	466.3	465.7	465.2	464.9	464.9
110°	548.7	549.6	550.5	551.3	552.2	551.6	551.0	550.5	549.9	549.6	549.6

TEST NUMBER: P1036086

CATALOG NUMBER: S125RDIW-B850D1340UB27-4F0-XX-W2A-A

CANDELA DISTRIBUTION (continued):

	295°	300°	305°	310°	315°	320°	325°	330°	335°	337.5°	340°
112.5°	629.8	630.9	632.1	633.2	634.4	634.1	633.8	633.5	633.2	633.1	632.7
115°	712.0	713.1	714.3	715.4	716.6	716.3	716.0	715.7	715.4	715.3	714.6
117.5°	790.7	792.4	794.1	795.8	797.5	796.3	795.2	794.0	792.9	792.3	792.3
120°	869.7	870.3	870.8	871.4	872.0	871.1	870.3	869.4	868.5	868.1	868.2
122.5°	942.9	943.5	944.0	944.6	945.2	944.9	944.6	944.3	944.0	943.9	943.2
125°	1012.5	1013.6	1014.8	1015.9	1017.1	1017.1	1017.1	1017.1	1017.1	1017.1	1016.1
127.5°	1079.0	1079.6	1080.1	1080.7	1081.3	1081.6	1081.9	1082.2	1082.5	1082.6	1081.9
130°	1142.0	1142.9	1143.8	1144.6	1145.5	1145.2	1144.9	1144.6	1144.3	1144.2	1143.5
132.5°	1203.3	1203.3	1203.3	1203.3	1203.3	1204.1	1205.0	1205.8	1206.7	1207.1	1206.2
135°	1260.1	1260.6	1261.2	1261.7	1262.3	1262.9	1263.5	1264.0	1264.6	1264.9	1264.0
137.5°	1316.3	1316.3	1316.3	1316.3	1316.3	1316.9	1317.5	1318.0	1318.6	1318.9	1318.0
140°	1367.3	1366.8	1366.2	1365.7	1365.1	1365.4	1365.7	1366.0	1366.3	1366.4	1366.1
142.5°	1415.2	1415.2	1415.2	1415.2	1415.2	1414.6	1414.0	1413.5	1412.9	1412.6	1412.5
145°	1461.3	1461.0	1460.7	1460.4	1460.1	1460.1	1460.1	1460.1	1460.1	1460.1	1459.8
147.5°	1501.1	1500.8	1500.5	1500.2	1499.9	1499.6	1499.3	1499.0	1498.7	1498.6	1498.6
150°	1539.4	1538.9	1538.3	1537.8	1537.2	1536.6	1536.0	1535.5	1534.9	1534.6	1534.9
152.5°	1572.8	1572.2	1571.7	1571.1	1570.5	1569.9	1569.4	1568.8	1568.3	1568.0	1568.7
155°	1603.5	1602.6	1601.8	1600.9	1600.1	1599.5	1598.9	1598.4	1597.8	1597.5	1598.4
157.5°	1629.2	1628.3	1627.5	1626.6	1625.8	1625.8	1625.8	1625.8	1625.8	1625.8	1626.2
160°	1653.4	1652.3	1651.2	1650.0	1648.9	1648.6	1648.3	1648.0	1647.7	1647.6	1648.5
162.5°	1676.2	1674.5	1672.8	1671.1	1669.4	1669.1	1668.8	1668.5	1668.2	1668.1	1669.0
165°	1694.2	1692.5	1690.8	1689.1	1687.4	1687.1	1686.8	1686.5	1686.2	1686.1	1687.0
167.5°	1709.5	1707.5	1705.5	1703.5	1701.5	1701.2	1701.0	1700.7	1700.4	1700.3	1701.2
170°	1721.0	1718.7	1716.4	1714.1	1711.8	1711.5	1711.2	1710.9	1710.6	1710.5	1711.5
172.5°	1728.8	1726.8	1724.8	1722.8	1720.8	1720.2	1719.6	1719.1	1718.5	1718.2	1719.2
175°	1735.1	1732.8	1730.5	1728.2	1725.9	1725.6	1725.4	1725.1	1724.8	1724.7	1725.6
177.5°	1737.8	1735.8	1733.8	1731.8	1729.8	1729.5	1729.2	1728.9	1728.6	1728.5	1729.4
180°	1732.4	1732.4	1732.4	1732.4	1732.4	1732.4	1732.4	1732.4	1732.4	1732.4	1732.4

TEST NUMBER: P1036086

CATALOG NUMBER: S125RDIW-B850D1340UB27-4F0-XX-W2A-A

CANDELA DISTRIBUTION (continued):

	345°	350°	355°	360°
0°	1260.6	1260.6	1260.6	1260.6
2.5°	1231.6	1241.0	1250.3	1261.7
5°	1206.8	1223.4	1241.0	1257.5
7.5°	1179.9	1203.7	1226.5	1250.3
10°	1149.9	1179.9	1205.8	1238.9
12.5°	1116.8	1148.8	1185.1	1222.3
15°	1083.6	1124.0	1162.3	1204.7
17.5°	1052.6	1090.9	1133.3	1184.0
20°	1015.3	1057.8	1105.4	1159.2
22.5°	976.0	1022.6	1074.3	1132.3
25°	942.9	990.5	1040.2	1101.2
27.5°	906.7	956.3	1005.0	1070.2
30°	865.3	919.1	968.8	1036.0
32.5°	825.9	879.7	934.6	997.7
35°	787.6	840.4	895.3	959.4
37.5°	751.4	799.0	852.8	910.8
40°	717.2	760.7	808.3	861.1
42.5°	673.8	724.5	769.0	807.3
45°	636.5	677.9	719.3	750.4
47.5°	593.0	634.4	669.6	694.5
50°	556.8	589.9	618.9	640.7
52.5°	513.4	544.4	568.2	584.8
55°	470.9	497.8	518.5	529.9
57.5°	432.6	450.2	465.7	476.1
60°	390.2	403.6	417.1	428.5
62.5°	344.7	359.1	366.4	378.8
65°	304.3	313.6	325.0	329.1
67.5°	265.0	270.1	277.4	285.7
70°	223.6	226.7	233.9	245.3
72.5°	187.3	190.4	195.6	199.8
75°	149.0	152.1	156.3	160.4
77.5°	117.0	118.0	120.1	124.2
80°	84.9	88.0	90.0	91.1
82.5°	59.0	60.0	60.0	61.1
85°	37.3	35.2	35.2	36.2
87.5°	13.5	15.5	15.5	17.6
90°	8.2	5.9	3.6	1.3
92.5°	16.7	19.2	21.8	24.4
95°	70.6	71.5	72.3	73.2
97.5°	142.5	140.8	139.1	137.4
100°	217.0	216.2	215.3	214.5
102.5°	296.2	295.1	293.9	292.8
105°	381.0	379.8	378.7	377.5
107.5°	464.9	464.9	464.9	464.9
110°	549.6	549.6	549.6	549.6

TEST NUMBER: P1036086

CATALOG NUMBER: S125RDIW-B850D1340UB27-4F0-XX-W2A-A

CANDELA DISTRIBUTION (continued):

	345°	350°	355°	360°
112.5°	631.8	630.9	630.1	629.2
115°	713.2	711.7	710.3	708.9
117.5°	792.3	792.3	792.3	792.3
120°	868.5	868.8	869.1	869.4
122.5°	941.7	940.3	938.8	937.4
125°	1014.1	1012.1	1010.1	1008.1
127.5°	1080.4	1079.0	1077.5	1076.1
130°	1142.1	1140.6	1139.2	1137.8
132.5°	1204.5	1202.8	1201.1	1199.4
135°	1262.3	1260.6	1258.9	1257.2
137.5°	1316.3	1314.6	1312.8	1311.1
140°	1365.5	1365.0	1364.4	1363.8
142.5°	1412.2	1411.9	1411.6	1411.3
145°	1459.2	1458.7	1458.1	1457.5
147.5°	1498.6	1498.6	1498.6	1498.6
150°	1535.5	1536.0	1536.6	1537.2
152.5°	1570.1	1571.6	1573.0	1574.4
155°	1600.1	1601.8	1603.5	1605.2
157.5°	1627.1	1627.9	1628.8	1629.6
160°	1650.2	1651.9	1653.6	1655.3
162.5°	1670.7	1672.4	1674.2	1675.9
165°	1688.7	1690.4	1692.1	1693.8
167.5°	1702.9	1704.6	1706.3	1708.0
170°	1713.5	1715.5	1717.5	1719.5
172.5°	1721.2	1723.2	1725.2	1727.2
175°	1727.3	1729.0	1730.7	1732.4
177.5°	1731.1	1732.8	1734.5	1736.2
180°	1732.4	1732.4	1732.4	1732.4

(END OF REPORT)