

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1036129

Luminaire Tested: S125RDIW-B850D470UB30-4F0-XX-W2A-A1

Issue Date: 5/7/2025

Test Information

Test Method: LM-79-2019
Report Number: P1036129
REPORT IS A COMBINATION OF REPORTS P1006952 AND P1007351
Test Lab: INNOVATION CENTER
Issue Date: 5/7/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S125RDIW-B850D470UB30-4F0-XX-W2A-A1
Description: Define 5 Regressed Direct/Indirect Wall Mount with 3000K BioUP LEDs {m-DER=0.589}
{m-EER=0.647}
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 4939.0 lumens
Efficiency: N/A
Efficacy: 100.6 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.4 / 1.47
Luminous Opening: Rectangular w/ Sides (W: 0.42' x L: 4' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 49.1
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1036129

CATALOG NUMBER: S125RDIW-B850D470UB30-4F0-XX-W2A-A1

Luminous Intensity Polar Plot

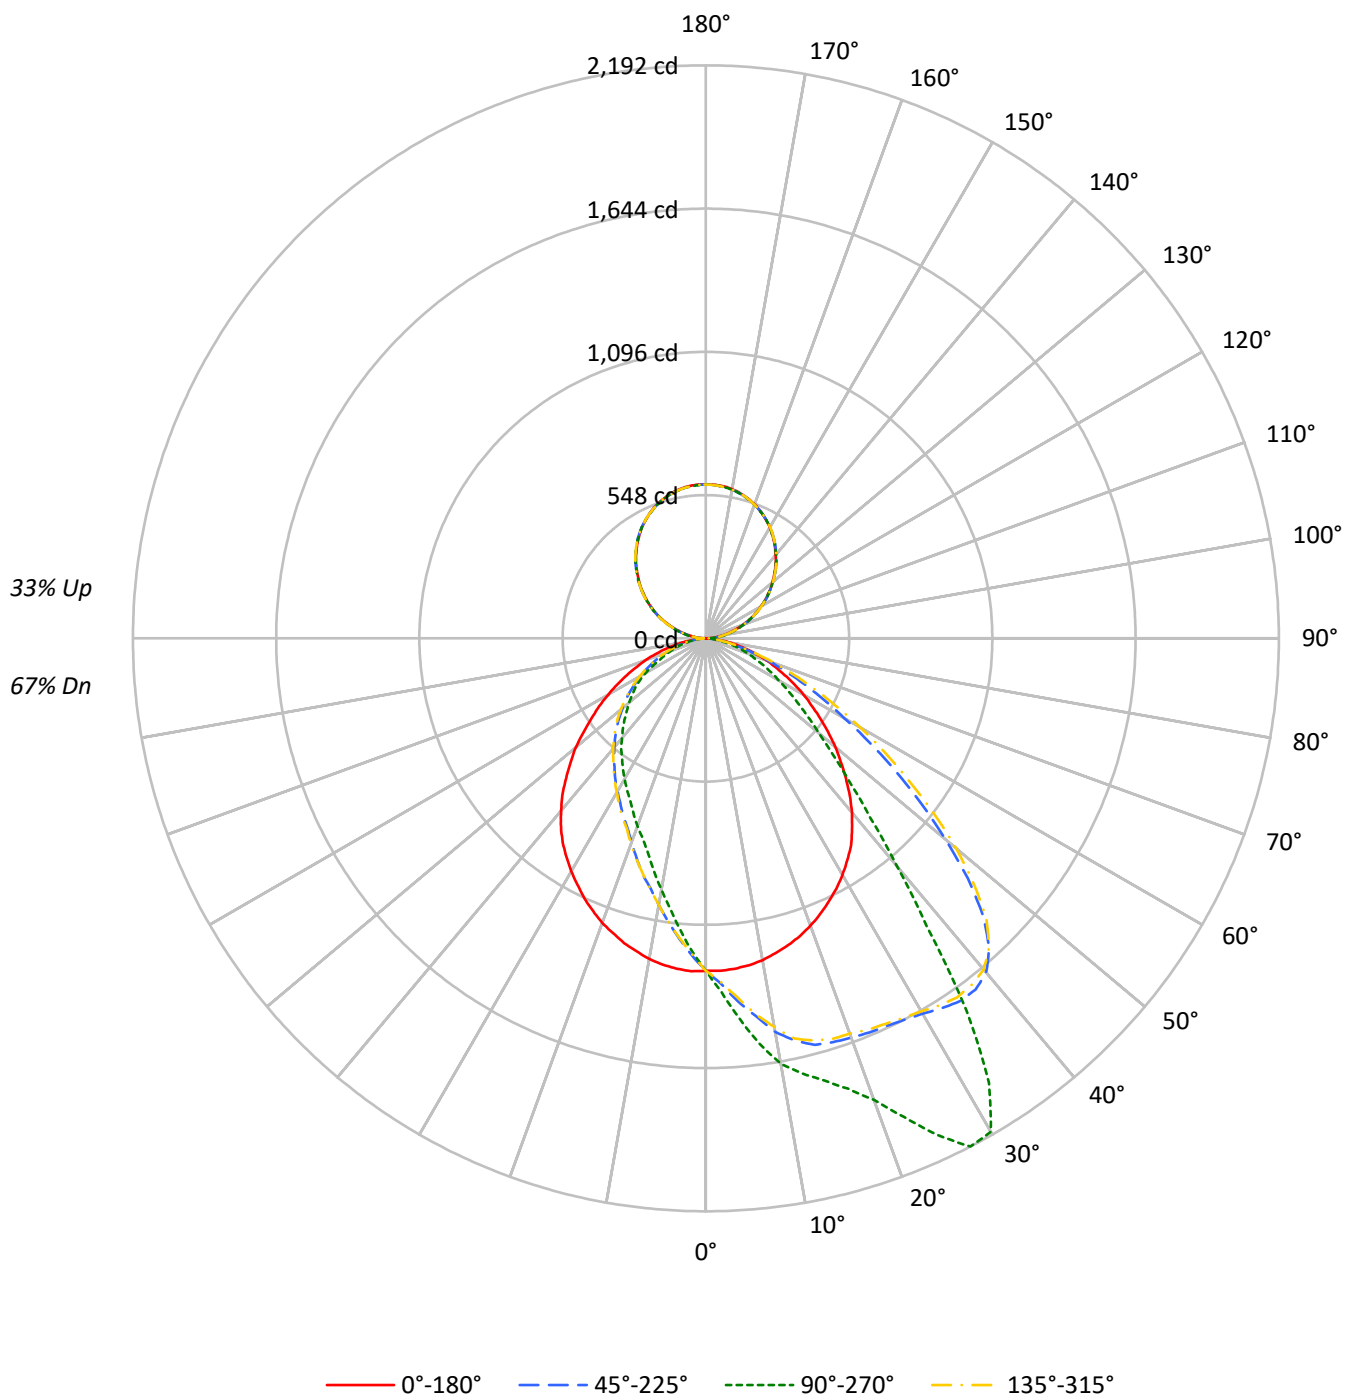

TEST NUMBER: P1036129

CATALOG NUMBER: S125RDIW-B850D470UB30-4F0-XX-W2A-A1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	111	111	111	111	105	105	105	105	93	93	93	82	82	82	71	71	71	69	69	69
1	102	98	94	91	96	92	89	86	82	80	77	73	71	69	64	63	62	61	60	57
2	93	86	80	75	88	81	76	72	73	69	65	65	61	59	57	55	53	51	49	49
3	86	76	69	63	80	72	66	60	65	59	55	58	54	50	51	48	45	44	42	42
4	79	68	60	54	74	64	57	52	58	52	48	52	47	43	46	42	39	38	36	36
5	72	61	53	47	68	58	50	45	52	46	41	47	42	38	42	38	35	34	32	32
6	67	55	47	41	63	52	45	39	47	41	36	42	37	33	38	34	31	30	28	28
7	62	50	41	36	58	47	40	35	43	37	32	38	33	30	35	30	27	26	25	25
8	58	45	37	32	54	43	36	31	39	33	29	35	30	27	32	28	25	24	22	22
9	54	41	34	29	51	39	32	28	36	30	26	33	28	24	29	25	22	21	20	20
10	50	38	31	26	47	36	30	25	33	27	23	30	25	22	27	23	20	19	18	18

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	8149	8149	8149	8149
5°	8142	9184	8142	7059
10°	8096	10320	8069	6103
15°	8008	10919	7954	5313
20°	7902	11787	7831	4803
25°	7764	13341	7676	4359
30°	7623	14180	7509	4041
35°	7441	11662	7337	3745
40°	7117	7920	7057	3479
45°	6692	5693	6683	3217
50°	6256	4378	6287	2975
55°	5766	3560	5755	2742
60°	5310	2918	5284	2435
65°	4777	2431	4807	1960
70°	4338	1951	4319	1632
75°	3664	1479	3664	1341
80°	2970	901	2934	901
85°	2087	474	2030	535

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 135°

Vertical Angle: 45°

Luminance: 11599 cd/sqm

TEST NUMBER: P1036129

CATALOG NUMBER: S125RDIW-B850D470UB30-4F0-XX-W2A-A1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	122.0	2.5
10°-20°	357.6	7.2
20°-30°	566.9	11.5
30°-40°	685.1	13.9
40°-50°	609.9	12.3
50°-60°	467.7	9.5
60°-70°	303.8	6.2
70°-80°	147.4	3.0
80°-90°	35.6	0.7
90°-100°	39.1	0.8
100°-110°	116.3	2.4
110°-120°	197.2	4.0
120°-130°	259.7	5.3
130°-140°	291.0	5.9
140°-150°	285.2	5.8
150°-160°	239.6	4.9
160°-170°	159.2	3.2
170°-180°	55.7	1.1
0°-30°	1046.5	21.2
0°-40°	1731.5	35.1
0°-60°	2809.2	56.9
0°-90°	3295.9	66.7
90°-120°	352.7	7.1
90°-150°	1188.5	24.1
90°-180°	1643.0	33.3
0°-180°	4939.0	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1272	1272	1272	1272	1272	
5°	1269	1458	1269	1120	1269	121
15°	1215	1751	1207	852	1215	343
25°	1111	2097	1098	685	1111	512
35°	968	1740	954	559	968	603
45°	757	778	756	440	757	584
55°	535	427	534	329	535	479
65°	332	242	334	195	332	332
75°	162	113	162	102	162	174
85°	36	24	36	27	36	42
90°	0	11	0	11	0	4
95°	30	39	30	39	30	31
105°	104	114	104	114	104	111
115°	198	199	198	199	198	195
125°	288	290	288	290	288	258
135°	375	376	375	376	375	289
145°	454	456	454	456	454	284
155°	520	520	520	520	520	239
165°	565	564	565	564	565	159
175°	587	585	587	585	587	56
180°	589	589	589	589	589	

TEST NUMBER: P1036129

CATALOG NUMBER: S125RDIW-B850D470UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
0°	1271.8	1271.8	1271.8	1271.8	1271.8	1271.8	1271.8	1271.8	1271.8	1271.8	1271.8
2.5°	1272.9	1283.3	1286.4	1294.8	1304.2	1306.3	1311.5	1318.8	1323.0	1321.9	1321.9
5°	1268.7	1286.4	1299.0	1313.6	1331.3	1338.6	1344.9	1360.6	1373.1	1380.4	1392.9
7.5°	1261.4	1287.5	1308.4	1330.3	1357.4	1370.0	1383.5	1405.5	1428.4	1443.1	1456.6
10°	1249.9	1283.3	1312.5	1344.9	1381.4	1400.2	1417.0	1450.4	1478.6	1497.4	1528.7
12.5°	1233.2	1274.9	1315.7	1358.5	1404.4	1424.3	1447.2	1483.8	1523.5	1550.6	1576.7
15°	1215.4	1265.5	1309.4	1360.6	1415.9	1446.2	1475.4	1514.1	1549.6	1579.8	1610.1
17.5°	1194.5	1247.8	1302.1	1360.6	1423.2	1453.5	1478.6	1524.5	1562.1	1592.4	1619.5
20°	1169.5	1229.0	1290.6	1355.3	1419.0	1447.2	1471.2	1521.4	1554.8	1587.2	1625.8
22.5°	1142.3	1207.1	1272.9	1336.5	1399.2	1429.5	1457.7	1501.5	1538.1	1581.9	1632.1
25°	1111.0	1182.0	1248.8	1312.5	1372.1	1400.2	1425.3	1473.3	1524.5	1579.8	1636.2
27.5°	1079.7	1148.6	1213.3	1271.8	1336.5	1362.7	1387.7	1448.3	1508.8	1567.3	1644.6
30°	1045.2	1115.2	1171.6	1225.9	1288.5	1315.7	1347.0	1415.9	1484.8	1564.2	1658.2
32.5°	1006.6	1070.3	1122.5	1178.9	1235.3	1268.7	1308.4	1383.5	1462.9	1557.9	1678.0
35°	968.0	1019.1	1067.2	1120.4	1188.3	1223.8	1262.4	1341.8	1441.0	1554.8	1694.7
37.5°	918.9	968.0	1005.5	1059.8	1129.8	1171.6	1210.2	1302.1	1414.9	1547.5	1693.7
40°	868.8	910.5	946.0	1002.4	1078.6	1117.3	1159.0	1259.3	1387.7	1526.6	1668.6
42.5°	814.5	850.0	888.6	942.9	1017.0	1054.6	1102.7	1219.6	1350.1	1497.4	1603.9
45°	757.0	791.5	823.9	880.2	954.4	995.1	1047.3	1167.4	1304.2	1435.7	1499.4
47.5°	700.6	730.9	765.4	814.5	889.6	934.5	987.8	1116.2	1242.6	1353.3	1358.5
50°	646.3	670.4	699.6	749.7	828.0	870.8	926.2	1046.3	1169.5	1245.7	1194.5
52.5°	590.0	611.9	642.2	686.0	759.1	809.2	857.3	977.4	1080.7	1131.9	1037.9
55°	534.6	553.4	584.7	633.8	697.5	736.1	785.2	897.0	987.8	988.8	886.5
57.5°	480.3	497.0	523.1	567.0	626.5	671.4	716.3	813.4	875.0	857.3	743.5
60°	432.3	442.7	466.7	509.6	564.9	597.3	645.3	726.7	767.5	735.1	612.9
62.5°	382.2	392.6	411.4	445.9	498.1	532.5	562.8	629.6	657.8	608.8	508.5
65°	332.0	344.6	358.2	385.3	434.4	457.4	484.5	533.6	560.7	503.3	416.6
67.5°	288.2	294.5	308.0	336.2	370.7	391.6	410.4	443.8	449.0	403.1	332.0
70°	247.5	249.6	262.1	278.8	304.9	317.4	333.1	352.9	352.9	315.3	259.0
72.5°	201.5	204.7	214.1	231.8	247.5	253.7	259.0	271.5	269.4	234.9	196.3
75°	161.8	163.9	171.2	179.6	185.9	197.3	201.5	199.4	198.4	169.2	147.2
77.5°	125.3	126.3	131.6	138.9	139.9	144.1	141.0	141.0	131.6	114.9	103.4
80°	91.9	92.9	95.0	97.1	97.1	97.1	97.1	91.9	85.6	75.2	72.0
82.5°	61.6	61.6	62.7	64.7	63.7	61.6	59.5	54.3	50.1	47.0	44.9
85°	36.5	36.5	37.6	36.5	32.4	31.3	29.2	28.2	27.1	26.1	26.1
87.5°	17.8	16.7	14.6	12.5	12.5	12.5	12.5	12.5	12.5	11.5	11.5
90°	0.5	1.3	2.1	2.9	3.7	4.1	4.5	5.2	5.9	6.6	7.3
92.5°	13.7	14.2	14.7	15.2	15.7	16.0	16.5	17.4	18.3	19.3	20.2
95°	29.8	30.0	30.2	30.4	30.6	30.7	31.2	32.2	33.3	34.3	35.3
97.5°	45.8	45.9	46.0	46.1	46.2	46.3	47.0	48.4	49.9	51.3	52.7
100°	64.1	64.1	64.1	64.1	64.1	64.1	64.8	66.1	67.4	68.8	70.1
102.5°	83.8	84.3	84.8	85.3	85.8	86.1	86.4	86.9	87.4	87.9	88.4
105°	104.5	105.0	105.5	106.0	106.5	106.7	107.0	107.6	108.3	108.9	109.5
107.5°	126.9	127.4	127.9	128.4	128.9	129.2	129.5	130.0	130.5	131.0	131.5
110°	150.3	150.8	151.3	151.8	152.3	152.6	152.7	153.0	153.3	153.6	153.9

TEST NUMBER: P1036129

CATALOG NUMBER: S125RDIW-B850D470UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	22.5°	25°	30°	35°	40°	45°
112.5°	174.1	174.3	174.5	174.7	174.9	175.0	175.2	175.6	176.0	176.4	176.8
115°	197.5	197.9	198.3	198.7	199.1	199.3	199.4	199.6	199.8	200.0	200.2
117.5°	221.3	221.4	221.5	221.6	221.7	221.7	221.8	222.0	222.3	222.5	222.7
120°	243.3	243.8	244.3	244.8	245.3	245.6	245.6	245.7	245.8	245.9	246.0
122.5°	267.1	267.2	267.3	267.4	267.5	267.6	267.7	268.0	268.3	268.6	268.9
125°	288.2	288.8	289.4	290.0	290.6	290.9	291.0	291.1	291.2	291.3	291.4
127.5°	311.5	311.8	312.1	312.4	312.7	312.9	313.0	313.1	313.2	313.3	313.4
130°	332.2	332.7	333.2	333.7	334.2	334.5	334.6	334.8	335.0	335.2	335.4
132.5°	352.8	353.7	354.6	355.5	356.4	356.9	356.8	356.7	356.6	356.5	356.4
135°	374.8	375.4	376.0	376.6	377.2	377.5	377.6	377.7	377.8	377.9	378.0
137.5°	395.4	396.0	396.6	397.2	397.8	398.1	398.2	398.4	398.7	398.9	399.1
140°	415.1	415.6	416.1	416.6	417.1	417.4	417.6	417.9	418.2	418.5	418.8
142.5°	434.8	435.2	435.6	436.0	436.4	436.6	436.8	437.2	437.7	438.1	438.5
145°	454.0	454.4	454.8	455.3	455.7	455.9	456.0	456.3	456.6	456.9	457.2
147.5°	471.9	472.2	472.5	472.8	473.1	473.3	473.4	473.6	473.8	474.0	474.2
150°	489.8	489.7	489.6	489.5	489.4	489.3	489.5	489.9	490.3	490.7	491.1
152.5°	504.4	504.6	504.8	505.0	505.2	505.3	505.4	505.5	505.6	505.7	505.8
155°	519.5	519.5	519.5	519.5	519.5	519.5	519.6	519.7	519.8	519.9	520.0
157.5°	533.3	533.1	532.9	532.7	532.5	532.4	532.4	532.5	532.6	532.7	532.8
160°	545.2	544.9	544.6	544.3	544.0	543.8	543.9	544.0	544.1	544.2	544.3
162.5°	555.7	555.5	555.3	555.1	554.9	554.8	554.8	554.8	554.8	554.8	554.8
165°	564.9	564.7	564.5	564.3	564.1	564.0	564.0	564.1	564.2	564.3	564.4
167.5°	573.1	572.7	572.3	571.9	571.5	571.3	571.3	571.3	571.3	571.3	571.3
170°	579.6	579.2	578.8	578.3	577.9	577.7	577.7	577.7	577.7	577.7	577.7
172.5°	584.1	583.7	583.3	582.9	582.5	582.3	582.3	582.3	582.3	582.3	582.3
175°	587.4	587.0	586.6	586.1	585.7	585.5	585.5	585.5	585.5	585.5	585.5
177.5°	589.6	589.2	588.8	588.4	588.0	587.8	587.8	587.7	587.6	587.5	587.4
180°	588.7	588.7	588.7	588.7	588.7	588.7	588.7	588.7	588.7	588.7	588.7

TEST NUMBER: P1036129

CATALOG NUMBER: S125RDIW-B850D470UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°	95°
0°	1271.8	1271.8	1271.8	1271.8	1271.8	1271.8	1271.8	1271.8	1271.8	1271.8	1271.8
2.5°	1327.2	1334.5	1340.7	1337.6	1350.1	1349.1	1351.2	1355.3	1356.4	1354.3	1350.1
5°	1399.2	1409.6	1427.4	1436.8	1434.7	1443.1	1447.2	1453.5	1459.8	1457.7	1457.7
7.5°	1479.6	1494.2	1512.0	1536.0	1539.1	1546.4	1559.0	1559.0	1566.3	1563.1	1562.1
10°	1549.6	1567.3	1595.5	1614.3	1622.7	1626.8	1639.4	1643.5	1651.9	1652.9	1652.9
12.5°	1607.0	1638.3	1657.1	1675.9	1680.1	1686.4	1695.7	1702.0	1705.1	1705.1	1702.0
15°	1637.3	1662.3	1684.3	1704.1	1715.6	1720.8	1730.2	1737.5	1741.7	1751.1	1753.2
17.5°	1649.8	1680.1	1715.6	1743.8	1763.6	1768.8	1787.6	1793.9	1802.3	1806.4	1811.7
20°	1667.6	1711.4	1754.2	1788.7	1807.5	1821.0	1840.9	1870.1	1878.5	1878.5	1875.3
22.5°	1683.2	1739.6	1798.1	1853.4	1869.1	1896.2	1932.8	1964.1	1976.6	1981.9	1977.7
25°	1702.0	1779.3	1855.5	1924.4	1967.2	1987.1	2036.2	2073.7	2088.4	2096.7	2098.8
27.5°	1734.4	1831.5	1928.6	2016.3	2060.2	2083.1	2134.3	2166.7	2184.4	2191.7	2186.5
30°	1770.9	1890.0	2002.7	2081.1	2110.3	2138.5	2171.9	2184.4	2180.2	2180.2	2195.9
32.5°	1808.5	1931.7	2032.0	2083.1	2093.6	2089.4	2075.8	2038.2	2016.3	2016.3	2029.9
35°	1829.4	1935.9	1987.1	1970.4	1929.6	1905.6	1831.5	1789.7	1742.7	1739.6	1755.3
37.5°	1817.9	1863.9	1843.0	1733.3	1678.0	1632.1	1516.1	1470.2	1435.7	1387.7	1461.9
40°	1737.5	1721.9	1613.3	1455.6	1394.0	1329.2	1237.4	1191.4	1143.4	1136.1	1153.8
42.5°	1601.8	1508.8	1350.1	1197.7	1135.0	1089.1	1019.1	974.2	943.9	931.4	952.3
45°	1432.6	1286.4	1127.7	1006.6	937.7	913.7	850.0	810.3	787.3	777.9	792.5
47.5°	1225.9	1078.6	928.3	825.9	785.2	761.2	718.4	683.9	664.1	657.8	664.1
50°	1041.0	889.6	763.3	697.5	661.0	641.1	605.6	583.7	568.0	563.9	574.3
52.5°	881.3	743.5	647.4	588.9	564.9	548.2	523.1	504.3	494.9	490.8	498.1
55°	738.2	626.5	549.2	499.1	481.4	470.9	449.0	438.6	428.1	427.1	434.4
57.5°	611.9	534.6	463.6	428.1	422.9	407.2	388.4	379.0	373.8	372.8	375.9
60°	509.6	440.6	397.8	366.5	359.2	346.7	336.2	330.0	323.7	321.6	323.7
62.5°	423.9	369.6	335.2	314.3	303.9	300.7	289.2	281.9	280.9	280.9	283.0
65°	349.8	303.9	281.9	265.2	257.9	254.8	246.4	241.2	242.2	242.2	243.3
67.5°	285.1	251.6	231.8	223.5	217.2	216.1	207.8	205.7	203.6	203.6	205.7
70°	226.6	205.7	191.1	186.9	185.9	178.6	175.4	174.4	171.2	172.3	172.3
72.5°	177.5	163.9	155.6	149.3	150.4	146.2	142.0	142.0	139.9	143.1	143.1
75°	131.6	125.3	119.0	116.9	119.0	116.9	113.8	112.8	113.8	112.8	112.8
77.5°	97.1	94.0	91.9	90.8	90.8	86.7	84.6	86.7	82.5	84.6	84.6
80°	67.9	63.7	62.7	60.6	61.6	58.5	59.5	57.4	57.4	57.4	57.4
82.5°	42.8	41.8	41.8	41.8	40.7	40.7	40.7	40.7	40.7	40.7	39.7
85°	26.1	25.1	25.1	25.1	24.0	24.0	24.0	24.0	24.0	24.0	24.0
87.5°	10.4	11.5	11.5	12.5	11.5	10.4	10.4	10.4	11.5	11.5	10.4
90°	7.8	8.3	8.8	9.3	9.6	9.8	10.1	10.4	10.7	11.0	10.7
92.5°	20.9	21.6	22.3	23.0	23.4	23.5	23.7	23.9	24.1	24.3	24.1
95°	36.0	36.7	37.4	38.1	38.5	38.6	38.8	39.0	39.2	39.4	39.2
97.5°	53.3	53.9	54.5	55.1	55.4	55.5	55.6	55.7	55.8	55.9	55.8
100°	71.0	71.9	72.8	73.7	74.2	74.3	74.5	74.7	74.9	75.1	74.9
102.5°	89.4	90.4	91.5	92.5	93.0	93.2	93.5	93.8	94.1	94.4	94.1
105°	110.1	110.7	111.3	111.9	112.2	112.4	112.7	113.0	113.3	113.6	113.3
107.5°	131.8	132.1	132.4	132.7	132.9	132.9	132.9	132.9	132.9	132.9	132.9
110°	154.2	154.5	154.8	155.1	155.3	155.3	155.2	155.1	155.0	154.9	155.0

TEST NUMBER: P1036129

CATALOG NUMBER: S125RDIW-B850D470UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	50°	55°	60°	65°	67.5°	70°	75°	80°	85°	90°	95°
112.5°	176.9	177.0	177.1	177.2	177.3	177.2	177.0	176.8	176.6	176.4	176.6
115°	200.1	200.0	199.9	199.8	199.8	199.7	199.6	199.5	199.4	199.3	199.4
117.5°	222.8	222.9	223.0	223.1	223.1	222.9	222.5	222.1	221.7	221.3	221.7
120°	246.0	246.0	246.0	246.0	246.0	245.8	245.4	245.0	244.6	244.2	244.6
122.5°	268.8	268.7	268.6	268.5	268.5	268.3	268.0	267.7	267.4	267.1	267.4
125°	291.2	291.0	290.8	290.6	290.5	290.4	290.3	290.2	290.1	290.0	290.1
127.5°	313.3	313.2	313.1	313.0	312.9	312.8	312.6	312.4	312.2	312.0	312.2
130°	335.3	335.2	335.1	335.0	334.9	334.8	334.6	334.4	334.2	334.0	334.2
132.5°	356.3	356.2	356.1	356.0	356.0	355.8	355.5	355.2	354.9	354.6	354.9
135°	378.0	378.0	378.0	378.0	378.0	377.8	377.4	376.9	376.5	376.1	376.5
137.5°	399.2	399.3	399.4	399.5	399.5	399.2	398.7	398.2	397.7	397.2	397.7
140°	419.0	419.2	419.4	419.6	419.7	419.4	418.9	418.4	417.9	417.4	417.9
142.5°	438.6	438.7	438.8	438.9	438.9	438.6	438.1	437.6	437.1	436.6	437.1
145°	457.2	457.2	457.2	457.2	457.2	457.1	456.8	456.5	456.2	455.9	456.2
147.5°	474.5	474.8	475.1	475.4	475.6	475.2	474.4	473.5	472.7	471.9	472.7
150°	491.1	491.1	491.1	491.1	491.1	491.0	490.8	490.6	490.4	490.2	490.4
152.5°	506.1	506.4	506.7	507.0	507.2	507.0	506.6	506.1	505.7	505.3	505.7
155°	520.4	520.8	521.2	521.6	521.8	521.5	521.0	520.5	520.0	519.5	520.0
157.5°	533.2	533.6	534.1	534.5	534.7	534.3	533.6	532.9	532.2	531.5	532.2
160°	544.7	545.1	545.5	545.9	546.1	545.8	545.3	544.8	544.3	543.8	544.3
162.5°	555.3	555.8	556.3	556.8	557.1	556.8	556.2	555.6	555.0	554.4	555.0
165°	564.8	565.2	565.7	566.1	566.3	566.0	565.4	564.7	564.1	563.5	564.1
167.5°	571.9	572.5	573.2	573.8	574.1	573.8	573.2	572.5	571.9	571.3	571.9
170°	578.3	578.9	579.6	580.2	580.5	580.1	579.4	578.7	578.0	577.3	578.0
172.5°	582.9	583.5	584.2	584.8	585.1	584.8	584.2	583.5	582.9	582.3	582.9
175°	586.1	586.7	587.4	588.0	588.3	587.9	587.2	586.5	585.8	585.1	585.8
177.5°	588.0	588.6	589.2	589.8	590.1	589.7	589.0	588.3	587.6	586.9	587.6
180°	588.7	588.7	588.7	588.7	588.7	588.7	588.7	588.7	588.7	588.7	588.7

TEST NUMBER: P1036129

CATALOG NUMBER: S125RDIW-B850D470UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	100°	105°	110°	112.5°	115°	120°	125°	130°	135°	140°	145°
0°	1271.8	1271.8	1271.8	1271.8	1271.8	1271.8	1271.8	1271.8	1271.8	1271.8	1271.8
2.5°	1355.3	1348.0	1351.2	1348.0	1344.9	1341.8	1334.5	1324.0	1315.7	1309.4	1308.4
5°	1459.8	1450.4	1444.1	1441.0	1434.7	1426.3	1412.8	1397.1	1378.3	1371.0	1356.4
7.5°	1555.8	1552.7	1538.1	1536.0	1531.8	1516.1	1493.2	1472.3	1448.3	1428.4	1409.6
10°	1646.7	1639.4	1628.9	1614.3	1612.2	1592.4	1570.4	1541.2	1509.9	1491.1	1457.7
12.5°	1703.1	1694.7	1683.2	1673.8	1668.6	1656.1	1625.8	1596.6	1568.4	1533.9	1504.7
15°	1743.8	1733.3	1712.5	1705.1	1698.9	1682.2	1660.2	1630.0	1592.4	1568.4	1526.6
17.5°	1799.1	1786.6	1765.7	1752.1	1740.6	1714.5	1683.2	1642.5	1607.0	1579.8	1542.3
20°	1862.8	1844.0	1816.9	1799.1	1782.4	1752.1	1708.3	1660.2	1609.1	1575.7	1537.0
22.5°	1968.3	1932.8	1890.0	1864.9	1841.9	1789.7	1737.5	1678.0	1620.6	1570.4	1523.5
25°	2070.6	2035.1	1981.9	1947.4	1911.9	1851.3	1782.4	1699.9	1626.8	1568.4	1506.8
27.5°	2165.6	2129.1	2080.0	2038.2	2003.8	1912.9	1822.1	1729.2	1636.2	1555.8	1493.2
30°	2187.6	2171.9	2134.3	2097.8	2066.4	1982.9	1877.4	1759.4	1647.7	1544.3	1474.4
32.5°	2054.9	2093.6	2103.0	2097.8	2077.9	2018.4	1921.3	1797.0	1664.4	1539.1	1443.1
35°	1779.3	1849.2	1921.3	1959.9	1978.7	1987.1	1929.6	1815.8	1675.9	1530.8	1422.2
37.5°	1475.4	1543.3	1657.1	1714.5	1778.2	1861.8	1884.7	1811.7	1670.7	1524.5	1388.8
40°	1212.3	1299.0	1392.9	1445.1	1500.5	1650.8	1764.7	1756.3	1654.0	1501.5	1362.7
42.5°	986.7	1041.0	1123.5	1181.0	1248.8	1417.0	1569.4	1644.6	1603.9	1473.3	1329.2
45°	822.8	864.6	923.1	981.5	1023.3	1175.7	1356.4	1479.6	1518.2	1423.2	1278.1
47.5°	693.3	724.7	775.8	812.4	857.3	977.4	1134.0	1307.3	1388.8	1352.2	1223.8
50°	594.1	619.2	659.9	682.9	722.6	825.9	945.0	1126.7	1249.9	1254.1	1151.7
52.5°	507.5	532.5	567.0	586.8	610.8	680.8	800.9	954.4	1096.4	1148.6	1069.2
55°	441.7	456.3	484.5	500.2	522.1	590.0	666.2	796.7	945.0	1030.6	980.5
57.5°	381.1	396.8	414.5	427.1	442.7	497.0	565.9	664.1	811.3	904.3	887.6
60°	332.0	341.4	358.2	367.6	382.2	417.7	465.7	563.9	680.8	768.5	777.9
62.5°	286.1	294.5	305.9	314.3	323.7	351.9	387.4	457.4	559.7	654.7	667.2
65°	246.4	253.7	260.0	267.3	274.6	292.4	322.7	376.9	456.3	545.1	572.2
67.5°	210.9	213.0	222.4	223.5	227.6	241.2	263.1	307.0	364.4	435.4	470.9
70°	176.5	180.6	182.7	185.9	190.0	199.4	217.2	240.2	283.0	340.4	373.8
72.5°	143.1	144.1	147.2	149.3	153.5	160.8	169.2	186.9	214.1	255.8	286.1
75°	113.8	114.9	116.9	118.0	121.1	123.2	127.4	139.9	158.7	183.8	205.7
77.5°	85.6	87.7	89.8	89.8	90.8	92.9	95.0	99.2	108.6	125.3	144.1
80°	58.5	59.5	59.5	60.6	59.5	62.7	65.8	71.0	75.2	80.4	89.8
82.5°	40.7	40.7	40.7	41.8	41.8	42.8	42.8	43.9	44.9	48.0	52.2
85°	25.1	25.1	26.1	24.0	25.1	26.1	26.1	25.1	26.1	27.1	28.2
87.5°	10.4	10.4	11.5	11.5	11.5	11.5	10.4	11.5	10.4	11.5	11.5
90°	10.4	10.1	9.8	9.6	9.3	8.8	8.3	7.8	7.3	6.6	5.9
92.5°	23.9	23.7	23.5	23.4	23.0	22.3	21.6	20.9	20.2	19.3	18.3
95°	39.0	38.8	38.6	38.5	38.1	37.4	36.7	36.0	35.3	34.3	33.3
97.5°	55.7	55.6	55.5	55.4	55.1	54.5	53.9	53.3	52.7	51.3	49.9
100°	74.7	74.5	74.3	74.2	73.7	72.8	71.9	71.0	70.1	68.8	67.4
102.5°	93.8	93.5	93.2	93.0	92.5	91.5	90.4	89.4	88.4	87.9	87.4
105°	113.0	112.7	112.4	112.2	111.9	111.3	110.7	110.1	109.5	108.9	108.3
107.5°	132.9	132.9	132.9	132.9	132.7	132.4	132.1	131.8	131.5	131.0	130.5
110°	155.1	155.2	155.3	155.3	155.1	154.8	154.5	154.2	153.9	153.6	153.3

TEST NUMBER: P1036129

CATALOG NUMBER: S125RDIW-B850D470UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	100°	105°	110°	112.5°	115°	120°	125°	130°	135°	140°	145°
112.5°	176.8	177.0	177.2	177.3	177.2	177.1	177.0	176.9	176.8	176.4	176.0
115°	199.5	199.6	199.7	199.8	199.8	199.9	200.0	200.1	200.2	200.0	199.8
117.5°	222.1	222.5	222.9	223.1	223.1	223.0	222.9	222.8	222.7	222.5	222.3
120°	245.0	245.4	245.8	246.0	246.0	246.0	246.0	246.0	246.0	245.9	245.8
122.5°	267.7	268.0	268.3	268.5	268.5	268.6	268.7	268.8	268.9	268.6	268.3
125°	290.2	290.3	290.4	290.5	290.6	290.8	291.0	291.2	291.4	291.3	291.2
127.5°	312.4	312.6	312.8	312.9	313.0	313.1	313.2	313.3	313.4	313.3	313.2
130°	334.4	334.6	334.8	334.9	335.0	335.1	335.2	335.3	335.4	335.2	335.0
132.5°	355.2	355.5	355.8	356.0	356.0	356.1	356.2	356.3	356.4	356.5	356.6
135°	376.9	377.4	377.8	378.0	378.0	378.0	378.0	378.0	378.0	377.9	377.8
137.5°	398.2	398.7	399.2	399.5	399.5	399.4	399.3	399.2	399.1	398.9	398.7
140°	418.4	418.9	419.4	419.7	419.6	419.4	419.2	419.0	418.8	418.5	418.2
142.5°	437.6	438.1	438.6	438.9	438.9	438.8	438.7	438.6	438.5	438.1	437.7
145°	456.5	456.8	457.1	457.2	457.2	457.2	457.2	457.2	457.2	456.9	456.6
147.5°	473.5	474.4	475.2	475.6	475.4	475.1	474.8	474.5	474.2	474.0	473.8
150°	490.6	490.8	491.0	491.1	491.1	491.1	491.1	491.1	491.1	490.7	490.3
152.5°	506.1	506.6	507.0	507.2	507.0	506.7	506.4	506.1	505.8	505.7	505.6
155°	520.5	521.0	521.5	521.8	521.6	521.2	520.8	520.4	520.0	519.9	519.8
157.5°	532.9	533.6	534.3	534.7	534.5	534.1	533.6	533.2	532.8	532.7	532.6
160°	544.8	545.3	545.8	546.1	545.9	545.5	545.1	544.7	544.3	544.2	544.1
162.5°	555.6	556.2	556.8	557.1	556.8	556.3	555.8	555.3	554.8	554.8	554.8
165°	564.7	565.4	566.0	566.3	566.1	565.7	565.2	564.8	564.4	564.3	564.2
167.5°	572.5	573.2	573.8	574.1	573.8	573.2	572.5	571.9	571.3	571.3	571.3
170°	578.7	579.4	580.1	580.5	580.2	579.6	578.9	578.3	577.7	577.7	577.7
172.5°	583.5	584.2	584.8	585.1	584.8	584.2	583.5	582.9	582.3	582.3	582.3
175°	586.5	587.2	587.9	588.3	588.0	587.4	586.7	586.1	585.5	585.5	585.5
177.5°	588.3	589.0	589.7	590.1	589.8	589.2	588.6	588.0	587.4	587.5	587.6
180°	588.7	588.7	588.7	588.7	588.7	588.7	588.7	588.7	588.7	588.7	588.7

TEST NUMBER: P1036129

CATALOG NUMBER: S125RDIW-B850D470UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	150°	155°	157.5°	160°	165°	170°	175°	180°	185°	190°	195°
0°	1271.8	1271.8	1271.8	1271.8	1271.8	1271.8	1271.8	1271.8	1271.8	1271.8	1271.8
2.5°	1305.2	1299.0	1294.8	1293.7	1287.5	1282.3	1276.0	1274.9	1271.8	1263.5	1258.2
5°	1345.9	1331.3	1328.2	1318.8	1303.1	1291.7	1277.0	1268.7	1259.3	1243.6	1231.1
7.5°	1387.7	1367.9	1353.3	1339.7	1317.8	1296.9	1276.0	1259.3	1242.6	1219.6	1200.8
10°	1428.4	1398.2	1380.4	1360.6	1330.3	1299.0	1269.7	1245.7	1218.6	1191.4	1164.3
12.5°	1466.0	1427.4	1401.3	1373.1	1335.5	1296.9	1259.3	1225.9	1197.7	1161.1	1130.8
15°	1489.0	1446.2	1420.1	1392.9	1336.5	1293.7	1249.9	1207.1	1169.5	1130.8	1102.7
17.5°	1502.6	1454.5	1425.3	1400.2	1342.8	1284.3	1228.0	1182.0	1141.3	1095.3	1057.8
20°	1496.3	1449.3	1422.2	1398.2	1331.3	1272.9	1212.3	1159.0	1107.9	1060.9	1021.2
22.5°	1482.7	1433.7	1403.4	1381.4	1321.9	1253.0	1186.2	1128.8	1075.5	1028.5	983.6
25°	1453.5	1405.5	1379.4	1352.2	1293.7	1228.0	1160.1	1098.5	1042.1	992.0	941.9
27.5°	1427.4	1368.9	1341.8	1317.8	1256.1	1197.7	1130.8	1063.0	1005.5	953.3	903.2
30°	1397.1	1331.3	1302.1	1269.7	1214.4	1159.0	1092.2	1029.6	970.0	914.7	866.7
32.5°	1364.7	1288.5	1255.1	1218.6	1162.2	1110.0	1053.6	992.0	932.5	878.2	828.0
35°	1323.0	1241.5	1202.9	1168.4	1110.0	1057.8	1005.5	954.4	894.9	837.4	789.4
37.5°	1283.3	1193.5	1152.8	1113.1	1051.5	1001.4	958.6	910.5	853.1	797.8	751.8
40°	1238.4	1135.0	1093.3	1056.7	993.0	937.7	899.0	861.4	811.3	758.1	708.0
42.5°	1197.7	1080.7	1036.9	999.3	932.5	880.2	843.7	812.4	768.5	719.4	668.3
45°	1141.3	1022.3	977.4	937.7	869.8	820.7	783.1	756.0	721.5	675.6	629.6
47.5°	1089.1	965.9	916.8	868.8	807.2	757.0	722.6	701.7	678.7	638.0	591.0
50°	1025.4	901.1	851.0	811.3	741.4	698.6	664.1	649.5	628.6	590.0	552.4
52.5°	956.5	838.5	791.5	743.5	678.7	636.9	606.7	590.0	573.3	545.1	509.6
55°	876.1	768.5	724.7	681.8	617.1	578.5	551.3	533.6	524.2	498.1	472.0
57.5°	798.8	697.5	656.8	617.1	560.7	516.9	499.1	483.5	469.9	451.1	429.2
60°	720.5	628.6	584.7	549.2	500.2	460.5	445.9	430.2	419.8	405.1	389.5
62.5°	630.7	552.4	519.0	485.5	443.8	412.5	395.7	383.2	369.6	360.2	346.7
65°	535.7	480.3	448.0	422.9	383.2	355.0	342.5	334.1	322.7	313.3	302.8
67.5°	446.9	403.1	389.5	362.3	332.0	307.0	297.6	287.1	277.8	272.5	263.1
70°	361.3	330.0	316.4	309.1	275.7	259.0	250.6	246.4	234.9	229.7	223.5
72.5°	279.8	268.4	259.0	249.6	227.6	217.2	207.8	203.6	195.3	191.1	189.0
75°	206.7	199.4	194.2	193.2	183.8	173.3	163.9	161.8	155.6	151.4	149.3
77.5°	145.1	143.1	142.0	143.1	136.8	130.5	128.4	126.3	119.0	118.0	118.0
80°	95.0	100.2	100.2	99.2	97.1	96.1	92.9	90.8	86.7	85.6	86.7
82.5°	58.5	61.6	62.7	64.7	63.7	62.7	60.6	59.5	60.6	58.5	59.5
85°	29.2	31.3	35.5	35.5	36.5	36.5	36.5	35.5	33.4	34.5	33.4
87.5°	11.5	12.5	12.5	12.5	11.5	14.6	15.7	15.7	15.7	13.6	13.6
90°	5.2	4.5	4.1	3.7	2.9	2.1	1.3	0.5	1.3	2.1	2.9
92.5°	17.4	16.5	16.0	15.7	15.2	14.7	14.2	13.7	14.2	14.7	15.2
95°	32.2	31.2	30.7	30.6	30.4	30.2	30.0	29.8	30.0	30.2	30.4
97.5°	48.4	47.0	46.3	46.2	46.1	46.0	45.9	45.8	45.9	46.0	46.1
100°	66.1	64.8	64.1	64.1	64.1	64.1	64.1	64.1	64.1	64.1	64.1
102.5°	86.9	86.4	86.1	85.8	85.3	84.8	84.3	83.8	84.3	84.8	85.3
105°	107.6	107.0	106.7	106.5	106.0	105.5	105.0	104.5	105.0	105.5	106.0
107.5°	130.0	129.5	129.2	128.9	128.4	127.9	127.4	126.9	127.4	127.9	128.4
110°	153.0	152.7	152.6	152.3	151.8	151.3	150.8	150.3	150.8	151.3	151.8

TEST NUMBER: P1036129

CATALOG NUMBER: S125RDIW-B850D470UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	150°	155°	157.5°	160°	165°	170°	175°	180°	185°	190°	195°
112.5°	175.6	175.2	175.0	174.9	174.7	174.5	174.3	174.1	174.3	174.5	174.7
115°	199.6	199.4	199.3	199.1	198.7	198.3	197.9	197.5	197.9	198.3	198.7
117.5°	222.0	221.8	221.7	221.7	221.6	221.5	221.4	221.3	221.4	221.5	221.6
120°	245.7	245.6	245.6	245.3	244.8	244.3	243.8	243.3	243.8	244.3	244.8
122.5°	268.0	267.7	267.6	267.5	267.4	267.3	267.2	267.1	267.2	267.3	267.4
125°	291.1	291.0	290.9	290.6	290.0	289.4	288.8	288.2	288.8	289.4	290.0
127.5°	313.1	313.0	312.9	312.7	312.4	312.1	311.8	311.5	311.8	312.1	312.4
130°	334.8	334.6	334.5	334.2	333.7	333.2	332.7	332.2	332.7	333.2	333.7
132.5°	356.7	356.8	356.9	356.4	355.5	354.6	353.7	352.8	353.7	354.6	355.5
135°	377.7	377.6	377.5	377.2	376.6	376.0	375.4	374.8	375.4	376.0	376.6
137.5°	398.4	398.2	398.1	397.8	397.2	396.6	396.0	395.4	396.0	396.6	397.2
140°	417.9	417.6	417.4	417.1	416.6	416.1	415.6	415.1	415.6	416.1	416.6
142.5°	437.2	436.8	436.6	436.4	436.0	435.6	435.2	434.8	435.2	435.6	436.0
145°	456.3	456.0	455.9	455.7	455.3	454.8	454.4	454.0	454.4	454.8	455.3
147.5°	473.6	473.4	473.3	473.1	472.8	472.5	472.2	471.9	472.2	472.5	472.8
150°	489.9	489.5	489.3	489.4	489.5	489.6	489.7	489.8	489.7	489.6	489.5
152.5°	505.5	505.4	505.3	505.2	505.0	504.8	504.6	504.4	504.6	504.8	505.0
155°	519.7	519.6	519.5	519.5	519.5	519.5	519.5	519.5	519.5	519.5	519.5
157.5°	532.5	532.4	532.4	532.5	532.7	532.9	533.1	533.3	533.1	532.9	532.7
160°	544.0	543.9	543.8	544.0	544.3	544.6	544.9	545.2	544.9	544.6	544.3
162.5°	554.8	554.8	554.8	554.9	555.1	555.3	555.5	555.7	555.5	555.3	555.1
165°	564.1	564.0	564.0	564.1	564.3	564.5	564.7	564.9	564.7	564.5	564.3
167.5°	571.3	571.3	571.3	571.5	571.9	572.3	572.7	573.1	572.7	572.3	571.9
170°	577.7	577.7	577.7	577.9	578.3	578.8	579.2	579.6	579.2	578.8	578.3
172.5°	582.3	582.3	582.3	582.5	582.9	583.3	583.7	584.1	583.7	583.3	582.9
175°	585.5	585.5	585.5	585.7	586.1	586.6	587.0	587.4	587.0	586.6	586.1
177.5°	587.7	587.8	587.8	588.0	588.4	588.8	589.2	589.6	589.2	588.8	588.4
180°	588.7	588.7	588.7	588.7	588.7	588.7	588.7	588.7	588.7	588.7	588.7

TEST NUMBER: P1036129

CATALOG NUMBER: S125RDIW-B850D470UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	200°	202.5°	205°	210°	215°	220°	225°	230°	235°	240°	245°
0°	1271.8	1271.8	1271.8	1271.8	1271.8	1271.8	1271.8	1271.8	1271.8	1271.8	1271.8
2.5°	1255.1	1250.9	1247.8	1244.7	1231.1	1216.5	1214.4	1211.2	1205.0	1212.3	1209.2
5°	1222.7	1213.3	1208.1	1194.5	1177.8	1165.3	1154.9	1142.3	1137.1	1132.9	1131.9
7.5°	1183.1	1174.7	1165.3	1151.7	1130.8	1110.0	1094.3	1081.8	1071.3	1066.1	1066.1
10°	1144.4	1134.0	1121.4	1098.5	1078.6	1052.5	1035.8	1023.3	1008.7	1000.3	993.0
12.5°	1104.7	1093.3	1081.8	1052.5	1029.6	1002.4	978.4	962.7	955.4	946.0	933.5
15°	1065.1	1047.3	1035.8	1006.6	977.4	950.2	934.5	917.8	901.1	891.7	887.6
17.5°	1023.3	1010.8	992.0	960.6	928.3	904.3	881.3	865.6	845.8	836.4	827.0
20°	985.7	966.9	948.1	916.8	885.5	853.1	830.1	811.3	798.8	791.5	783.1
22.5°	940.8	923.1	907.4	874.0	839.5	809.2	784.2	772.7	760.2	748.7	740.3
25°	902.2	884.4	868.8	832.2	794.6	766.4	747.6	733.0	719.4	714.2	705.9
27.5°	861.4	844.7	823.9	787.3	753.9	729.9	710.0	696.5	686.0	675.6	669.3
30°	822.8	804.0	785.2	745.5	718.4	694.4	675.6	658.9	650.5	645.3	634.9
32.5°	785.2	761.2	745.5	709.0	682.9	659.9	644.3	629.6	619.2	609.8	601.4
35°	744.5	718.4	702.7	672.5	645.3	622.3	608.8	598.3	585.8	577.4	573.3
37.5°	705.9	683.9	668.3	636.9	609.8	591.0	576.4	562.8	557.6	546.1	544.0
40°	664.1	645.3	630.7	600.4	575.3	560.7	545.1	532.5	523.1	517.9	510.6
42.5°	626.5	610.8	595.2	567.0	543.0	525.2	513.7	502.3	493.9	485.5	480.3
45°	592.0	575.3	560.7	533.6	509.6	493.9	482.4	468.8	466.7	455.3	450.0
47.5°	555.5	540.9	528.4	500.2	478.2	462.6	449.0	439.6	430.2	426.0	418.7
50°	520.0	505.4	490.8	465.7	445.9	430.2	416.6	406.2	401.0	394.7	388.4
52.5°	481.4	469.9	458.4	432.3	412.5	398.9	387.4	373.8	368.6	363.4	359.2
55°	449.0	432.3	419.8	397.8	380.1	365.5	352.9	342.5	337.3	333.1	327.9
57.5°	405.1	394.7	384.3	364.4	347.7	333.1	320.6	312.2	305.9	302.8	303.9
60°	367.6	356.1	349.8	328.9	312.2	300.7	289.2	280.9	274.6	271.5	270.4
62.5°	327.9	319.5	308.0	293.4	276.7	266.3	257.9	251.6	241.2	240.2	237.0
65°	289.2	283.0	272.5	259.0	245.4	236.0	226.6	218.2	214.1	208.8	205.7
67.5°	251.6	245.4	236.0	224.5	215.1	205.7	197.3	189.0	181.7	177.5	175.4
70°	215.1	209.9	203.6	190.0	178.6	171.2	165.0	159.8	152.5	150.4	149.3
72.5°	179.6	174.4	171.2	159.8	149.3	143.1	136.8	131.6	128.4	127.4	124.3
75°	147.2	142.0	137.8	127.4	121.1	116.9	110.7	108.6	105.5	104.4	103.4
77.5°	114.9	109.6	108.6	101.3	94.0	91.9	89.8	85.6	85.6	85.6	83.5
80°	82.5	81.4	80.4	73.1	70.0	67.9	66.8	63.7	61.6	59.5	58.5
82.5°	55.3	54.3	53.3	50.1	47.0	45.9	44.9	42.8	42.8	43.9	41.8
85°	33.4	31.3	30.3	29.2	27.1	27.1	28.2	27.1	27.1	27.1	26.1
87.5°	12.5	12.5	12.5	12.5	13.6	11.5	12.5	12.5	11.5	11.5	10.4
90°	3.7	4.1	4.5	5.2	5.9	6.6	7.3	7.8	8.3	8.8	9.3
92.5°	15.7	16.0	16.5	17.4	18.3	19.3	20.2	20.9	21.6	22.3	23.0
95°	30.6	30.7	31.2	32.2	33.3	34.3	35.3	36.0	36.7	37.4	38.1
97.5°	46.2	46.3	47.0	48.4	49.9	51.3	52.7	53.3	53.9	54.5	55.1
100°	64.1	64.1	64.8	66.1	67.4	68.8	70.1	71.0	71.9	72.8	73.7
102.5°	85.8	86.1	86.4	86.9	87.4	87.9	88.4	89.4	90.4	91.5	92.5
105°	106.5	106.7	107.0	107.6	108.3	108.9	109.5	110.1	110.7	111.3	111.9
107.5°	128.9	129.2	129.5	130.0	130.5	131.0	131.5	131.8	132.1	132.4	132.7
110°	152.3	152.6	152.7	153.0	153.3	153.6	153.9	154.2	154.5	154.8	155.1

TEST NUMBER: P1036129

CATALOG NUMBER: S125RDIW-B850D470UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	200°	202.5°	205°	210°	215°	220°	225°	230°	235°	240°	245°
112.5°	174.9	175.0	175.2	175.6	176.0	176.4	176.8	176.9	177.0	177.1	177.2
115°	199.1	199.3	199.4	199.6	199.8	200.0	200.2	200.1	200.0	199.9	199.8
117.5°	221.7	221.7	221.8	222.0	222.3	222.5	222.7	222.8	222.9	223.0	223.1
120°	245.3	245.6	245.6	245.7	245.8	245.9	246.0	246.0	246.0	246.0	246.0
122.5°	267.5	267.6	267.7	268.0	268.3	268.6	268.9	268.8	268.7	268.6	268.5
125°	290.6	290.9	291.0	291.1	291.2	291.3	291.4	291.2	291.0	290.8	290.6
127.5°	312.7	312.9	313.0	313.1	313.2	313.3	313.4	313.3	313.2	313.1	313.0
130°	334.2	334.5	334.6	334.8	335.0	335.2	335.4	335.3	335.2	335.1	335.0
132.5°	356.4	356.9	356.8	356.7	356.6	356.5	356.4	356.3	356.2	356.1	356.0
135°	377.2	377.5	377.6	377.7	377.8	377.9	378.0	378.0	378.0	378.0	378.0
137.5°	397.8	398.1	398.2	398.4	398.7	398.9	399.1	399.2	399.3	399.4	399.5
140°	417.1	417.4	417.6	417.9	418.2	418.5	418.8	419.0	419.2	419.4	419.6
142.5°	436.4	436.6	436.8	437.2	437.7	438.1	438.5	438.6	438.7	438.8	438.9
145°	455.7	455.9	456.0	456.3	456.6	456.9	457.2	457.2	457.2	457.2	457.2
147.5°	473.1	473.3	473.4	473.6	473.8	474.0	474.2	474.5	474.8	475.1	475.4
150°	489.4	489.3	489.5	489.9	490.3	490.7	491.1	491.1	491.1	491.1	491.1
152.5°	505.2	505.3	505.4	505.5	505.6	505.7	505.8	506.1	506.4	506.7	507.0
155°	519.5	519.5	519.6	519.7	519.8	519.9	520.0	520.4	520.8	521.2	521.6
157.5°	532.5	532.4	532.4	532.5	532.6	532.7	532.8	533.2	533.6	534.1	534.5
160°	544.0	543.8	543.9	544.0	544.1	544.2	544.3	544.7	545.1	545.5	545.9
162.5°	554.9	554.8	554.8	554.8	554.8	554.8	554.8	555.3	555.8	556.3	556.8
165°	564.1	564.0	564.0	564.1	564.2	564.3	564.4	564.8	565.2	565.7	566.1
167.5°	571.5	571.3	571.3	571.3	571.3	571.3	571.3	571.9	572.5	573.2	573.8
170°	577.9	577.7	577.7	577.7	577.7	577.7	577.7	578.3	578.9	579.6	580.2
172.5°	582.5	582.3	582.3	582.3	582.3	582.3	582.3	582.9	583.5	584.2	584.8
175°	585.7	585.5	585.5	585.5	585.5	585.5	585.5	586.1	586.7	587.4	588.0
177.5°	588.0	587.8	587.8	587.7	587.6	587.5	587.4	588.0	588.6	589.2	589.8
180°	588.7	588.7	588.7	588.7	588.7	588.7	588.7	588.7	588.7	588.7	588.7

TEST NUMBER: P1036129

CATALOG NUMBER: S125RDIW-B850D470UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	247.5°	250°	255°	260°	265°	270°	275°	280°	285°	290°	292.5°
0°	1271.8	1271.8	1271.8	1271.8	1271.8	1271.8	1271.8	1271.8	1271.8	1271.8	1271.8
2.5°	1203.9	1206.0	1200.8	1198.7	1194.5	1199.8	1200.8	1199.8	1209.2	1205.0	1207.1
5°	1134.0	1129.8	1126.7	1119.4	1119.4	1120.4	1123.5	1118.3	1121.4	1128.8	1127.7
7.5°	1056.7	1054.6	1055.7	1047.3	1041.0	1043.1	1041.0	1050.4	1055.7	1053.6	1057.8
10°	986.7	990.9	981.5	977.4	973.2	977.4	976.3	978.4	984.7	988.8	996.1
12.5°	930.4	929.3	924.1	919.9	912.6	914.7	921.0	918.9	919.9	929.3	928.3
15°	877.1	870.8	866.7	857.3	859.4	852.1	858.3	865.6	868.8	877.1	882.3
17.5°	823.9	822.8	817.6	816.5	805.1	801.9	808.2	810.3	813.4	817.6	824.9
20°	779.0	777.9	770.6	768.5	759.1	765.4	763.3	767.5	769.6	777.9	781.0
22.5°	738.2	733.0	730.9	727.8	724.7	723.6	727.8	726.7	734.1	737.2	738.2
25°	700.6	696.5	695.4	690.2	688.1	685.0	688.1	691.2	699.6	702.7	706.9
27.5°	666.2	663.1	661.0	656.8	653.7	653.7	655.7	659.9	663.1	665.1	667.2
30°	634.9	632.8	626.5	624.4	621.3	621.3	621.3	623.4	628.6	634.9	638.0
32.5°	602.5	598.3	594.1	594.1	591.0	591.0	592.0	594.1	599.4	600.4	605.6
35°	571.2	567.0	563.9	561.8	562.8	558.6	560.7	563.9	570.1	572.2	575.3
37.5°	540.9	539.8	533.6	530.4	532.5	532.5	531.5	533.6	537.8	541.9	544.0
40°	507.5	505.4	505.4	502.3	503.3	499.1	502.3	504.3	506.4	510.6	513.7
42.5°	478.2	476.1	472.0	473.0	469.9	469.9	472.0	473.0	476.1	481.4	483.5
45°	446.9	446.9	444.8	441.7	442.7	439.6	441.7	442.7	446.9	452.1	450.0
47.5°	416.6	415.6	415.6	411.4	413.5	410.4	413.5	414.5	416.6	419.8	418.7
50°	387.4	384.3	385.3	384.3	383.2	383.2	385.3	385.3	387.4	387.4	390.5
52.5°	357.1	357.1	355.0	356.1	358.2	356.1	359.2	356.1	358.2	359.2	361.3
55°	330.0	327.9	328.9	327.9	332.0	328.9	332.0	330.0	332.0	331.0	333.1
57.5°	300.7	297.6	298.6	297.6	300.7	299.7	302.8	299.7	300.7	301.8	304.9
60°	267.3	267.3	267.3	265.2	268.4	268.4	267.3	267.3	271.5	273.6	272.5
62.5°	236.0	234.9	231.8	230.8	231.8	229.7	233.9	232.9	234.9	237.0	239.1
65°	201.5	199.4	198.4	196.3	196.3	195.3	196.3	200.5	201.5	202.6	207.8
67.5°	173.3	172.3	171.2	168.1	168.1	170.2	170.2	170.2	176.5	173.3	177.5
70°	148.3	146.2	144.1	143.1	143.1	144.1	145.1	146.2	145.1	149.3	150.4
72.5°	124.3	125.3	123.2	123.2	123.2	122.2	122.2	124.3	125.3	124.3	125.3
75°	103.4	103.4	102.3	103.4	103.4	102.3	102.3	104.4	104.4	103.4	106.5
77.5°	83.5	82.5	80.4	78.3	79.4	78.3	79.4	78.3	81.4	84.6	82.5
80°	58.5	57.4	57.4	57.4	58.5	57.4	59.5	57.4	58.5	58.5	59.5
82.5°	41.8	42.8	42.8	41.8	42.8	41.8	42.8	42.8	42.8	41.8	42.8
85°	27.1	27.1	27.1	27.1	26.1	27.1	27.1	27.1	28.2	27.1	28.2
87.5°	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	12.5	11.5	12.5
90°	9.6	9.8	10.1	10.4	10.7	11.0	10.7	10.4	10.1	9.8	9.6
92.5°	23.4	23.5	23.7	23.9	24.1	24.3	24.1	23.9	23.7	23.5	23.4
95°	38.5	38.6	38.8	39.0	39.2	39.4	39.2	39.0	38.8	38.6	38.5
97.5°	55.4	55.5	55.6	55.7	55.8	55.9	55.8	55.7	55.6	55.5	55.4
100°	74.2	74.3	74.5	74.7	74.9	75.1	74.9	74.7	74.5	74.3	74.2
102.5°	93.0	93.2	93.5	93.8	94.1	94.4	94.1	93.8	93.5	93.2	93.0
105°	112.2	112.4	112.7	113.0	113.3	113.6	113.3	113.0	112.7	112.4	112.2
107.5°	132.9	132.9	132.9	132.9	132.9	132.9	132.9	132.9	132.9	132.9	132.9
110°	155.3	155.3	155.2	155.1	155.0	154.9	155.0	155.1	155.2	155.3	155.3

TEST NUMBER: P1036129

CATALOG NUMBER: S125RDIW-B850D470UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	247.5°	250°	255°	260°	265°	270°	275°	280°	285°	290°	292.5°
112.5°	177.3	177.2	177.0	176.8	176.6	176.4	176.6	176.8	177.0	177.2	177.3
115°	199.8	199.7	199.6	199.5	199.4	199.3	199.4	199.5	199.6	199.7	199.8
117.5°	223.1	222.9	222.5	222.1	221.7	221.3	221.7	222.1	222.5	222.9	223.1
120°	246.0	245.8	245.4	245.0	244.6	244.2	244.6	245.0	245.4	245.8	246.0
122.5°	268.5	268.3	268.0	267.7	267.4	267.1	267.4	267.7	268.0	268.3	268.5
125°	290.5	290.4	290.3	290.2	290.1	290.0	290.1	290.2	290.3	290.4	290.5
127.5°	312.9	312.8	312.6	312.4	312.2	312.0	312.2	312.4	312.6	312.8	312.9
130°	334.9	334.8	334.6	334.4	334.2	334.0	334.2	334.4	334.6	334.8	334.9
132.5°	356.0	355.8	355.5	355.2	354.9	354.6	354.9	355.2	355.5	355.8	356.0
135°	378.0	377.8	377.4	376.9	376.5	376.1	376.5	376.9	377.4	377.8	378.0
137.5°	399.5	399.2	398.7	398.2	397.7	397.2	397.7	398.2	398.7	399.2	399.5
140°	419.7	419.4	418.9	418.4	417.9	417.4	417.9	418.4	418.9	419.4	419.7
142.5°	438.9	438.6	438.1	437.6	437.1	436.6	437.1	437.6	438.1	438.6	438.9
145°	457.2	457.1	456.8	456.5	456.2	455.9	456.2	456.5	456.8	457.1	457.2
147.5°	475.6	475.2	474.4	473.5	472.7	471.9	472.7	473.5	474.4	475.2	475.6
150°	491.1	491.0	490.8	490.6	490.4	490.2	490.4	490.6	490.8	491.0	491.1
152.5°	507.2	507.0	506.6	506.1	505.7	505.3	505.7	506.1	506.6	507.0	507.2
155°	521.8	521.5	521.0	520.5	520.0	519.5	520.0	520.5	521.0	521.5	521.8
157.5°	534.7	534.3	533.6	532.9	532.2	531.5	532.2	532.9	533.6	534.3	534.7
160°	546.1	545.8	545.3	544.8	544.3	543.8	544.3	544.8	545.3	545.8	546.1
162.5°	557.1	556.8	556.2	555.6	555.0	554.4	555.0	555.6	556.2	556.8	557.1
165°	566.3	566.0	565.4	564.7	564.1	563.5	564.1	564.7	565.4	566.0	566.3
167.5°	574.1	573.8	573.2	572.5	571.9	571.3	571.9	572.5	573.2	573.8	574.1
170°	580.5	580.1	579.4	578.7	578.0	577.3	578.0	578.7	579.4	580.1	580.5
172.5°	585.1	584.8	584.2	583.5	582.9	582.3	582.9	583.5	584.2	584.8	585.1
175°	588.3	587.9	587.2	586.5	585.8	585.1	585.8	586.5	587.2	587.9	588.3
177.5°	590.1	589.7	589.0	588.3	587.6	586.9	587.6	588.3	589.0	589.7	590.1
180°	588.7	588.7	588.7	588.7	588.7	588.7	588.7	588.7	588.7	588.7	588.7

TEST NUMBER: P1036129

CATALOG NUMBER: S125RDIW-B850D470UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	295°	300°	305°	310°	315°	320°	325°	330°	335°	337.5°	340°
0°	1271.8	1271.8	1271.8	1271.8	1271.8	1271.8	1271.8	1271.8	1271.8	1271.8	1271.8
2.5°	1202.9	1208.1	1203.9	1200.8	1209.2	1213.3	1213.3	1220.6	1228.0	1234.2	1235.3
5°	1128.8	1137.1	1139.2	1138.2	1150.7	1157.0	1170.5	1177.8	1188.3	1195.6	1203.9
7.5°	1060.9	1072.4	1073.4	1075.5	1094.3	1104.7	1116.2	1135.0	1149.6	1160.1	1169.5
10°	993.0	1000.3	1007.6	1017.0	1035.8	1053.6	1070.3	1090.1	1108.9	1119.4	1132.9
12.5°	941.9	947.1	955.4	961.7	981.5	997.2	1019.1	1046.3	1073.4	1081.8	1098.5
15°	888.6	891.7	908.4	914.7	931.4	957.5	971.1	997.2	1026.4	1042.1	1060.9
17.5°	827.0	845.8	856.2	863.5	884.4	905.3	927.2	954.4	992.0	1006.6	1020.2
20°	783.1	796.7	808.2	817.6	836.4	867.7	887.6	909.5	945.0	961.7	981.5
22.5°	744.5	756.0	766.4	776.9	789.4	817.6	840.6	870.8	906.3	922.0	945.0
25°	708.0	719.4	725.7	738.2	754.9	774.8	801.9	829.1	864.6	882.3	904.3
27.5°	672.5	683.9	695.4	705.9	717.4	736.1	754.9	789.4	825.9	846.8	865.6
30°	642.2	647.4	657.8	669.3	680.8	698.6	720.5	744.5	786.3	805.1	828.0
32.5°	608.8	618.2	625.5	633.8	648.4	663.1	682.9	713.2	746.6	764.3	789.4
35°	577.4	585.8	591.0	605.6	615.0	630.7	650.5	677.7	705.9	725.7	747.6
37.5°	547.2	555.5	561.8	570.1	582.7	596.2	617.1	636.9	670.4	687.1	712.1
40°	515.8	523.1	530.4	539.8	551.3	568.0	580.6	605.6	632.8	651.6	670.4
42.5°	485.5	489.7	498.1	508.5	520.0	534.6	552.4	572.2	599.4	616.1	632.8
45°	453.2	460.5	469.9	477.2	487.6	502.3	517.9	535.7	562.8	579.5	597.3
47.5°	422.9	428.1	434.4	445.9	459.4	469.9	486.6	503.3	528.4	544.0	560.7
50°	391.6	396.8	406.2	413.5	423.9	437.5	453.2	470.9	494.9	505.4	522.1
52.5°	362.3	364.4	373.8	381.1	391.6	407.2	419.8	435.4	458.4	469.9	486.6
55°	333.1	335.2	340.4	347.7	359.2	371.7	385.3	403.1	422.9	433.3	449.0
57.5°	302.8	304.9	310.1	315.3	326.8	338.3	354.0	368.6	388.4	397.8	412.5
60°	272.5	272.5	277.8	285.1	293.4	303.9	317.4	335.2	349.8	361.3	371.7
62.5°	240.2	243.3	246.4	251.6	261.0	273.6	285.1	297.6	315.3	323.7	333.1
65°	207.8	210.9	217.2	222.4	229.7	238.1	252.7	263.1	276.7	286.1	294.5
67.5°	179.6	182.7	186.9	193.2	198.4	207.8	218.2	228.7	243.3	249.6	255.8
70°	150.4	153.5	156.6	165.0	170.2	177.5	184.8	195.3	207.8	212.0	217.2
72.5°	127.4	128.4	132.6	134.7	142.0	148.3	156.6	162.9	172.3	177.5	181.7
75°	107.6	107.6	108.6	110.7	114.9	119.0	125.3	131.6	139.9	143.1	148.3
77.5°	84.6	87.7	86.7	88.8	90.8	92.9	98.2	102.3	110.7	112.8	114.9
80°	60.6	61.6	64.7	67.9	67.9	71.0	74.1	75.2	80.4	83.5	83.5
82.5°	43.9	44.9	43.9	44.9	45.9	47.0	50.1	54.3	54.3	55.3	57.4
85°	27.1	27.1	28.2	29.2	29.2	28.2	30.3	29.2	30.3	32.4	32.4
87.5°	13.6	12.5	12.5	12.5	12.5	12.5	13.6	12.5	13.6	13.6	13.6
90°	9.3	8.8	8.3	7.8	7.3	6.6	5.9	5.2	4.5	4.1	3.7
92.5°	23.0	22.3	21.6	20.9	20.2	19.3	18.3	17.4	16.5	16.0	15.7
95°	38.1	37.4	36.7	36.0	35.3	34.3	33.3	32.2	31.2	30.7	30.6
97.5°	55.1	54.5	53.9	53.3	52.7	51.3	49.9	48.4	47.0	46.3	46.2
100°	73.7	72.8	71.9	71.0	70.1	68.8	67.4	66.1	64.8	64.1	64.1
102.5°	92.5	91.5	90.4	89.4	88.4	87.9	87.4	86.9	86.4	86.1	85.8
105°	111.9	111.3	110.7	110.1	109.5	108.9	108.3	107.6	107.0	106.7	106.5
107.5°	132.7	132.4	132.1	131.8	131.5	131.0	130.5	130.0	129.5	129.2	128.9
110°	155.1	154.8	154.5	154.2	153.9	153.6	153.3	153.0	152.7	152.6	152.3

TEST NUMBER: P1036129

CATALOG NUMBER: S125RDIW-B850D470UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	295°	300°	305°	310°	315°	320°	325°	330°	335°	337.5°	340°
112.5°	177.2	177.1	177.0	176.9	176.8	176.4	176.0	175.6	175.2	175.0	174.9
115°	199.8	199.9	200.0	200.1	200.2	200.0	199.8	199.6	199.4	199.3	199.1
117.5°	223.1	223.0	222.9	222.8	222.7	222.5	222.3	222.0	221.8	221.7	221.7
120°	246.0	246.0	246.0	246.0	246.0	245.9	245.8	245.7	245.6	245.6	245.3
122.5°	268.5	268.6	268.7	268.8	268.9	268.6	268.3	268.0	267.7	267.6	267.5
125°	290.6	290.8	291.0	291.2	291.4	291.3	291.2	291.1	291.0	290.9	290.6
127.5°	313.0	313.1	313.2	313.3	313.4	313.3	313.2	313.1	313.0	312.9	312.7
130°	335.0	335.1	335.2	335.3	335.4	335.2	335.0	334.8	334.6	334.5	334.2
132.5°	356.0	356.1	356.2	356.3	356.4	356.5	356.6	356.7	356.8	356.9	356.4
135°	378.0	378.0	378.0	378.0	378.0	377.9	377.8	377.7	377.6	377.5	377.2
137.5°	399.5	399.4	399.3	399.2	399.1	398.9	398.7	398.4	398.2	398.1	397.8
140°	419.6	419.4	419.2	419.0	418.8	418.5	418.2	417.9	417.6	417.4	417.1
142.5°	438.9	438.8	438.7	438.6	438.5	438.1	437.7	437.2	436.8	436.6	436.4
145°	457.2	457.2	457.2	457.2	457.2	456.9	456.6	456.3	456.0	455.9	455.7
147.5°	475.4	475.1	474.8	474.5	474.2	474.0	473.8	473.6	473.4	473.3	473.1
150°	491.1	491.1	491.1	491.1	491.1	490.7	490.3	489.9	489.5	489.3	489.4
152.5°	507.0	506.7	506.4	506.1	505.8	505.7	505.6	505.5	505.4	505.3	505.2
155°	521.6	521.2	520.8	520.4	520.0	519.9	519.8	519.7	519.6	519.5	519.5
157.5°	534.5	534.1	533.6	533.2	532.8	532.7	532.6	532.5	532.4	532.4	532.5
160°	545.9	545.5	545.1	544.7	544.3	544.2	544.1	544.0	543.9	543.8	544.0
162.5°	556.8	556.3	555.8	555.3	554.8	554.8	554.8	554.8	554.8	554.8	554.9
165°	566.1	565.7	565.2	564.8	564.4	564.3	564.2	564.1	564.0	564.0	564.1
167.5°	573.8	573.2	572.5	571.9	571.3	571.3	571.3	571.3	571.3	571.3	571.5
170°	580.2	579.6	578.9	578.3	577.7	577.7	577.7	577.7	577.7	577.7	577.9
172.5°	584.8	584.2	583.5	582.9	582.3	582.3	582.3	582.3	582.3	582.3	582.5
175°	588.0	587.4	586.7	586.1	585.5	585.5	585.5	585.5	585.5	585.5	585.7
177.5°	589.8	589.2	588.6	588.0	587.4	587.5	587.6	587.7	587.8	587.8	588.0
180°	588.7	588.7	588.7	588.7	588.7	588.7	588.7	588.7	588.7	588.7	588.7

TEST NUMBER: P1036129

CATALOG NUMBER: S125RDIW-B850D470UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	345°	350°	355°	360°
0°	1271.8	1271.8	1271.8	1271.8
2.5°	1242.6	1252.0	1261.4	1272.9
5°	1217.5	1234.2	1252.0	1268.7
7.5°	1190.4	1214.4	1237.4	1261.4
10°	1160.1	1190.4	1216.5	1249.9
12.5°	1126.7	1159.0	1195.6	1233.2
15°	1093.3	1134.0	1172.6	1215.4
17.5°	1061.9	1100.6	1143.4	1194.5
20°	1024.3	1067.2	1115.2	1169.5
22.5°	984.7	1031.6	1083.9	1142.3
25°	951.2	999.3	1049.4	1111.0
27.5°	914.7	964.8	1013.9	1079.7
30°	872.9	927.2	977.4	1045.2
32.5°	833.3	887.6	942.9	1006.6
35°	794.6	847.9	903.2	968.0
37.5°	758.1	806.1	860.4	918.9
40°	723.6	767.5	815.5	868.8
42.5°	679.8	730.9	775.8	814.5
45°	642.2	683.9	725.7	757.0
47.5°	598.3	640.1	675.6	700.6
50°	561.8	595.2	624.4	646.3
52.5°	517.9	549.2	573.3	590.0
55°	475.1	502.3	523.1	534.6
57.5°	436.5	454.2	469.9	480.3
60°	393.7	407.2	420.8	432.3
62.5°	347.7	362.3	369.6	382.2
65°	307.0	316.4	327.9	332.0
67.5°	267.3	272.5	279.8	288.2
70°	225.5	228.7	236.0	247.5
72.5°	189.0	192.1	197.3	201.5
75°	150.4	153.5	157.7	161.8
77.5°	118.0	119.0	121.1	125.3
80°	85.6	88.8	90.8	91.9
82.5°	59.5	60.6	60.6	61.6
85°	37.6	35.5	35.5	36.5
87.5°	13.6	15.7	15.7	17.8
90°	2.9	2.1	1.3	0.5
92.5°	15.2	14.7	14.2	13.7
95°	30.4	30.2	30.0	29.8
97.5°	46.1	46.0	45.9	45.8
100°	64.1	64.1	64.1	64.1
102.5°	85.3	84.8	84.3	83.8
105°	106.0	105.5	105.0	104.5
107.5°	128.4	127.9	127.4	126.9
110°	151.8	151.3	150.8	150.3

TEST NUMBER: P1036129

CATALOG NUMBER: S125RDIW-B850D470UB30-4F0-XX-W2A-A1

CANDELA DISTRIBUTION (continued):

	345°	350°	355°	360°
112.5°	174.7	174.5	174.3	174.1
115°	198.7	198.3	197.9	197.5
117.5°	221.6	221.5	221.4	221.3
120°	244.8	244.3	243.8	243.3
122.5°	267.4	267.3	267.2	267.1
125°	290.0	289.4	288.8	288.2
127.5°	312.4	312.1	311.8	311.5
130°	333.7	333.2	332.7	332.2
132.5°	355.5	354.6	353.7	352.8
135°	376.6	376.0	375.4	374.8
137.5°	397.2	396.6	396.0	395.4
140°	416.6	416.1	415.6	415.1
142.5°	436.0	435.6	435.2	434.8
145°	455.3	454.8	454.4	454.0
147.5°	472.8	472.5	472.2	471.9
150°	489.5	489.6	489.7	489.8
152.5°	505.0	504.8	504.6	504.4
155°	519.5	519.5	519.5	519.5
157.5°	532.7	532.9	533.1	533.3
160°	544.3	544.6	544.9	545.2
162.5°	555.1	555.3	555.5	555.7
165°	564.3	564.5	564.7	564.9
167.5°	571.9	572.3	572.7	573.1
170°	578.3	578.8	579.2	579.6
172.5°	582.9	583.3	583.7	584.1
175°	586.1	586.6	587.0	587.4
177.5°	588.4	588.8	589.2	589.6
180°	588.7	588.7	588.7	588.7

(END OF REPORT)