

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P#

Luminaire Tested: **LSSQWM2B10WFL558027D010 2LBDL*WMH**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P#
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14805)
Test Lab: INNOVATION CENTER (G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSSQWM2B10WFL558027D010 2LBDL*WMH
Description: 1000 Lumen, 2inch Portfolio LED Cylinder
WIDE FLOOD OPTIC
LENSED SPUN ROUND TRIM WITH WHEAT METALLIC HAZE FINISH
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 871.2 lumens
Efficiency: N/A
Efficacy: 84.6 lumens/watt
Spacing Criteria (0/90/45): 0.78 / 0.78 / 0.83
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 10.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P#

CATALOG NUMBER: LSSQWM2B10WFL558027D010 2LBDL*WMH

Luminous Intensity Polar Plot

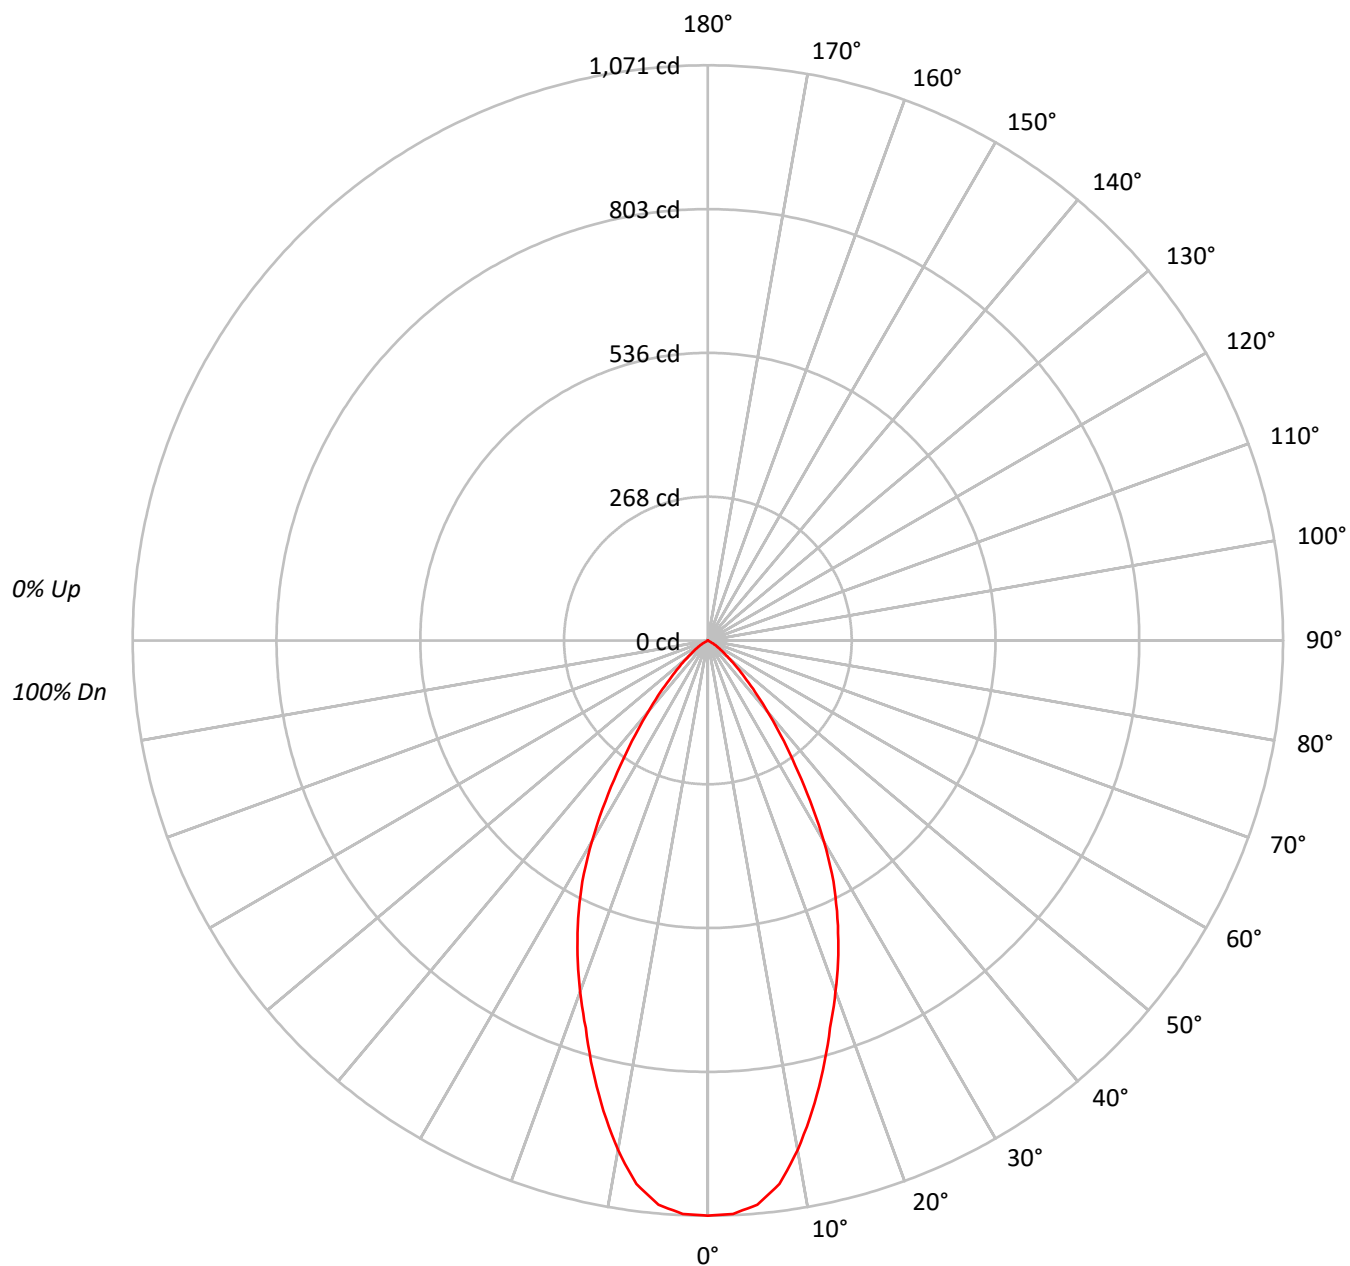



TEST NUMBER: P#

CATALOG NUMBER: LSSQWM2B10WFL558027D010 2LBDL*WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	113	111	108	106		111	108	106	104		104	103	101		101	99	98		97	96	95
2	108	103	99	95		105	101	97	94		98	95	92		95	92	90		92	90	88
3	102	95	90	86		100	94	89	86		91	87	84		89	86	83		87	84	82
4	97	89	83	79		95	88	83	78		86	81	78		84	80	77		82	78	76
5	92	83	77	73		90	82	77	72		80	75	72		79	74	71		77	73	70
6	87	78	72	67		85	77	71	67		75	70	67		74	70	66		73	69	66
7	82	73	67	63		81	72	67	62		71	66	62		70	65	62		69	65	61
8	78	69	63	58		77	68	62	58		67	62	58		66	61	58		65	61	58
9	75	65	59	55		73	64	59	55		63	58	54		62	58	54		62	57	54
10	71	61	55	51		70	61	55	51		60	55	51		59	54	51		58	54	51

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	414886
5°	409978
10°	378926
15°	332117
20°	286606
25°	243996
30°	193220
35°	134104
40°	87123
45°	52423
50°	30311
55°	16950
60°	7437
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P#

CATALOG NUMBER: LSSQWM2B10WFL558027D010 2LBDL*WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	97.8	11.2
10°-20°	230.7	26.5
20°-30°	259.7	29.8
30°-40°	179.4	20.6
40°-50°	77.7	8.9
50°-60°	24.1	2.8
60°-70°	1.7	0.2
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	588.2	67.5
0°-40°	767.6	88.1
0°-60°	869.5	99.8
0°-90°	871.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	871.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1071	
5°	1054	98
15°	828	231
25°	571	260
35°	284	179
45°	96	78
55°	25	24
65°	0	2
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P#

CATALOG NUMBER: LSSQWM2B10WFL558027D010 2LBDL*WMH

CANDELA DISTRIBUTION (FULL):

	0°
0°	1071.1
2.5°	1068.7
5°	1054.4
7.5°	1020.9
10°	963.4
12.5°	897.6
15°	828.2
17.5°	756.4
20°	695.3
22.5°	634.3
25°	570.9
27.5°	506.2
30°	432.0
32.5°	354.3
35°	283.6
37.5°	222.6
40°	172.3
42.5°	130.5
45°	95.7
47.5°	70.6
50°	50.3
52.5°	35.9
55°	25.1
57.5°	18.0
60°	9.6
62.5°	2.4
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)