

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P224171

Luminaire Tested: **LSSQWM2B10SP158030D010 2LBDC*MMS**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P224171
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (150)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSSQWM2B10SP158030D010 2LBDC*MMS
Description: 1000 Lumen, 2inch Portfolio LED Cylinder
SPOT OPTIC
CAST ROUND TRIM WITH MATTE METALLIC SILVER
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 593.7 lumens
Efficiency: N/A
Efficacy: 57.6 lumens/watt
Spacing Criteria (0/90/45): 0.24 / 0.24 / 0.23
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 10.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P224171

CATALOG NUMBER: LSSQWM2B10SP158030D010 2LBDC*MMS

Luminous Intensity Polar Plot

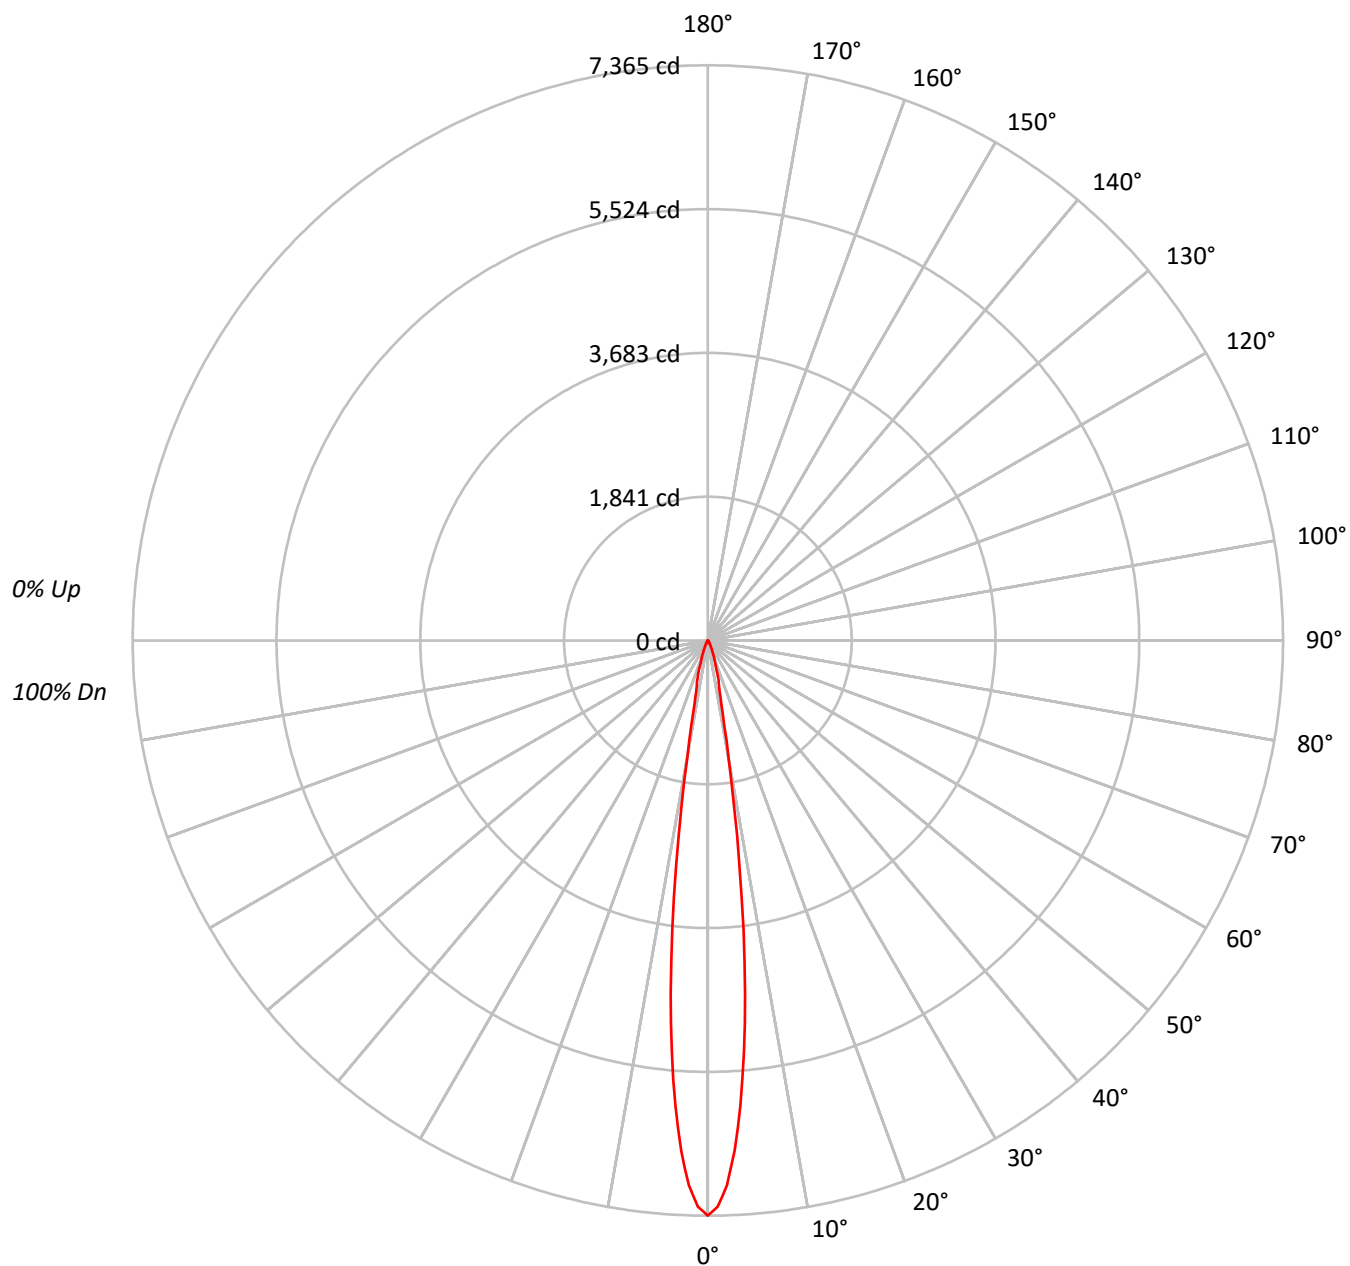



TEST NUMBER: P224171

CATALOG NUMBER: LSSQWM2B10SP158030D010 2LBDC*MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10		50	30	10			50	30	10			0
RCR																				
0	119	119	119	119	116	116	116	116		111	111	111			106	106	106			100
1	116	114	112	111	113	112	110	109		108	107	106			104	103	103			98
2	113	110	107	105	111	108	106	104		105	103	102			102	101	100			96
3	110	106	103	101	108	105	102	100		102	100	98			100	99	97			94
4	108	103	100	97	106	102	99	97		100	98	96			98	96	95			93
5	105	101	97	95	104	100	97	94		98	96	94			97	95	93			91
6	103	98	95	93	102	98	95	92		96	94	92			95	93	91			90
7	101	96	93	91	100	96	93	90		95	92	90			94	91	90			88
8	100	94	91	89	99	94	91	89		93	90	89			92	90	88			87
9	98	93	90	88	97	92	89	87		92	89	87			91	89	87			86
10	96	91	88	86	96	91	88	86		90	88	86			90	87	86			85

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	2852842
5°	2062331
10°	600405
15°	210651
20°	90190
25°	40602
30°	15699
35°	7802
40°	5208
45°	3396
50°	1868
55°	1418
60°	775
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P224171

CATALOG NUMBER: LSSQWM2B10SP158030D010 2LBDC*MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	375.3	63.2
10°-20°	152.7	25.7
20°-30°	46.9	7.9
30°-40°	11.6	1.9
40°-50°	4.8	0.8
50°-60°	2.1	0.4
60°-70°	0.4	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	574.9	96.8
0°-40°	586.4	98.8
0°-60°	593.3	99.9
0°-90°	593.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	593.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	7365	
5°	5304	375
15°	525	153
25°	95	47
35°	16	12
45°	6	5
55°	2	2
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P224171

CATALOG NUMBER: LSSQWM2B10SP158030D010 2LBDC*MMS

CANDELA DISTRIBUTION (FULL):

0°	
0°	7365.1
1°	7252.6
2°	6978.1
3°	6540.5
4°	5968.7
5°	5304.0
6°	4554.7
7°	3741.4
8°	2916.7
9°	2145.8
10°	1526.5
11°	1094.0
12°	822.6
13°	669.8
14°	586.2
15°	525.3
17.5°	324.1
20°	218.8
22.5°	146.6
25°	95.0
27.5°	57.8
30°	35.1
32.5°	22.7
35°	16.5
37.5°	13.4
40°	10.3
42.5°	8.3
45°	6.2
47.5°	4.1
50°	3.1
52.5°	3.1
55°	2.1
57.5°	2.1
60°	1.0
62.5°	1.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0



TEST NUMBER: P224171

CATALOG NUMBER: LSSQWM2B10SP158030D010 2LBDC*MMS

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







85°	0.0
87.5°	0.0



(END OF REPORT)