

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P#

Luminaire Tested: **LSSQWM2B10WFL558030D010 2LBDLC*MW**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P#
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14810)
Test Lab: INNOVATION CENTER (G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSSQWM2B10WFL558030D010 2LBDLC*MW
Description: 1000 Lumen, 2inch Portfolio LED Cylinder
WIDE FLOOD OPTIC
LENSED CAST ROUND TRIM WITH MATTE WHITE FINISH
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 874.0 lumens
Efficiency: N/A
Efficacy: 84.9 lumens/watt
Spacing Criteria (0/90/45): 0.79 / 0.79 / 0.84
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 10.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P#

CATALOG NUMBER: LSSQWM2B10WFL558030D010 2LBDLC*MW

Luminous Intensity Polar Plot

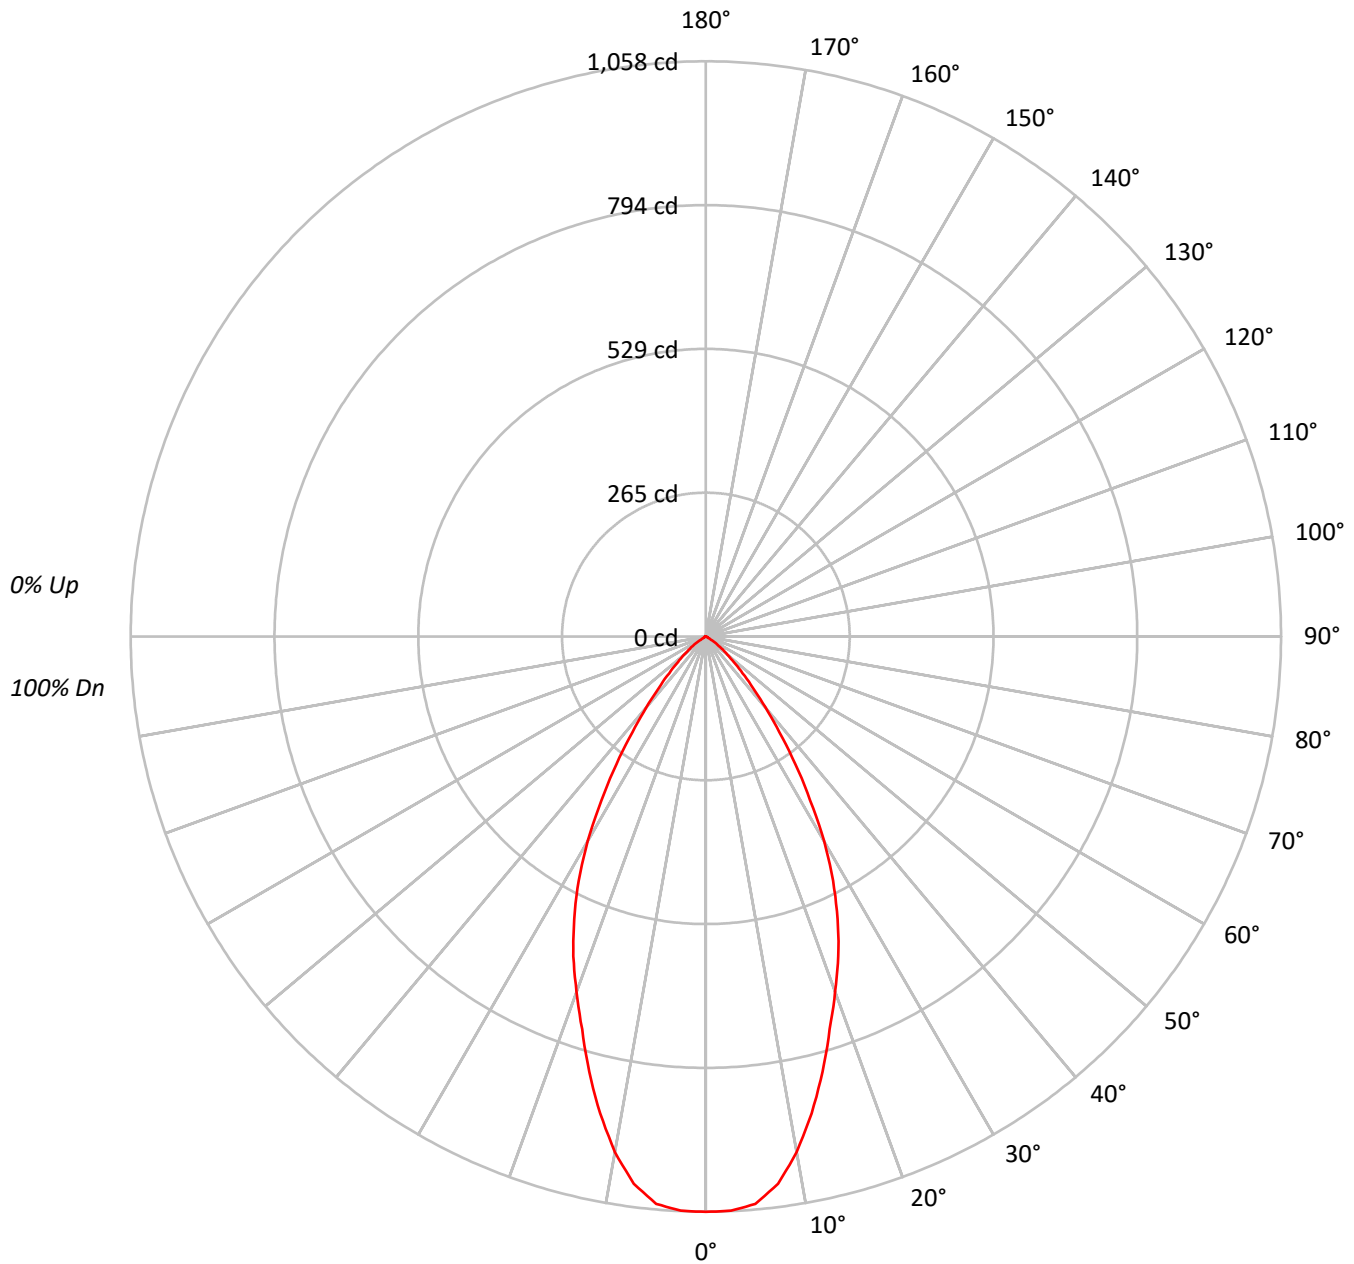



TEST NUMBER: P#

CATALOG NUMBER: LSSQWM2B10WFL558030D010 2LBDLC*MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	113	110	108	106		111	108	106	104		104	102	101		101	99	98		97	96	95
2	108	102	98	95		105	101	97	94		98	94	92		95	92	90		92	90	88
3	102	95	90	86		100	94	89	85		91	87	84		89	85	83		87	84	81
4	97	89	83	79		95	88	82	78		85	81	77		83	80	76		82	78	76
5	91	83	77	72		90	82	76	72		80	75	71		78	74	71		77	73	70
6	87	78	71	67		85	77	71	67		75	70	66		74	69	66		73	69	65
7	82	73	67	62		81	72	66	62		71	66	62		70	65	62		69	64	61
8	78	69	62	58		77	68	62	58		67	62	58		66	61	58		65	61	57
9	74	65	59	55		73	64	58	54		63	58	54		62	57	54		61	57	54
10	71	61	55	51		70	61	55	51		60	55	51		59	54	51		58	54	51

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	409928
5°	407334
10°	378690
15°	332437
20°	286565
25°	245065
30°	194472
35°	135570
40°	85757
45°	52369
50°	30974
55°	16950
60°	3719
65°	3300
70°	2718
75°	3592
80°	2677
85°	5333



TEST NUMBER: P#

CATALOG NUMBER: LSSQWM2B10WFL558030D010 2LBDLC*MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	97.2	11.1
10°-20°	230.9	26.4
20°-30°	260.5	29.8
30°-40°	180.2	20.6
40°-50°	76.8	8.8
50°-60°	22.2	2.5
60°-70°	3.3	0.4
70°-80°	2.1	0.2
80°-90°	0.8	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	588.6	67.3
0°-40°	768.8	88.0
0°-60°	867.9	99.3
0°-90°	874.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	874.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1058	
5°	1048	97
15°	829	231
25°	573	260
35°	287	180
45°	96	77
55°	25	22
65°	4	3
75°	2	2
85°	1	1
90°	0	



TEST NUMBER: P#

CATALOG NUMBER: LSSQWM2B10WFL558030D010 2LBDLC*MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	1058.3
2.5°	1057.1
5°	1047.6
7.5°	1015.3
10°	962.8
12.5°	898.3
15°	829.0
17.5°	757.3
20°	695.2
22.5°	636.7
25°	573.4
27.5°	506.5
30°	434.8
32.5°	357.2
35°	286.7
37.5°	222.2
40°	169.6
42.5°	127.8
45°	95.6
47.5°	69.3
50°	51.4
52.5°	37.0
55°	25.1
57.5°	10.8
60°	4.8
62.5°	3.6
65°	3.6
67.5°	2.4
70°	2.4
72.5°	2.4
75°	2.4
77.5°	1.2
80°	1.2
82.5°	1.2
85°	1.2
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)