

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P223876

Luminaire Tested: **LSSQWM2B10SP159030D010 2LBD*WMH**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P223876
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (150)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSSQWM2B10SP159030D010 2LBD*WMH
Description: 1000 Lumen, 2inch Portfolio LED Cylinder
SPOT OPTIC
SPUN ROUND TRIM WITH WHEAT METALLIC HAZE FINISH
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 460.3 lumens
Efficiency: N/A
Efficacy: 44.7 lumens/watt
Spacing Criteria (0/90/45): 0.24 / 0.24 / 0.23
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 10.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P223876

CATALOG NUMBER: LSSQWM2B10SP159030D010 2LBD*WMH

Luminous Intensity Polar Plot

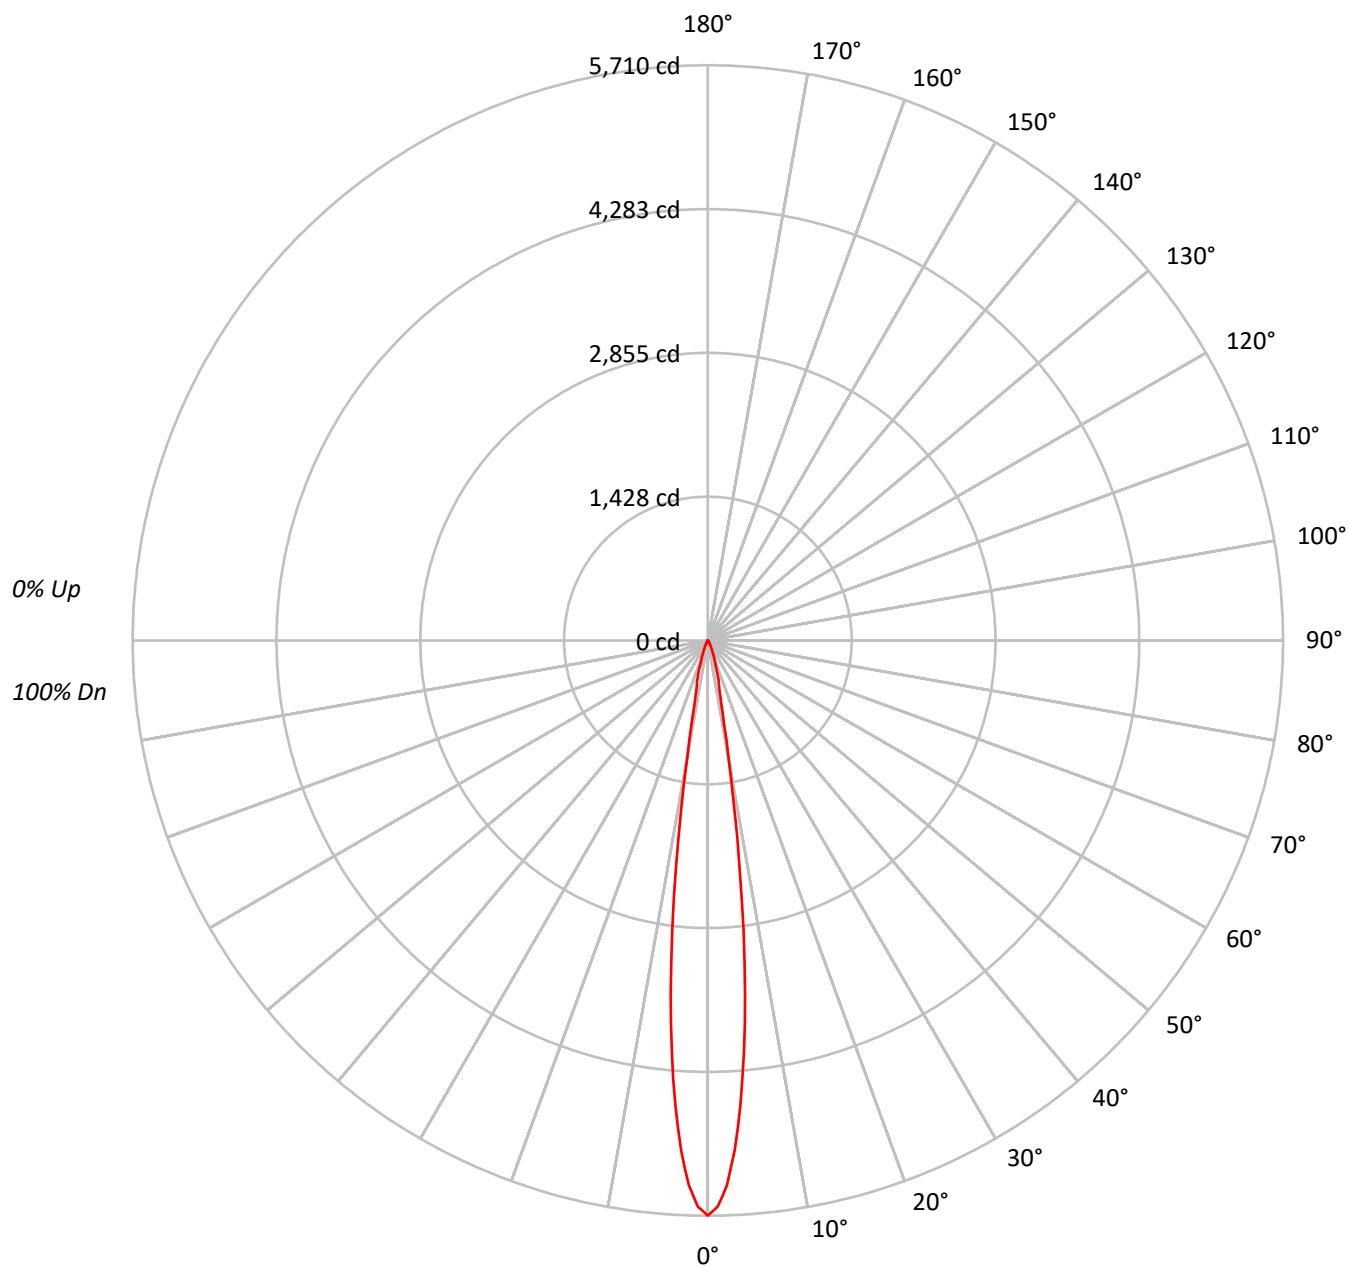



TEST NUMBER: P223876

CATALOG NUMBER: LSSQWM2B10SP159030D010 2LBD*WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10		50	30	10			50	30	10			50
RCR																				
0	119	119	119	119	116	116	116	116		111	111	111			106	106	106			102
1	116	114	112	111	113	112	110	109		108	107	106			104	103	103			101
2	113	110	107	105	111	108	106	104		105	103	102			102	101	100			100
3	110	106	103	101	108	105	102	100		102	100	98			100	99	97			98
4	108	103	100	97	106	102	99	97		100	98	96			98	96	95			97
5	105	101	97	95	104	100	97	94		98	96	94			97	95	93			95
6	103	98	95	93	102	98	95	92		96	94	92			95	93	91			94
7	101	96	93	91	100	96	93	90		95	92	90			94	91	90			93
8	100	94	91	89	99	94	91	89		93	90	89			92	90	88			92
9	98	93	90	88	97	92	89	87		92	89	87			91	89	87			90
10	96	91	88	86	96	91	88	86		90	88	86			90	87	86			89

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	2211823
5°	1598929
10°	465496
15°	163331
20°	69910
25°	31456
30°	12166
35°	6053
40°	4045
45°	2629
50°	1446
55°	1081
60°	620
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P223876

CATALOG NUMBER: LSSQWM2B10SP159030D010 2LBD*WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	291.0	63.2
10°-20°	118.4	25.7
20°-30°	36.3	7.9
30°-40°	9.0	1.9
40°-50°	3.7	0.8
50°-60°	1.6	0.3
60°-70°	0.3	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	445.7	96.8
0°-40°	454.7	98.8
0°-60°	460.0	99.9
0°-90°	460.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	460.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	5710	
5°	4112	291
15°	407	118
25°	74	36
35°	13	9
45°	5	4
55°	2	2
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P223876

CATALOG NUMBER: LSSQWM2B10SP159030D010 2LBD*WMH

CANDELA DISTRIBUTION (FULL):

	0°
0°	5710.2
1°	5623.0
2°	5410.2
3°	5070.9
4°	4627.6
5°	4112.2
6°	3531.3
7°	2900.7
8°	2261.4
9°	1663.6
10°	1183.5
11°	848.2
12°	637.8
13°	519.3
14°	454.5
15°	407.3
17.5°	251.3
20°	169.6
22.5°	113.6
25°	73.6
27.5°	44.8
30°	27.2
32.5°	17.6
35°	12.8
37.5°	10.4
40°	8.0
42.5°	6.4
45°	4.8
47.5°	3.2
50°	2.4
52.5°	2.4
55°	1.6
57.5°	1.6
60°	0.8
62.5°	0.8
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0



TEST NUMBER: P223876

CATALOG NUMBER: LSSQWM2B10SP159030D010 2LBD*WMH

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







85°	0.0
87.5°	0.0



(END OF REPORT)