

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P224801

Luminaire Tested: **LSRWM2B10FL409730D010 2LBDL\*B**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P224801  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14834)  
Test Lab: INNOVATION CENTER (G1)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LSRWM2B10FL409730D010 2LBDL\*B  
Description: 1000 Lumen, 2inch Portfolio LED Cylinder  
FLOOD OPTIC  
LENSED SPUN ROUND TRIM WITH BLACK FINISH  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 700.5 lumens  
Efficiency: N/A  
Efficacy: 68.0 lumens/watt  
Spacing Criteria (0/90/45): 0.61 / 0.61 / 0.6  
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')  
CIE Type: Direct


Input Watts (W): 10.3  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P224801

CATALOG NUMBER: LSRWM2B10FL409730D010 2LBDL\*B

### Luminous Intensity Polar Plot

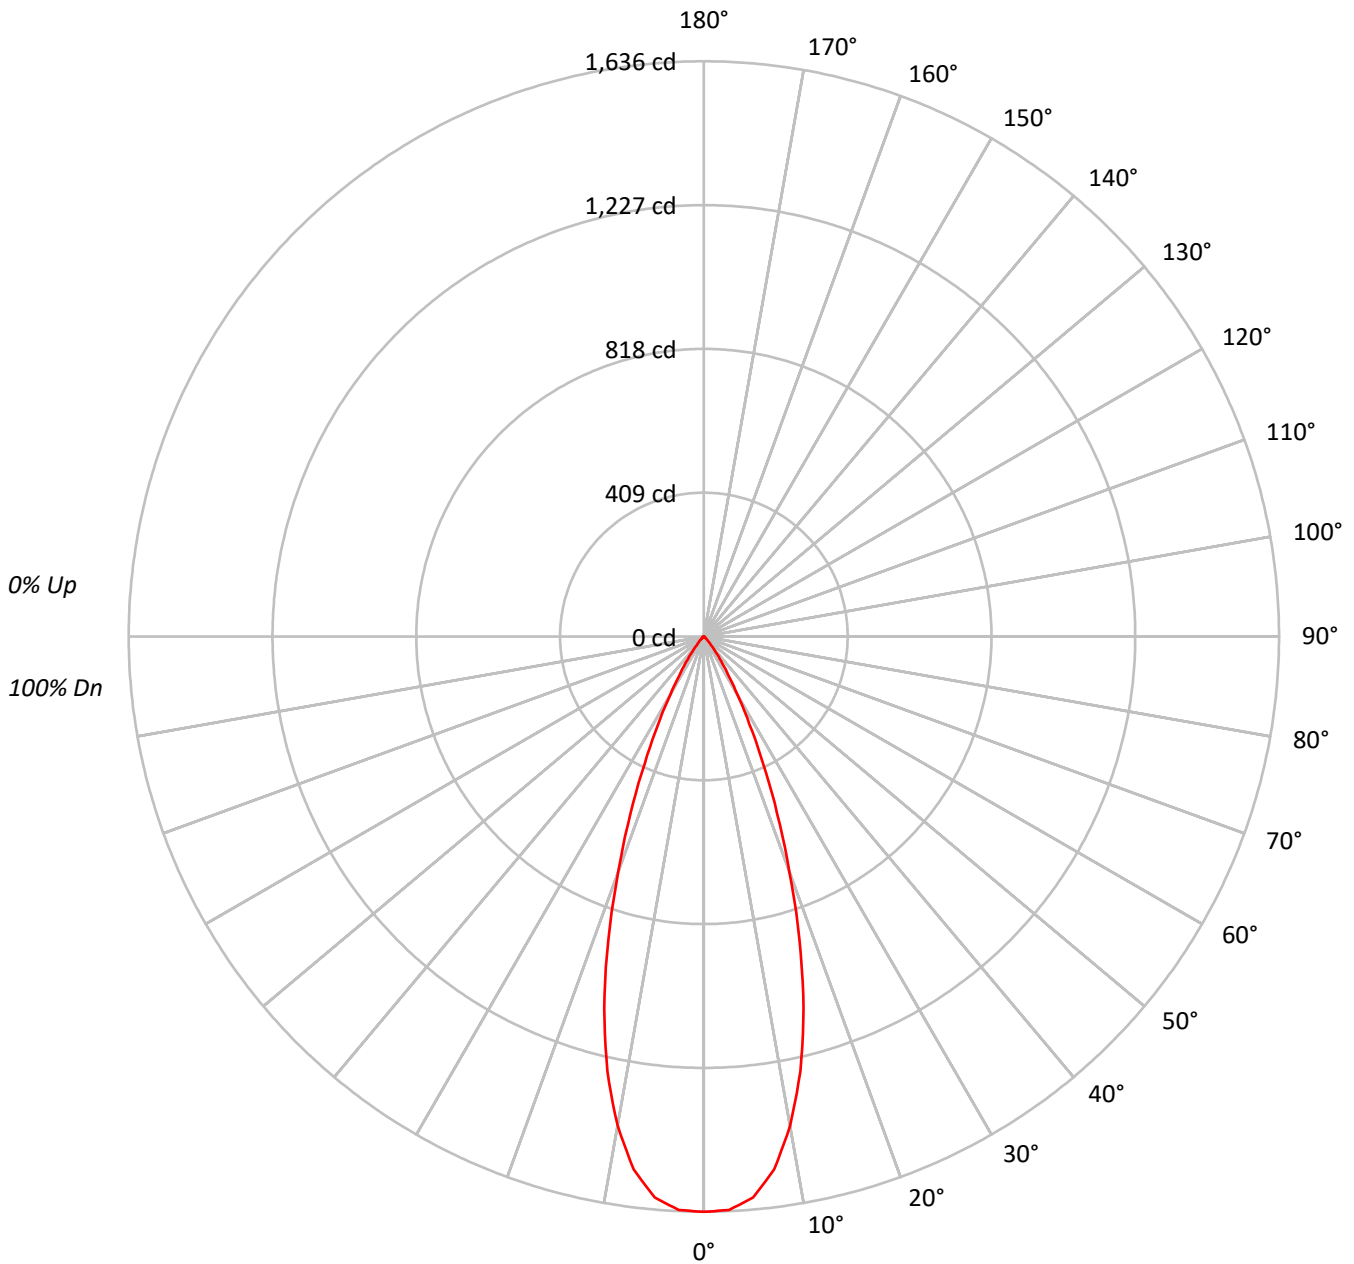



TEST NUMBER: P224801

CATALOG NUMBER: LSRWM2B10FL409730D010 2LBDL\*B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20																	
RC	80									50									30									10									0								
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0															
RCR																																													
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																											
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95																											
2	110	106	103	100	108	104	101	99	101	99	96	98	96	94	96	94	92	91																											
3	106	100	96	93	104	99	95	92	97	93	91	94	92	89	92	90	88	87																											
4	102	95	91	87	100	94	90	87	92	89	86	90	87	85	89	86	84	83																											
5	98	91	86	83	96	90	86	82	88	85	82	87	84	81	85	83	80	79																											
6	94	87	82	79	93	86	82	78	85	81	78	84	80	77	82	79	77	76																											
7	91	83	78	75	90	83	78	75	81	77	74	80	77	74	79	76	74	72																											
8	87	80	75	72	86	79	75	71	78	74	71	77	74	71	76	73	71	69																											
9	84	77	72	69	83	76	72	68	75	71	68	74	71	68	74	70	68	67																											
10	82	74	69	66	81	73	69	66	73	68	66	72	68	65	71	68	65	64																											

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	633814
5°	622782
10°	555567
15°	439146
20°	292830
25°	169887
30°	85026
35°	40004
40°	15624
45°	6957
50°	3314
55°	1823
60°	697
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P224801

CATALOG NUMBER: LSRWM2B10FL409730D010 2LBDL\*B

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	146.8	21.0
10°-20°	296.4	42.3
20°-30°	186.5	26.6
30°-40°	57.0	8.1
40°-50°	11.2	1.6
50°-60°	2.5	0.4
60°-70°	0.1	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	629.7	89.9
0°-40°	686.7	98.0
0°-60°	700.4	100.0
0°-90°	700.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	700.5	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1636	
5°	1602	147
15°	1095	296
25°	398	186
35°	85	57
45°	13	11
55°	3	2
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P224801

CATALOG NUMBER: LSRWM2B10FL409730D010 2LBDL\*B

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1636.3
2.5°	1632.6
5°	1601.7
7.5°	1529.0
10°	1412.5
12.5°	1267.0
15°	1095.1
17.5°	904.1
20°	710.4
22.5°	544.8
25°	397.5
27.5°	280.1
30°	190.1
32.5°	128.2
35°	84.6
37.5°	51.8
40°	30.9
42.5°	20.0
45°	12.7
47.5°	8.2
50°	5.5
52.5°	3.6
55°	2.7
57.5°	1.8
60°	0.9
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)