

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P#

Luminaire Tested: **LSRWM2B10WFL559730D010 2LBD*H**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P#
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P29157)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSRWM2B10WFL559730D010 2LBD*H
Description: 1000 Lumen, 2inch Portfolio LED Cylinder
WIDE FLOOD OPTIC
SPUN ROUND TRIM WITH HAZE FINISH
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 716.5 lumens
Efficiency: N/A
Efficacy: 69.6 lumens/watt
Spacing Criteria (0/90/45): 0.77 / 0.77 / 0.82
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 10.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P#

CATALOG NUMBER: LSRWM2B10WFL559730D010 2LBD*H

Luminous Intensity Polar Plot

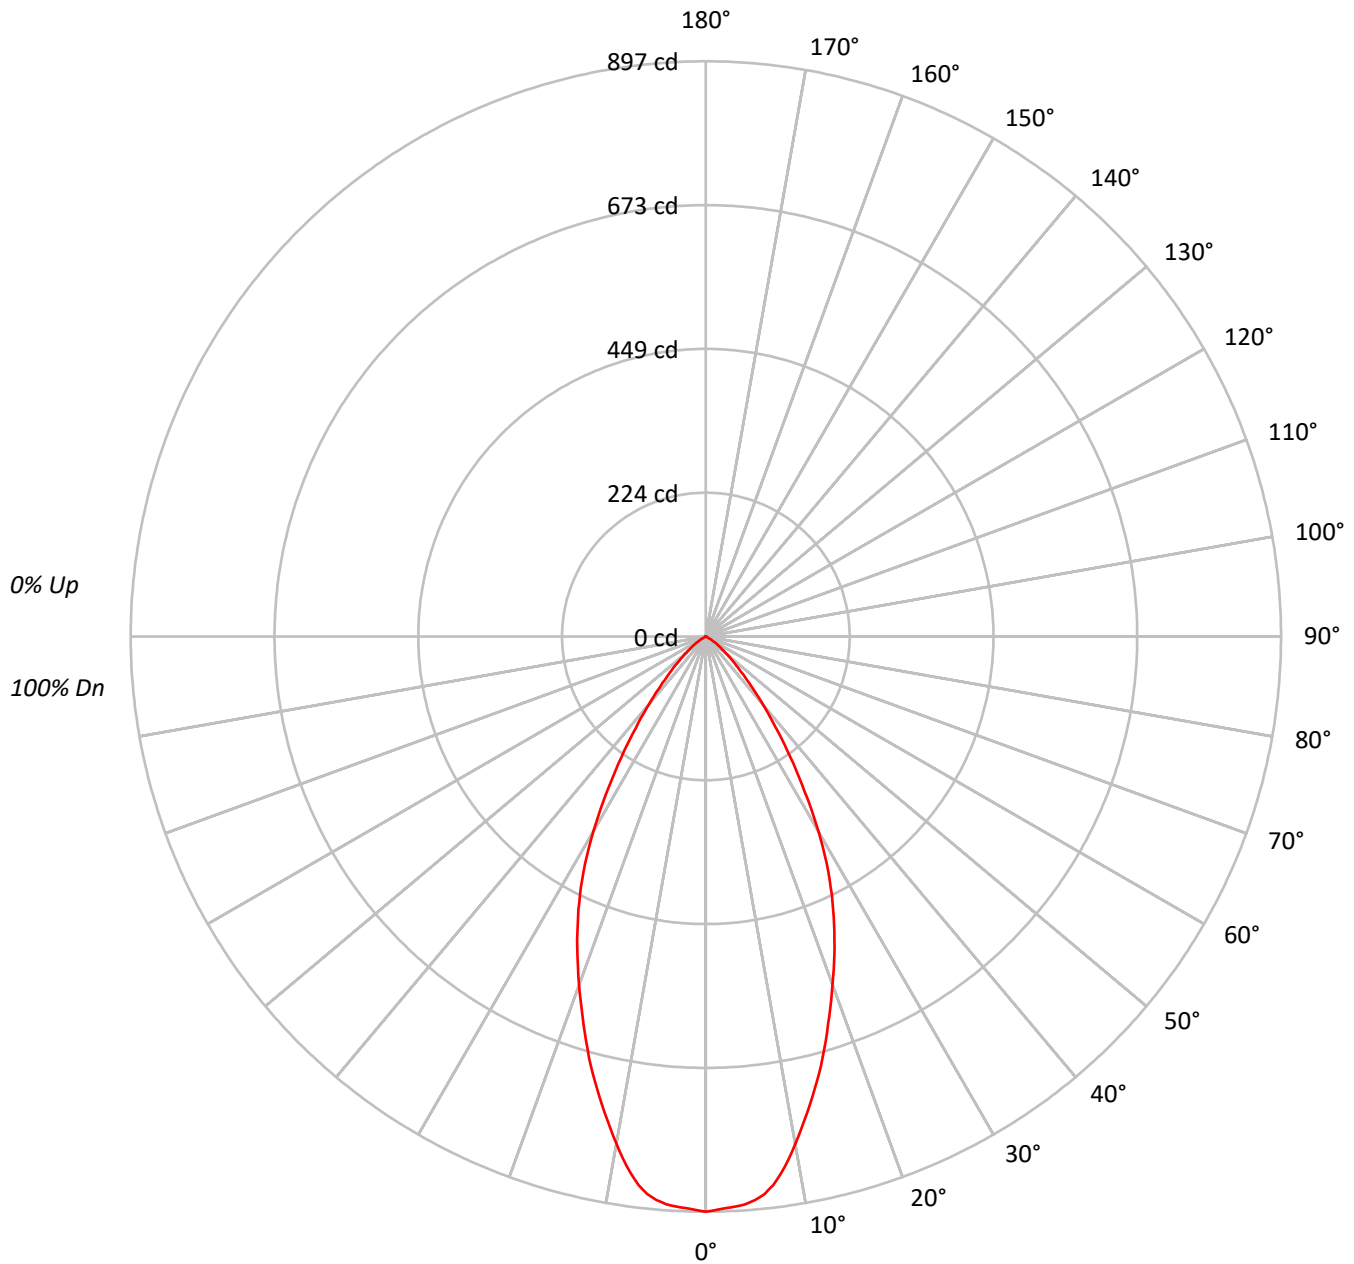



TEST NUMBER: P#

CATALOG NUMBER: LSRWM2B10WFL559730D010 2LBD*H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	113	111	108	106		111	108	106	104		104	103	101		101	99	98		97	96	95
2	108	103	99	95		105	101	97	94		98	95	92		95	92	90		92	90	88
3	102	96	91	86		100	94	90	86		92	88	84		89	86	83		87	84	82
4	97	89	83	79		95	88	83	79		86	81	78		84	80	77		82	79	76
5	92	83	77	73		90	82	77	73		81	76	72		79	75	71		77	74	71
6	87	78	72	68		86	77	71	67		76	71	67		74	70	66		73	69	66
7	83	73	67	63		81	73	67	63		71	66	62		70	65	62		69	65	62
8	79	69	63	59		77	68	63	59		67	62	58		66	62	58		65	61	58
9	75	65	59	55		74	65	59	55		64	58	55		63	58	55		62	58	54
10	71	62	56	52		70	61	55	52		60	55	52		59	55	51		59	54	51

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	347449
5°	343061
10°	315955
15°	278060
20°	238131
25°	200916
30°	156857
35°	108380
40°	69627
45°	42509
50°	25129
55°	14317
60°	4571
65°	642
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P#

CATALOG NUMBER: LSRWM2B10WFL559730D010 2LBD*H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	81.7	11.4
10°-20°	192.7	26.9
20°-30°	213.6	29.8
30°-40°	145.0	20.2
40°-50°	62.6	8.7
50°-60°	19.6	2.7
60°-70°	1.2	0.2
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	488.0	68.1
0°-40°	633.0	88.4
0°-60°	715.2	99.8
0°-90°	716.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	716.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	897	
5°	882	82
15°	693	193
25°	470	214
35°	229	145
45°	78	63
55°	21	20
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P#

CATALOG NUMBER: LSRWM2B10WFL559730D010 2LBD*H

CANDELA DISTRIBUTION (FULL):

	0°
0°	897.0
1°	894.8
2°	891.9
3°	890.4
4°	887.5
5°	882.3
6°	874.3
7°	861.8
8°	845.0
9°	825.2
10°	803.3
11°	781.3
12°	759.3
13°	737.4
14°	715.4
15°	693.4
17.5°	634.1
20°	577.7
22.5°	524.3
25°	470.1
27.5°	413.7
30°	350.7
32.5°	287.0
35°	229.2
37.5°	179.4
40°	137.7
42.5°	104.0
45°	77.6
47.5°	57.1
50°	41.7
52.5°	30.0
55°	21.2
57.5°	13.9
60°	5.9
62.5°	1.5
65°	0.7
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0



TEST NUMBER: P#

CATALOG NUMBER: LSRWM2B10WFL559730D010 2LBD*H

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







85°	0.0
87.5°	0.0



(END OF REPORT)