

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P225511

Luminaire Tested: **LSRWM2B10FL408040D010 2LBDL*H**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P225511
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14832)
Test Lab: INNOVATION CENTER (G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSRWM2B10FL408040D010 2LBDL*H
Description: 1000 Lumen, 2inch Portfolio LED Cylinder
FLOOD OPTIC
LENSED SPUN ROUND TRIM WITH HAZE FINISH
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1010.0 lumens
Efficiency: N/A
Efficacy: 98.1 lumens/watt
Spacing Criteria (0/90/45): 0.6 / 0.6 / 0.6
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 10.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P225511

CATALOG NUMBER: LSRWM2B10FL408040D010 2LBDL*H

Luminous Intensity Polar Plot

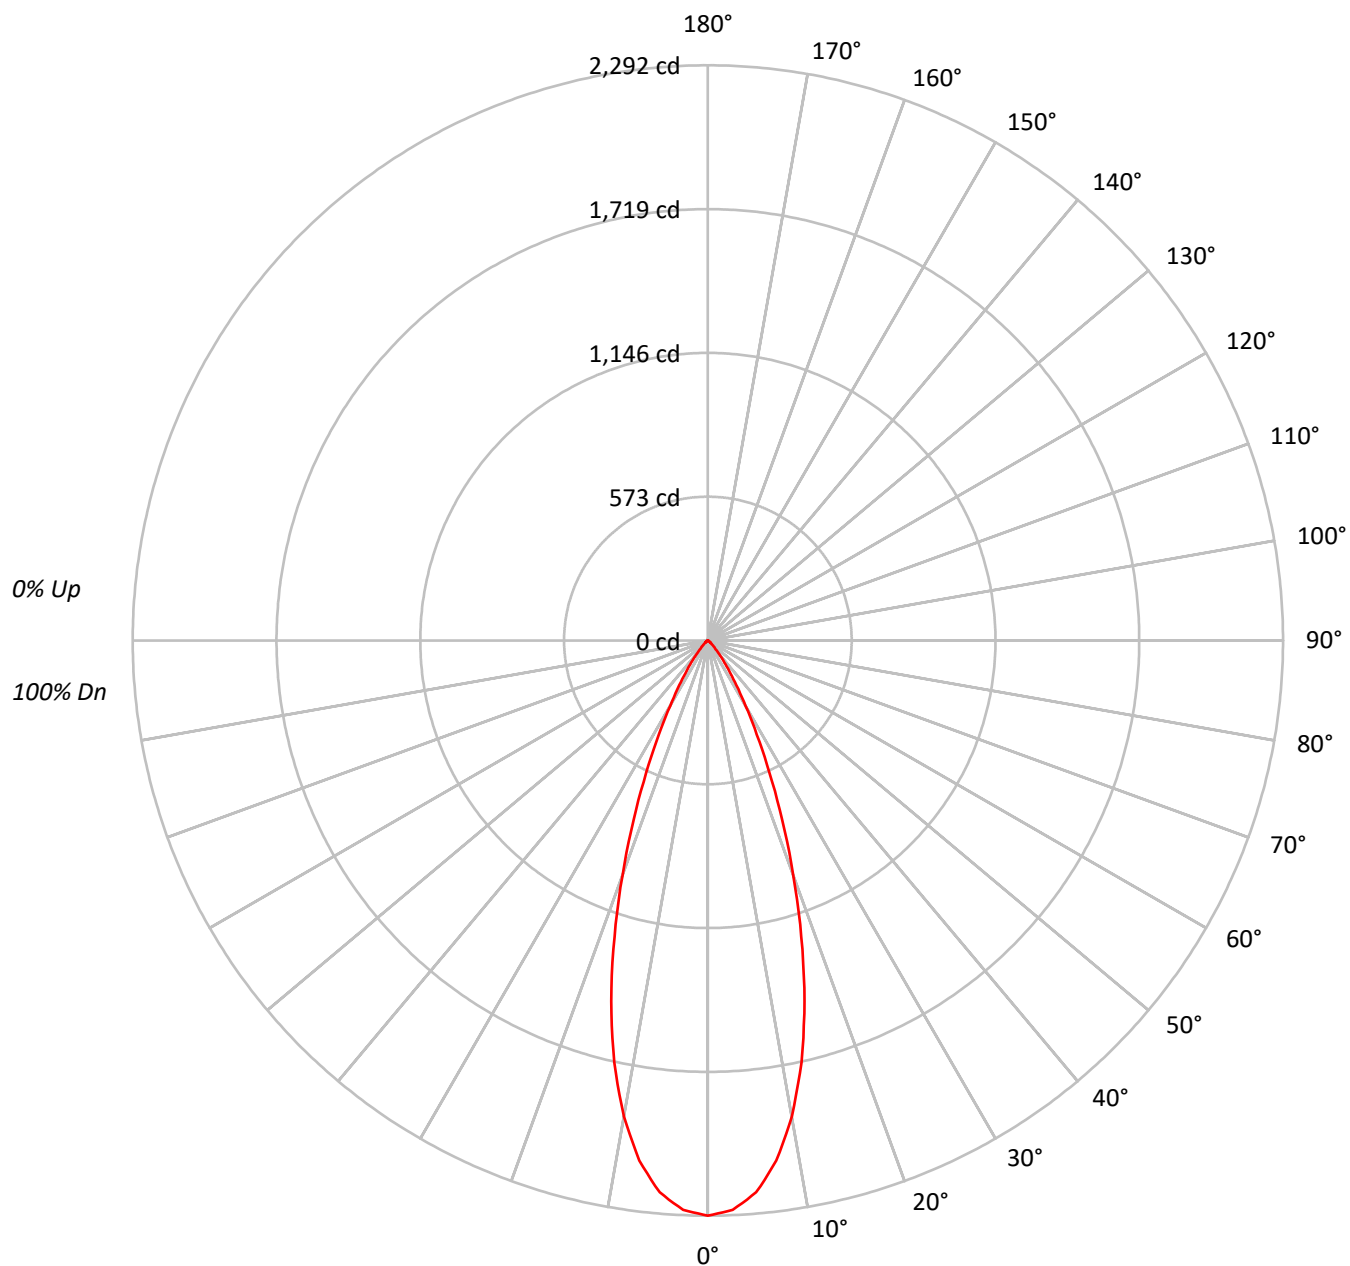



TEST NUMBER: P225511

CATALOG NUMBER: LSRWM2B10FL408040D010 2LBDL*H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10		50	30	10			50	30	10			50
RCR																				
0	119	119	119	119	116	116	116	116		111	111	111			106	106	106			102
1	114	112	110	108	112	110	108	106		106	104	103			102	101	100			99
2	110	105	102	99	108	104	101	98		101	98	96			98	96	94			95
3	105	100	96	92	103	98	95	91		96	93	90			94	91	89			91
4	101	95	90	86	99	94	89	86		91	88	85			90	86	84			88
5	97	90	85	81	96	89	84	81		87	83	80			86	82	80			84
6	93	86	81	77	92	85	80	77		84	79	76			82	79	76			81
7	90	82	77	73	88	81	76	73		80	76	73			79	75	72			78
8	86	78	73	70	85	78	73	70		77	72	69			76	72	69			75
9	83	75	70	67	82	75	70	67		74	69	66			73	69	66			72
10	80	72	67	64	79	72	67	64		71	67	64			70	66	64			70

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	887836
5°	858294
10°	757301
15°	596623
20°	409979
25°	247586
30°	134225
35°	68991
40°	33726
45°	15995
50°	8376
55°	5605
60°	3254
65°	1283
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P225511

CATALOG NUMBER: LSRWM2B10FL408040D010 2LBDL*H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	201.7	20.0
10°-20°	405.0	40.1
20°-30°	270.6	26.8
30°-40°	98.0	9.7
40°-50°	25.3	2.5
50°-60°	7.5	0.7
60°-70°	1.9	0.2
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	877.3	86.9
0°-40°	975.3	96.6
0°-60°	1008.2	99.8
0°-90°	1010.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1010.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2292	
5°	2207	202
15°	1488	405
25°	579	271
35°	146	98
45°	29	25
55°	8	8
65°	1	2
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P225511

CATALOG NUMBER: LSRWM2B10FL408040D010 2LBDL*H

CANDELA DISTRIBUTION (FULL):

	0°
0°	2292.1
2.5°	2271.3
5°	2207.4
7.5°	2090.7
10°	1925.4
12.5°	1722.5
15°	1487.8
17.5°	1237.7
20°	994.6
22.5°	771.0
25°	579.3
27.5°	422.3
30°	300.1
32.5°	211.2
35°	145.9
37.5°	101.4
40°	66.7
42.5°	43.1
45°	29.2
47.5°	20.8
50°	13.9
52.5°	11.1
55°	8.3
57.5°	5.6
60°	4.2
62.5°	2.8
65°	1.4
67.5°	1.4
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)