

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P225447

Luminaire Tested: **LSRWM2B10FL408040D010 2LBDLC*MB**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P225447
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14833)
Test Lab: INNOVATION CENTER (G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSRWM2B10FL408040D010 2LBDLC*MB
Description: 1000 Lumen, 2inch Portfolio LED Cylinder
FLOOD OPTIC
LENSED CAST ROUND TRIM WITH MATTE BLACK FINISH
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 986.0 lumens
Efficiency: N/A
Efficacy: 95.7 lumens/watt
Spacing Criteria (0/90/45): 0.6 / 0.6 / 0.6
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 10.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P225447

CATALOG NUMBER: LSRWM2B10FL408040D010 2LBDLC*MB

Luminous Intensity Polar Plot

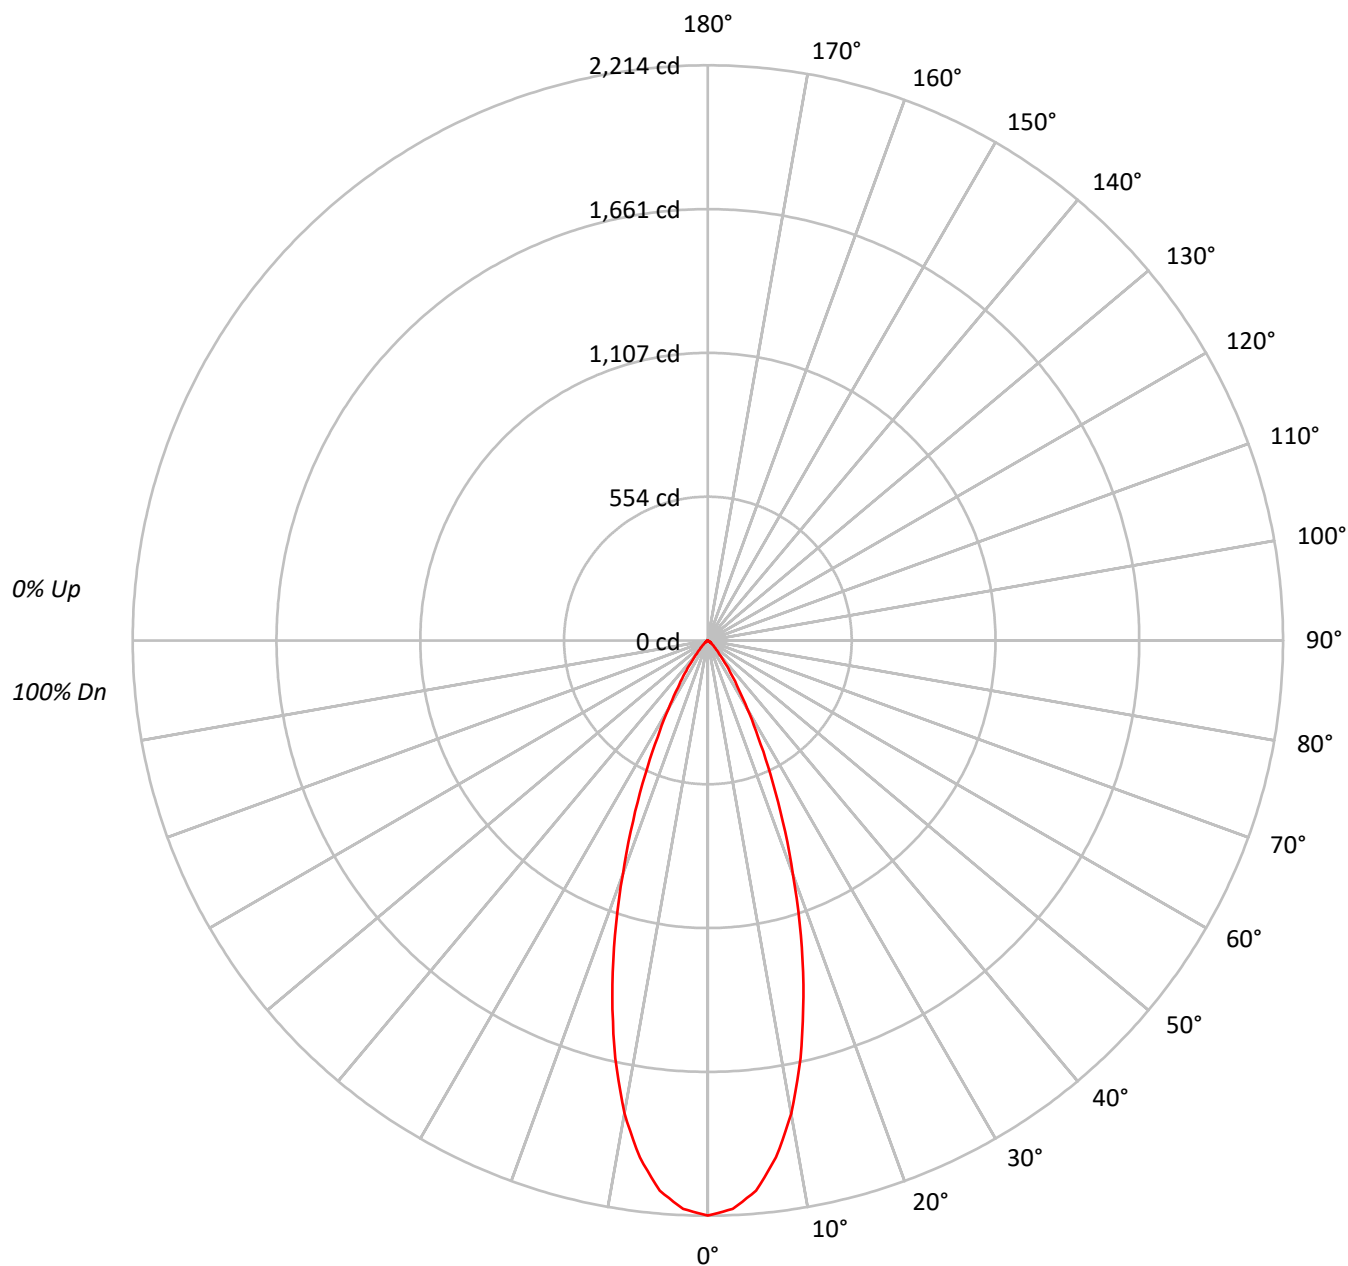



TEST NUMBER: P225447

CATALOG NUMBER: LSRWM2B10FL408040D010 2LBDLC*MB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	114	112	110	108		112	110	108	106		106	104	103		102	101	100		99	98	97
2	110	105	102	99		107	104	101	98		101	98	96		98	96	94		95	93	92
3	105	100	95	92		103	98	94	91		96	92	90		93	91	88		91	89	87
4	101	94	90	86		99	93	89	86		91	87	85		89	86	84		88	85	83
5	97	90	85	81		95	89	84	81		87	83	80		85	82	79		84	81	79
6	93	85	80	77		92	85	80	76		83	79	76		82	78	75		81	77	75
7	89	81	76	73		88	81	76	73		80	75	72		79	75	72		78	74	72
8	86	78	73	69		85	77	73	69		76	72	69		75	72	69		75	71	68
9	83	75	70	66		82	74	69	66		73	69	66		72	69	66		72	68	65
10	80	72	67	63		79	71	66	63		70	66	63		70	66	63		69	65	63

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	857390
5°	826682
10°	727055
15°	569875
20°	394727
25°	243184
30°	135299
35°	72206
40°	35800
45°	18241
50°	10063
55°	6551
60°	3254
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P225447

CATALOG NUMBER: LSRWM2B10FL408040D010 2LBDLC*MB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	193.9	19.7
10°-20°	388.2	39.4
20°-30°	265.2	26.9
30°-40°	101.1	10.3
40°-50°	28.1	2.8
50°-60°	8.8	0.9
60°-70°	0.8	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	847.2	85.9
0°-40°	948.3	96.2
0°-60°	985.2	99.9
0°-90°	986.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	986.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2214	
5°	2126	194
15°	1421	388
25°	569	265
35°	153	101
45°	33	28
55°	10	9
65°	0	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P225447

CATALOG NUMBER: LSRWM2B10FL408040D010 2LBDLC*MB

CANDELA DISTRIBUTION (FULL):

	0°
0°	2213.5
2.5°	2189.9
5°	2126.1
7.5°	2006.7
10°	1848.5
12.5°	1647.3
15°	1421.1
17.5°	1189.3
20°	957.6
22.5°	752.2
25°	569.0
27.5°	417.7
30°	302.5
32.5°	215.1
35°	152.7
37.5°	106.9
40°	70.8
42.5°	47.2
45°	33.3
47.5°	23.6
50°	16.7
52.5°	12.5
55°	9.7
57.5°	6.9
60°	4.2
62.5°	1.4
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)