

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P222557

Luminaire Tested: **LSSQWM2B10NFL259040D010 2LBDLC*MMS**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P222557
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (155)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSSQWM2B10NFL259040D010 2LBDLC*MMS
Description: 1000 Lumen, 2inch Portfolio LED Cylinder
NARROW FLOOD OPTIC
LENSED CAST ROUND TRIM WITH MATTE METALLIC SILVER
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 813.9 lumens
Efficiency: N/A
Efficacy: 79.0 lumens/watt
Spacing Criteria (0/90/45): 0.39 / 0.39 / 0.35
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 10.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P222557

CATALOG NUMBER: LSSQWM2B10NFL259040D010 2LBDLC*MMS

Luminous Intensity Polar Plot

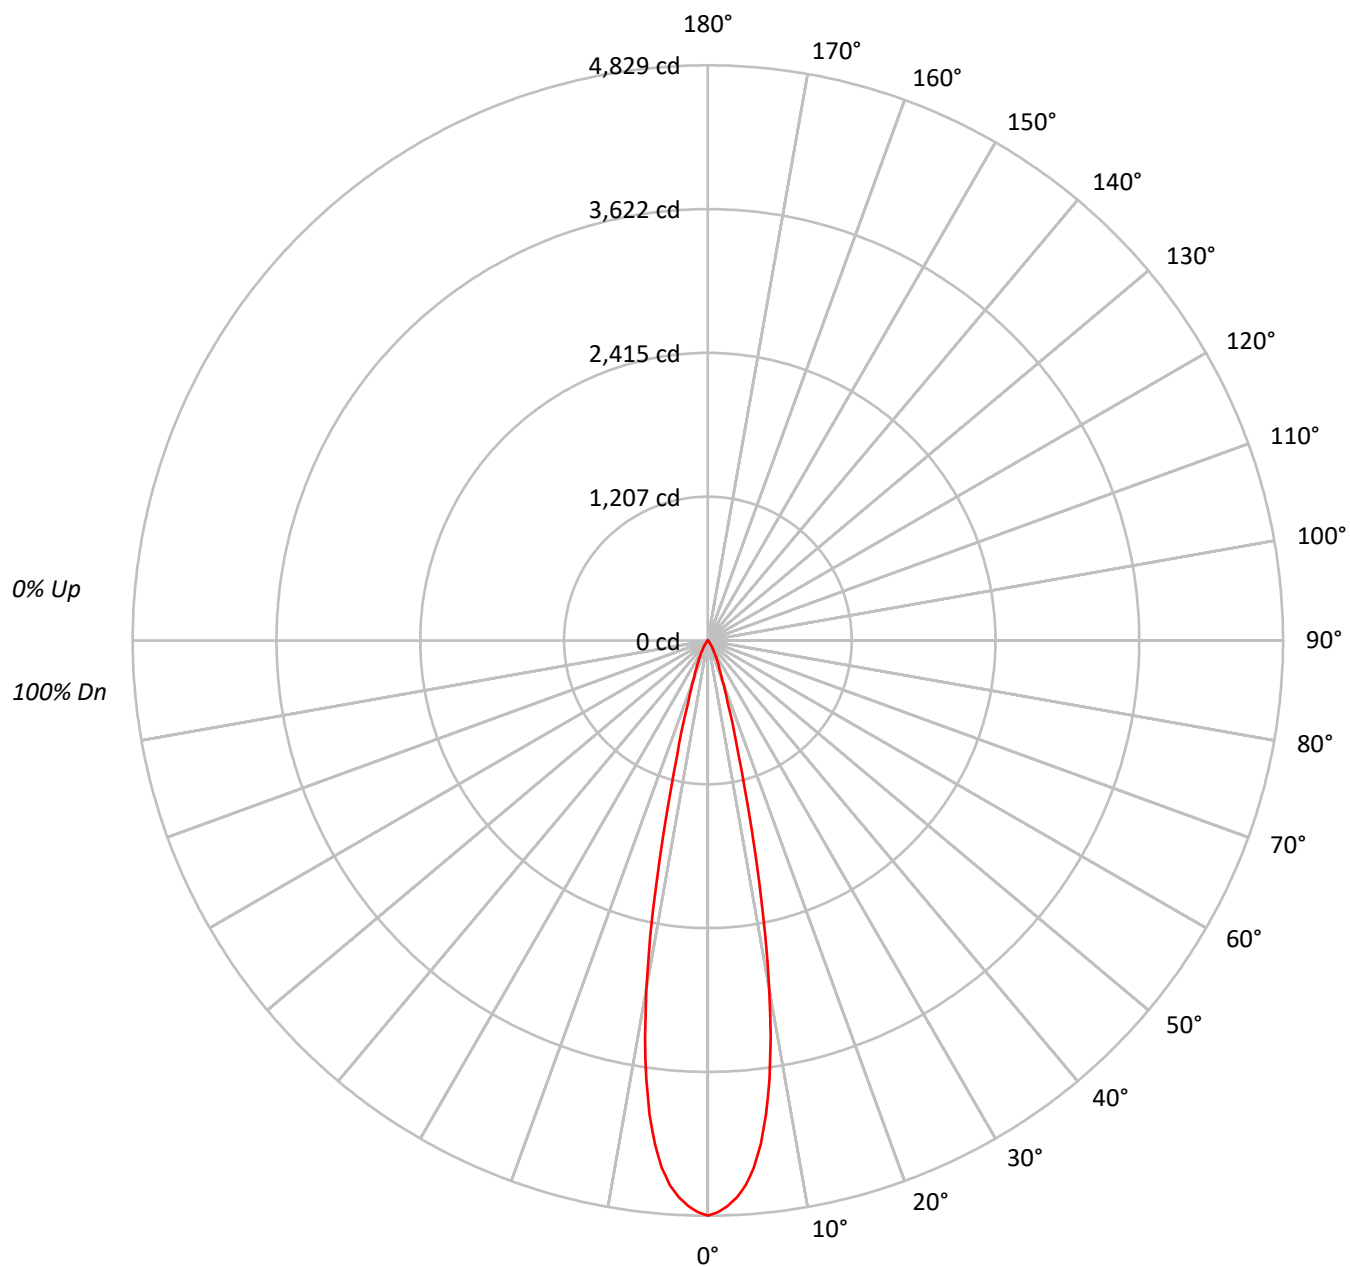



TEST NUMBER: P222557

CATALOG NUMBER: LSSQWM2B10NFL259040D010 2LBDLC*MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	115	113	112	110	113	111	110	108	107	106	105		104	103	102		100
2	112	109	106	104	110	107	104	102	104	102	100		101	99	98		98
3	109	105	101	99	107	103	100	98	101	98	96		99	97	95		96
4	106	101	97	95	104	100	97	94	98	95	93		96	94	92		95
5	103	98	94	91	102	97	94	91	95	92	90		94	91	89		93
6	101	95	91	89	99	94	91	88	93	90	88		92	89	87		91
7	98	92	89	86	97	92	88	86	91	88	85		90	87	85		89
8	96	90	86	84	95	90	86	84	89	86	83		88	85	83		87
9	94	88	84	82	93	88	84	82	87	84	82		86	83	81		85
10	92	86	82	80	91	86	82	80	85	82	80		84	82	80		84

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1870339
5°	1726891
10°	1168912
15°	397682
20°	146044
25°	77443
30°	39807
35°	18583
40°	6068
45°	3068
50°	1446
55°	540
60°	620
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P222557

CATALOG NUMBER: LSSQWM2B10NFL259040D010 2LBDLC*MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	377.8	46.4
10°-20°	317.7	39.0
20°-30°	87.2	10.7
30°-40°	25.4	3.1
40°-50°	4.7	0.6
50°-60°	1.1	0.1
60°-70°	0.1	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	782.6	96.2
0°-40°	808.0	99.3
0°-60°	813.8	100.0
0°-90°	813.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	813.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4829	
5°	4441	378
15°	992	318
25°	181	87
35°	39	25
45°	6	5
55°	1	1
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P222557

CATALOG NUMBER: LSSQWM2B10NFL259040D010 2LBDLC*MMS

CANDELA DISTRIBUTION (FULL):

	0°
0°	4828.6
1°	4800.5
2°	4750.8
3°	4679.4
4°	4581.6
5°	4441.3
6°	4249.7
7°	4010.0
8°	3717.4
9°	3371.9
10°	2971.9
11°	2533.3
12°	2077.2
13°	1641.9
14°	1270.7
15°	991.7
17.5°	559.6
20°	354.3
22.5°	252.5
25°	181.2
27.5°	128.3
30°	89.0
32.5°	62.5
35°	39.3
37.5°	16.0
40°	12.0
42.5°	8.8
45°	5.6
47.5°	3.2
50°	2.4
52.5°	1.6
55°	0.8
57.5°	0.8
60°	0.8
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0



TEST NUMBER: P222557

CATALOG NUMBER: LSSQWM2B10NFL259040D010 2LBDLC*MMS

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







85°	0.0
87.5°	0.0



(END OF REPORT)