

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P224630

Luminaire Tested: **LSSQWM2B10FL409030D2WD010 2LBDLC*MMS**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P224630
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14836)
Test Lab: INNOVATION CENTER (G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSSQWM2B10FL409030D2WD010 2LBDLC*MMS
Description: 1000 Lumen, 2inch Portfolio LED Cylinder
FLOOD OPTIC
LENSED CAST ROUND TRIM WITH MATTE METALLIC SILVER
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 565.7 lumens
Efficiency: N/A
Efficacy: 54.9 lumens/watt
Spacing Criteria (0/90/45): 0.61 / 0.61 / 0.59
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 10.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P224630

CATALOG NUMBER: LSSQWM2B10FL409030D2WD010 2LBDLC*MMS

Luminous Intensity Polar Plot

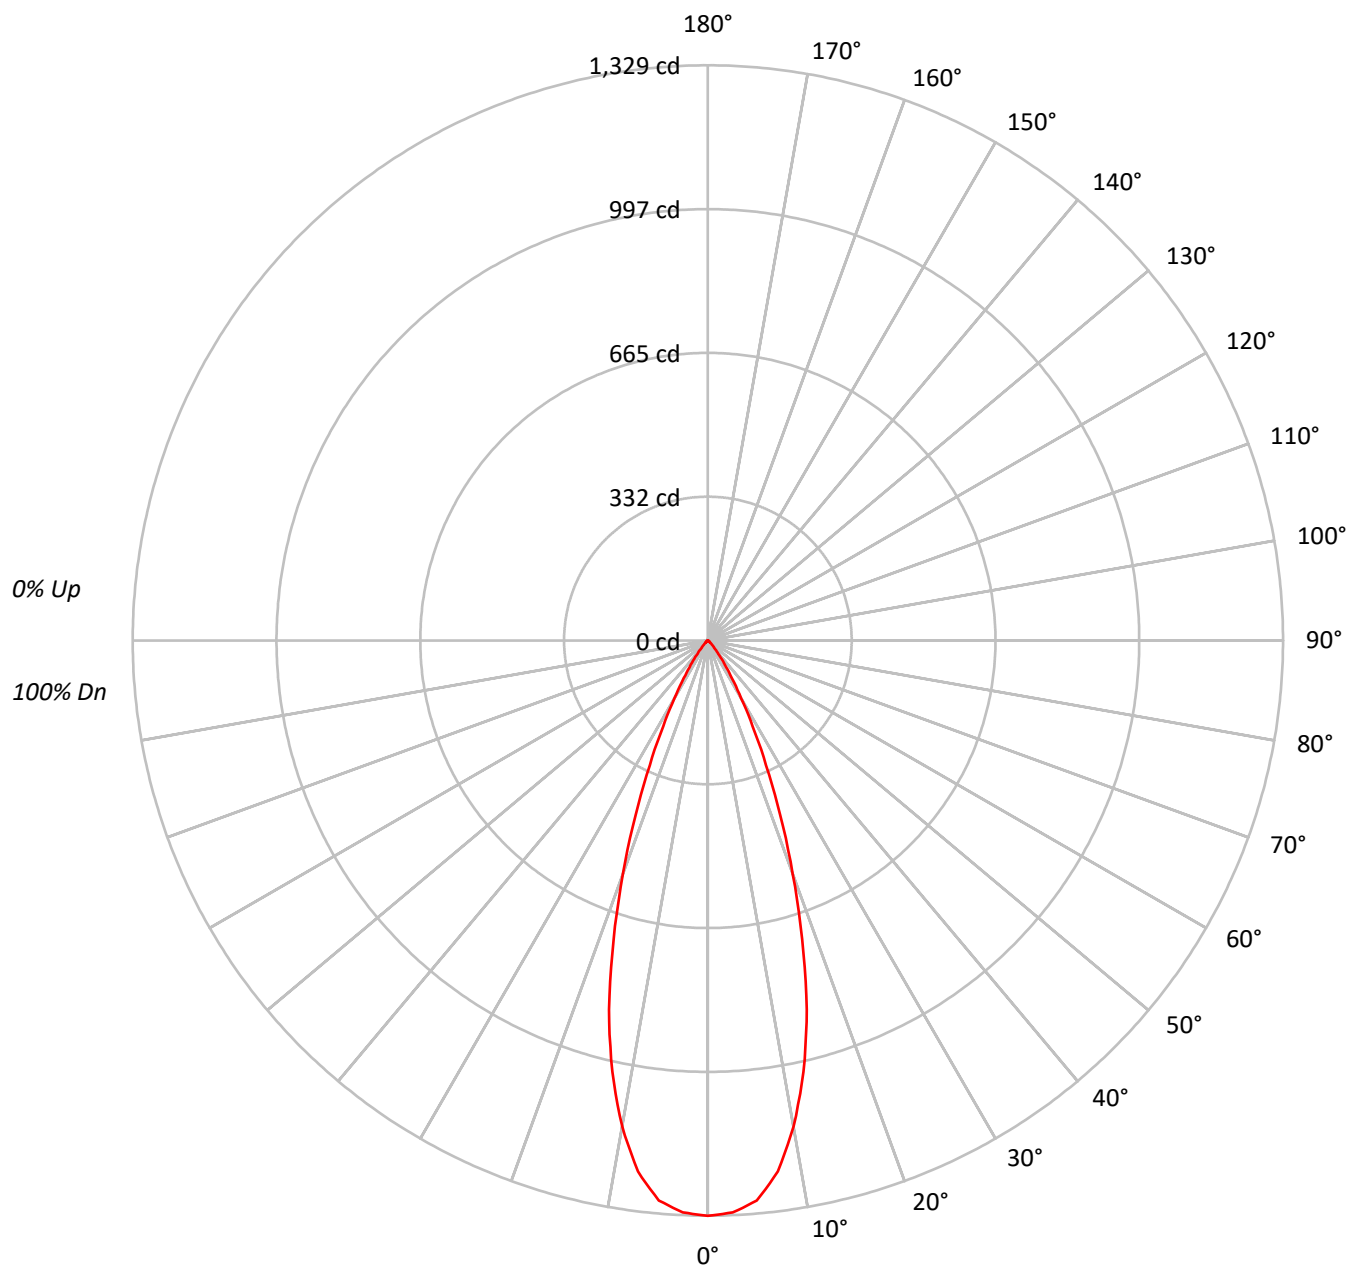



TEST NUMBER: P224630

CATALOG NUMBER: LSSQWM2B10FL409030D2WD010 2LBDLC*MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10			50	30	10			50
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111			106	106	106			102
1	114	112	110	108		112	110	108	106		106	104	103			102	101	100			99
2	110	106	102	100		108	104	101	99		101	99	96			98	96	94			95
3	106	100	96	93		104	99	95	92		97	93	91			94	92	89			92
4	102	95	91	87		100	94	90	87		92	89	86			90	87	85			89
5	98	91	86	83		96	90	86	82		88	85	82			87	83	81			85
6	94	87	82	78		93	86	82	78		85	81	78			83	80	77			82
7	91	83	78	75		89	82	78	75		81	77	74			80	77	74			79
8	87	80	75	71		86	79	75	71		78	74	71			77	73	71			76
9	84	76	72	68		83	76	71	68		75	71	68			74	71	68			74
10	81	74	69	66		81	73	69	66		72	68	65			72	68	65			71

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	514938
5°	505046
10°	448622
15°	354012
20°	236152
25°	135910
30°	68835
35°	32249
40°	13197
45°	5971
50°	3073
55°	1958
60°	1162
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P224630

CATALOG NUMBER: LSSQWM2B10FL409030D2WD010 2LBDLC*MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	118.9	21.0
10°-20°	238.6	42.2
20°-30°	149.4	26.4
30°-40°	46.2	8.2
40°-50°	9.6	1.7
50°-60°	2.6	0.5
60°-70°	0.4	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	506.9	89.6
0°-40°	553.1	97.8
0°-60°	565.3	99.9
0°-90°	565.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	565.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1329	
5°	1299	119
15°	883	239
25°	318	149
35°	68	46
45°	11	10
55°	3	3
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P224630

CATALOG NUMBER: LSSQWM2B10FL409030D2WD010 2LBDLC*MMS

CANDELA DISTRIBUTION (FULL):

	0°
0°	1329.4
2.5°	1322.8
5°	1298.9
7.5°	1237.8
10°	1140.6
12.5°	1020.8
15°	882.8
17.5°	723.9
20°	572.9
22.5°	435.6
25°	318.0
27.5°	223.6
30°	153.9
32.5°	103.1
35°	68.2
37.5°	42.8
40°	26.1
42.5°	16.7
45°	10.9
47.5°	7.3
50°	5.1
52.5°	3.6
55°	2.9
57.5°	2.1
60°	1.5
62.5°	0.7
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)