

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P#

Luminaire Tested: **LSSQWM2B10WFL559030D2WD010 2LBD*B**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P#
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14809)
Test Lab: INNOVATION CENTER (G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSSQWM2B10WFL559030D2WD010 2LBD*B
Description: 1000 Lumen, 2inch Portfolio LED Cylinder
WIDE FLOOD OPTIC
SPUN ROUND TRIM WITH BLACK FINISH
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 575.5 lumens
Efficiency: N/A
Efficacy: 55.9 lumens/watt
Spacing Criteria (0/90/45): 0.79 / 0.79 / 0.84
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 10.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P#

CATALOG NUMBER: LSSQWM2B10WFL559030D2WD010 2LBD*B

Luminous Intensity Polar Plot

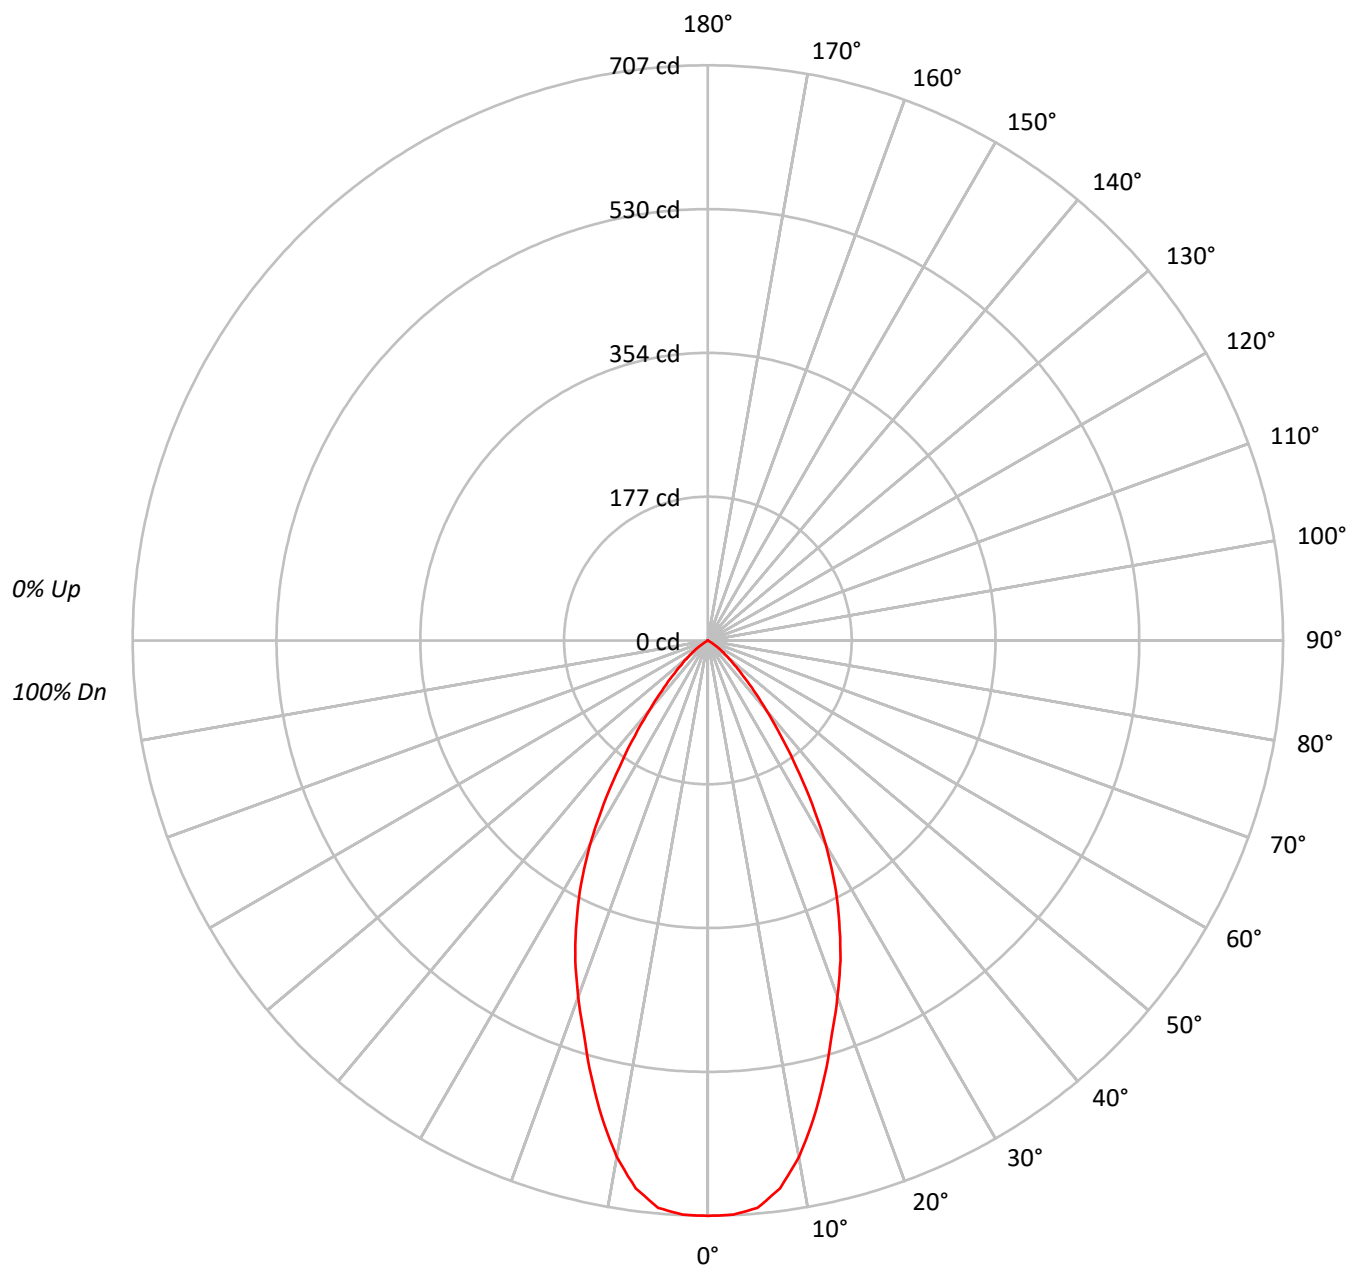



TEST NUMBER: P#

CATALOG NUMBER: LSSQWM2B10WFL559030D2WD010 2LBD*B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	113	111	108	106		111	109	106	104		104	103	101		101	99	98		97	96	95
2	108	103	99	95		106	101	97	94		98	95	92		95	92	90		92	90	88
3	102	96	91	87		100	94	90	86		92	88	85		89	86	83		87	84	82
4	97	89	84	79		95	88	83	79		86	82	78		84	80	77		82	79	76
5	92	83	78	73		90	83	77	73		81	76	72		79	75	72		77	74	71
6	87	78	72	68		86	77	72	68		76	71	67		74	70	67		73	69	66
7	83	73	67	63		81	73	67	63		71	66	63		70	66	62		69	65	62
8	79	69	63	59		78	69	63	59		67	62	59		66	62	58		65	61	58
9	75	65	59	55		74	65	59	55		64	59	55		63	58	55		62	58	55
10	71	62	56	52		70	61	56	52		60	55	52		60	55	52		59	55	51

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	273970
5°	272178
10°	253535
15°	222320
20°	192046
25°	163348
30°	129574
35°	89418
40°	56177
45°	33525
50°	19404
55°	9792
60°	620
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P#

CATALOG NUMBER: LSSQWM2B10WFL559030D2WD010 2LBD*B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	65.0	11.3
10°-20°	154.5	26.8
20°-30°	173.9	30.2
30°-40°	119.5	20.8
40°-50°	49.6	8.6
50°-60°	12.8	2.2
60°-70°	0.1	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	393.5	68.4
0°-40°	513.0	89.1
0°-60°	575.4	100.0
0°-90°	575.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	575.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	707	
5°	700	65
15°	554	155
25°	382	174
35°	189	119
45°	61	50
55°	14	13
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P#

CATALOG NUMBER: LSSQWM2B10WFL559030D2WD010 2LBD*B

CANDELA DISTRIBUTION (FULL):

	0°
0°	707.3
2.5°	706.5
5°	700.0
7.5°	679.2
10°	644.6
12.5°	601.1
15°	554.4
17.5°	506.9
20°	465.9
22.5°	425.7
25°	382.2
27.5°	338.0
30°	289.7
32.5°	238.2
35°	189.1
37.5°	147.2
40°	111.1
42.5°	83.7
45°	61.2
47.5°	44.2
50°	32.2
52.5°	22.6
55°	14.5
57.5°	4.8
60°	0.8
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)