

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P224996

Luminaire Tested: **LSRWM2B05FL408030D010 2LBDL*LI**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P224996
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (152)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSRWM2B05FL408030D010 2LBDL*LI
Description: 500 Lumen, 2inch Portfolio LED Cylinder
FLOOD OPTIC
LENSED SPUN ROUND TRIM WITH LI FINISH
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 725.0 lumens
Efficiency: N/A
Efficacy: 99.3 lumens/watt
Spacing Criteria (0/90/45): 0.59 / 0.59 / 0.58
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 7.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P224996

CATALOG NUMBER: LSRWM2B05FL408030D010 2LBDL*LI

Luminous Intensity Polar Plot

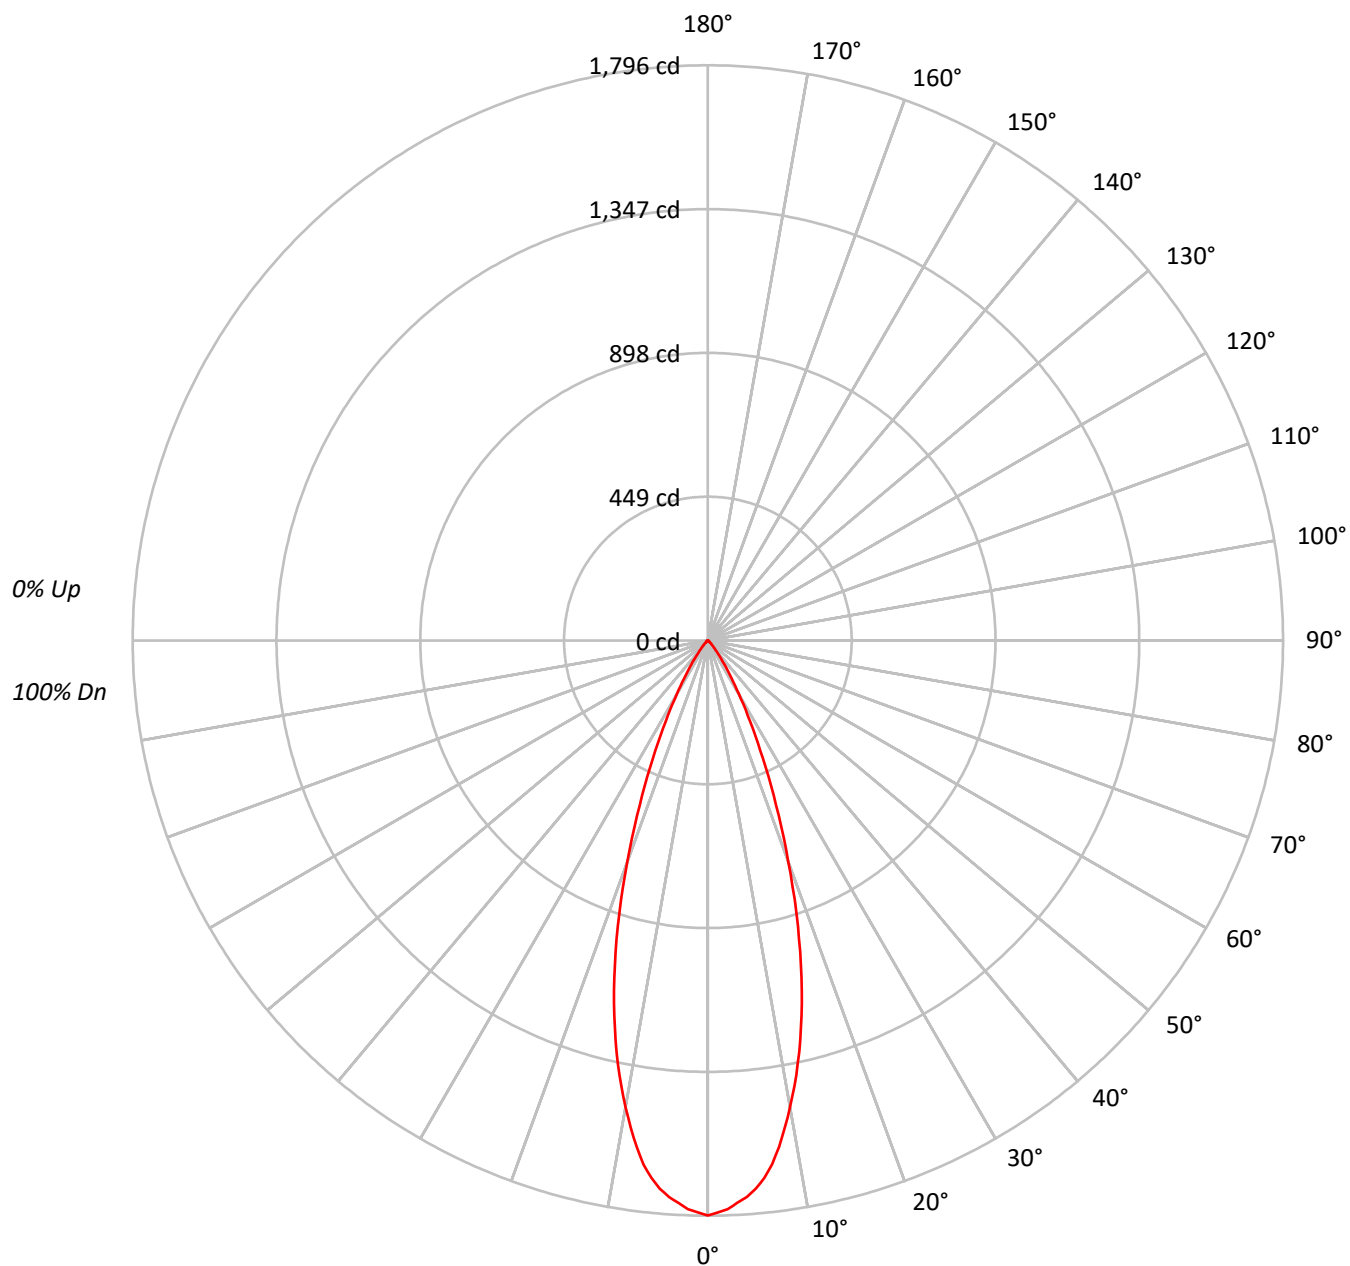



TEST NUMBER: P224996

CATALOG NUMBER: LSRWM2B05FL408030D010 2LBDL*LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10			50	30	10			50
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111			106	106	106			102
1	114	112	110	108		112	110	108	106		106	105	103			102	101	100			99
2	110	106	103	100		108	104	101	99		101	99	97			98	96	95			96
3	106	101	96	93		104	99	95	92		97	94	91			94	92	90			92
4	102	96	91	88		100	95	90	87		93	89	86			91	88	85			89
5	98	91	86	83		97	90	86	83		89	85	82			87	84	81			86
6	94	87	82	79		93	86	82	79		85	81	78			84	80	78			83
7	91	83	79	75		90	83	78	75		82	78	75			81	77	74			80
8	88	80	75	72		87	80	75	72		79	74	71			78	74	71			77
9	85	77	72	69		84	76	72	69		76	71	69			75	71	68			74
10	82	74	69	66		81	74	69	66		73	69	66			72	68	66			72

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	695480
5°	668313
10°	581762
15°	454304
20°	302146
25°	173007
30°	86010
35°	39531
40°	15877
45°	7231
50°	3375
55°	1891
60°	1085
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P224996

CATALOG NUMBER: LSRWM2B05FL408030D010 2LBDL*LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	156.4	21.6
10°-20°	307.2	42.4
20°-30°	190.1	26.2
30°-40°	56.9	7.8
40°-50°	11.4	1.6
50°-60°	2.8	0.4
60°-70°	0.2	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	653.8	90.2
0°-40°	710.7	98.0
0°-60°	724.9	100.0
0°-90°	725.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	725.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1796	
5°	1719	156
15°	1133	307
25°	405	190
35°	84	57
45°	13	11
55°	3	3
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P224996

CATALOG NUMBER: LSRWM2B05FL408030D010 2LBDL*LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	1795.5
1°	1785.7
2°	1776.6
3°	1758.5
4°	1741.8
5°	1718.8
6°	1687.5
7°	1647.8
8°	1596.9
9°	1539.1
10°	1479.1
11°	1417.1
12°	1350.9
13°	1282.0
14°	1208.1
15°	1132.9
17.5°	934.3
20°	733.0
22.5°	554.6
25°	404.8
27.5°	284.3
30°	192.3
32.5°	126.8
35°	83.6
37.5°	52.3
40°	31.4
42.5°	20.2
45°	13.2
47.5°	8.4
50°	5.6
52.5°	4.2
55°	2.8
57.5°	2.1
60°	1.4
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0



TEST NUMBER: P224996

CATALOG NUMBER: LSRWM2B05FL408030D010 2LBDL*LI

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







85°	0.0
87.5°	0.0



(END OF REPORT)