

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P#

Luminaire Tested: **LSSQ2B05WFL559040D010 2LBDDLETELC*MB**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P#
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14812)
Test Lab: INNOVATION CENTER (G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSSQ2B05WFL559040D010 2LBDDELETELC*MB
Description: 500 Lumen, 2inch Portfolio LED Cylinder
WIDE FLOOD OPTIC
LENSED SQUARE CAST TRIM WITH MATTE BLACK FINISH
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 536.0 lumens
Efficiency: N/A
Efficacy: 73.4 lumens/watt
Spacing Criteria (0/90/45): 0.78 / 0.76 / 0.83
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 7.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P#

CATALOG NUMBER: LSSQ2B05WFL559040D010 2LBDDELETEL*MB

Luminous Intensity Polar Plot

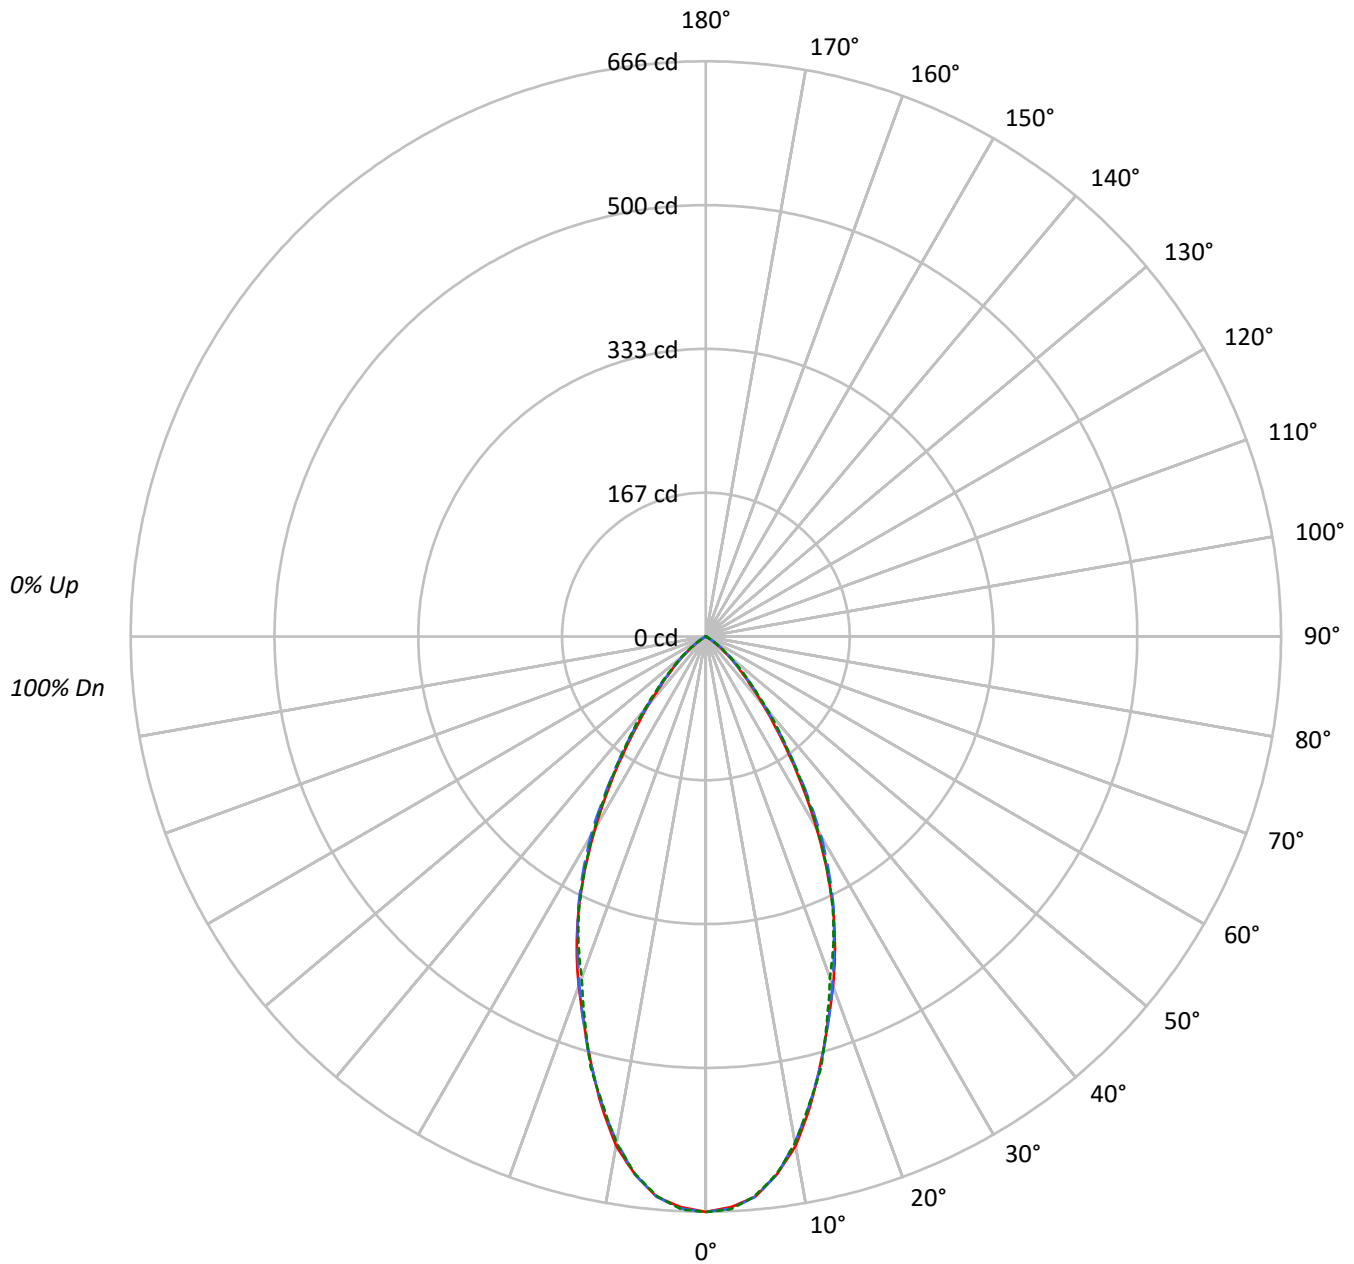



TEST NUMBER: P#

CATALOG NUMBER: LSSQ2B05WFL559040D010 2LBDDELETEL*MB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	113	111	108	106		111	108	106	104		104	103	101		101	99	98		97	96	95
2	108	103	99	95		105	101	97	94		98	95	92		95	92	90		92	90	88
3	102	95	90	86		100	94	89	86		91	88	84		89	86	83		87	84	82
4	97	89	83	79		95	88	83	79		86	81	78		84	80	77		82	79	76
5	92	83	77	73		90	82	77	72		80	75	72		79	74	71		77	73	70
6	87	78	72	67		85	77	71	67		76	70	67		74	70	66		73	69	66
7	83	73	67	63		81	72	67	62		71	66	62		70	65	62		69	65	61
8	78	69	63	58		77	68	62	58		67	62	58		66	61	58		65	61	58
9	75	65	59	55		74	64	59	55		63	58	54		62	58	54		62	57	54
10	71	61	55	51		70	61	55	51		60	55	51		59	54	51		58	54	51

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	258127	258127	258127
5°	253203	253203	252853
10°	235482	233830	234144
15°	205518	205838	206881
20°	177413	176753	173250
25°	148902	149629	148560
30°	114590	119152	115753
35°	79961	83176	82373
40°	52182	54306	56025
45°	31991	33799	35223
50°	18861	20368	21392
55°	7969	10265	9725
60°	1317	2634	1937
65°	733	733	733
70°	0	0	0
75°	0	0	0
80°	0	0	0
85°	0	0	0



TEST NUMBER: P#

CATALOG NUMBER: LSSQ2B05WFL559040D010 2LBDDELETEL*MB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	60.4	11.3
10°-20°	142.8	26.6
20°-30°	158.2	29.5
30°-40°	110.1	20.5
40°-50°	49.6	9.2
50°-60°	14.0	2.6
60°-70°	1.0	0.2
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	361.4	67.4
0°-40°	471.5	88.0
0°-60°	535.0	99.8
0°-90°	536.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	536.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	666	666	666	666	666	
5°	651	654	651	649	650	60
15°	512	515	513	512	516	143
25°	348	351	350	346	348	158
35°	169	174	176	176	174	107
45°	58	60	62	63	64	47
55°	12	14	15	15	14	12
65°	1	1	1	1	1	1
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	



TEST NUMBER: P#

CATALOG NUMBER: LSSQ2B05WFL559040D010 2LBDDELETEL*MB

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	666.4	666.4	666.4	666.4	666.4
2.5°	661.3	664.7	663.0	663.0	663.8
5°	651.2	653.7	651.2	648.6	650.3
7.5°	628.3	630.9	628.3	626.6	627.5
10°	598.7	597.0	594.5	592.8	595.3
12.5°	557.3	556.4	554.8	553.9	553.9
15°	512.5	515.0	513.3	512.5	515.9
17.5°	469.3	471.9	470.2	467.7	466.0
20°	430.4	431.3	428.8	424.5	420.3
22.5°	390.7	391.5	387.3	385.6	385.6
25°	348.4	351.0	350.1	345.9	347.6
27.5°	302.7	307.0	308.7	303.6	303.6
30°	256.2	259.6	266.4	259.6	258.8
32.5°	210.6	215.6	219.0	218.2	215.6
35°	169.1	174.2	175.9	175.9	174.2
37.5°	131.9	137.0	138.7	140.4	140.4
40°	103.2	105.7	107.4	109.9	110.8
42.5°	77.8	80.3	82.9	84.6	83.7
45°	58.4	60.0	61.7	63.4	64.3
47.5°	44.0	44.0	45.7	47.4	47.4
50°	31.3	33.0	33.8	34.7	35.5
52.5°	21.1	22.0	23.7	24.5	23.7
55°	11.8	13.5	15.2	15.2	14.4
57.5°	5.1	7.6	8.5	8.5	6.8
60°	1.7	3.4	3.4	4.2	2.5
62.5°	0.8	1.7	1.7	1.7	0.8
65°	0.8	0.8	0.8	0.8	0.8
67.5°	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180° - - 45°-225° - - - 90°-270°







(END OF REPORT)