

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P#

Luminaire Tested: **LSSQWM2B05WFL559040D010 2LBDDELETEC*MB**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P#
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14813)
Test Lab: INNOVATION CENTER (G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSSQWM2B05WFL559040D010 2LBDDELETEC*MB
Description: 500 Lumen, 2inch Portfolio LED Cylinder
WIDE FLOOD OPTIC
SQUARE CAST TRIM WITH MATTE BLACK FINISH
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 536.0 lumens
Efficiency: N/A
Efficacy: 73.4 lumens/watt
Spacing Criteria (0/90/45): 0.78 / 0.77 / 0.83
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 7.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P#

CATALOG NUMBER: LSSQWM2B05WFL559040D010 2LBDDELETEC*MB

Luminous Intensity Polar Plot

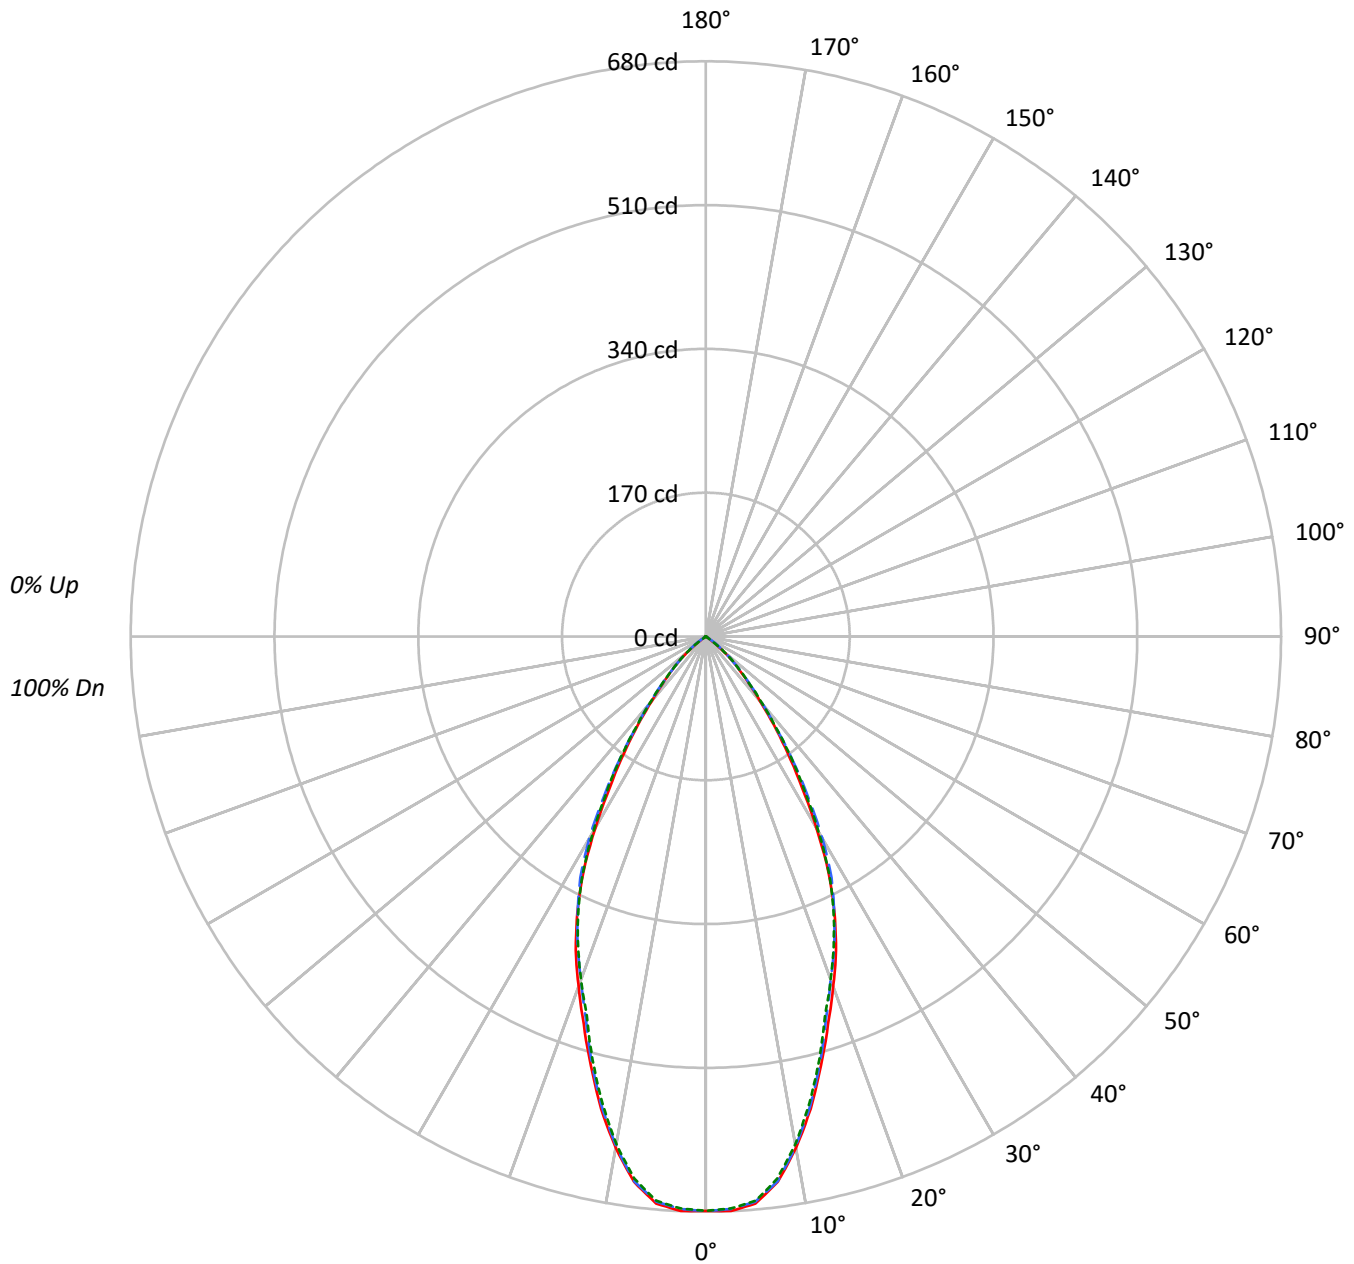



TEST NUMBER: P#

CATALOG NUMBER: LSSQWM2B05WFL559040D010 2LBDDELETEC*MB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10		50	30	10			50	30	10			50
RCR																				
0	119	119	119	119	116	116	116	116		111	111	111			106	106	106			102
1	114	111	108	106	111	109	106	104		105	103	101			101	99	98			97
2	108	103	99	96	106	101	98	94		98	95	92			95	93	90			92
3	102	96	91	87	100	95	90	86		92	88	85			89	86	84			87
4	97	90	84	80	95	88	83	79		86	82	78			84	80	77			82
5	92	84	78	74	91	83	77	73		81	76	73			79	75	72			78
6	87	79	73	68	86	78	72	68		76	71	68			75	70	67			74
7	83	74	68	64	82	73	67	63		72	67	63			71	66	63			70
8	79	70	64	59	78	69	63	59		68	63	59			67	62	59			66
9	75	66	60	56	74	65	59	56		64	59	55			63	59	55			62
10	72	62	56	52	71	62	56	52		61	56	52			60	55	52			59

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	263047	263047	263047
5°	261641	260746	260435
10°	241460	240555	239651
15°	210691	209167	207603
20°	181411	177866	177866
25°	153561	153262	152578
30°	117005	123223	119063
35°	79630	84406	83697
40°	50210	52992	52587
45°	31060	31443	31881
50°	15909	17777	17295
55°	2093	6280	2634
60°	620	620	620
65°	0	0	0
70°	0	0	0
75°	0	0	0
80°	0	0	0
85°	0	0	0



TEST NUMBER: P#

CATALOG NUMBER: LSSQWM2B05WFL559040D010 2LBDDELETEC*MB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	62.1	11.6
10°-20°	145.2	27.1
20°-30°	162.9	30.4
30°-40°	110.7	20.6
40°-50°	46.3	8.6
50°-60°	8.7	1.6
60°-70°	0.1	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	370.3	69.1
0°-40°	480.9	89.7
0°-60°	535.9	100.0
0°-90°	536.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	536.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	679	679	679	679	679	
5°	673	672	671	669	670	62
15°	525	524	522	517	518	147
25°	359	362	359	358	357	163
35°	168	174	178	175	177	107
45°	57	56	57	58	58	45
55°	3	7	9	7	4	6
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	



TEST NUMBER: P#

CATALOG NUMBER: LSSQWM2B05WFL559040D010 2LBDDELETEC*MB

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	679.1	679.1	679.1	679.1	679.1
2.5°	679.9	678.3	677.6	676.8	676.8
5°	672.9	672.1	670.6	669.0	669.8
7.5°	650.4	649.6	649.6	646.5	646.5
10°	613.9	613.9	611.6	611.6	609.3
12.5°	572.0	568.9	568.9	566.6	565.0
15°	525.4	523.9	521.6	516.9	517.7
17.5°	480.4	477.3	472.7	470.3	468.8
20°	440.1	439.3	431.5	430.0	431.5
22.5°	402.0	402.8	396.6	395.0	395.0
25°	359.3	362.4	358.6	357.8	357.0
27.5°	313.6	319.0	321.3	315.9	315.1
30°	261.6	270.9	275.5	270.1	266.2
32.5°	211.1	220.4	225.1	221.2	218.9
35°	168.4	173.9	178.5	174.6	177.0
37.5°	131.9	135.0	136.6	136.6	136.6
40°	99.3	102.4	104.8	105.6	104.0
42.5°	75.3	76.8	78.4	79.2	78.4
45°	56.7	55.9	57.4	58.2	58.2
47.5°	41.1	41.1	41.9	42.7	42.7
50°	26.4	27.9	29.5	28.7	28.7
52.5°	11.6	16.3	19.4	16.3	13.2
55°	3.1	7.0	9.3	7.0	3.9
57.5°	0.8	2.3	3.1	2.3	1.6
60°	0.8	0.8	0.8	0.8	0.8
62.5°	0.8	0.0	0.0	0.0	0.8
65°	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180° - - 45°-225° - - - 90°-270°







(END OF REPORT)