

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P224833

Luminaire Tested: **LD2B15D010 EU2B15FL408050 2LBDL*B**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P224833
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14834)
Test Lab: INNOVATION CENTER (G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD2B15D010 EU2B15FL408050 2LBDL*B
Description: 1500 Lumen, 2inch Portfolio LED Downlight
FLOOD OPTIC
LENSED SPUN ROUND TRIM WITH BLACK FINISH
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1330.7 lumens
Efficiency: N/A
Efficacy: 93.1 lumens/watt
Spacing Criteria (0/90/45): 0.61 / 0.61 / 0.6
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 14.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P224833

CATALOG NUMBER: LD2B15D010 EU2B15FL408050 2LBDL*B

Luminous Intensity Polar Plot

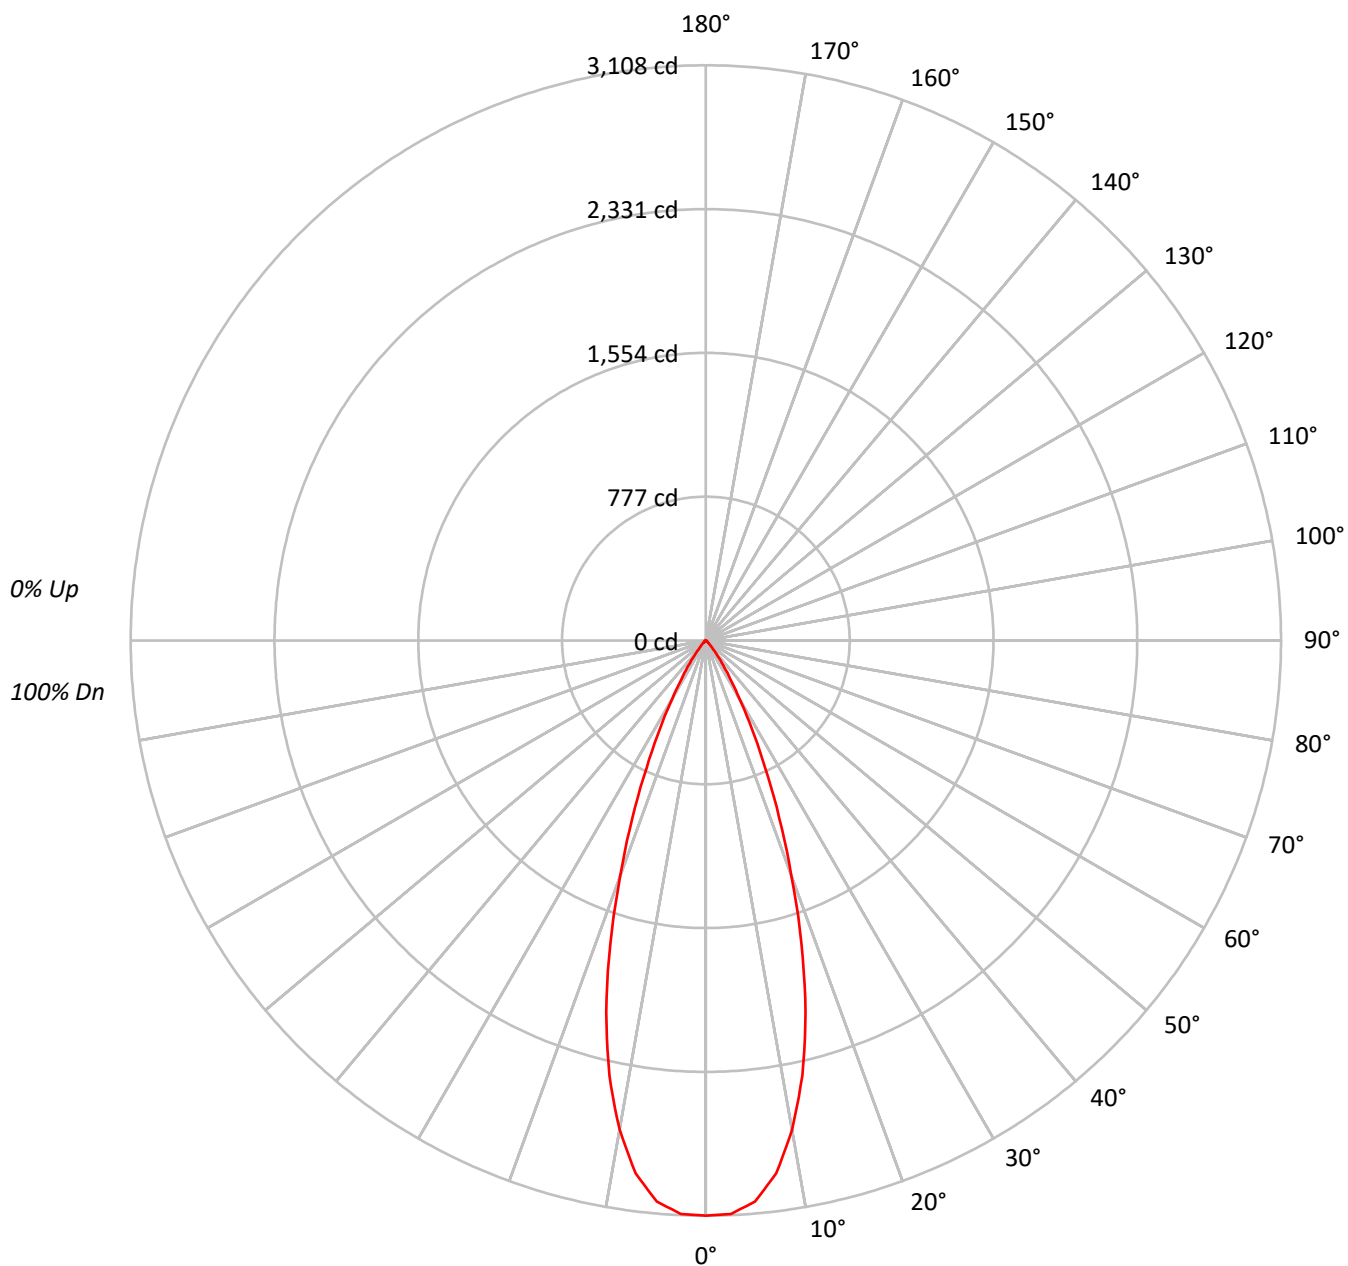



TEST NUMBER: P224833

CATALOG NUMBER: LD2B15D010 EU2B15FL408050 2LBDL*B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10			50	30	10			50
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111			106	106	106			102
1	114	112	110	108		112	110	108	106		106	104	103			102	101	100			99
2	110	106	103	100		108	104	101	99		101	99	96			98	96	94			95
3	106	100	96	93		104	99	95	92		97	93	91			94	92	89			92
4	102	95	91	87		100	94	90	87		92	89	86			90	87	85			89
5	98	91	86	83		96	90	86	82		88	85	82			87	84	81			85
6	94	87	82	79		93	86	82	78		85	81	78			84	80	77			82
7	91	83	78	75		90	83	78	75		81	77	74			80	77	74			79
8	87	80	75	72		86	79	75	71		78	74	71			77	74	71			76
9	84	77	72	69		83	76	72	68		75	71	68			74	71	68			74
10	82	74	69	66		81	73	69	66		73	68	65			72	68	65			71

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1204026
5°	1183080
10°	1055399
15°	834221
20°	556229
25°	322721
30°	161509
35°	75989
40°	29681
45°	13257
50°	6267
55°	3512
60°	1317
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P224833

CATALOG NUMBER: LD2B15D010 EU2B15FL408050 2LBDL*B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	278.9	21.0
10°-20°	563.1	42.3
20°-30°	354.2	26.6
30°-40°	108.3	8.1
40°-50°	21.3	1.6
50°-60°	4.8	0.4
60°-70°	0.2	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1196.2	89.9
0°-40°	1304.5	98.0
0°-60°	1330.5	100.0
0°-90°	1330.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1330.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3108	
5°	3043	279
15°	2080	563
25°	755	354
35°	161	108
45°	24	21
55°	5	5
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P224833

CATALOG NUMBER: LD2B15D010 EU2B15FL408050 2LBDL*B

CANDELA DISTRIBUTION (FULL):

	0°
0°	3108.4
2.5°	3101.4
5°	3042.7
7.5°	2904.5
10°	2683.3
12.5°	2406.9
15°	2080.3
17.5°	1717.5
20°	1349.4
22.5°	1035.0
25°	755.1
27.5°	532.2
30°	361.1
32.5°	243.6
35°	160.7
37.5°	98.5
40°	58.7
42.5°	38.0
45°	24.2
47.5°	15.6
50°	10.4
52.5°	6.9
55°	5.2
57.5°	3.5
60°	1.7
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)