

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P264066

Luminaire Tested: **LD2B20D010 EU2B2010SP158035 2LBSQC*MW**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P264066
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-1805-787-1)
Test Lab: INNOVATION CENTER(G2)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD2B20D010 EU2B2010SP158035 2LBSQC*MW
Description: 2000 Lumen, 2inch Portfolio LED Downlight
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1601.9 lumens
Efficiency: N/A
Efficacy: 76.6 lumens/watt
Spacing Criteria (0/90/45): 0.28 / 0.28 / 0.28
Luminous Opening: Circular (Dia: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 20.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P264066

CATALOG NUMBER: LD2B20D010 EU2B2010SP158035 2LBSQC*MW

Luminous Intensity Polar Plot

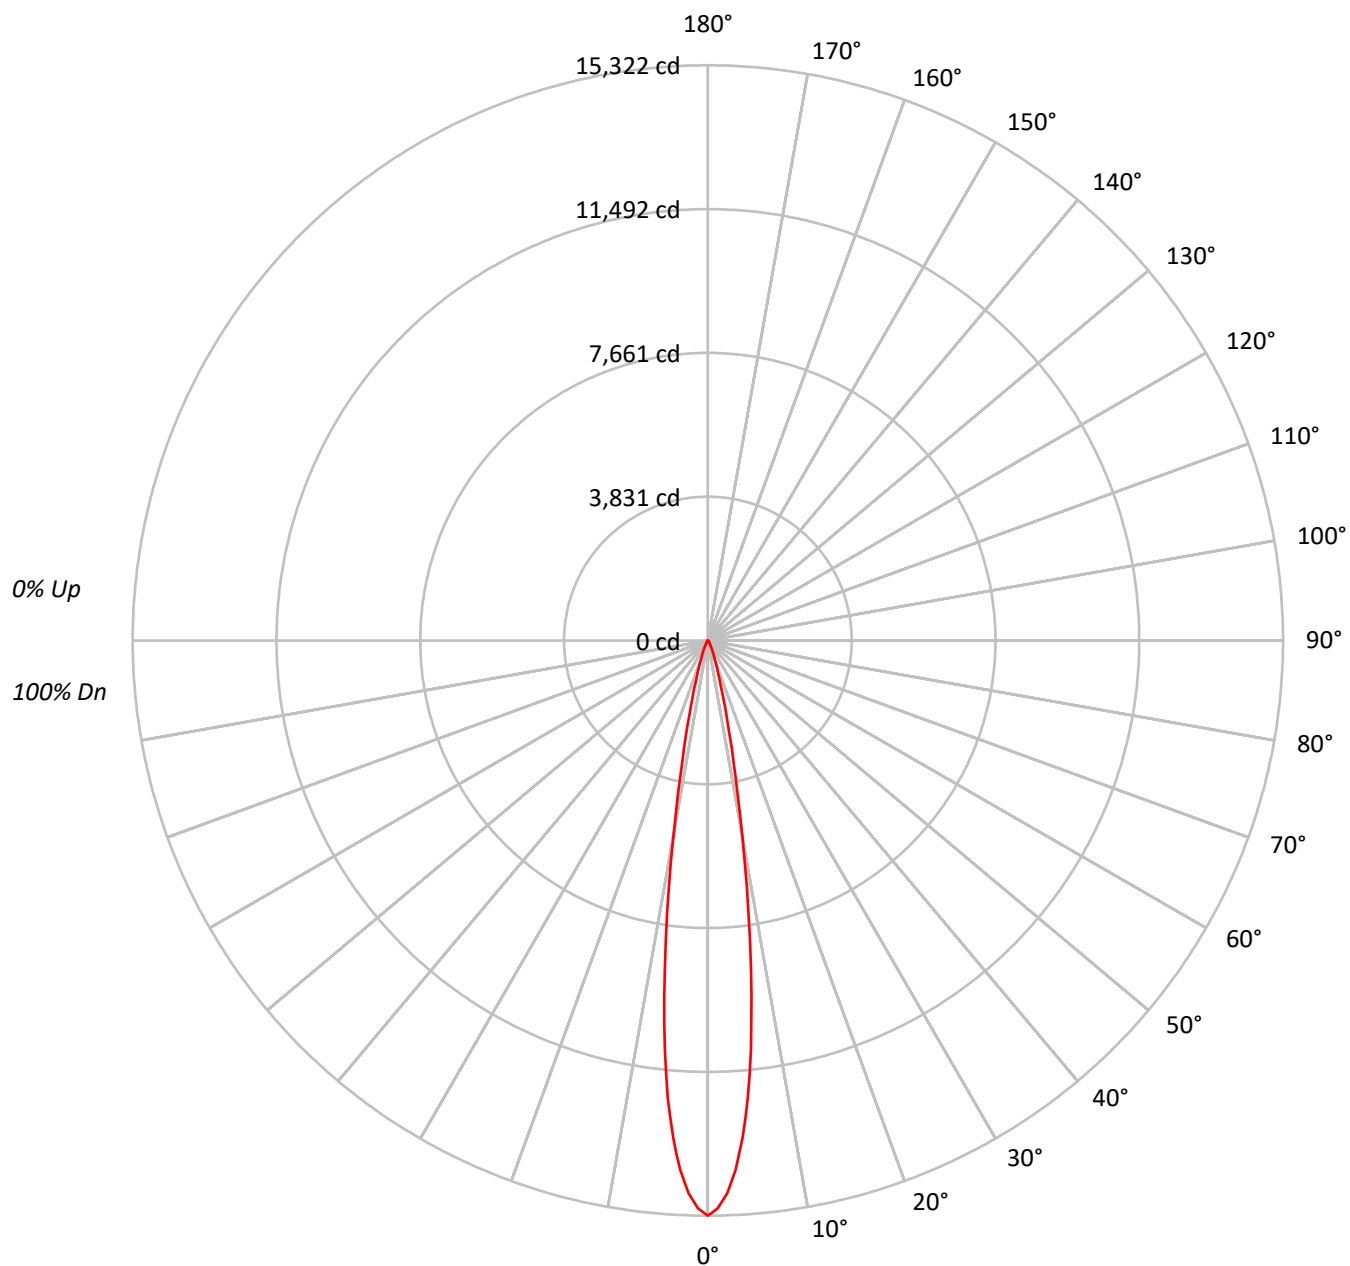



TEST NUMBER: P264066

CATALOG NUMBER: LD2B20D010 EU2B2010SP158035 2LBSQC*MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10			50	30	10			0
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111			106	106	106			100
1	116	114	112	111		113	112	110	109		108	107	106			104	103	102			98
2	113	109	107	105		111	108	106	104		105	103	101			102	101	99			96
3	110	106	103	100		108	105	102	100		102	100	98			100	98	97			94
4	107	103	99	97		106	102	99	96		100	97	95			98	96	94			92
5	105	100	97	94		104	99	96	94		98	95	93			96	94	92			90
6	103	98	94	92		102	97	94	91		96	93	91			95	92	90			89
7	101	95	92	90		100	95	92	89		94	91	89			93	90	89			87
8	99	93	90	88		98	93	90	88		92	89	87			91	89	87			86
9	97	92	88	86		96	91	88	86		91	88	86			90	87	86			85
10	95	90	87	85		95	90	87	85		89	86	85			89	86	84			83

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	7559191
5°	6059091
10°	2644535
15°	819524
20°	285718
25°	126184
30°	57139
35°	29693
40°	16938
45°	8024
50°	5066
55°	2838
60°	1579
65°	1868
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P264066

CATALOG NUMBER: LD2B20D010 EU2B2010SP158035 2LBSQC*MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	929.1	58.0
10°-20°	508.8	31.8
20°-30°	116.0	7.2
30°-40°	33.3	2.1
40°-50°	10.3	0.6
50°-60°	3.1	0.2
60°-70°	1.4	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1553.9	97.0
0°-40°	1587.2	99.1
0°-60°	1600.6	99.9
0°-90°	1601.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1601.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	15322	
5°	12234	929
15°	1604	509
25°	232	116
35°	49	33
45°	12	10
55°	3	3
65°	2	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P264066

CATALOG NUMBER: LD2B20D010 EU2B2010SP158035 2LBSQC*MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	15321.8
1°	15131.1
2°	14734.9
3°	14120.1
4°	13275.1
5°	12234.5
6°	10958.7
7°	9533.4
8°	8045.6
9°	6605.5
10°	5278.8
11°	4156.0
12°	3271.5
13°	2574.5
14°	2033.6
15°	1604.5
16°	1265.9
17°	1007.8
18°	810.5
19°	659.2
20°	544.2
22.5°	351.8
25°	231.8
26°	195.6
27°	166.0
28°	139.7
29°	116.7
30°	100.3
32.5°	69.0
35°	49.3
37.5°	36.2
40°	26.3
42.5°	18.1
45°	11.5
47.5°	8.2
50°	6.6
52.5°	4.9
55°	3.3
57.5°	1.6
60°	1.6
62.5°	1.6
65°	1.6
67.5°	1.6



TEST NUMBER: P264066

CATALOG NUMBER: LD2B20D010 EU2B2010SP158035 2LBSQC*MW

CANDELA DISTRIBUTION (continued):

	0°
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







70°	0.0
72.5°	0.0



(END OF REPORT)