

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P223270

Luminaire Tested: **LD2B20D010 EU2B20NFL258035 2LBDSQC*MB**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P223270
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (155)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD2B20D010 EU2B20NFL258035 2LBDSQC*MB
Description: 2000 Lumen, 2inch Portfolio LED Downlight
NARROW FLOOD OPTIC
SQUARE CAST TRIM WITH MATTE BLACK FINISH
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1763.7 lumens
Efficiency: N/A
Efficacy: 84.4 lumens/watt
Spacing Criteria (0/90/45): 0.39 / 0.39 / 0.35
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 20.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P223270

CATALOG NUMBER: LD2B20D010 EU2B20NFL258035 2LBDSQC*MB

Luminous Intensity Polar Plot

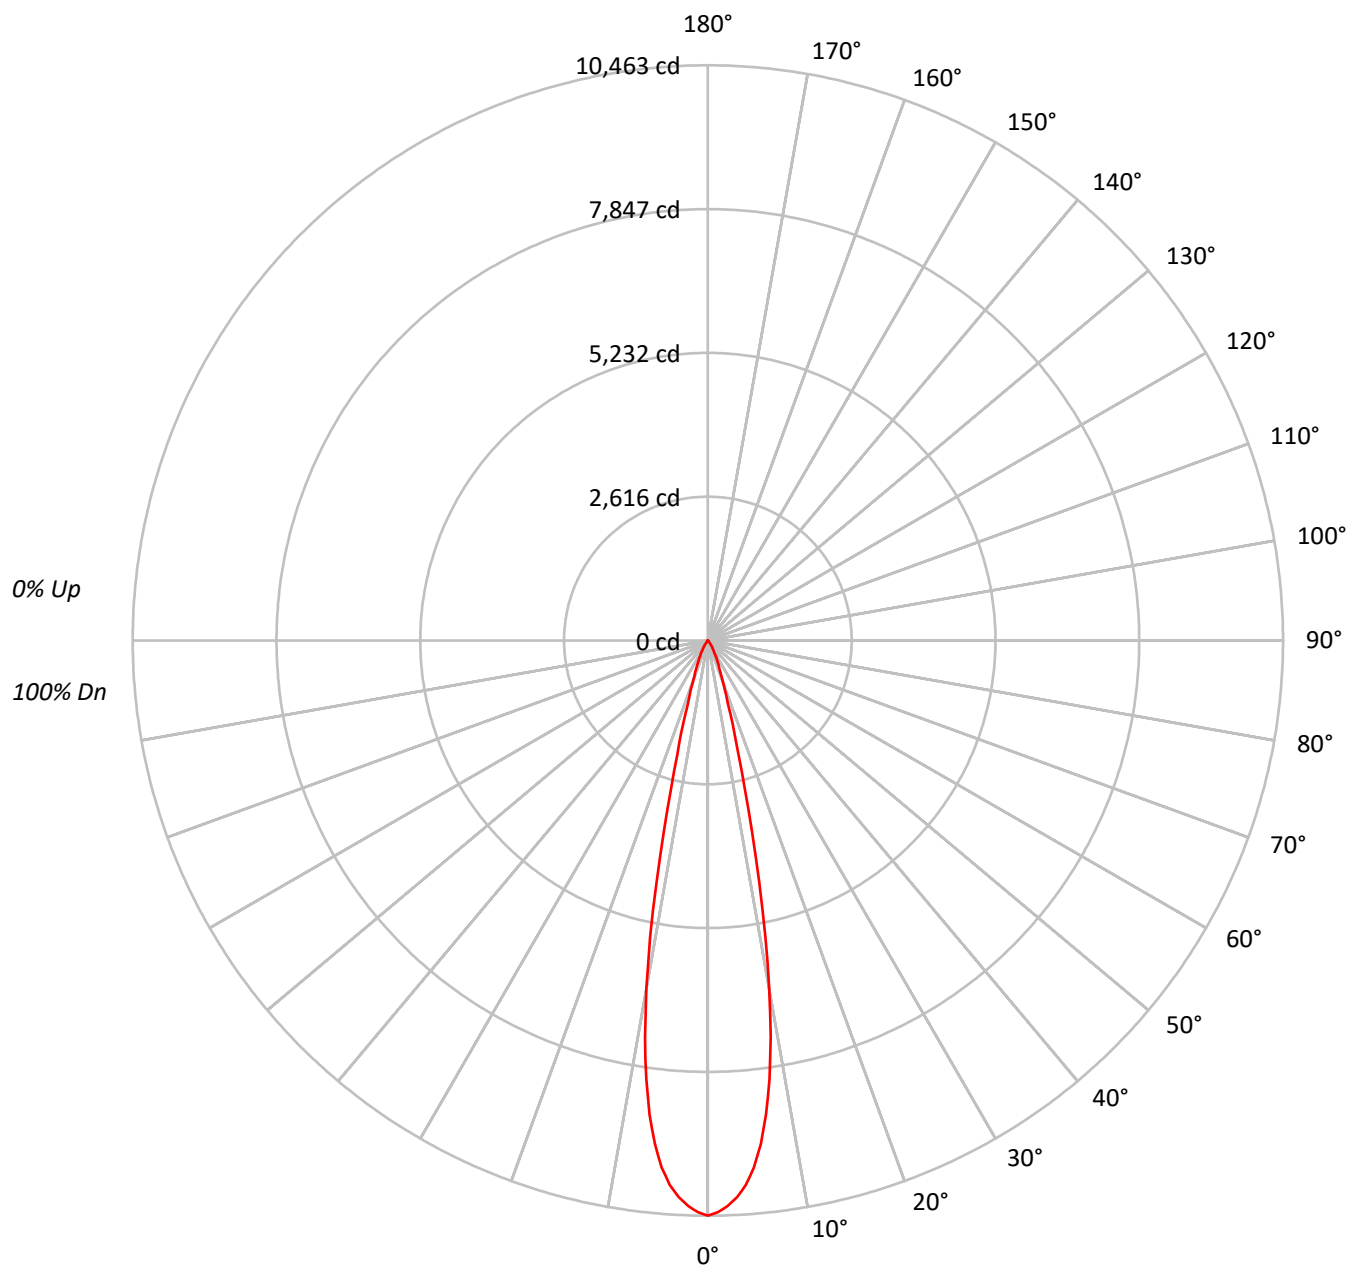



TEST NUMBER: P223270

CATALOG NUMBER: LD2B20D010 EU2B20NFL258035 2LBDSQC*MB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	115	113	112	110	113	111	110	108	107	106	105		104	103	102		100
2	112	109	106	104	110	107	104	102	104	102	100		101	99	98		98
3	109	105	101	99	107	103	100	98	101	98	96		99	97	95		96
4	106	101	97	95	104	100	97	94	98	95	93		96	94	92		95
5	103	98	94	91	102	97	94	91	95	92	90		94	91	89		93
6	101	95	91	89	99	94	91	88	93	90	88		92	89	87		91
7	98	92	89	86	97	92	88	86	91	88	85		90	87	85		89
8	96	90	86	84	95	90	86	84	89	86	83		88	85	83		87
9	94	88	84	82	93	88	84	82	87	84	82		86	83	81		85
10	92	86	82	80	91	86	82	80	85	82	80		84	82	80		84

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	4052956
5°	3742174
10°	2532951
15°	861771
20°	316532
25°	167793
30°	86233
35°	40241
40°	13197
45°	6683
50°	3134
55°	1148
60°	1317
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P223270

CATALOG NUMBER: LD2B20D010 EU2B20NFL258035 2LBDSQC*MB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	818.7	46.4
10°-20°	688.3	39.0
20°-30°	188.9	10.7
30°-40°	55.1	3.1
40°-50°	10.2	0.6
50°-60°	2.3	0.1
60°-70°	0.2	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1695.9	96.2
0°-40°	1751.0	99.3
0°-60°	1763.5	100.0
0°-90°	1763.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1763.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	10463	
5°	9624	819
15°	2149	688
25°	393	189
35°	85	55
45°	12	10
55°	2	2
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P223270

CATALOG NUMBER: LD2B20D010 EU2B20NFL258035 2LBDSQC*MB

CANDELA DISTRIBUTION (FULL):

	0°
0°	10463.4
1°	10402.6
2°	10294.9
3°	10140.2
4°	9928.3
5°	9624.3
6°	9209.1
7°	8689.6
8°	8055.6
9°	7306.8
10°	6439.9
11°	5489.7
12°	4501.2
13°	3557.9
14°	2753.5
15°	2149.0
17.5°	1212.6
20°	767.9
22.5°	547.2
25°	392.6
27.5°	278.0
30°	192.8
32.5°	135.5
35°	85.1
37.5°	34.7
40°	26.1
42.5°	19.1
45°	12.2
47.5°	6.9
50°	5.2
52.5°	3.5
55°	1.7
57.5°	1.7
60°	1.7
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0



TEST NUMBER: P223270

CATALOG NUMBER: LD2B20D010 EU2B20NFL258035 2LBDSQC*MB

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







85°	0.0
87.5°	0.0



(END OF REPORT)