

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P224610

Luminaire Tested: **LD2B20D010 EU2B20FL409035 2LBDLC*MMS**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P224610
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14836)
Test Lab: INNOVATION CENTER (G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD2B20D010 EU2B20FL409035 2LBDLC*MMS
Description: 2000 Lumen, 2inch Portfolio LED Downlight
FLOOD OPTIC
LENSED CAST ROUND TRIM WITH MATTE METALLIC SILVER
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1441.5 lumens
Efficiency: N/A
Efficacy: 69.0 lumens/watt
Spacing Criteria (0/90/45): 0.61 / 0.61 / 0.59
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 20.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P224610

CATALOG NUMBER: LD2B20D010 EU2B20FL409035 2LBDLC*MMS

Luminous Intensity Polar Plot

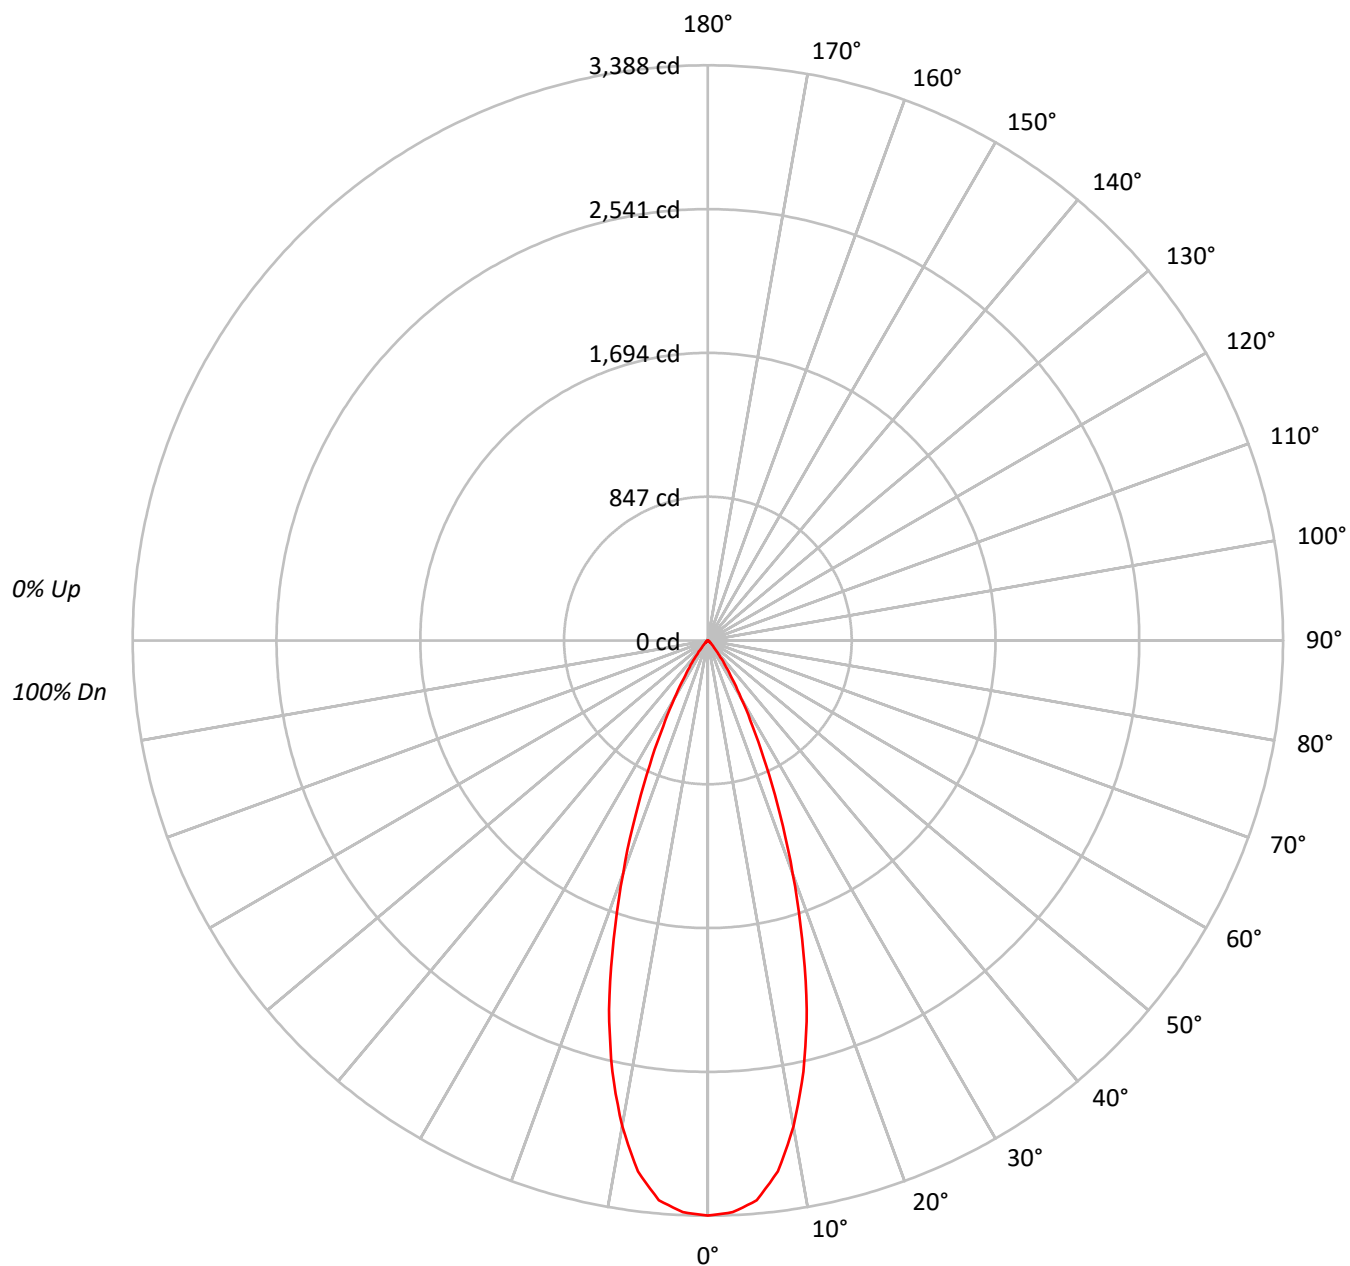



TEST NUMBER: P224610

CATALOG NUMBER: LD2B20D010 EU2B20FL409035 2LBDLC*MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					0
RW	70	50	30	10	70	50	30	10		50	30	10			50	30	10			0
RCR																				
0	119	119	119	119	116	116	116	116		111	111	111			106	106	106			100
1	114	112	110	108	112	110	108	106		106	104	103			102	101	100			95
2	110	106	102	100	108	104	101	99		101	99	96			98	96	94			91
3	106	100	96	93	104	99	95	92		97	93	91			94	92	89			87
4	102	95	91	87	100	94	90	87		92	89	86			90	87	85			83
5	98	91	86	83	96	90	86	82		88	85	82			87	83	81			79
6	94	87	82	78	93	86	82	78		85	81	78			83	80	77			75
7	91	83	78	75	89	82	78	75		81	77	74			80	77	74			72
8	87	80	75	71	86	79	75	71		78	74	71			77	73	71			69
9	84	76	72	68	83	76	71	68		75	71	68			74	71	68			67
10	81	74	69	66	81	73	69	66		72	68	65			72	68	65			64

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1312135
5°	1286935
10°	1143189
15°	902152
20°	601696
25°	346313
30°	175419
35°	82231
40°	33676
45°	15229
50°	7834
55°	4997
60°	2866
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P224610

CATALOG NUMBER: LD2B20D010 EU2B20FL409035 2LBDLC*MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	302.9	21.0
10°-20°	607.9	42.2
20°-30°	380.8	26.4
30°-40°	117.8	8.2
40°-50°	24.4	1.7
50°-60°	6.8	0.5
60°-70°	0.9	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1291.6	89.6
0°-40°	1409.5	97.8
0°-60°	1440.6	99.9
0°-90°	1441.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1441.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3388	
5°	3310	303
15°	2250	608
25°	810	381
35°	174	118
45°	28	24
55°	7	7
65°	0	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P224610

CATALOG NUMBER: LD2B20D010 EU2B20FL409035 2LBDLC*MMS

CANDELA DISTRIBUTION (FULL):

	0°
0°	3387.5
2.5°	3370.9
5°	3309.8
7.5°	3154.4
10°	2906.5
12.5°	2601.2
15°	2249.7
17.5°	1844.5
20°	1459.7
22.5°	1110.1
25°	810.3
27.5°	569.8
30°	392.2
32.5°	262.7
35°	173.9
37.5°	109.2
40°	66.6
42.5°	42.6
45°	27.8
47.5°	18.5
50°	13.0
52.5°	9.3
55°	7.4
57.5°	5.6
60°	3.7
62.5°	1.9
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)