

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P224683

Luminaire Tested: **LD2B20D010 EU2B20FL409035 2LBDLC*MW**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P224683
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14835)
Test Lab: INNOVATION CENTER (G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD2B20D010 EU2B20FL409035 2LBDLC*MW
Description: 2000 Lumen, 2inch Portfolio LED Downlight
FLOOD OPTIC
LENSED CAST ROUND TRIM WITH MATTE WHITE FINISH
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1444.0 lumens
Efficiency: N/A
Efficacy: 69.1 lumens/watt
Spacing Criteria (0/90/45): 0.61 / 0.61 / 0.59
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 20.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P224683

CATALOG NUMBER: LD2B20D010 EU2B20FL409035 2LBDLC*MW

Luminous Intensity Polar Plot

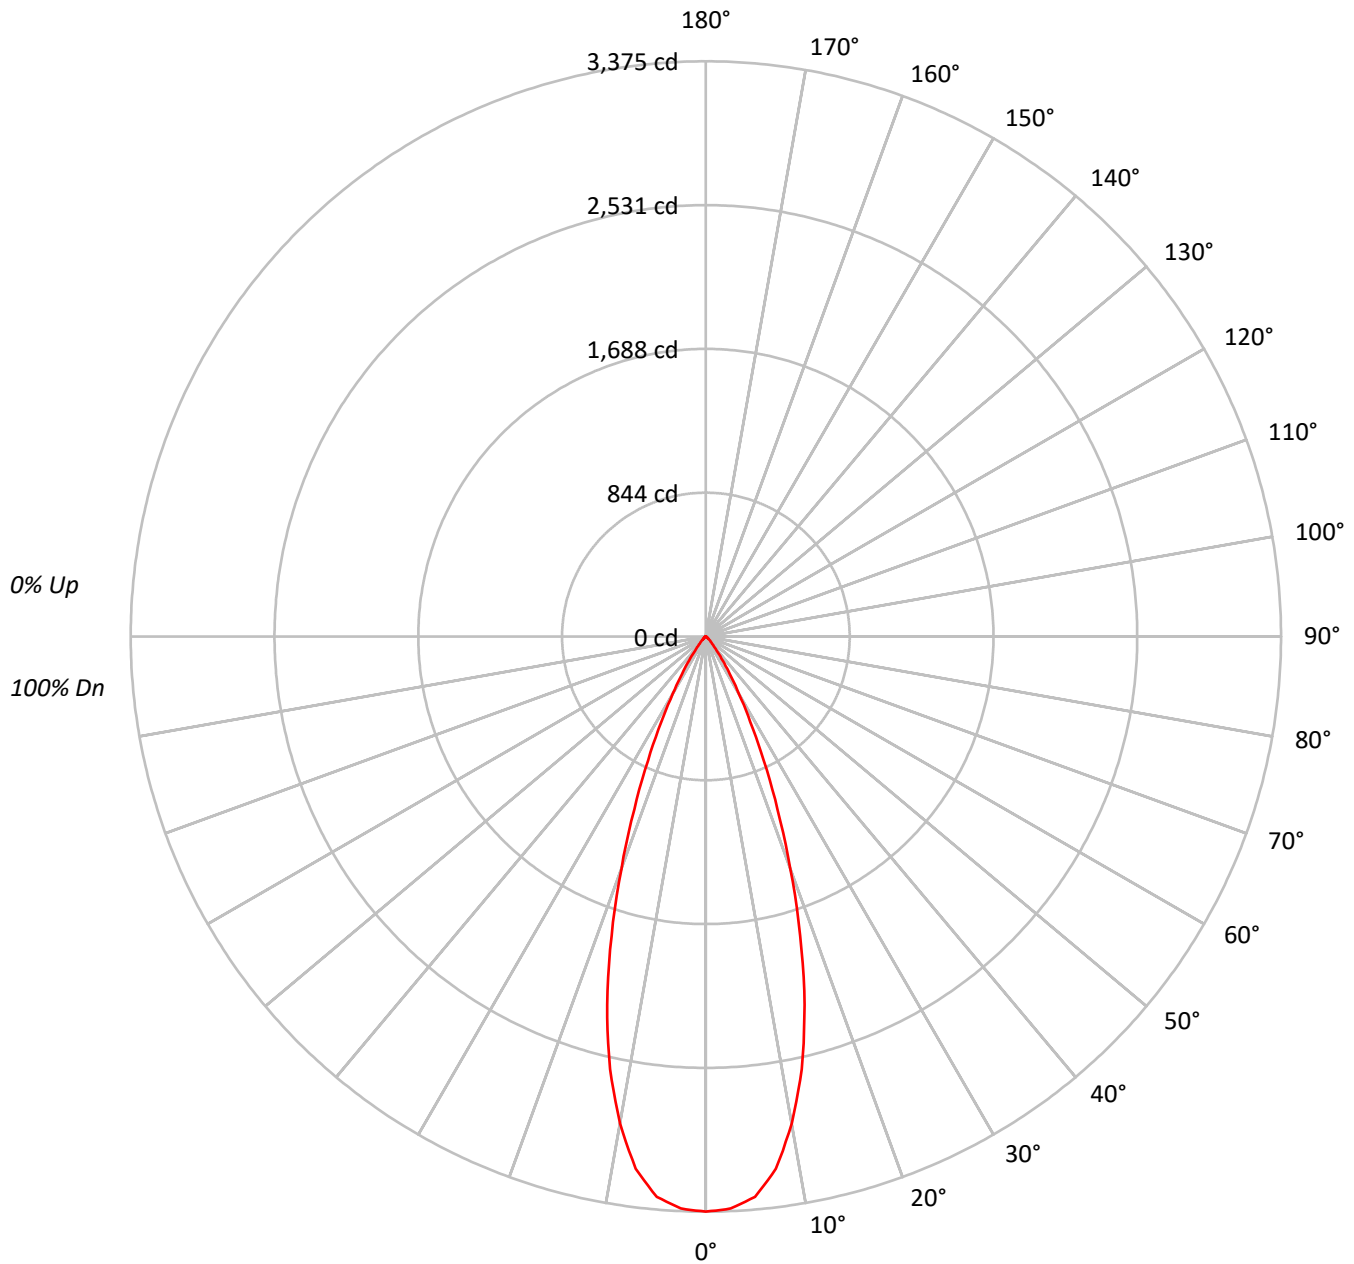



TEST NUMBER: P224683

CATALOG NUMBER: LD2B20D010 EU2B20FL409035 2LBDLC*MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					0
RW	70	50	30	10		70	50	30	10		50	30	10			50	30	10			0
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111			106	106	106			100
1	114	112	110	108		112	110	108	106		106	104	103			102	101	100			95
2	110	106	102	99		108	104	101	98		101	98	96			98	96	94			91
3	105	100	96	93		104	99	95	92		96	93	90			94	91	89			86
4	101	95	90	87		100	94	90	86		92	88	85			90	87	85			82
5	98	91	86	82		96	90	85	82		88	84	81			86	83	80			79
6	94	86	82	78		93	86	81	78		84	80	77			83	79	77			75
7	90	83	78	74		89	82	77	74		81	77	74			80	76	73			72
8	87	79	74	71		86	79	74	71		78	74	71			77	73	70			69
9	84	76	71	68		83	76	71	68		75	71	68			74	70	67			66
10	81	73	68	65		80	73	68	65		72	68	65			71	68	65			64

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1307177
5°	1283358
10°	1140829
15°	897260
20°	597038
25°	342766
30°	173138
35°	81474
40°	32766
45°	16215
50°	8919
55°	6280
60°	5733
65°	3391
70°	4190
75°	2844
80°	4238
85°	0



TEST NUMBER: P224683

CATALOG NUMBER: LD2B20D010 EU2B20FL409035 2LBDLC*MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	302.3	20.9
10°-20°	606.1	42.0
20°-30°	377.1	26.1
30°-40°	115.9	8.0
40°-50°	25.5	1.8
50°-60°	9.1	0.6
60°-70°	4.6	0.3
70°-80°	2.7	0.2
80°-90°	0.8	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1285.4	89.0
0°-40°	1401.4	97.0
0°-60°	1435.9	99.4
0°-90°	1444.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1444.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3375	
5°	3301	302
15°	2238	606
25°	802	377
35°	172	116
45°	30	25
55°	9	9
65°	4	5
75°	2	3
85°	0	1
90°	0	



TEST NUMBER: P224683

CATALOG NUMBER: LD2B20D010 EU2B20FL409035 2LBDLC*MW

CANDELA DISTRIBUTION (FULL):

0°	
0°	3374.7
2.5°	3359.9
5°	3300.6
7.5°	3150.6
10°	2900.5
12.5°	2600.5
15°	2237.5
17.5°	1841.1
20°	1448.4
22.5°	1098.4
25°	802.0
27.5°	564.9
30°	387.1
32.5°	261.2
35°	172.3
37.5°	103.7
40°	64.8
42.5°	44.5
45°	29.6
47.5°	20.4
50°	14.8
52.5°	13.0
55°	9.3
57.5°	7.4
60°	7.4
62.5°	5.6
65°	3.7
67.5°	3.7
70°	3.7
72.5°	3.7
75°	1.9
77.5°	1.9
80°	1.9
82.5°	1.9
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)