

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P224358

Luminaire Tested: **LD2B20D010 EU2B20FL409035 2LBDSQC*MMS**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P224358
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P14831)
Test Lab: INNOVATION CENTER (G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD2B20D010 EU2B20FL409035 2LBDSQC*MMS
Description: 2000 Lumen, 2inch Portfolio LED Downlight
FLOOD OPTIC
SQUARE CAST TRIM WITH MATTE METALLIC SILVER
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1482.3 lumens
Efficiency: N/A
Efficacy: 70.9 lumens/watt
Spacing Criteria (0/90/45): 0.61 / 0.61 / 0.59
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 20.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P224358

CATALOG NUMBER: LD2B20D010 EU2B20FL409035 2LBDSQC*MMS

Luminous Intensity Polar Plot

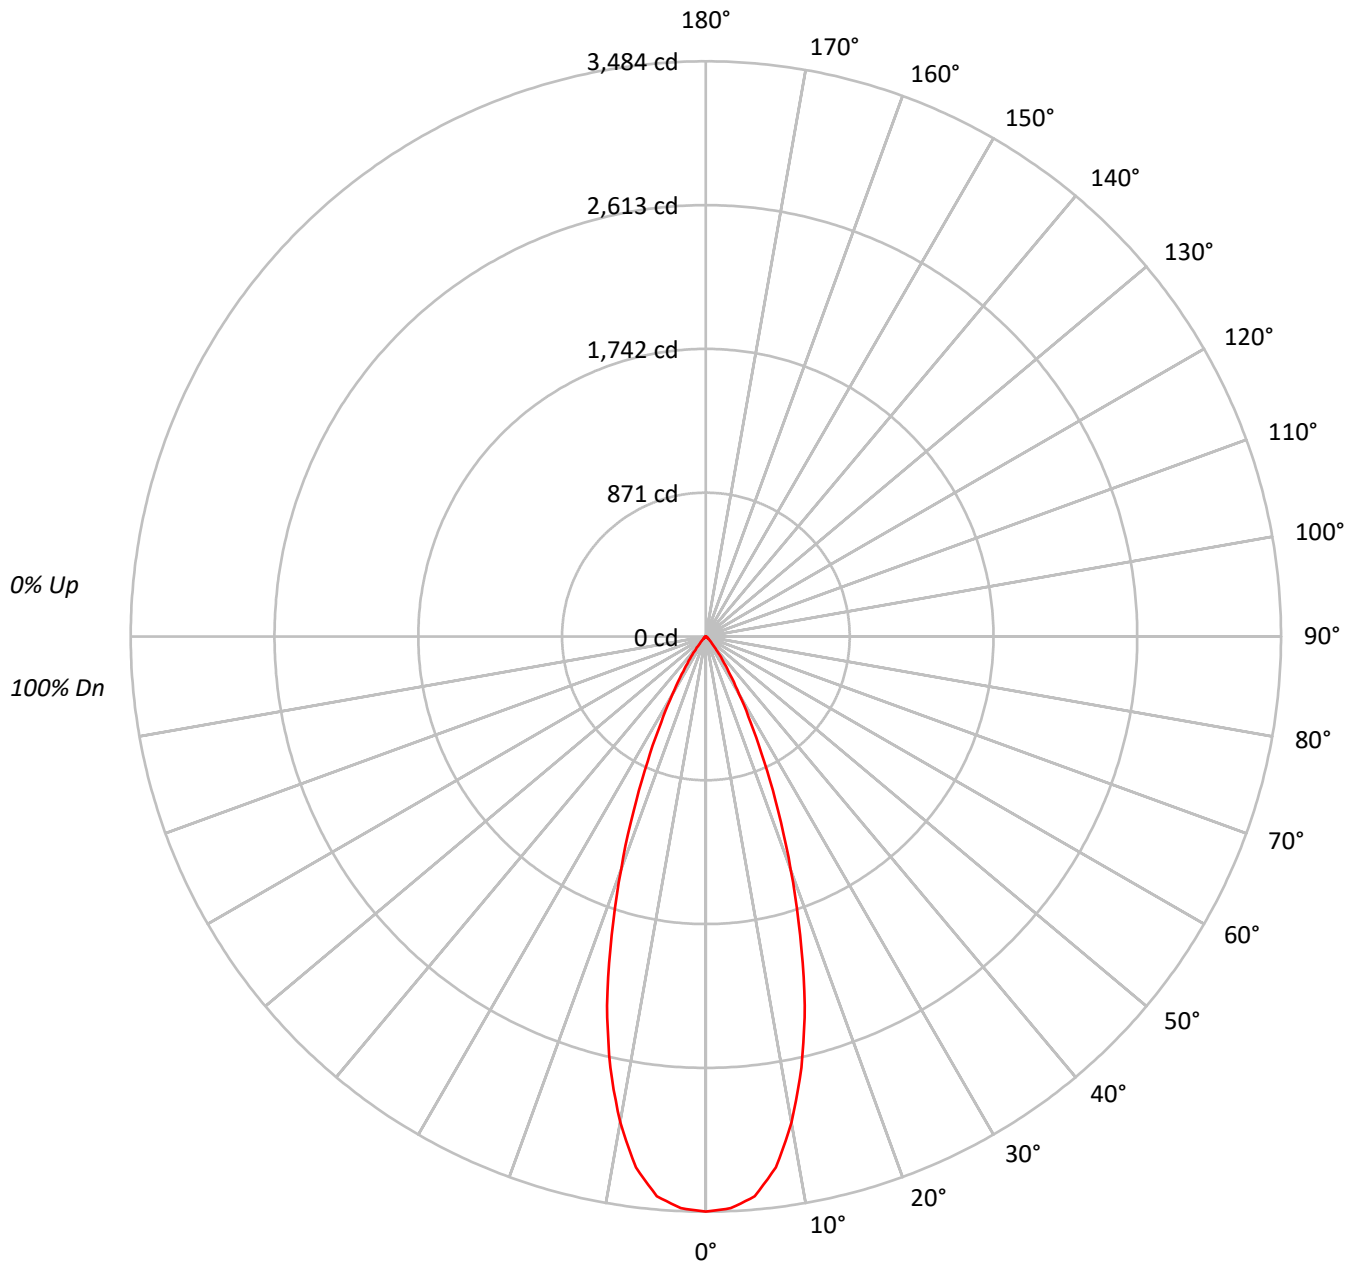



TEST NUMBER: P224358

CATALOG NUMBER: LD2B20D010 EU2B20FL409035 2LBDSQC*MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10			50	30	10			0
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111			106	106	106			100
1	114	112	110	108		112	110	108	106		106	104	103			102	101	100			95
2	110	106	102	100		108	104	101	99		101	99	96			98	96	94			91
3	106	100	96	93		104	99	95	92		97	93	91			94	92	89			87
4	102	95	91	87		100	94	90	87		92	89	86			90	87	85			83
5	98	91	86	83		96	90	86	82		88	85	82			87	83	81			79
6	94	87	82	78		93	86	82	78		85	81	78			83	80	77			76
7	91	83	78	75		89	82	78	75		81	77	74			80	77	74			72
8	87	80	75	71		86	79	75	71		78	74	71			77	73	71			69
9	84	76	72	68		83	76	71	68		75	71	68			74	71	68			67
10	81	74	69	66		81	73	69	66		72	68	65			72	68	65			64

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1349320
5°	1323407
10°	1175598
15°	927737
20°	618761
25°	356143
30°	180383
35°	84548
40°	34637
45°	15612
50°	8015
55°	5132
60°	2944
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P224358

CATALOG NUMBER: LD2B20D010 EU2B20FL409035 2LBDSQC*MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	311.5	21.0
10°-20°	625.2	42.2
20°-30°	391.6	26.4
30°-40°	121.2	8.2
40°-50°	25.0	1.7
50°-60°	7.0	0.5
60°-70°	0.9	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1328.2	89.6
0°-40°	1449.4	97.8
0°-60°	1481.4	99.9
0°-90°	1482.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1482.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3484	
5°	3404	312
15°	2314	625
25°	833	392
35°	179	121
45°	28	25
55°	8	7
65°	0	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P224358

CATALOG NUMBER: LD2B20D010 EU2B20FL409035 2LBDSQC*MMS

CANDELA DISTRIBUTION (FULL):

	0°
0°	3483.5
2.5°	3466.4
5°	3403.6
7.5°	3243.8
10°	2988.9
12.5°	2675.0
15°	2313.5
17.5°	1896.8
20°	1501.1
22.5°	1141.5
25°	833.3
27.5°	586.0
30°	403.3
32.5°	270.2
35°	178.8
37.5°	112.2
40°	68.5
42.5°	43.8
45°	28.5
47.5°	19.0
50°	13.3
52.5°	9.5
55°	7.6
57.5°	5.7
60°	3.8
62.5°	1.9
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)