

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P222703

Luminaire Tested: **LD2B20D010 EU2B20NFL259035 2LBDC*MMS**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P222703
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (155)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD2B20D010 EU2B20NFL259035 2LBDC*MMS
Description: 2000 Lumen, 2inch Portfolio LED Downlight
NARROW FLOOD OPTIC
CAST ROUND TRIM WITH MATTE METALLIC SILVER
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1538.4 lumens
Efficiency: N/A
Efficacy: 73.6 lumens/watt
Spacing Criteria (0/90/45): 0.39 / 0.39 / 0.35
Luminous Opening: Rectangular (W 0.17' x L: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 20.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P222703

CATALOG NUMBER: LD2B20D010 EU2B20NFL259035 2LBDC*MMS

Luminous Intensity Polar Plot

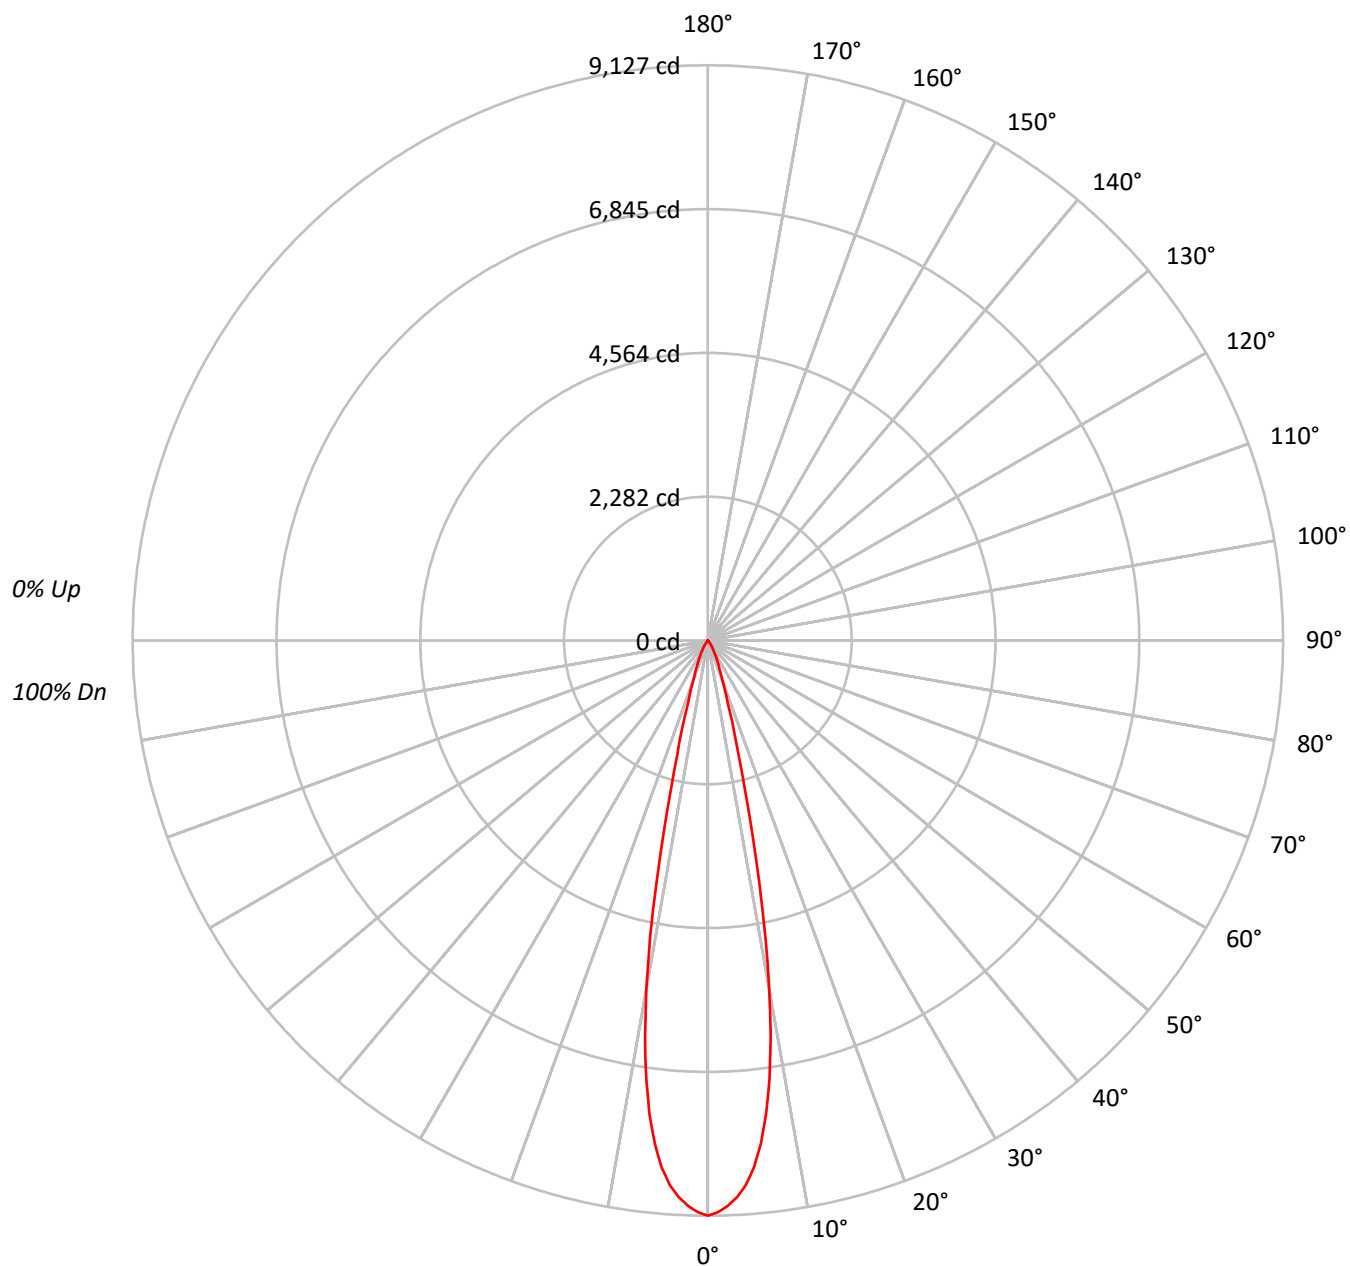



TEST NUMBER: P222703

CATALOG NUMBER: LD2B20D010 EU2B20NFL259035 2LBDC*MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10			50	30	10			0
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111			106	106	106			100
1	115	113	112	110		113	111	110	108		107	106	105			104	103	102			97
2	112	109	106	104		110	107	104	102		104	102	100			101	99	98			95
3	109	105	101	99		107	103	100	98		101	98	96			99	97	95			92
4	106	101	97	95		104	100	97	94		98	95	93			96	94	92			90
5	103	98	94	91		102	97	94	91		95	92	90			94	91	89			88
6	101	95	91	89		99	94	91	88		93	90	88			92	89	87			86
7	98	92	89	86		97	92	88	86		91	88	85			90	87	85			84
8	96	90	86	84		95	90	86	84		89	86	83			88	85	83			82
9	94	88	84	82		93	88	84	82		87	84	82			86	83	81			80
10	92	86	82	80		91	86	82	80		85	82	80			84	82	80			79

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	3535191
5°	3264113
10°	2209404
15°	751653
20°	276095
25°	146381
30°	75231
35°	35134
40°	11478
45°	5807
50°	2712
55°	1013
60°	1162
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P222703

CATALOG NUMBER: LD2B20D010 EU2B20NFL259035 2LBDC*MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	714.1	46.4
10°-20°	600.4	39.0
20°-30°	164.8	10.7
30°-40°	48.0	3.1
40°-50°	8.9	0.6
50°-60°	2.0	0.1
60°-70°	0.2	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1479.3	96.2
0°-40°	1527.3	99.3
0°-60°	1538.2	100.0
0°-90°	1538.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1538.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	9127	
5°	8395	714
15°	1874	600
25°	342	165
35°	74	48
45°	11	9
55°	2	2
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P222703

CATALOG NUMBER: LD2B20D010 EU2B20NFL259035 2LBDC*MMS

CANDELA DISTRIBUTION (FULL):

	0°
0°	9126.7
1°	9073.7
2°	8979.8
3°	8844.9
4°	8660.0
5°	8394.8
6°	8032.7
7°	7579.6
8°	7026.5
9°	6373.4
10°	5617.3
11°	4788.4
12°	3926.2
13°	3103.4
14°	2401.8
15°	1874.4
17.5°	1057.7
20°	669.8
22.5°	477.3
25°	342.5
27.5°	242.5
30°	168.2
32.5°	118.2
35°	74.3
37.5°	30.3
40°	22.7
42.5°	16.7
45°	10.6
47.5°	6.1
50°	4.5
52.5°	3.0
55°	1.5
57.5°	1.5
60°	1.5
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0



TEST NUMBER: P222703

CATALOG NUMBER: LD2B20D010 EU2B20NFL259035 2LBDC*MMS

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







85°	0.0
87.5°	0.0



(END OF REPORT)