

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P1179817

Luminaire Tested: LDA2B209024R2040D010 2LBD1B

Issue Date: 1/17/2025

**Test Information**

Test Method: LM-79-2019  
Report Number: P1179817  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2206-683-15)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/17/2025  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LDA2B209024R2040D010 2LBD1B  
Description: 2000 LUMEN 2IN ADJUSTABLE LED LUMINAIRE WITH 90 CRI LEDS AND 2400K CCT LEDS  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 1324.0 lumens  
Efficiency: N/A  
Efficacy: 64.3 lumens/watt  
Spacing Criteria (0/90/45): 0.31 / 0.63 / 0.43  
Luminous Opening: Circular (Dia: 0.17' x H: 0')  
CIE Type: Direct

Input Watts (W): 20.6  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1179817

CATALOG NUMBER: LDA2B209024R2040D010 2LBD1B

### Luminous Intensity Polar Plot

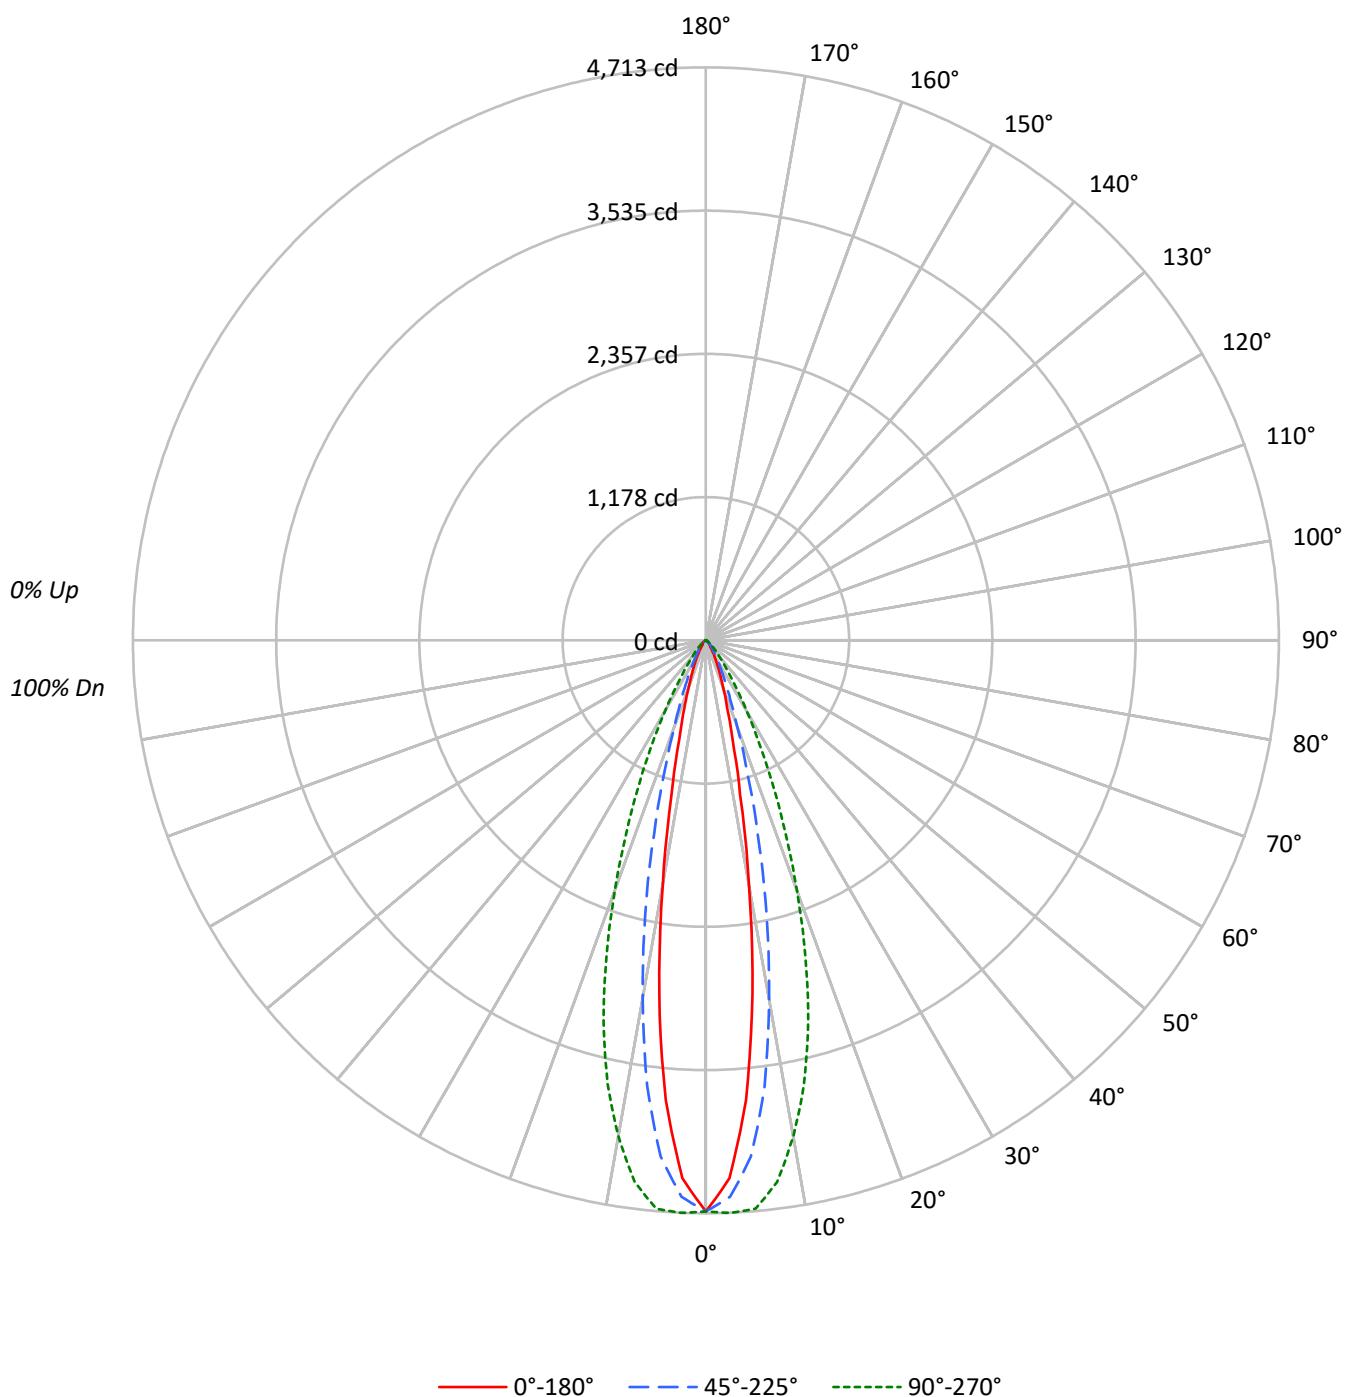

TEST NUMBER: P1179817

CATALOG NUMBER: LDA2B209024R2040D010 2LBD1B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|-----|-----|-----|--|-----|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |  | 20  |     |     |  | 20  |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |  | 30  |     |     |  | 10  |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  |  | 50  | 30  | 10  |  | 50  |
| RCR |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 |  | 106 | 106 | 106 |  | 102 |
| 1   | 114 | 112 | 110 | 108 | 112 | 110 | 108 | 106 | 106 | 104 | 103 |  | 102 | 101 | 100 |  | 99  |
| 2   | 110 | 106 | 102 | 99  | 108 | 104 | 101 | 98  | 101 | 98  | 96  |  | 98  | 96  | 94  |  | 95  |
| 3   | 106 | 100 | 96  | 93  | 104 | 99  | 95  | 92  | 96  | 93  | 91  |  | 94  | 92  | 89  |  | 92  |
| 4   | 102 | 95  | 91  | 88  | 100 | 94  | 90  | 87  | 92  | 89  | 86  |  | 90  | 87  | 85  |  | 89  |
| 5   | 98  | 91  | 86  | 83  | 97  | 90  | 86  | 83  | 89  | 85  | 82  |  | 87  | 84  | 81  |  | 86  |
| 6   | 94  | 87  | 83  | 79  | 93  | 87  | 82  | 79  | 85  | 81  | 78  |  | 84  | 80  | 78  |  | 83  |
| 7   | 91  | 84  | 79  | 76  | 90  | 83  | 79  | 75  | 82  | 78  | 75  |  | 81  | 77  | 75  |  | 80  |
| 8   | 88  | 81  | 76  | 73  | 87  | 80  | 76  | 72  | 79  | 75  | 72  |  | 78  | 75  | 72  |  | 77  |
| 9   | 85  | 78  | 73  | 70  | 84  | 77  | 73  | 70  | 76  | 72  | 70  |  | 76  | 72  | 69  |  | 75  |
| 10  | 83  | 75  | 70  | 67  | 82  | 75  | 70  | 67  | 74  | 70  | 67  |  | 73  | 70  | 67  |  | 73  |

**AVERAGE LUMINANCE (cd/sqm):**

|     | 0°      | 45°     | 90°     |
|-----|---------|---------|---------|
| 0°  | 2317616 | 2317616 | 2317616 |
| 5°  | 1878568 | 2109948 | 2323646 |
| 10° | 1021383 | 1498059 | 2074929 |
| 15° | 432006  | 840669  | 1660908 |
| 20° | 220510  | 395291  | 1148439 |
| 25° | 122101  | 202231  | 699944  |
| 30° | 68362   | 112342  | 381746  |
| 35° | 39570   | 67998   | 194477  |
| 40° | 29433   | 51523   | 107683  |
| 45° | 25885   | 34886   | 63772   |
| 50° | 27401   | 23026   | 34002   |
| 55° | 19697   | 15999   | 18407   |
| 60° | 12729   | 11249   | 11249   |
| 65° | 10040   | 10040   | 10040   |
| 70° | 8222    | 8222    | 8222    |
| 75° | 8197    | 8197    | 8197    |
| 80° | 8239    | 8239    | 8239    |
| 85° | 7925    | 7925    | 7925    |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 90°

Vertical Angle: 45°

Luminance: 63772 cd/sqm

TEST NUMBER: P1179817

CATALOG NUMBER: LDA2B209024R2040D010 2LBD1B

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 366.0  | 27.6      |
| 10°-20°   | 517.6  | 39.1      |
| 20°-30°   | 266.6  | 20.1      |
| 30°-40°   | 98.1   | 7.4       |
| 40°-50°   | 43.1   | 3.3       |
| 50°-60°   | 18.9   | 1.4       |
| 60°-70°   | 8.3    | 0.6       |
| 70°-80°   | 4.2    | 0.3       |
| 80°-90°   | 1.2    | 0.1       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| <hr/>     |        |           |
| 0°-30°    | 1150.3 | 86.9      |
| 0°-40°    | 1248.4 | 94.3      |
| 0°-60°    | 1310.4 | 99.0      |
| 0°-90°    | 1324.0 | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 1324.0 | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°   | 22.5° | 45°  | 67.5° | 90°  | Flux |
|-----|------|-------|------|-------|------|------|
| 0°  | 4698 | 4698  | 4698 | 4698  | 4698 |      |
| 5°  | 3793 | 3922  | 4260 | 4562  | 4692 | 305  |
| 15° | 846  | 983   | 1646 | 2746  | 3252 | 259  |
| 25° | 224  | 252   | 372  | 853   | 1286 | 108  |
| 35° | 66   | 76    | 113  | 197   | 323  | 45   |
| 45° | 37   | 43    | 50   | 60    | 91   | 30   |
| 55° | 23   | 20    | 19   | 20    | 21   | 21   |
| 65° | 9    | 9     | 9    | 7     | 9    | 9    |
| 75° | 4    | 4     | 4    | 4     | 4    | 4    |
| 85° | 1    | 1     | 1    | 1     | 1    | 1    |
| 90° | 0    | 0     | 0    | 0     | 0    |      |

TEST NUMBER: P1179817

CATALOG NUMBER: LDA2B209024R2040D010 2LBD1B

**CANDELA DISTRIBUTION (FULL):**

|       | 0°     | 22.5°  | 45°    | 67.5°  | 90°    |
|-------|--------|--------|--------|--------|--------|
| 0°    | 4697.6 | 4697.6 | 4697.6 | 4697.6 | 4697.6 |
| 2.5°  | 4429.0 | 4481.9 | 4580.5 | 4674.8 | 4713.3 |
| 5°    | 3793.2 | 3921.8 | 4260.4 | 4561.9 | 4691.9 |
| 7.5°  | 2937.4 | 3148.9 | 3697.5 | 4261.9 | 4493.3 |
| 10°   | 2038.8 | 2253.1 | 2990.3 | 3801.8 | 4141.8 |
| 12.5° | 1300.1 | 1508.7 | 2304.5 | 3291.8 | 3733.2 |
| 15°   | 845.8  | 983.0  | 1645.9 | 2746.0 | 3251.8 |
| 17.5° | 587.2  | 684.4  | 1120.1 | 2167.4 | 2718.8 |
| 20°   | 420.0  | 488.6  | 752.9  | 1653.0 | 2187.4 |
| 22.5° | 304.3  | 351.5  | 522.9  | 1207.3 | 1700.2 |
| 25°   | 224.3  | 251.5  | 371.5  | 852.9  | 1285.8 |
| 27.5° | 165.7  | 182.9  | 268.6  | 588.6  | 940.1  |
| 30°   | 120.0  | 134.3  | 197.2  | 404.3  | 670.1  |
| 32.5° | 87.2   | 100.0  | 147.2  | 280.0  | 467.2  |
| 35°   | 65.7   | 75.7   | 112.9  | 197.2  | 322.9  |
| 37.5° | 54.3   | 60.0   | 92.9   | 142.9  | 228.6  |
| 40°   | 45.7   | 51.4   | 80.0   | 105.7  | 167.2  |
| 42.5° | 40.0   | 47.1   | 65.7   | 78.6   | 125.7  |
| 45°   | 37.1   | 42.9   | 50.0   | 60.0   | 91.4   |
| 47.5° | 37.1   | 35.7   | 38.6   | 45.7   | 64.3   |
| 50°   | 35.7   | 30.0   | 30.0   | 35.7   | 44.3   |
| 52.5° | 30.0   | 24.3   | 24.3   | 25.7   | 30.0   |
| 55°   | 22.9   | 20.0   | 18.6   | 20.0   | 21.4   |
| 57.5° | 17.1   | 17.1   | 15.7   | 14.3   | 15.7   |
| 60°   | 12.9   | 12.9   | 11.4   | 11.4   | 11.4   |
| 62.5° | 10.0   | 10.0   | 10.0   | 8.6    | 10.0   |
| 65°   | 8.6    | 8.6    | 8.6    | 7.1    | 8.6    |
| 67.5° | 7.1    | 7.1    | 5.7    | 7.1    | 7.1    |
| 70°   | 5.7    | 5.7    | 5.7    | 5.7    | 5.7    |
| 72.5° | 4.3    | 4.3    | 4.3    | 4.3    | 4.3    |
| 75°   | 4.3    | 4.3    | 4.3    | 4.3    | 4.3    |
| 77.5° | 2.9    | 2.9    | 2.9    | 2.9    | 2.9    |
| 80°   | 2.9    | 2.9    | 2.9    | 2.9    | 2.9    |
| 82.5° | 1.4    | 1.4    | 1.4    | 1.4    | 1.4    |
| 85°   | 1.4    | 1.4    | 1.4    | 1.4    | 1.4    |
| 87.5° | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    |
| 90°   | 0.0    | 0.0    | 0.0    | 0.0    | 0.0    |

(END OF REPORT)