

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P1306685

Luminaire Tested: LDSQA3D02R359024DE010 3LSQPHRL1MMS

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1306685
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-10)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LDSQA3D02R359024DE010 3LSQPHRL1MMS
Description: 3in Adjustable LED luminaire with, R35 optic, 2400K CCT AND, 90CRI , 3LSQPHRL1MMS TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 194.0 lumens
Efficiency: N/A
Efficacy: 53.9 lumens/watt
Spacing Criteria (0/90/45): 0.59 / 0.58 / 0.6
Luminous Opening: Rectangular (W 0.25' x L: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1306685

CATALOG NUMBER: LDSQA3D02R359024DE010 3LSQPHRL1MMS

Luminous Intensity Polar Plot

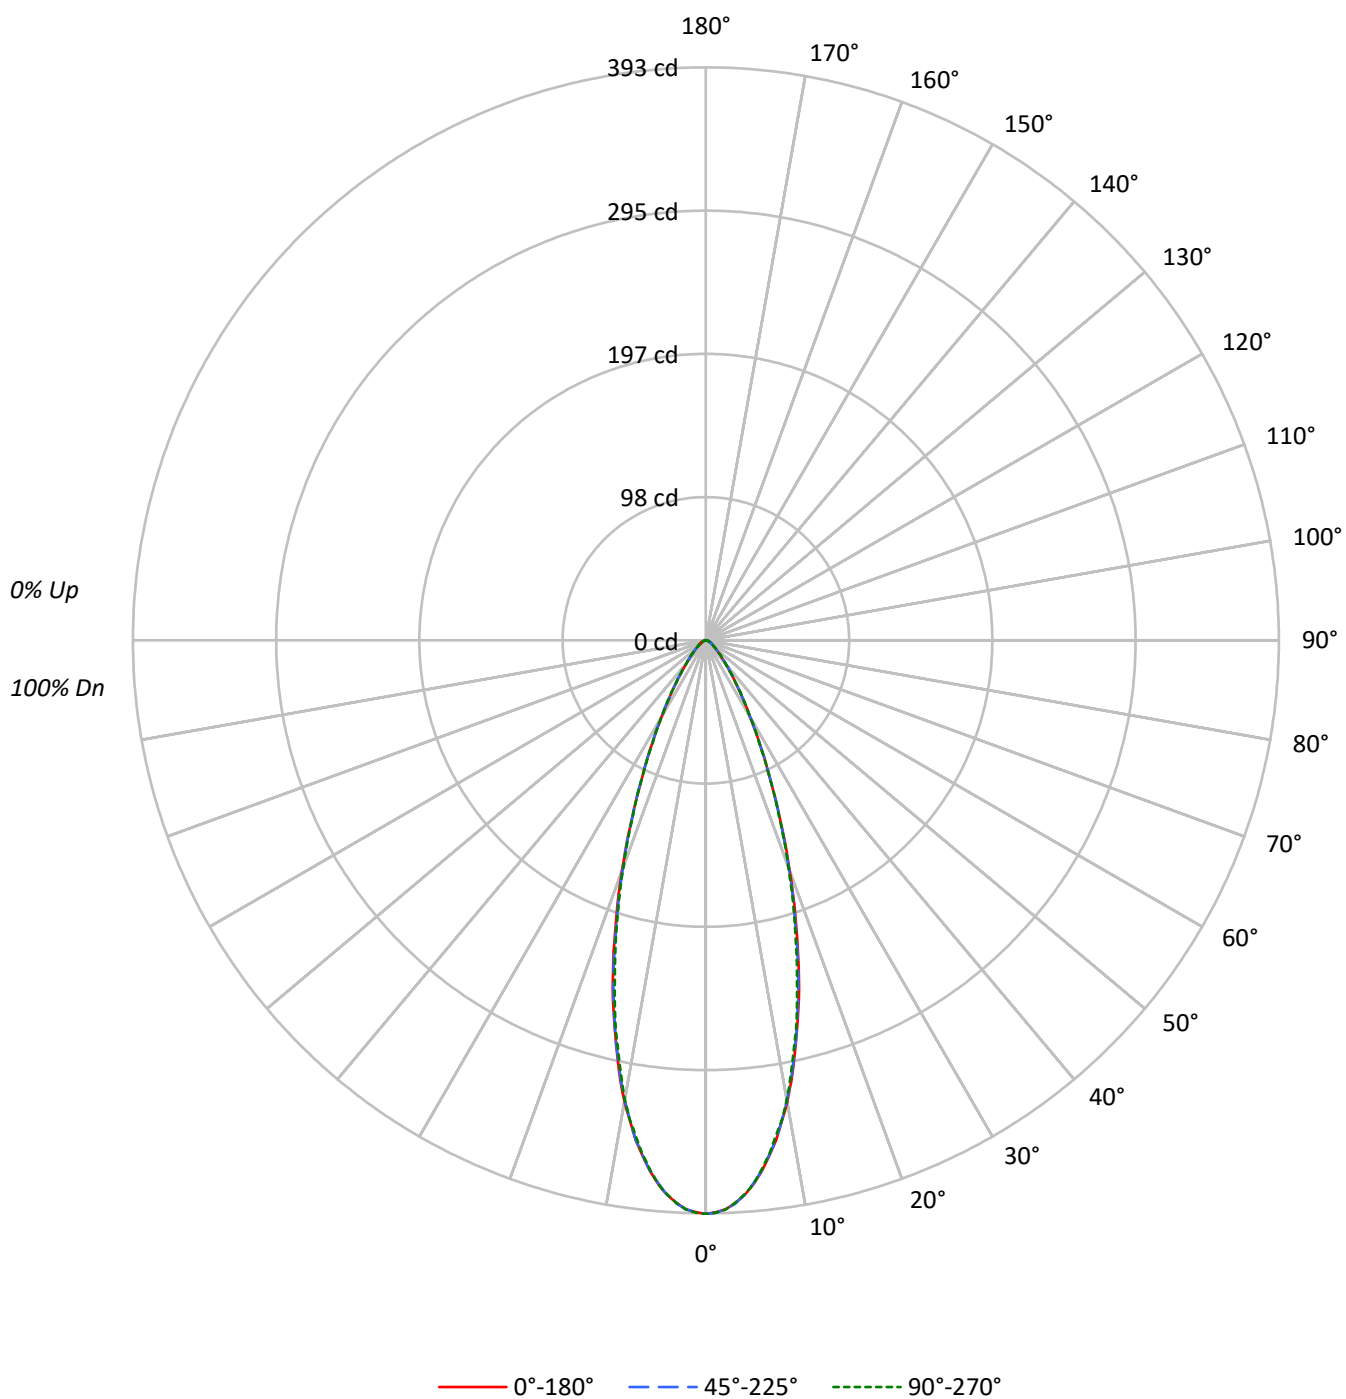

TEST NUMBER: P1306685

CATALOG NUMBER: LDSQA3D02R359024DE010 3LSQPHRL1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	111	108	106	111	109	106	104	105	103	101		101	99	98		97
2	108	103	99	96	106	102	98	95	98	95	93		95	93	91		93
3	103	97	92	88	101	95	91	87	93	89	86		90	87	85		88
4	98	91	86	82	96	90	85	81	88	84	80		86	82	79		84
5	94	86	80	76	92	85	80	76	83	79	75		82	78	75		80
6	90	81	76	72	88	81	75	71	79	74	71		78	74	70		76
7	86	77	72	68	85	77	71	67	75	71	67		74	70	67		73
8	82	73	68	64	81	73	68	64	72	67	64		71	67	63		70
9	79	70	65	61	78	70	64	61	69	64	61		68	63	60		67
10	76	67	62	58	75	67	61	58	66	61	58		65	61	58		64

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	67752	67752	67752
5°	64744	64623	64744
10°	56206	56014	55944
15°	44040	43701	43005
20°	30809	30534	30332
25°	19573	19687	19573
30°	12051	12131	12051
35°	7464	7506	7506
40°	4744	4789	4789
45°	3191	3239	3288
50°	2304	2358	2358
55°	1802	1802	1802
60°	1481	1481	1481
65°	1304	1304	1304
70°	1209	1209	1209
75°	998	998	998
80°	893	893	893
85°	395	395	790

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 67.5°

Vertical Angle: 45°

Luminance: 3288 cd/sqm

TEST NUMBER: P1306685

CATALOG NUMBER: LDSQA3D02R359024DE010 3LSQPHRL1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	34.0	17.5
10°-20°	66.9	34.5
20°-30°	48.3	24.9
30°-40°	23.3	12.0
40°-50°	10.7	5.5
50°-60°	5.6	2.9
60°-70°	3.2	1.7
70°-80°	1.6	0.8
80°-90°	0.4	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	149.2	76.9
0°-40°	172.5	88.9
0°-60°	188.8	97.3
0°-90°	194.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	194.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	393	393	393	393	393	
5°	374	375	374	374	374	34
15°	247	247	245	244	241	67
25°	103	103	104	104	103	48
35°	36	36	36	36	36	23
45°	13	13	13	14	14	11
55°	6	6	6	6	6	5
65°	3	3	3	3	3	3
75°	2	2	2	2	2	2
85°	0	0	0	0	0	0
90°	0	0	0	0	0	

TEST NUMBER: P1306685

CATALOG NUMBER: LDSQA3D02R359024DE010 3LSQPHRL1MMS

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	393.4	393.4	393.4	393.4	393.4
1°	392.3	392.9	392.7	392.9	392.7
2°	390.4	390.8	390.4	390.6	390.6
3°	386.3	386.7	386.7	386.5	386.3
4°	381.3	382.4	381.3	381.5	380.9
5°	374.5	375.3	373.8	374.0	374.5
6°	366.1	366.3	365.9	365.6	365.2
7°	356.4	357.3	355.8	356.0	355.5
8°	346.1	345.9	345.9	345.0	343.7
9°	333.6	334.5	333.2	332.8	333.0
10°	321.4	321.4	320.3	319.2	319.9
11°	307.4	307.0	306.3	304.8	304.4
12°	292.1	293.0	291.1	290.4	288.9
13°	276.4	277.7	276.9	274.5	274.7
14°	261.8	261.0	260.3	259.9	258.4
15°	247.0	246.6	245.1	244.0	241.2
17.5°	206.4	206.8	204.0	203.6	202.5
20°	168.1	166.8	166.6	166.8	165.5
22.5°	132.6	133.9	132.4	132.6	131.8
25°	103.0	103.2	103.6	103.6	103.0
27.5°	80.0	80.0	79.5	80.0	79.3
30°	60.6	60.6	61.0	61.5	60.6
32.5°	46.9	46.9	46.9	47.1	47.3
35°	35.5	35.5	35.7	35.7	35.7
37.5°	27.3	27.5	27.7	27.7	27.7
40°	21.1	21.3	21.3	21.5	21.3
42.5°	16.8	16.8	16.8	17.0	17.0
45°	13.1	13.3	13.3	13.5	13.5
47.5°	10.7	10.7	10.7	11.0	11.0
50°	8.6	8.8	8.8	8.8	8.8
52.5°	7.1	7.1	7.3	7.3	7.3
55°	6.0	6.0	6.0	6.0	6.0
57.5°	4.9	5.2	5.2	5.2	5.2
60°	4.3	4.3	4.3	4.3	4.3
62.5°	3.7	3.7	3.7	3.7	3.7
65°	3.2	3.2	3.2	3.2	3.2
67.5°	2.6	2.8	2.8	2.8	2.8
70°	2.4	2.4	2.4	2.4	2.4
72.5°	1.7	1.9	1.9	1.9	1.9
75°	1.5	1.5	1.5	1.5	1.5
77.5°	1.3	1.1	1.1	1.1	1.3
80°	0.9	0.9	0.9	0.9	0.9
82.5°	0.6	0.6	0.6	0.6	0.6
85°	0.2	0.2	0.2	0.2	0.4
87.5°	0.0	0.0	0.0	0.2	0.2



TEST NUMBER: P1306685

CATALOG NUMBER: LDSQA3D02R359024DE010 3LSQPHRL1MMS

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)