

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P1309184

Luminaire Tested: LDSQA3D13R129030DE010 3LSQCDR1MW

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1309184
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-24)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LDSQA3D13R129030DE010 3LSQCDR1MW
Description: 3in Adjustable LED luminaire with, R12 optic, 3000K CCT AND, 90CRI , 3LSQCDR1MW TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1107.0 lumens
Efficiency: N/A
Efficacy: 71.4 lumens/watt
Spacing Criteria (0/90/45): 0.22 / 0.22 / 0.22
Luminous Opening: Rectangular (W 0.25' x L: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 15.5
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1309184

CATALOG NUMBER: LDSQA3D13R129030DE010 3LSQCDR1MW

Luminous Intensity Polar Plot

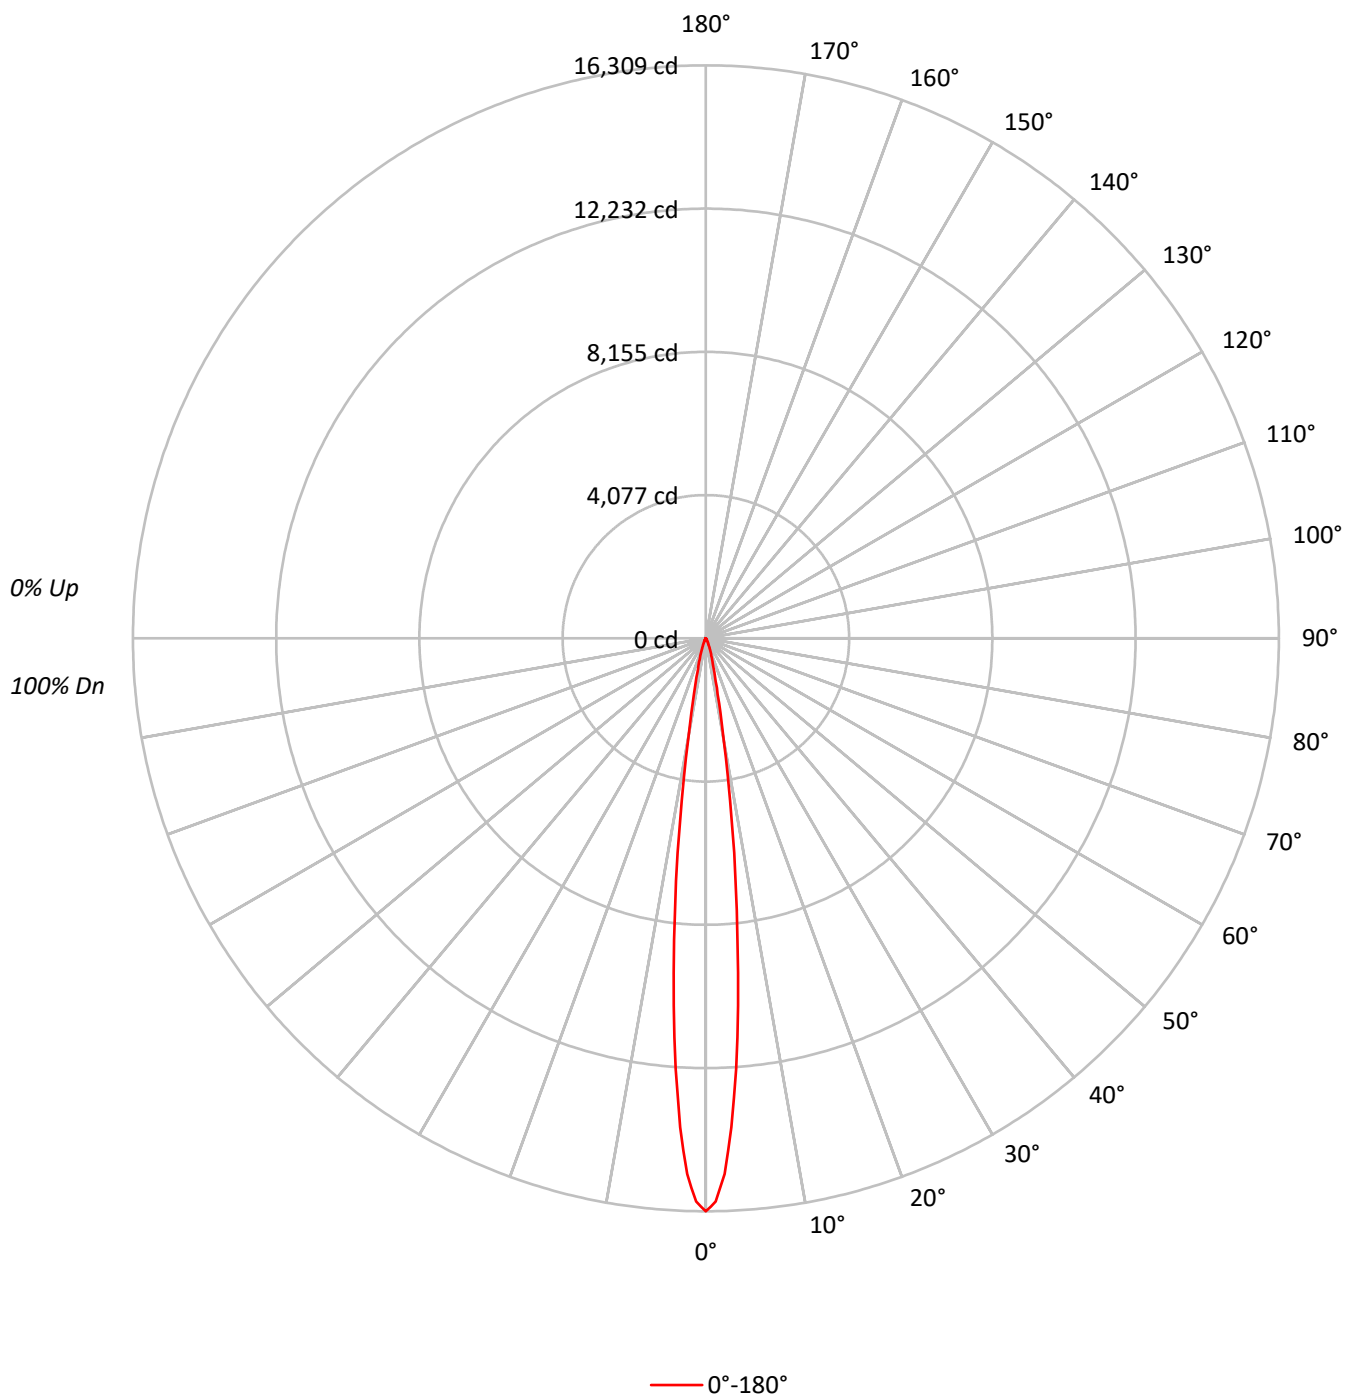

TEST NUMBER: P1309184

CATALOG NUMBER: LDSQA3D13R129030DE010 3LSQCDR1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	116	114	113	111		114	112	111	109		108	107	106		104	104	103		101	101	100
2	113	110	108	106		111	108	106	104		105	104	102		103	101	100		100	99	98
3	110	107	104	102		109	105	103	101		103	101	99		101	99	98		99	98	96
4	108	104	101	98		107	103	100	98		101	99	97		99	97	96		98	96	95
5	106	102	98	96		105	101	98	96		99	97	95		98	96	94		97	95	93
6	104	99	96	94		103	99	96	94		98	95	93		96	94	93		95	93	92
7	102	98	94	92		101	97	94	92		96	93	92		95	93	91		94	92	91
8	101	96	93	91		100	95	93	90		95	92	90		94	92	90		93	91	90
9	99	94	91	89		98	94	91	89		93	91	89		93	90	89		92	90	88
10	98	93	90	88		97	93	90	88		92	90	88		91	89	88		91	89	87

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	2808727
5°	1814813
10°	512047
15°	144778
20°	60536
25°	26813
30°	13682
35°	7232
40°	3103
45°	828
50°	911
55°	0
60°	0
65°	0
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 50°

Luminance: 911 cd/sqm

TEST NUMBER: P1309184

CATALOG NUMBER: LDSQA3D13R129030DE010 3LSQCDR1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	739.6	66.8
10°-20°	268.3	24.2
20°-30°	71.8	6.5
30°-40°	22.6	2.0
40°-50°	4.2	0.4
50°-60°	0.4	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1079.8	97.5
0°-40°	1102.4	99.6
0°-60°	1107.0	100.0
0°-90°	1107.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1107.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	16309	
5°	10498	740
15°	812	268
25°	141	72
35°	34	23
45°	3	4
55°	0	0
65°	0	0
75°	0	0
85°	0	0
90°	0	

TEST NUMBER: P1309184

CATALOG NUMBER: LDSQA3D13R129030DE010 3LSQCDR1MW

CANDELA DISTRIBUTION (FULL):

0°	
0°	16308.7
1°	16033.5
2°	15259.3
3°	13934.7
4°	12290.0
5°	10497.5
6°	8629.2
7°	6957.0
8°	5353.7
9°	3984.3
10°	2928.0
11°	2157.3
12°	1624.0
13°	1259.3
14°	997.8
15°	812.0
17.5°	516.1
20°	330.3
22.5°	213.3
25°	141.1
27.5°	96.3
30°	68.8
32.5°	48.2
35°	34.4
37.5°	24.1
40°	13.8
42.5°	6.9
45°	3.4
47.5°	3.4
50°	3.4
52.5°	0.0
55°	0.0
57.5°	0.0
60°	0.0
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0



TEST NUMBER: P1309184

CATALOG NUMBER: LDSQA3D13R129030DE010 3LSQCDR1MW

CANDELA DISTRIBUTION (continued):



(END OF REPORT)