

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P1310910

Luminaire Tested: LDSQA3D02R089040DE010 3LSQPHR1MW

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1310910
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2408-211-1)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LDSQA3D02R089040DE010 3LSQPHR1MW
Description: 3in Adjustable LED luminaire with, R08 optic, 4000K CCT AND, 90CRI , 3LSQPHR1MW TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 265.9 lumens
Efficiency: N/A
Efficacy: 54.3 lumens/watt
Spacing Criteria (0/90/45): 0.16 / 0.16 / 0.16
Luminous Opening: Rectangular (W 0.25' x L: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 4.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1310910
CATALOG NUMBER: LDSQA3D02R089040DE010 3LSQPHR1MW

Luminous Intensity Polar Plot

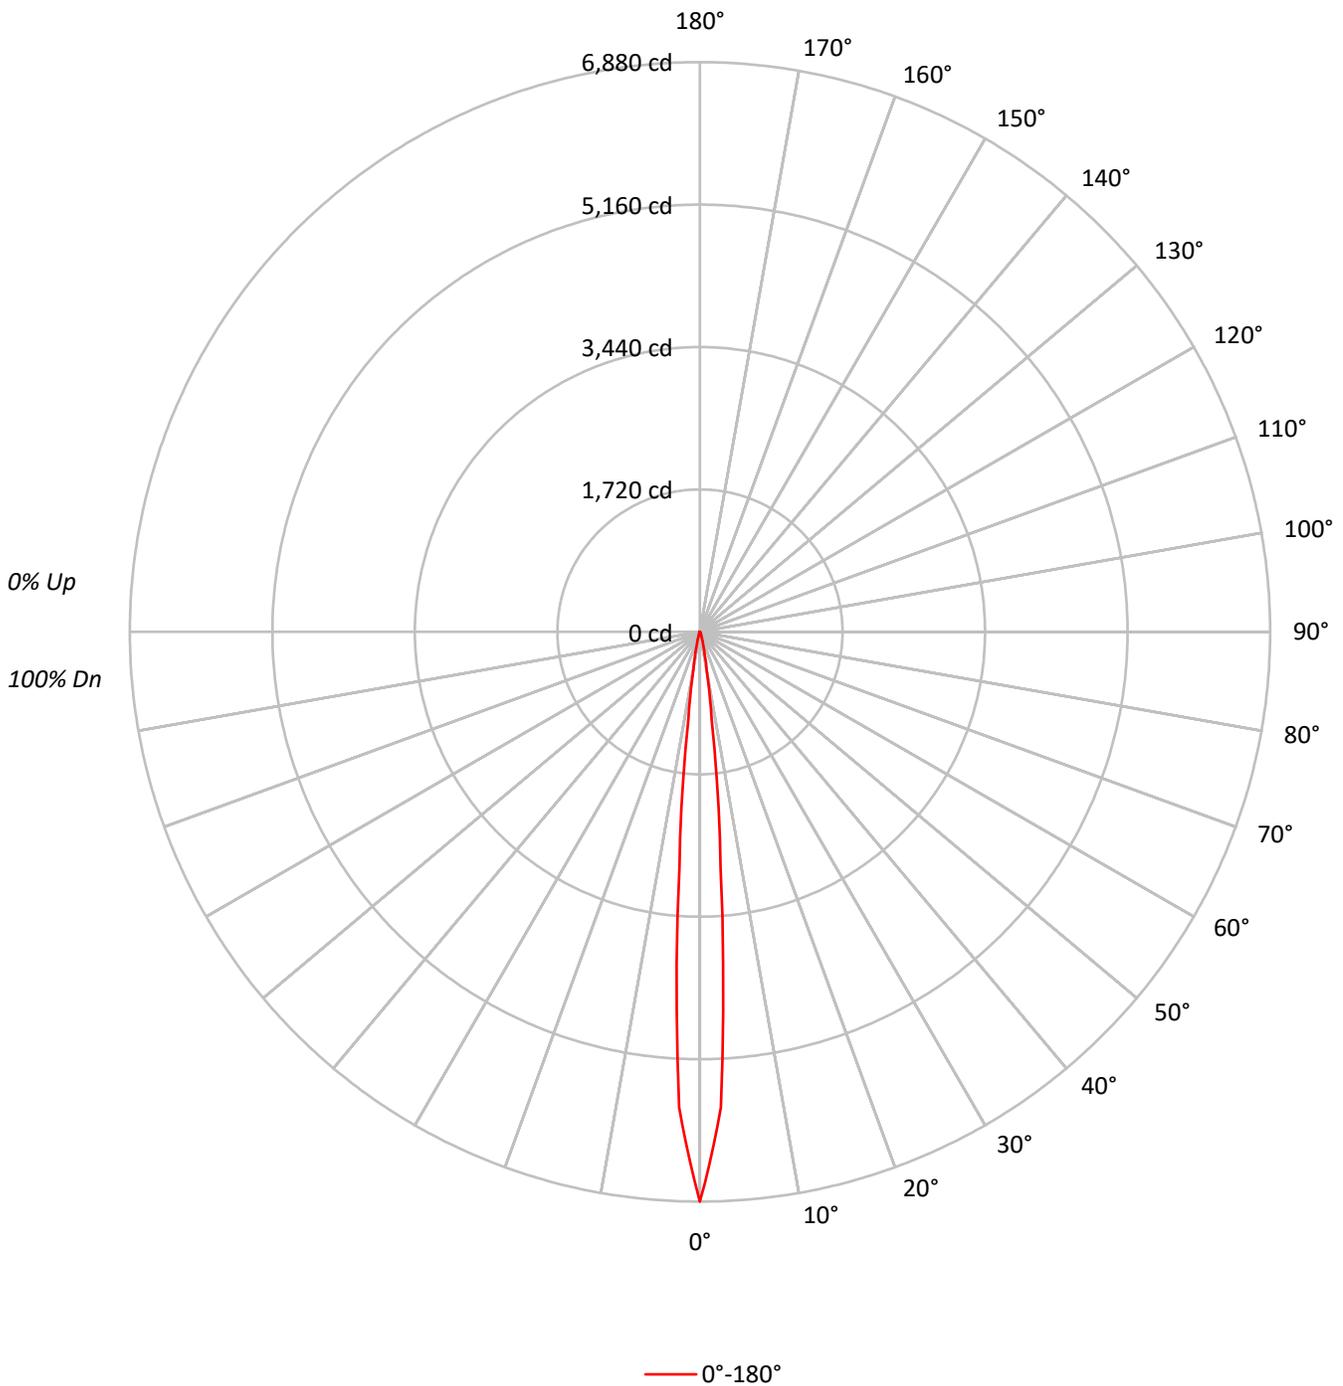



TEST NUMBER: P1310910

CATALOG NUMBER: LDSQA3D02R089040DE010 3LSQPHR1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	102	102	102	100
1	116	114	113	111	114	112	111	110	108	107	106	105	104	103	101	101	100	100	100	100	99
2	113	111	108	106	111	109	107	105	106	104	103	103	102	101	101	100	99	99	99	99	97
3	111	108	105	103	109	106	104	102	104	102	100	102	100	99	100	98	97	97	97	97	96
4	109	105	102	100	108	104	101	99	102	100	98	100	99	97	99	97	96	96	96	96	95
5	107	103	100	98	106	102	99	97	101	98	97	99	97	96	98	96	95	95	95	95	94
6	105	101	98	96	104	100	98	96	99	97	95	98	96	95	97	95	94	94	94	94	93
7	104	100	97	95	103	99	96	94	98	96	94	97	95	94	96	95	93	93	93	93	92
8	103	98	95	93	102	98	95	93	97	95	93	96	94	93	95	94	92	92	92	92	92
9	101	97	94	92	101	97	94	92	96	94	92	95	93	92	95	93	92	92	92	92	91
10	100	96	93	92	100	96	93	91	95	93	91	95	92	91	94	92	91	91	91	91	90

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1184909
5°	494092
10°	79518
15°	22786
20°	7679
25°	3382
30°	1869
35°	1325
40°	1169
45°	755
50°	563
55°	300
60°	344
65°	408
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 755 cd/sqm



TEST NUMBER: P1310910
 CATALOG NUMBER: LDSQA3D02R089040DE010 3LSQPHR1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	205.2	77.2
10°-20°	43.0	16.2
20°-30°	9.3	3.5
30°-40°	4.0	1.5
40°-50°	2.5	0.9
50°-60°	1.0	0.4
60°-70°	0.9	0.3
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	257.5	96.8
0°-40°	261.5	98.4
0°-60°	265.0	99.7
0°-90°	265.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	265.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	6880	
5°	2858	205
15°	128	43
25°	18	9
35°	6	4
45°	3	2
55°	1	1
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P1310910
CATALOG NUMBER: LDSQA3D02R089040DE010 3LSQPHR1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	6880.1
2.5°	5750.7
5°	2858.0
7.5°	1065.5
10°	454.7
12.5°	234.7
15°	127.8
17.5°	72.3
20°	41.9
22.5°	27.2
25°	17.8
27.5°	13.6
30°	9.4
32.5°	7.3
35°	6.3
37.5°	5.2
40°	5.2
42.5°	4.2
45°	3.1
47.5°	2.1
50°	2.1
52.5°	1.0
55°	1.0
57.5°	1.0
60°	1.0
62.5°	1.0
65°	1.0
67.5°	1.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)