

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P1312717

Luminaire Tested: LDSQA3D17R309050DE010 3LSQPHR1MB

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1312717
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-4)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LDSQA3D17R309050DE010 3LSQPHR1MB
Description: 3in Adjustable LED luminaire with, R30 optic, 5000K CCT AND, 90CRI , 3LSQPHR1MB TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1631.0 lumens
Efficiency: N/A
Efficacy: 76.9 lumens/watt
Spacing Criteria (0/90/45): 0.5 / 0.49 / 0.46
Luminous Opening: Rectangular (W 0.25' x L: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 21.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1312717

CATALOG NUMBER: LDSQA3D17R309050DE010 3LSQPHR1MB

Luminous Intensity Polar Plot

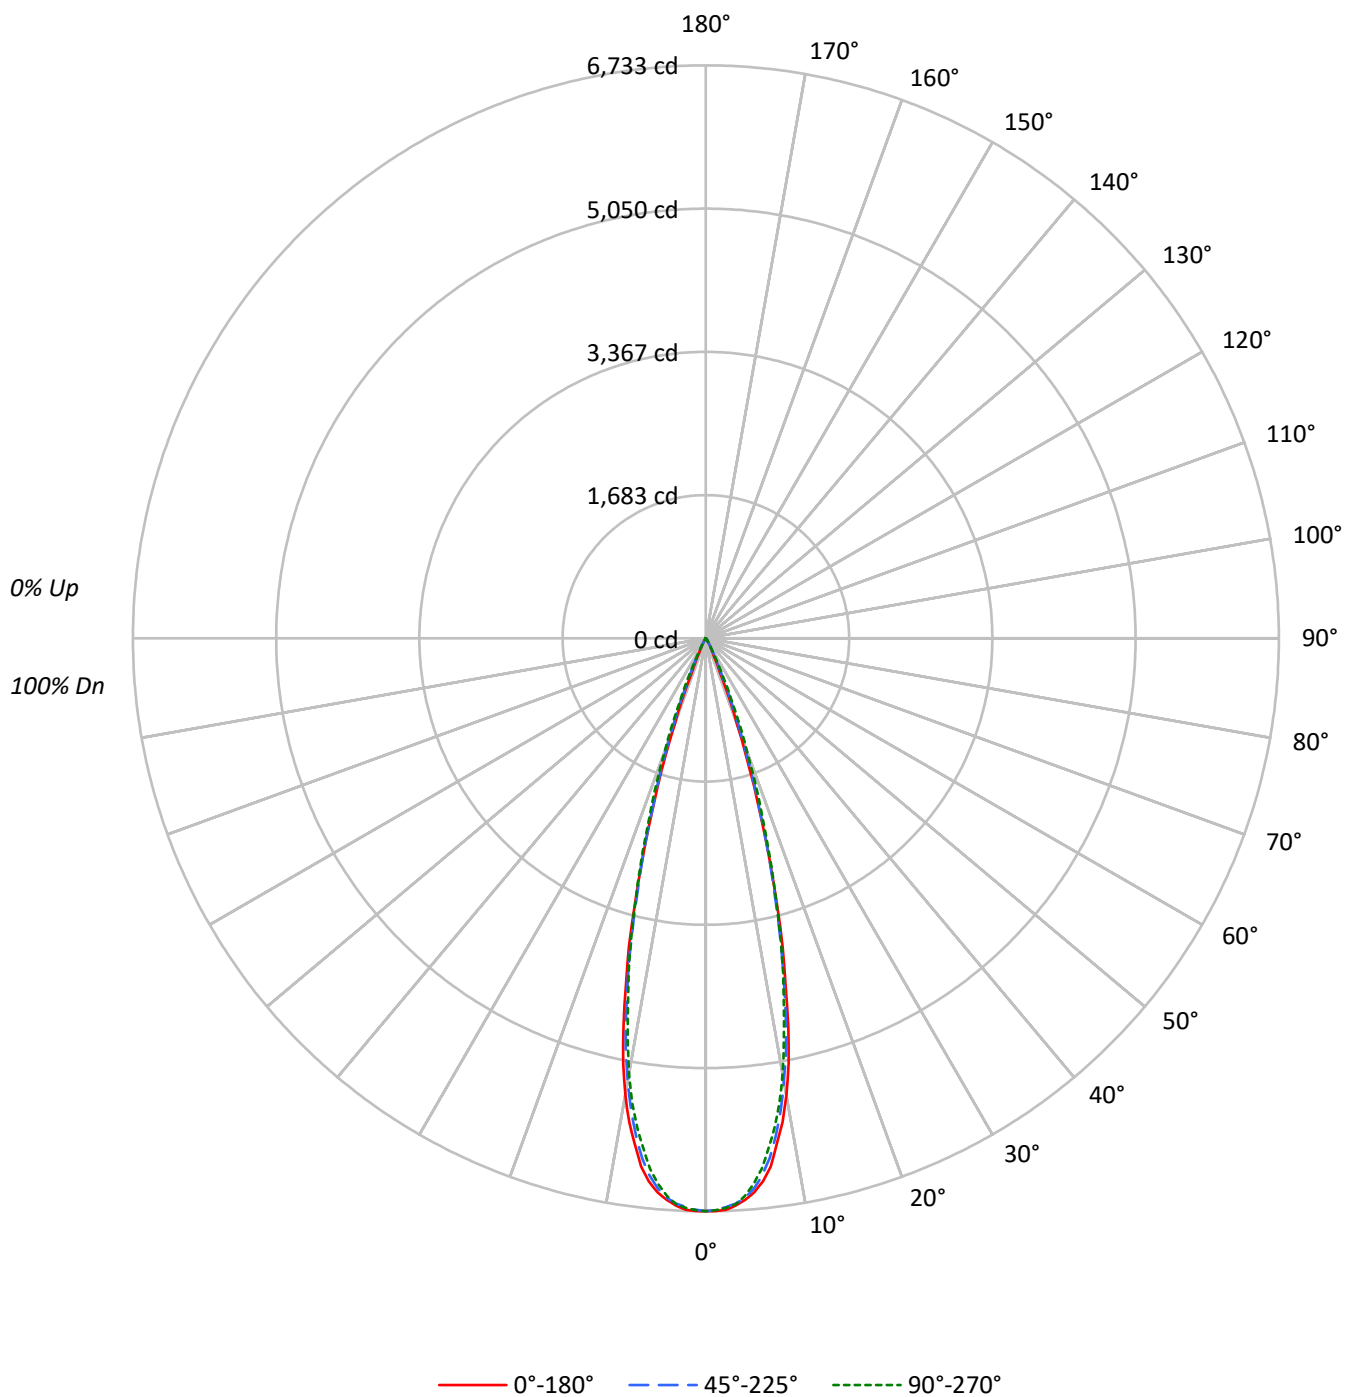

TEST NUMBER: P1312717

CATALOG NUMBER: LDSQA3D17R309050DE010 3LSQPHR1MB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	115	113	111	110	113	111	109	108	107	106	105		103	103	102		100
2	112	108	105	103	110	107	104	102	104	101	100		101	99	98		98
3	108	104	101	98	107	103	100	97	100	98	96		98	96	94		96
4	105	100	97	94	104	99	96	93	97	94	92		95	93	91		94
5	102	97	93	90	101	96	93	90	95	91	89		93	90	88		92
6	100	94	90	87	99	93	90	87	92	89	86		91	88	86		90
7	97	91	87	84	96	91	87	84	90	86	84		88	86	83		88
8	95	89	85	82	94	88	84	82	87	84	82		86	83	81		86
9	92	86	82	80	92	86	82	80	85	82	79		84	81	79		84
10	90	84	80	78	90	84	80	78	83	80	77		82	79	77		82

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1159265	1159265	1159265
5°	1129411	1121631	1112400
10°	953128	923871	908866
15°	574387	558340	568610
20°	194822	224989	259518
25°	35801	56115	66262
30°	12310	13702	15372
35°	3553	4436	4731
40°	944	1574	1259
45°	341	341	341
50°	375	0	375
55°	0	0	0
60°	0	0	0
65°	0	0	0
70°	0	0	0
75°	0	0	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 52.5°

Luminance: 396 cd/sqm

TEST NUMBER: P1312717

CATALOG NUMBER: LDSQA3D17R309050DE010 3LSQPHR1MB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	582.1	35.7
10°-20°	850.7	52.2
20°-30°	180.0	11.0
30°-40°	16.6	1.0
40°-50°	1.6	0.1
50°-60°	0.1	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1612.7	98.9
0°-40°	1629.3	99.9
0°-60°	1631.0	100.0
0°-90°	1631.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1631.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	6731	6731	6731	6731	6731	
5°	6533	6520	6488	6468	6434	590
15°	3222	3210	3132	3205	3189	850
25°	188	211	295	347	349	137
35°	17	21	21	25	22	14
45°	1	1	1	1	1	1
55°	0	0	0	0	0	0
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	

TEST NUMBER: P1312717

CATALOG NUMBER: LDSQA3D17R309050DE010 3LSQPHR1MB

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	6731.2	6731.2	6731.2	6731.2	6731.2
1°	6732.6	6725.6	6715.7	6729.8	6720.0
2°	6718.5	6701.7	6687.6	6701.7	6697.5
3°	6676.4	6662.3	6652.5	6659.5	6659.5
4°	6613.1	6597.6	6589.2	6590.6	6569.5
5°	6532.9	6520.3	6487.9	6468.3	6434.5
6°	6414.8	6383.9	6344.5	6312.2	6268.6
7°	6254.5	6206.7	6150.5	6094.2	6039.4
8°	5997.2	5974.7	5898.8	5860.8	5806.0
9°	5755.3	5700.5	5618.9	5557.1	5527.5
10°	5450.2	5368.7	5282.9	5233.7	5197.1
11°	5088.8	5005.9	4937.0	4865.3	4809.0
12°	4664.2	4593.9	4515.1	4467.3	4401.2
13°	4160.8	4150.9	4062.3	4046.9	4038.4
14°	3729.1	3689.7	3602.5	3626.4	3632.1
15°	3221.5	3210.2	3131.5	3204.6	3189.1
17.5°	2017.8	2022.0	2071.2	2186.6	2223.1
20°	1063.0	1095.4	1227.6	1366.8	1416.0
22.5°	430.3	502.0	637.0	731.2	794.5
25°	188.4	210.9	295.3	347.3	348.7
27.5°	106.9	108.3	142.0	147.6	150.5
30°	61.9	63.3	68.9	73.1	77.3
32.5°	33.7	36.6	38.0	43.6	43.6
35°	16.9	21.1	21.1	25.3	22.5
37.5°	9.8	11.2	12.7	12.7	11.2
40°	4.2	5.6	7.0	7.0	5.6
42.5°	1.4	2.8	2.8	2.8	4.2
45°	1.4	1.4	1.4	1.4	1.4
47.5°	1.4	1.4	0.0	1.4	1.4
50°	1.4	0.0	0.0	0.0	1.4
52.5°	1.4	0.0	0.0	0.0	1.4
55°	0.0	0.0	0.0	0.0	0.0
57.5°	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1312717

CATALOG NUMBER: LDSQA3D17R309050DE010 3LSQPHR1MB

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)