

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P1312848

Luminaire Tested: LDSQA3D20R259050D010 3LSQPHR1MW

Issue Date: 1/29/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1312848  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-3)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/29/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LDSQA3D20R259050D010 3LSQPHR1MW  
Description: 3in Adjustable LED luminaire with, R25 optic, 5000K CCT AND, 90CRI , 3LSQPHR1MW TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2071.0 lumens  
Efficiency: N/A  
Efficacy: 71.9 lumens/watt  
Spacing Criteria (0/90/45): 0.43 / 0.43 / 0.4  
Luminous Opening: Rectangular (W 0.25' x L: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 28.8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1312848  
CATALOG NUMBER: LDSQA3D20R259050D010 3LSQPHR1MW

### Luminous Intensity Polar Plot

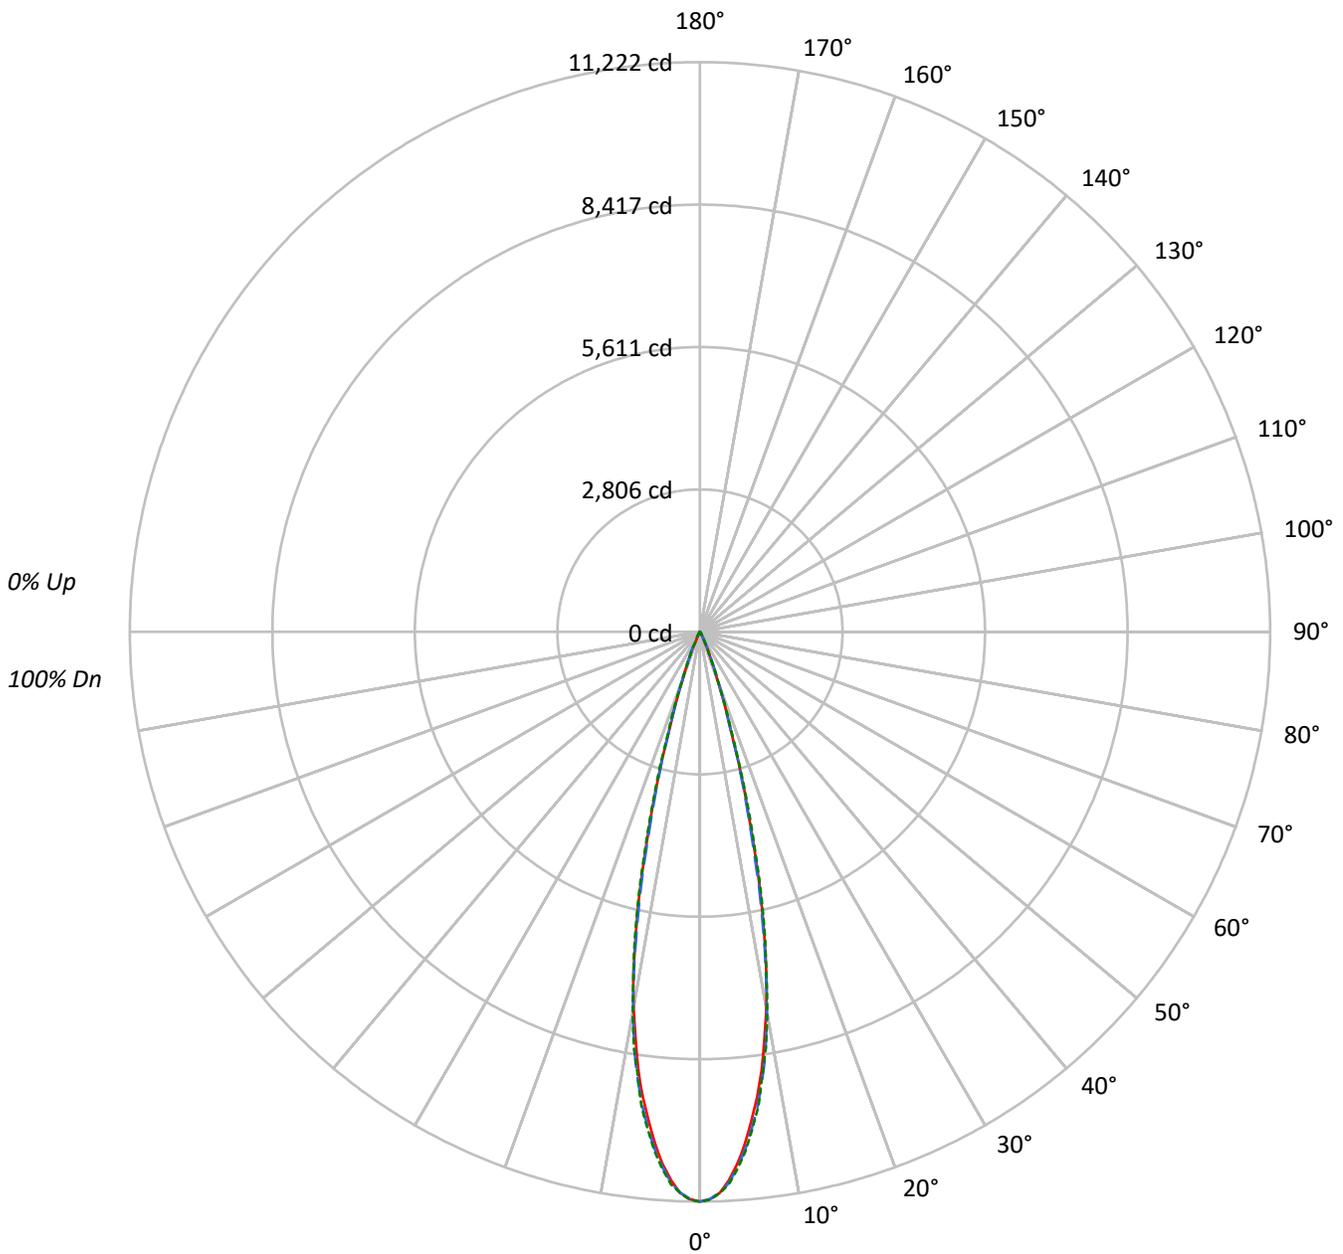

— 0°-180°    - - 45°-225°    - - - 90°-270°



TEST NUMBER: P1312848  
 CATALOG NUMBER: LDSQA3D20R259050D010 3LSQPHR1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20		
RC	80				70				50				30				10		0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10		0
RCR																			
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102		100
1	115	113	112	110	113	111	110	108	107	106	105	104	103	102	100	100	99		97
2	112	109	106	104	110	107	105	103	104	102	101	101	100	98	99	97	96		95
3	109	105	102	99	107	104	101	98	101	99	97	99	97	95	97	95	94		93
4	106	101	98	95	105	100	97	95	99	96	94	97	94	93	95	93	92		91
5	104	98	95	92	102	98	94	92	96	93	91	95	92	90	93	91	89		88
6	101	96	92	89	100	95	92	89	94	91	89	93	90	88	91	89	87		86
7	99	93	89	87	98	93	89	87	92	89	86	91	88	86	90	87	86		85
8	97	91	87	85	96	90	87	85	90	86	84	89	86	84	88	86	84		83
9	95	89	85	83	94	88	85	83	88	85	82	87	84	82	86	84	82		81
10	93	87	83	81	92	86	83	81	86	83	81	85	82	80	85	82	80		80

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	1932648	1932648	1932648
5°	1751349	1767306	1775932
10°	1316597	1325953	1332092
15°	651911	632476	674626
20°	184100	187161	189177
25°	31924	60352	37891
30°	12489	12847	13225
35°	3890	4268	4268
40°	1237	1664	1237
45°	901	438	901
50°	482	0	482
55°	540	0	540
60°	0	0	0
65°	0	0	0
70°	0	0	0
75°	0	0	0
80°	0	0	0
85°	0	0	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 901 cd/sqm



TEST NUMBER: P1312848

CATALOG NUMBER: LDSQA3D20R259050D010 3LSQPHR1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	891.5	43.0
10°-20°	1005.3	48.5
20°-30°	155.9	7.5
30°-40°	15.8	0.8
40°-50°	2.1	0.1
50°-60°	0.3	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2052.7	99.1
0°-40°	2068.5	99.9
0°-60°	2071.0	100.0
0°-90°	2071.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2071.0	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	11222	11222	11222	11222	11222	
5°	10130	10149	10223	10263	10273	883
15°	3656	3630	3547	3706	3784	1001
25°	168	249	318	242	199	141
35°	18	20	20	22	20	15
45°	4	2	2	2	4	2
55°	2	0	0	0	2	1
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	0



TEST NUMBER: P1312848

CATALOG NUMBER: LDSQA3D20R259050D010 3LSQPHR1MW

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	11221.8	11221.8	11221.8	11221.8	11221.8
1°	11175.6	11190.4	11173.7	11192.2	11190.4
2°	11059.3	11074.0	11053.7	11064.8	11064.8
3°	10821.0	10852.4	10870.9	10883.8	10894.9
4°	10507.1	10542.2	10569.9	10603.1	10603.1
5°	10130.4	10148.9	10222.7	10263.4	10272.6
6°	9681.7	9755.6	9811.0	9892.2	9842.4
7°	9233.0	9293.9	9371.5	9384.4	9419.5
8°	8723.3	8787.9	8860.0	8847.0	8817.5
9°	8102.9	8197.0	8282.0	8254.3	8291.2
10°	7528.6	7585.8	7582.1	7554.4	7617.2
11°	6861.9	6874.9	6802.9	6915.5	6847.2
12°	6071.6	6082.7	5990.4	6101.1	6171.3
13°	5314.5	5288.6	5161.2	5307.1	5395.7
14°	4442.9	4452.1	4289.6	4572.2	4550.0
15°	3656.3	3630.4	3547.3	3706.1	3783.7
17.5°	1948.2	1964.8	1944.5	2023.9	2073.7
20°	1004.5	1032.2	1021.2	1054.4	1032.2
22.5°	520.7	559.5	570.6	544.7	474.6
25°	168.0	249.3	317.6	241.9	199.4
27.5°	101.6	99.7	155.1	107.1	108.9
30°	62.8	60.9	64.6	64.6	66.5
32.5°	35.1	36.9	35.1	38.8	36.9
35°	18.5	20.3	20.3	22.2	20.3
37.5°	11.1	12.9	12.9	12.9	11.1
40°	5.5	7.4	7.4	5.5	5.5
42.5°	3.7	3.7	3.7	3.7	3.7
45°	3.7	1.8	1.8	1.8	3.7
47.5°	1.8	1.8	0.0	1.8	1.8
50°	1.8	1.8	0.0	1.8	1.8
52.5°	1.8	0.0	0.0	0.0	1.8
55°	1.8	0.0	0.0	0.0	1.8
57.5°	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1312848  
CATALOG NUMBER: LDSQA3D20R259050D010 3LSQPHR1MW

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)