

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P1314563

Luminaire Tested: LDSQA3D09R709730DE010 3LSQCDR1MMS

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1314563
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-31)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LDSQA3D09R709730DE010 3LSQCDR1MMS
Description: 3in Adjustable LED luminaire with, R70 optic, 3000K CCT AND, 97CRI , 3LSQCDR1MMS TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 776.0 lumens
Efficiency: N/A
Efficacy: 69.9 lumens/watt
Spacing Criteria (0/90/45): 1 / 0.99 / 1.03
Luminous Opening: Rectangular (W 0.25' x L: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 11.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1314563

CATALOG NUMBER: LDSQA3D09R709730DE010 3LSQCDR1MMS

Luminous Intensity Polar Plot

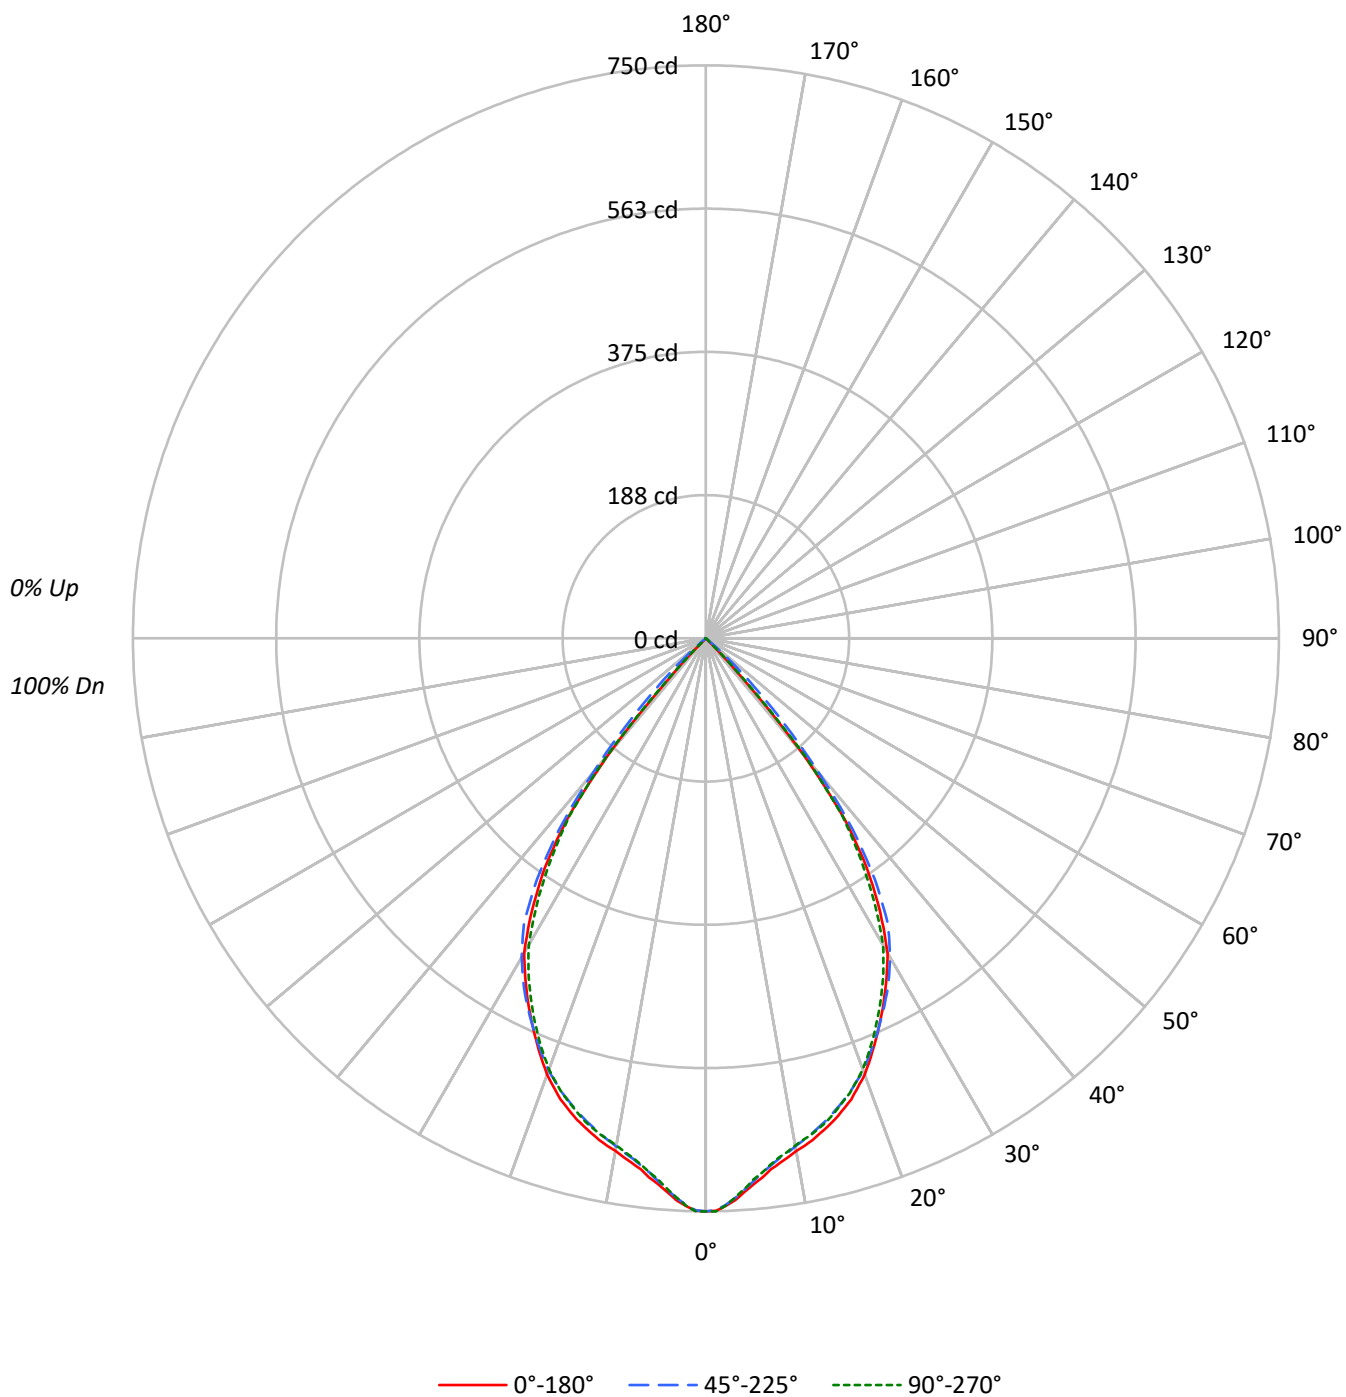

TEST NUMBER: P1314563

CATALOG NUMBER: LDSQA3D09R709730DE010 3LSQCDR1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	111	108	106	111	108	106	104	104	103	101		101	99	98		97
2	108	103	98	95	105	101	97	94	98	95	92		95	92	90		92
3	102	95	90	86	100	94	89	85	91	87	84		89	86	83		87
4	96	89	83	79	95	88	82	78	85	81	77		83	79	76		81
5	91	83	77	72	90	82	76	72	80	75	71		78	74	71		77
6	86	77	71	67	85	76	71	66	75	70	66		73	69	65		72
7	82	72	66	62	80	71	66	61	70	65	61		69	64	61		68
8	78	68	61	57	76	67	61	57	66	61	57		65	60	57		64
9	74	63	57	53	72	63	57	53	62	57	53		61	56	53		60
10	70	60	54	50	69	59	53	50	58	53	49		58	53	49		57

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	129184	129184	129184
5°	124007	123316	122987
10°	119128	118096	117851
15°	116304	114663	114895
20°	111377	110295	110057
25°	103375	103622	102006
30°	94620	95913	92274
35°	77391	81134	74364
40°	44559	51934	45729
45°	633	21579	2241
50°	0	2277	0
55°	0	0	0
60°	0	0	0
65°	0	0	0
70°	0	0	0
75°	0	0	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 45°

Vertical Angle: 45°

Luminance: 21579 cd/sqm

TEST NUMBER: P1314563

CATALOG NUMBER: LDSQA3D09R709730DE010 3LSQCDR1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	66.9	8.6
10°-20°	181.3	23.4
20°-30°	249.1	32.1
30°-40°	225.9	29.1
40°-50°	52.5	6.8
50°-60°	0.3	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	497.4	64.1
0°-40°	723.2	93.2
0°-60°	776.0	100.0
0°-90°	776.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	776.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	750	750	750	750	750	
5°	717	715	713	712	711	67
15°	652	648	643	643	644	183
25°	544	547	545	540	537	250
35°	368	373	386	370	354	221
45°	3	30	89	38	9	32
55°	0	0	0	0	0	0
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	

TEST NUMBER: P1314563

CATALOG NUMBER: LDSQA3D09R709730DE010 3LSQCDR1MMS

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	750.1	750.1	750.1	750.1	750.1
1°	749.4	748.1	748.8	749.4	750.1
2°	743.5	742.2	742.2	742.9	742.9
3°	736.3	733.7	733.7	733.0	733.0
4°	726.4	724.5	723.2	722.5	722.5
5°	717.3	715.3	713.3	712.0	711.4
6°	709.4	706.1	703.5	702.8	703.5
7°	700.2	698.2	695.6	693.6	694.3
8°	693.6	691.0	687.7	686.4	686.4
9°	687.7	685.1	681.8	679.2	680.5
10°	681.2	678.5	675.3	673.3	673.9
11°	676.6	673.3	669.4	668.0	668.7
12°	671.3	667.4	663.4	662.8	664.1
13°	664.8	660.8	656.9	656.9	658.2
14°	658.9	654.3	650.3	650.3	652.3
15°	652.3	647.7	643.1	643.1	644.4
17.5°	632.6	628.7	624.1	624.1	624.7
20°	607.7	605.7	601.8	599.8	600.5
22.5°	576.2	576.2	574.2	570.9	569.6
25°	544.0	546.6	545.3	540.1	536.8
27.5°	510.5	515.1	515.8	507.9	502.0
30°	475.8	479.7	482.3	473.1	464.0
32.5°	424.6	436.4	443.0	430.5	411.5
35°	368.1	373.4	385.9	369.5	353.7
37.5°	299.2	305.8	316.3	303.2	294.0
40°	198.2	224.4	231.0	224.4	203.4
42.5°	71.5	126.0	151.6	128.6	84.0
45°	2.6	29.5	88.6	38.1	9.2
47.5°	0.0	0.7	40.0	1.3	0.0
50°	0.0	0.0	8.5	0.0	0.0
52.5°	0.0	0.0	0.7	0.0	0.0
55°	0.0	0.0	0.0	0.0	0.0
57.5°	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1314563

CATALOG NUMBER: LDSQA3D09R709730DE010 3LSQCDR1MMS

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)