

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P1314575

Luminaire Tested: LDSQA3D10R129730DE010 3LSQCDR1MMS

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1314575
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-24)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LDSQA3D10R129730DE010 3LSQCDR1MMS
Description: 3in Adjustable LED luminaire with, R12 optic, 3000K CCT AND, 97CRI , 3LSQCDR1MMS TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 785.0 lumens
Efficiency: N/A
Efficacy: 67.1 lumens/watt
Spacing Criteria (0/90/45): 0.22 / 0.22 / 0.22
Luminous Opening: Rectangular (W 0.25' x L: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 11.7
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1314575

CATALOG NUMBER: LDSQA3D10R129730DE010 3LSQCDR1MMS

Luminous Intensity Polar Plot

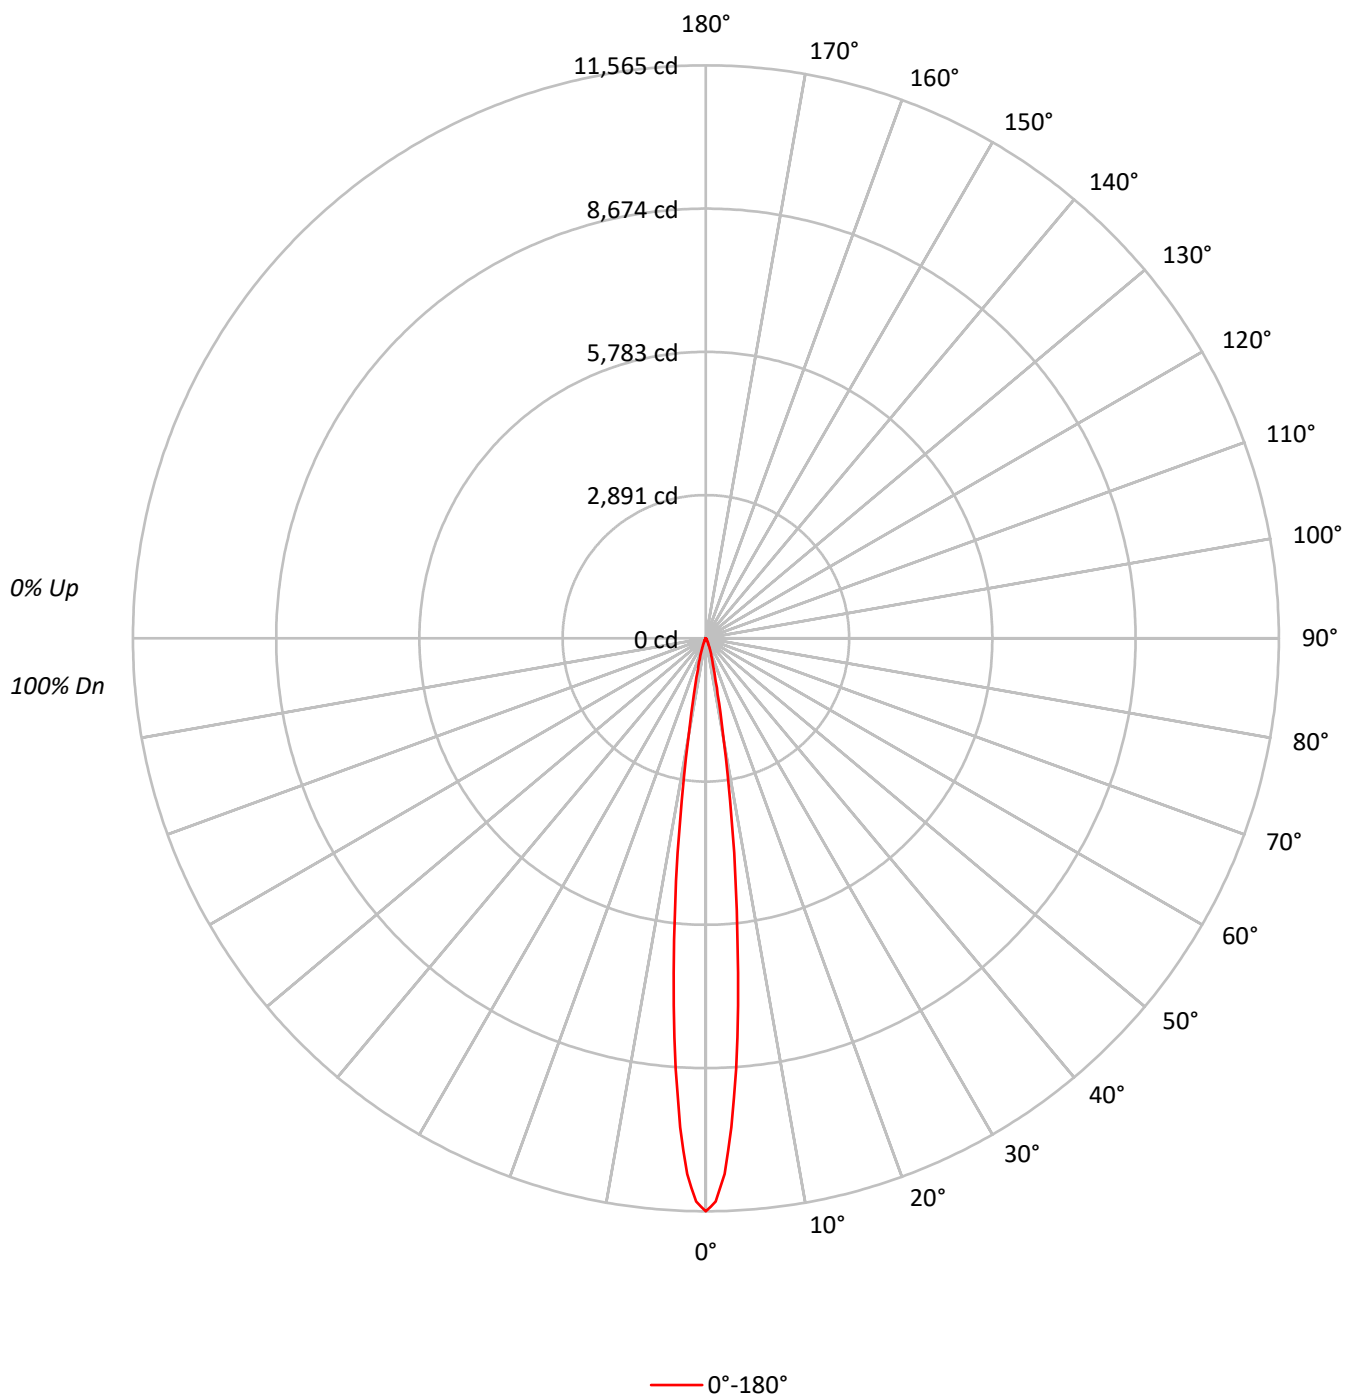

TEST NUMBER: P1314575

CATALOG NUMBER: LDSQA3D10R129730DE010 3LSQCDR1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100
1	116	114	113	111	114	112	111	109	108	107	106	104	104	103	101	101	100	98	98	98
2	113	110	108	106	111	108	106	104	105	104	102	103	101	100	100	99	98	97	97	97
3	110	107	104	102	109	105	103	101	103	101	99	101	99	98	99	98	96	95	95	95
4	108	104	101	98	107	103	100	98	101	99	97	99	97	96	98	96	95	94	94	94
5	106	102	98	96	105	101	98	96	99	97	95	98	96	94	97	95	93	92	92	92
6	104	99	96	94	103	99	96	94	98	95	93	96	94	93	95	93	92	91	91	91
7	102	98	94	92	101	97	94	92	96	93	92	95	93	91	94	92	91	90	90	90
8	101	96	93	91	100	95	93	90	95	92	90	94	92	90	93	91	90	89	89	89
9	99	94	91	89	98	94	91	89	93	91	89	93	90	89	92	90	88	88	88	88
10	98	93	90	88	97	93	90	88	92	90	88	91	89	88	91	89	87	87	87	87

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1991738
5°	1286922
10°	363102
15°	102664
20°	42923
25°	19003
30°	9705
35°	5130
40°	2203
45°	585
50°	643
55°	0
60°	0
65°	0
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 50°

Luminance: 643 cd/sqm

TEST NUMBER: P1314575

CATALOG NUMBER: LDSQA3D10R129730DE010 3LSQCDR1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	524.5	66.8
10°-20°	190.3	24.2
20°-30°	50.9	6.5
30°-40°	16.0	2.0
40°-50°	3.0	0.4
50°-60°	0.3	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	765.7	97.5
0°-40°	781.7	99.6
0°-60°	785.0	100.0
0°-90°	785.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	785.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	11565	
5°	7444	524
15°	576	190
25°	100	51
35°	24	16
45°	2	3
55°	0	0
65°	0	0
75°	0	0
85°	0	0
90°	0	

TEST NUMBER: P1314575

CATALOG NUMBER: LDSQA3D10R129730DE010 3LSQCDR1MMS

CANDELA DISTRIBUTION (FULL):

0°	
0°	11564.9
1°	11369.7
2°	10820.8
3°	9881.4
4°	8715.2
5°	7444.0
6°	6119.2
7°	4933.4
8°	3796.4
9°	2825.4
10°	2076.3
11°	1529.8
12°	1151.6
13°	893.0
14°	707.6
15°	575.8
17.5°	366.0
20°	234.2
22.5°	151.3
25°	100.0
27.5°	68.3
30°	48.8
32.5°	34.2
35°	24.4
37.5°	17.1
40°	9.8
42.5°	4.9
45°	2.4
47.5°	2.4
50°	2.4
52.5°	0.0
55°	0.0
57.5°	0.0
60°	0.0
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0



TEST NUMBER: P1314575

CATALOG NUMBER: LDSQA3D10R129730DE010 3LSQCDR1MMS

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)